


PR6-10 MANUAL ERRATA

Rev. A-1, January 7, 2015

1. Page 1, Introduction, third paragraph, change “open-source” to “open-collector”.
2. Page 2, *Installation and Operation, Elecraft K3*: A Y-cable with phono connectors is provided to allow you to connect two devices, such as both the preamplifier and the P3 Panadapter, to the K3’s 12VDC Output as shown below:



2. Page 2, *Installation and Operation, Elecraft K3 Control (CTRL) Input*: If you are adding the preamplifier to a K3 that already has the optional KPAK3AUX cable attached to the AUX output and you want to switch the PR6-10 on and off when the 6 or 10 meter band is selected with the DIGOUT1 signal, connect the DB-15 Y cable supplied with the KPAK3AUX cable set and the DE15 Line Interrupter supplied with your PR6-10 as shown below.

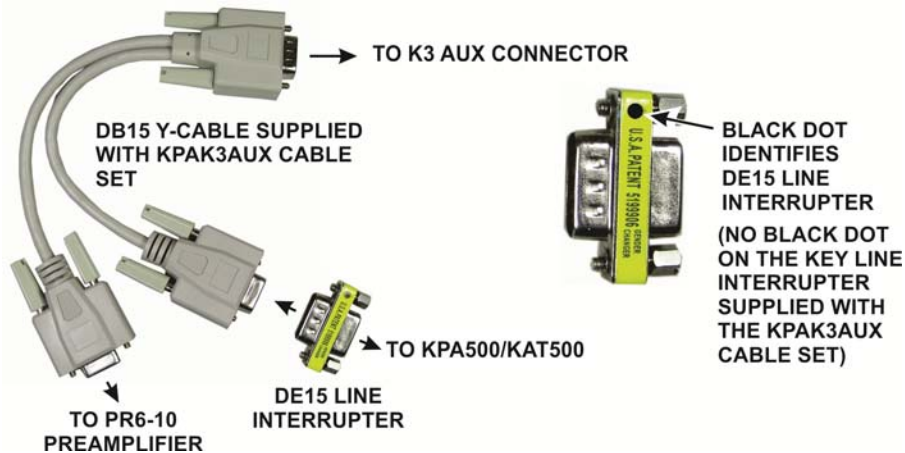

PR6-10 MANUAL ERRATA

Rev. A-1, January 7, 2015

1. Page 1, Introduction, third paragraph, change “open-source” to “open-collector”.
2. Page 2, *Installation and Operation, Elecraft K3*: A Y-cable with phono connectors is provided to allow you to connect two devices, such as both the preamplifier and the P3 Panadapter, to the K3’s 12VDC Output as shown below:



2. Page 2, *Installation and Operation, Elecraft K3 Control (CTRL) Input*: If you are adding the preamplifier to a K3 that already has the optional KPAK3AUX cable attached to the AUX output and you want to switch the PR6-10 on and off when the 6 or 10 meter band is selected with the DIGOUT1 signal, connect the DB-15 Y cable supplied with the KPAK3AUX cable set and the DE15 Line Interrupter supplied with your PR6-10 as shown below.

