



Rev D

O-LU25H-XXYZXX-X-X-X-X**Precision Ultra Low Phase Noise OCXO in 20x20 mm Package****Product Data Sheet****Features**

- SC-cut crystal
- High Stability
- Low to Very Low Power consumption (0.3 W)
- Low Aging
- Ultra Low Phase Noise Option:
 Premium(P) -145dBc/Hz at 10Hz;
 -172dBc/Hz on the floor
 Ultimate(U) -115 dBc/Hz at 1 Hz
 -146dBc/Hz at 10Hz;
 -172dBc/Hz on the floor
 Extraordinary(E) -120 dBc/Hz at 1 Hz
 -148 dBc/Hz at 10 Hz
 -173 dBc/Hz on the floor
- Sine Wave or HCMOS/TTL output

Applications

- Instrumentation

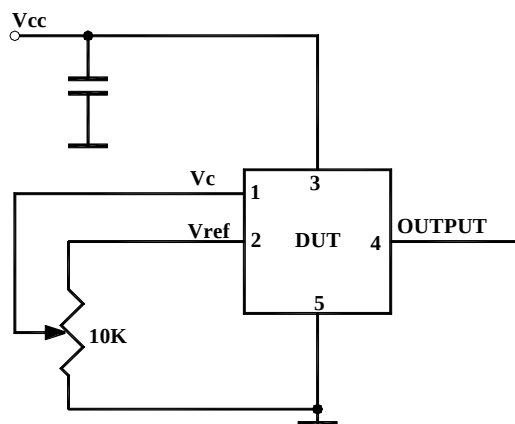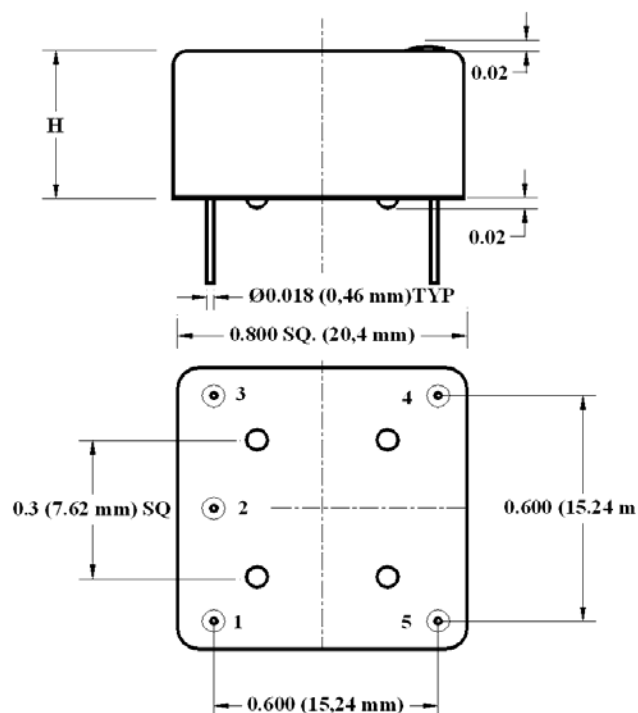

Height Options

Code	Height, H
4	0.4" (10.2 mm)
5	0.5" (12.7 mm)

Parameter	Symb	Condition	Min	Typ	Max	Unit	Note
Absolute Maximum Ratings							
Input Break Down Voltage	V _{cc}	5 V supply	-0.5		5.5	V	
Storage temper.	T _s		-50		90	°C	
Control Voltage	V _c		-1 -1		5.5 11	V	Slope option "P" Slope option "L"

Electrical

Frequency	F		8	10.000	13	MHz		All parameters for 10 MHz
Frequency stability	$\Delta F/F$	vs. Temp.		±20		ppb	See chart below	
		vs. Supply		0.2	0.3	ppb/10%V _{cc}		
Aging		per day per year, first year second year		5E-10 5E-8 3E-8			after 30 days of continuous operation	
Allan Deviation		0.1s 1s 10s		5E-13 2E-12 5E-12			Premium version, Option "P"	
		1Hz 10 Hz 100 Hz 1 KHz 10 KHz 100 KHz			-112 -145 -155 -162 -169 -172	dBc/Hz	Premium version, option "P"	
		1Hz 10 Hz 100 Hz 1 KHz 10 KHz 100 KHz		-115	-114 -146 -156 -163 -169 -172		Ultimate version, option "U" 2*	
		1Hz 10 Hz 100 Hz 1 KHz 10 KHz 100 KHz			-120 -148 -160 -168 -170 -173		Extraordinary version, option E, available with slope option L	
Retrace		After 30 minutes			±10	ppb	24 Hours off 3*	
G-sensitivity		worst direction			±1.0	ppb/G		
Input Voltage	V _{cc}		4.75	5.0	5.25	V		
Power consumption, Still air 4*	P	steady state, 25°C, Operating temp range to 70°C start-up @ -30°C		0.6 0.45 0.3 2.0	0.7 0.55 0.4 2.5	W	Grade "N" Grade "A" Grade "X"	
Spectral Purity		Subharmonics Spurious Harmonics		none -35	-80 -30	dBc		
Load		10KOhm//15pF (HCMOS/TTL), AC-coupled 50 Ohm (Sine-wave)					Output Code T Output Code S	
Warm-up time	τ	to 0.1ppm accuracy		3	5	minutes		
Output Waveform		HCMOS/TTL compatible or Sinewave						
Output Power			+10	+13		dBm	Output Code S	
Logic 1 (CMOS)	V _{oh}		3.3			V	Output Code T	
Logic 0 (CMOS)	V _{ol}				0.1	V	Output Code T	
Control voltage	V _c		0 0		4.5 10.0	V	Slope option "P" Slope option "L"	
Input impedance	Z _{in}	At V _c pin	10			KOhm		



Modulation bandwidth	Fm				1,000	Hz	
Reference Voltage	Vref			4.5		V	
Output Impedance		At Vref pin		100		Ohm	
Pull range		from nominal F	±0.4	±0.6		ppm	
Deviation slope		Monotonic, positive Monotonic, positive		1.0/Vref 0.12		ppm/V	Slope option "P" Slope option "L"
Setability	Vc0	@25°C, Fnom. Internal bias is optional, specify on PO 2.25 V for "P", 4.5 V for "L"	2.25 ± 0.5 5 ± 0.5			V	Slope option "P" 3* Slope option "L"

Notes:

*. For highest operating temperature higher than 70°C the power consumption will be higher (about 20% for 85°C).

Values listed are for test in still air environment, the values will go up while testing in the temperature chamber.

2*. This specification is preliminary. It is recommended to specify Slope option "L" for Ultimate Phase noise performance. Recommended test equipment – Symmetricom 5120A-01 Phase Noise and Allan Deviation Test Set (be aware of limitations on the floor, especially if the DUT frequency is not 10.000 MHz), Noise XT DCNTS, or Holtzworth HA7000B series. "Clean" analog power supply i.e. HP E3610A or equivalent. It's assumed that phase noise test is performed under static conditions (no vibration), in still air, and care is taken for minimizing EMI.

3*. Longer storage time, especially at low temperatures, may affect both retrace and setability parameters. It may require few days on power for re-stabilization.

4*. The power consumption is affected by the operating temperature range (the higher the highest temperature – the higher the power consumption), and by the height of the cover (the shorter the cover – the higher the power). The values in the table are for high operating temperature at 70°C, and height option "5".

Environmental and Mechanical

Operating temp. range	0°C to 70°C Standard, Other options – see chart below
Mechanical Shock	Per MIL-STD-202, 30G, 11ms
Vibration	Per MIL-STD-202, 5G to 2000 Hz
Soldering Conditions	260°C for 10s Max leads only

Electrical Connections

Pin Out	Pin #1-Vc ; Pin#2 – Vref; Pin #3 – Vcc; Pin #4- Output ; Pin #5- GND;
----------------	---

Creating a Part Number

O - **L** **U25** **H** **X** **X** **YZ** **XX** - **X** - **X** - **X** - **X** **FREQ**

OCXO
Low Power
Package Code
5 pin 20x20, ultra low noise

Height code per dwg

Supply Voltage

Code	Specification
0	5V ± 5%

Output

Code	Specification
T	CMOS/TTL
S	Sinewave

Temperature Stability

Code	Specification
17	±1x10 ⁻⁷
58	±5x10 ⁻⁸
28	±2x10 ⁻⁸
18	±1x10 ⁻⁸
YZ	±Yx10 ^{-Z}

Temperature Range

Code	In 5°C steps 6*
First letter	Lowest temperature from A = -40°C
Second letter	Highest temperature to Z = 85°C
Examples	
IS	0°C to 50°C
GU	-10°C to 60°C
EW	-20°C to 70°C

Environmental

Code	Specification
L	Contains a level of lead that is in excess of RoHS directive and is not designed for reflow
R	RoHS compliant, not designed for reflow

Power Consumption 4*

Grade	P at RT, TYP, W
N	0.6
A	0.45
X	0.3

Phase Noise (See Table)

Code	Specification
P	Premium
U	Ultimate
E	Extraordinary

Deviation slope

Code	Specification
P	Positive, 0 to Vref
L	Positive, 0 to 10 V

Not all combinations are available. Consult Factory.

6*Temperature Code Table

Letter	Temp °C	Letter	Temp °C	Letter	Temp °C	Letter	Temp °C	Letter	Temp °C	Letter	Temp °C
A	-40	F	-15	K	10	P	35	U	60	Z	85
B	-35	G	-10	L	15	Q	40	V	65		
C	-30	H	-5	M	20	R	45	W	70		
D	-25	I	0	N	25	S	50	X	75		
E	-20	J	5	O	30	T	55	Y	80		



**FREQUENCY
CONTROLS, INC.**

357 Beloit Street, P.O. Box 457, Burlington, WI 53105-0457 U.S.A. Phone 262/763-3591 FAX 262/763-2881

Email: nelsales@nelfc.com www.nelfc.com