

THE POSSIBILITIES ARE INFINITE




A4 COLOR
DUPLIX
DOCUMENT
SCANNER

fi-5110C Image Scanner



- A4
- ADF
- Straight Path
- DUPLIX
- COLOR
- IR Multi Feed Detection Sensor
- USB 2.0/1.1
- Mono. 30 A4 ipm
- Color 30 A4 ipm
- 600 dpi

- Win98SE
- Win Me
- Win 2000 Professional
- Win XP

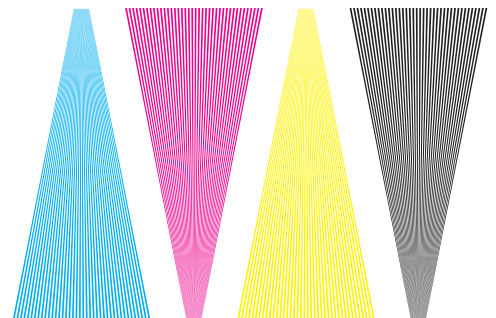

Adobe Bundled!
Acrobat 6.0
Standard

● Convert any document to a PDF file



● FUJITSU TWAIN Driver

POWERED BY



PIXEL TRANSLATIONS


● Genuine Pixel Translations ISIS driver



for Microsoft® Windows®
Operating Systems

QUALITY SCANNER

As an ENERGYSTAR® Partner, Fujitsu has determined that this product meets the ENERGYSTAR® guidelines for energy efficiency. ENERGYSTAR is a U.S. registered mark.



TECHNICAL SPECIFICATIONS

The fi-5110C image scanner with USB 2.0 interface capability expands the market for production scanning. These features will insure Fujitsu's customers' productivity well into the future.

- Small Footprint
 (W) 293.5 x (H) 130.0 x (D) 166.0mm
- Fast scanning speed in its class
 -15ppm/30ipm A4 portrait at 150dpi (color)
 -15ppm/30ipm A4 portrait at 200dpi (monochrome)
- Superior paper handling
 -50 Sheet ADF Capacity
 -IR multi feed detection
 -Straight paper path and easy maintenance
- Excellent image quality
 -Optical Resolution of 600dpi
 -Image processing software V2.0 (Option)
 -Superior CCD (charge-coupled device) image sensing technology
 -Supports sRGB technology
- Superior input/output performance
 -USB 2.0 interface
- Easy to use
 -Bundled with ScandAll21, Adobe Acrobat 6.0 Standard and other software



Scanner Type		ADF (Automatic Document Feeder)	
Image Sensor Type		Color CCD (Charge-Coupled Device) x 2	
Light Source		White cold cathode discharge lamp	
Optical Resolution		600 dpi	
Output Resolution	Color	50 - 600 dpi	
	Grayscale	50 - 600 dpi	
	Monochrome	50 - 600 dpi	
AD Converter		1024 levels (10 bit)	
Gray Scale Level	Color	8bit and 24 bit / pixel	
	Grayscale	8 bit / pixel	
	Monochrome	1 bit / pixel	
Scanning Speed (A4 portrait)	Color	150 dpi	15 ppm(Simplex) / 30 ipm(Duplex)
	Monochrome	200 dpi	15 ppm(Simplex) / 30 ipm (Duplex)
Document Size	Minimum	A8 (53 x 74mm)	
	Maximum	A4 (210 x 297mm) or legal (216 x 355.6mm)	
Document Weight (Thickness)		52 to 127 g/m ² , or 14 to 34 lb	
Capacity		Maximum 50 sheets, 80 g/m ² or 20 lb	
Background		White	
Interface		USB 2.0 x 1 *Also works with USB 1.1	
Connector shape		USB (B type)	
Image Processing		Image emphasis, simplified DTC, error diffusion, dither, moire removal Non-dropout color (Generated by the driver)	
Voltage or Voltage Range		AC 100 to 240V, +10% / -10%	
Power		Operating: 28W Sleep mode: less than 6W Turned off while plugged in: 1W	
Operational Environment	Temperature	Temperature: 5 to 35 degree C (42 to 95 degree F)	
	Relative humidity	Relative humidity: 20 to 80% (non-condensing)	
Dimensions	Width	293.5mm (11.6 in)	
	Depth	166mm (6.5 in)	
	Height	130mm (5.1 in)	
Weight		2.7kg	
Option		Image processing software option V2.0	
Others	Multi feed detection	Yes, IR multi feed detection sensor	
	Long paper scanning	864mm (34 in)	
	Paper counter	Yes	

Consumables

Pick Roller	PA03360 - 0001	Lifetime: Every 100,000 sheets or one year
Pad ASSY	PA03360 - 0002	Lifetime: Every 50,000 sheets or one year

Microsoft, Windows and Windows NT are registered trademarks of Microsoft Corporation in the United States and/or other countries.
 ISIS, QuickScan and their respective logos are trademarks or registered trademarks of Pixel Translations, a division of Captiva Software Corporation.
 Adobe, Adobe logo and Acrobat are either registered trademarks of Adobe Systems Incorporated in the United States and/or other countries.
 Other product names are the trademarks or registered trademarks of the respective companies.
 Specifications are subject to change without notice. For the latest information, contact your local Fujitsu representative. First edition September 2004

Japan contact

PFU LIMITED
 International Sales Dept., Imaging Business Div.
 Products Group
 Solid Square East Tower, 580 Horikawa-cho, Saiwai-ku,
 Kawasaki-city, Kanagawa 212-8563, Japan
 Phone: (81-44) 540-4658 Fax: (81-44) 540-4639
<http://imagescanner.fujitsu.com/>

XXXXXXXX contact

FUJITSU ///////////////
 ////////////////////////////////////
 ////////////////////////////////////
 ////////////////////////////////////
 ////////////////////////////////////
 ////////////////////////////////////
 Phone: (1-23) 456-7890 Fax: 123-456
<http://www.///////.com/>

