


S
C
A
N
N
E
R
S


FUJITSU

A4 Document Scanner

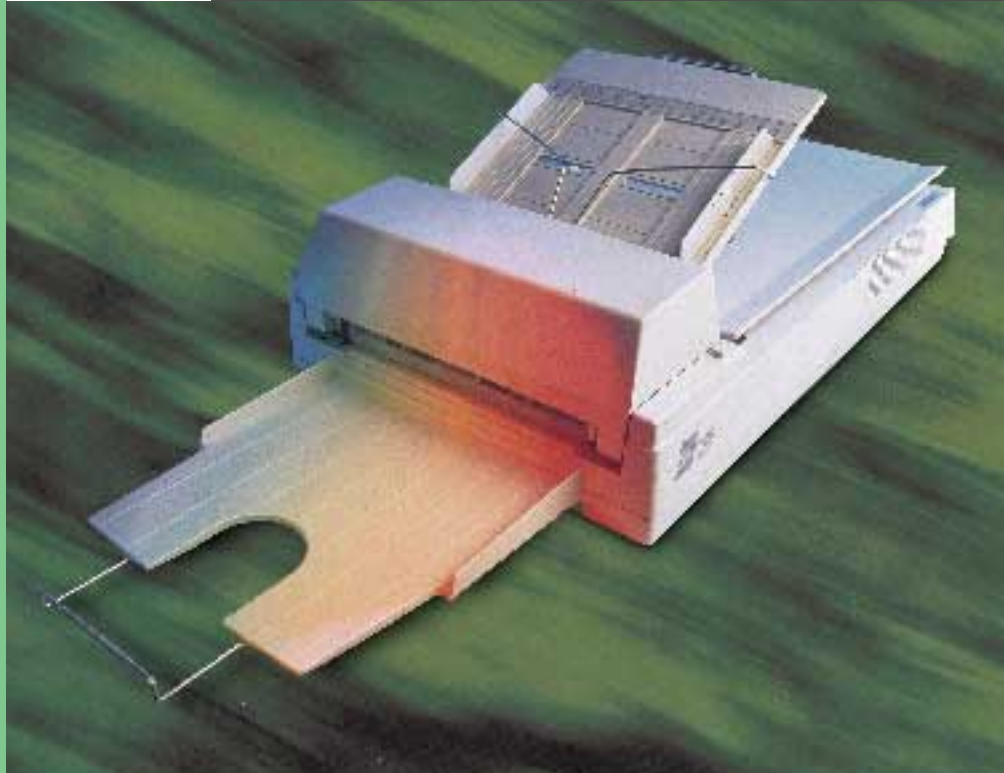

ScanPartner™ 600C

15 ppm, Colour Scanner with
ADF and Flatbed.

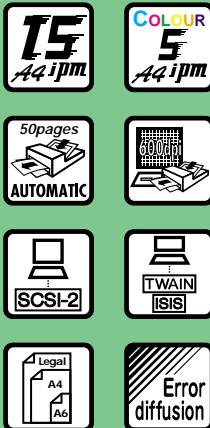

The ScanPartner 600C, a versatile entry-level desktop scanner, designed to meet the demands of document imaging applications.

Combining fast document feeding with the quality of a colour desktop publishing scanner, the Fujitsu ScanPartner 600C is a powerful and reliable addition to any workgroup.

Quality Colour

The Fujitsu ScanPartner 600C allows documents to be continuously scanned in single pass 24-bit colour through the ADF at a resolution high enough to satisfy optical character recognition (OCR). Long life cold cathode lighting, single pass CCD scanning, and true 600 dpi resolution provide high quality

scanning of colour or black and white documents for use in an array of applications.

Speed and Versatility

A built-in 50-page ADF allows continuous scanning of documents as large as A4 size and as fast as 15 ppm. This speed greatly improves operator productivity while maintaining high quality. The Scan Partner 600C's flatbed capability provides the added versatility needed to scan documents as small as 1 inch x 1 inch.

Convenient Operation

All ScanPartners have an industry standard SCSI-2 interface which provides high data transfer rates while making them both easy and inexpensive to install, and like all Fujitsu scanners, the ScanPartner family has been designed to deliver the highest level of image quality, reliability, performance and compatibility, as well as an upgrade path for the future growth.

ScanPartner 600C Specifications

Technology		Charge coupled device (CCD) image sensor
Resolution		Up to 600 x 1,200 dpi (1%) increments
Halftone patterns		Binary; halftone; error diffusion
Grayscale		64 dither/256 levels
Colour		24-bit colour/16.7 million colours; single pass
Scanning speed		15 ppm (at 200 dpi, line-art mode, letter size)
Document feeding mode		ADF and flatbed
ADF capacity		50 sheets
Document size	ADF minimum	4.1 in. x 5.8 in.
	ADF maximum	8.5 in. x 14 in.
	Flatbed maximum	8.5 in. x 11 in.
Interface		SCSI-2
Driver reqd.		ISIS (Windows) or TWAIN (Windows)
Power requirements		100-120 VAC, 50/60 Hz or (auto-switching) 200-240 VAC, 50/60 Hz
Operating environment	Temperature	5°C - 35°C
	Relative humidity	20% - 80%
Power consumption		38 W
Dimensions (H x W x D)		6.3 in. x 22.0 in. x 13.6 in.
Weight		30 lbs

Specifications are subject to change without notice. For the latest information, contact your local Fujitsu representative.

European contacts:

FUJITSU EUROPE LTD.
2 Longwalk Road, Stockley Park,
Uxbridge, Middlesex. UB11 1AB, ENGLAND.
Phone: (44-20) 8573-4444
Fax: (44-20) 8573-2643

FUJITSU DEUTSCHLAND GmbH
Frankfurter Ring 211,
80807 München, GERMANY.
Phone: (49-89) 32378-0
Fax: (49-89) 32378-100

FUJITSU NORDIC AB
Kung Hans väg 12,
S-192 68 Sollentuna, SWEDEN.
Phone: (46-(0)8) 626-4500
Fax: (46-(0)8) 626-4588

FUJITSU ITALIA S.p.A.
Via Nazario Sauro, 38
20099 Sesto San Giovanni (MI), ITALY.
Phone: (39-02) 26294-1
Fax: (39-02) 26294-201

FUJITSU FRANCE S.A.
1 Place Des Etats-Unis, SILIC 310,
94588 Rungis cedex, FRANCE.
Phone: (33-1) 4180-3888
Fax: (33-1) 4180-3850

