


2.5 AC-DC Power supply: PR-240-CE

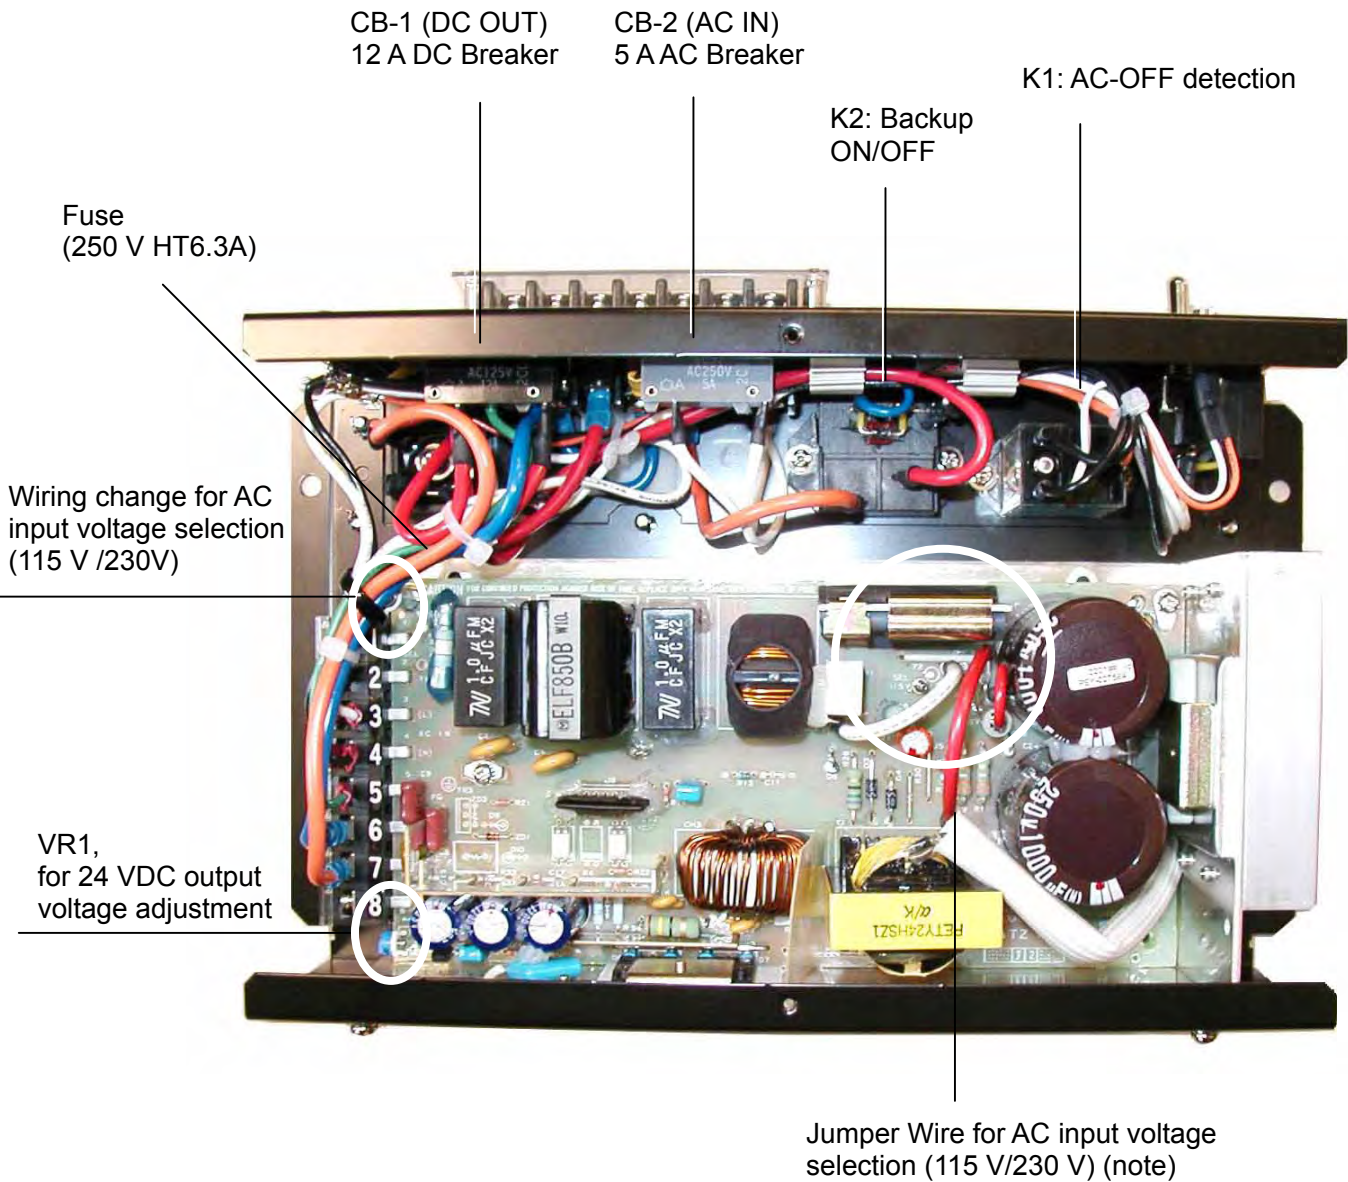


Note: For AC input voltage selection, see page 3-29 for details.

3.9 PR-240 input voltage modification



PR-240 is shipped for 220 VAC power input. Changing between 230 VAC and 115 VAC is made as shown below. No soldering is required.

Change tap connection.

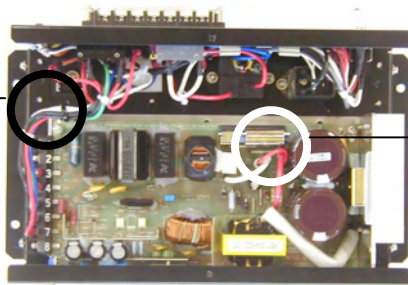



Change jumper connection

Step 1. Changing tap connection

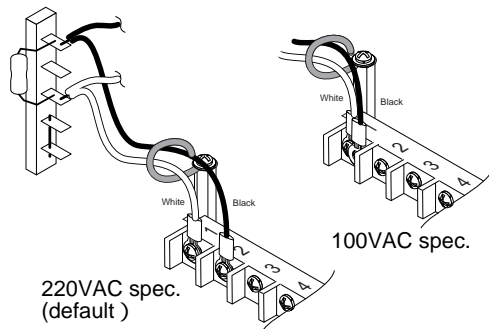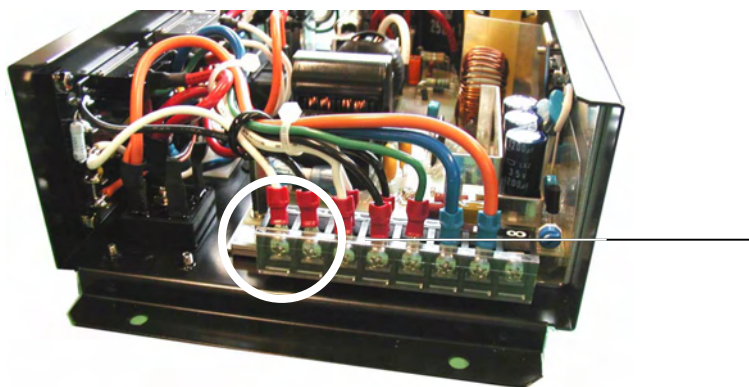

The white wire is connected to #1 and the black #2 in 220 VAC sets. Both white and black wire are connected to #1 in 115 VAC sets.

Step 2. Changing jumper connection

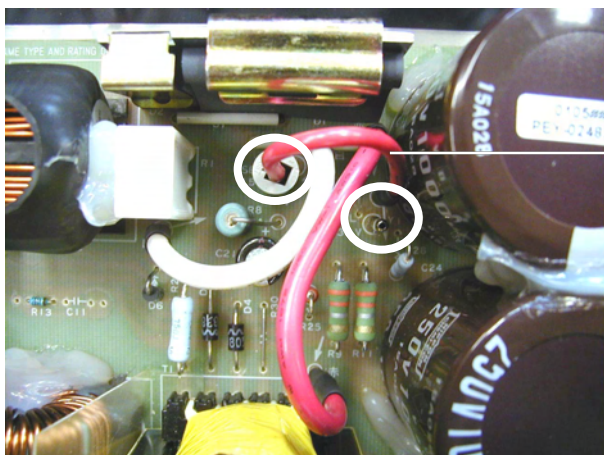

Change the connection of red wire depending on ship's mains.