


FLUSH MOUNT TEMPLATE

GPSMAP 188C/198C & FISHFINDER 320C

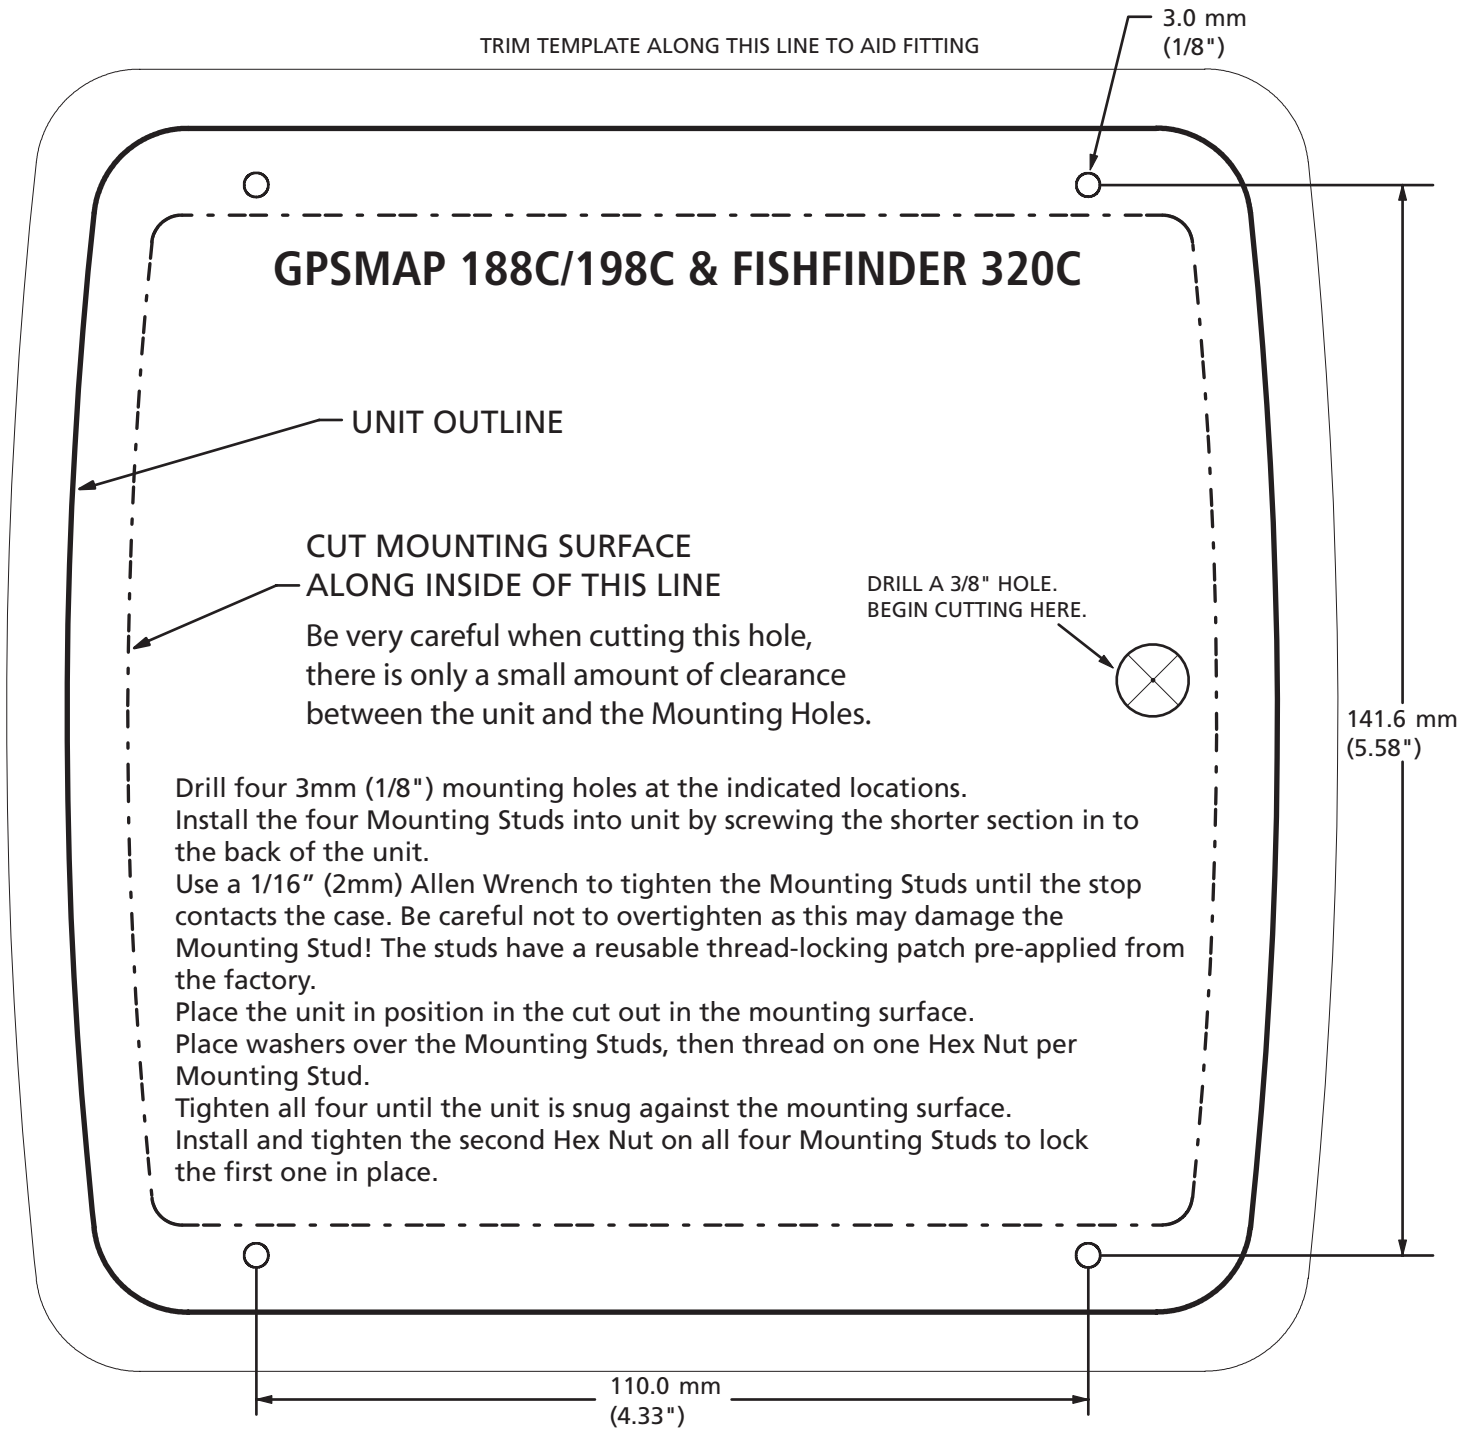

Drill four 3mm (1/8") mounting holes at the indicated locations. Install the four Mounting Studs into unit by screwing the shorter section in to the back of the unit. Use a 1/16" (2mm) Allen Wrench to tighten the Mounting Studs until the stop contacts the case. Be careful not to overtighten as this may damage the Mounting Stud! The studs have a reusable thread-locking patch pre-applied from the factory. Place the unit in position in the cut out in the mounting surface. Place washers over the Mounting Studs, then thread on one Hex Nut per Mounting Stud. Tighten all four until the unit is snug against the mounting surface. Install and tighten the second Hex Nut on all four Mounting Studs to lock the first one in place.

© Copyright 2005 Garmin Ltd. or its subsidiaries
Garmin International, Inc. 1200 East 151st Street, Olathe, Kansas 66062, U.S.A.
www.garmin.com