

StreetPilot[®] c330

setup guide

START HERE


This setup guide includes instructions for mounting, configuring, and using your c330. Remove your unit and the vehicle suction cup mount from the product box before you begin.

Your unit's battery must be charged before it can be used on battery-operated power. It will begin to charge once the c330 is fully mounted as described in this guide.


Mount your c330

1

Fit the bottom of your c330 into the cradle of the suction cup mount (1).

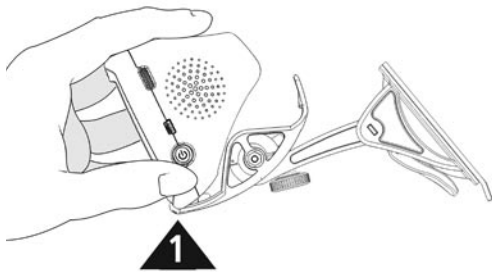

Tilt your c330 back until it snaps in place (2).

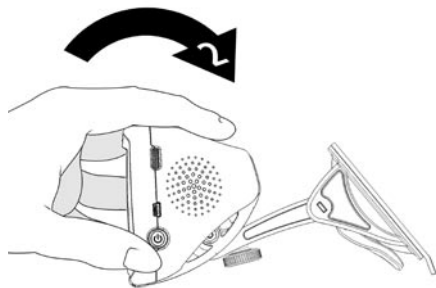


WARNING: For use in vehicles, it is the sole responsibility of the owner/operator of a vehicle with the c330 installed to place and secure the device so it will not interfere with the vehicle operating controls and safety devices, obstruct the driver's view of driving conditions, or cause personal injury in the event of an accident.

NOTICE TO STATE OF CALIFORNIA DRIVERS: California Vehicle Code Section 26708 (a) (1) provides that drivers in California should not use suction mounts on their windshield or side or rear windows. Other garmin dashboard or friction mounting options should be used. For available accessories, refer to the garmin web site at www.garmin.com. Also, refer to the *Owner's Manual* for instructions on using the included mounting disk with the suction cup mount.

2

Place the suction cup on your windshield. Be sure the lever is pointing down, as shown at right.


Note: To ensure a tight grip, make certain your windshield is clean and dry before you mount the suction cup.

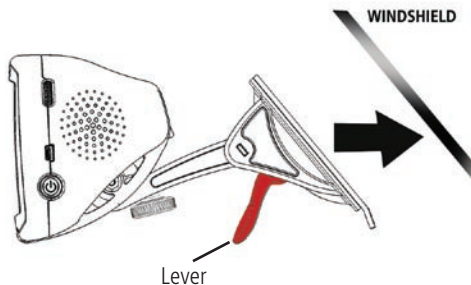

3


Flip the lever back, toward the windshield. Adjust the c330 to obtain a maximum viewing angle.

To remove the suction cup from the windshield, lift the lever to release the suction cup's grip. To help release the grip, pull upwards on the rubber tab.

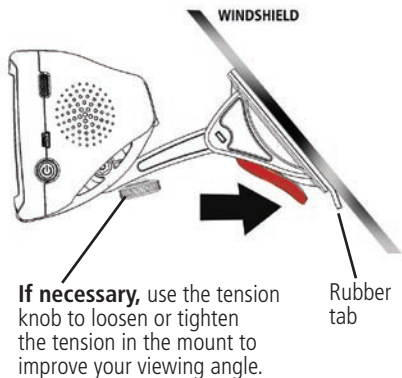

4


Plug the end of the cable into an available power receptacle. Your unit will automatically turn on if you have started your vehicle.

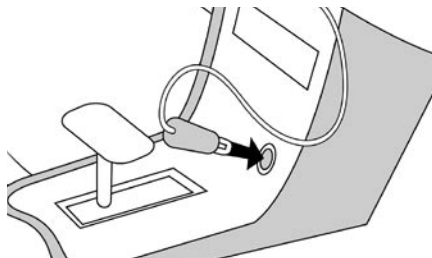


To remove the unit from the mount

1

To remove the unit from the mount, press the indentation on the back of the unit (1).

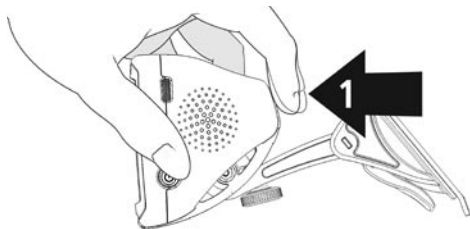**2**

Then, lift the unit off of the mount (2).

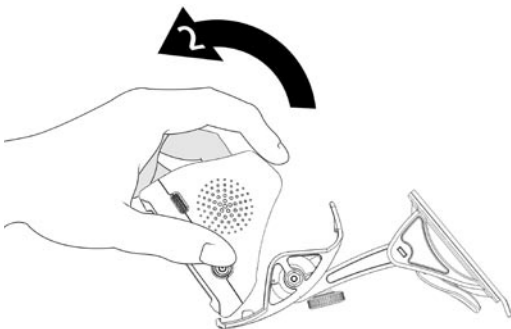

Configure your c330

1

Press the **Power** button to turn on the unit.

Note: If the unit is not receiving power, a “Low Battery” warning may appear. Do not worry about this message. Connect the unit to your vehicle’s power receptacle, as described previously.



2

Once the power is turned on, follow the on-screen instructions to set up your c330 for the first time.



3


When the setup is complete, you will see the **WARNING** screen, shown at right. Touch **Agree** to begin using your c330.



Find a place

1

Touch **Where to?**

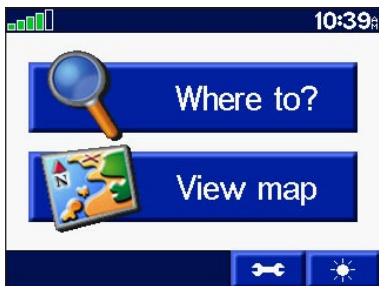

2

Touch an icon that will help you find your destination.




3

Touch a destination.



4

Touch **Go!**

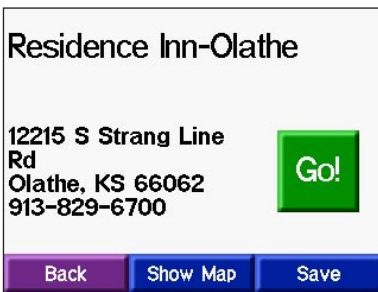

5

Enjoy the route!



To learn more about the exciting features that are available with your c330, see the enclosed *Owner's Manual*.

Register your unit!

To register your c330, go to the Garmin Web site at:
<http://www.garmin.com/unlockregister/register.jsp>.
Your "Registration Code" is located on the enclosed
sheet.

Registering your unit enables you to be informed of map
software and product updates. It also allows Garmin to
better track your unit if it is lost or stolen.



© Copyright 2005 Garmin Ltd. or its subsidiaries