

Install the Battery


A 9-volt battery is supplied with the Quick Start Signal Source. To install the battery, do the following:

1. Slide open the battery cover on the back of the Signal Source.
2. Snap the battery onto the battery terminal cable.
3. Insert the battery into the Signal Source.
4. Replace the battery cover.

To help extend the life of the battery, turn off the Signal Source whenever you are not using it. An alkaline battery will provide approximately 4–6 hours of continuous operation.

Connect the Signal Source to the Analyzer

Use 3 BNC cables to connect the Quick Start Signal Source to the Analyzer.

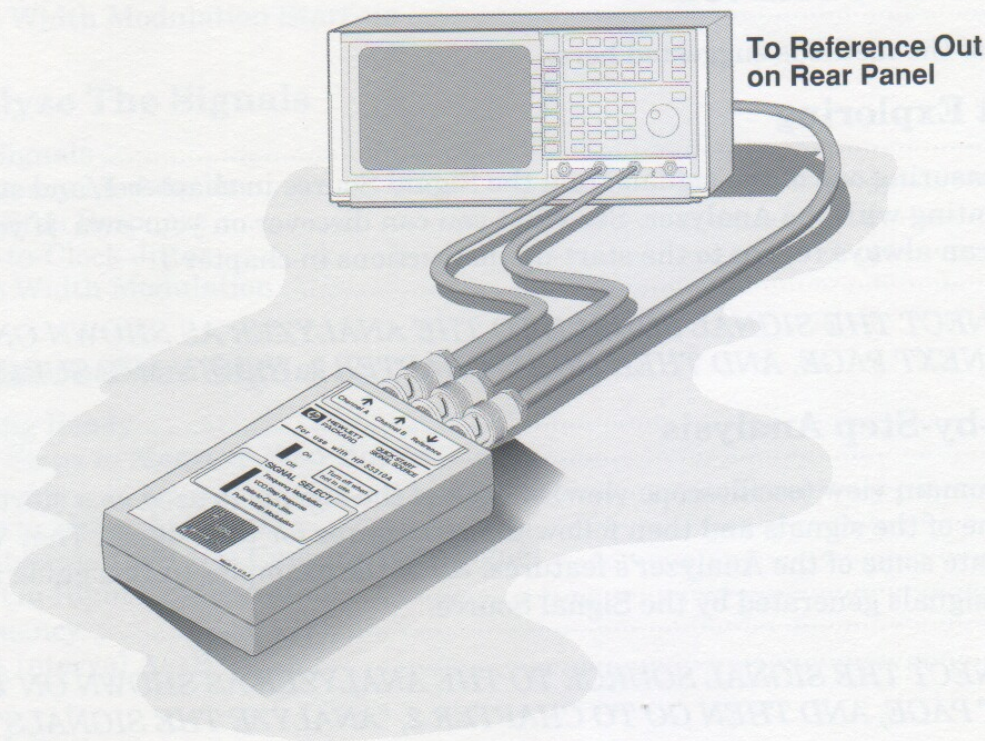

Note

If your Signal Source should fail during the first year of ownership, and replacing the battery does not fix it, call your local HP sales office for a replacement.