


Keysight Technologies

FET Characterization Using the B2900A Series of SMUs

Technical Overview



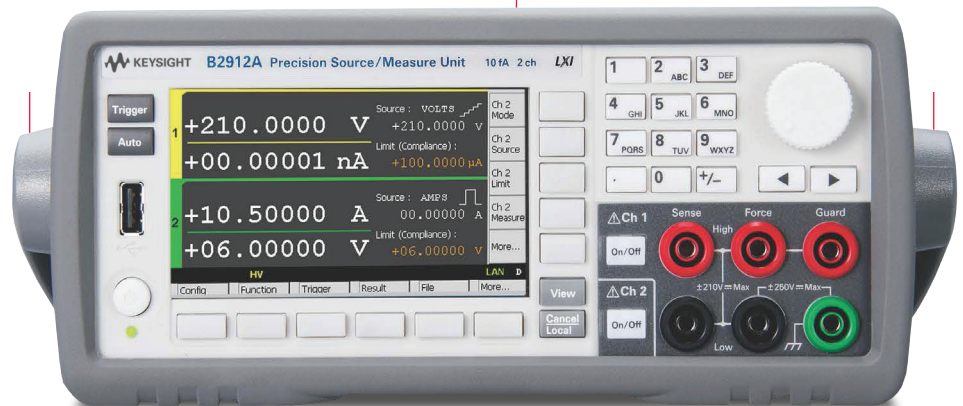

Introduction

Keysight B2901/02/11/12A Precision Source/Measure Unit

Keysight B2901A Precision SMU, 1ch, 100 fA resolution, 210 V, 3A DC/10.5 A pulse
Keysight B2902A Precision SMU, 2ch, 100 fA resolution, 210 V, 3A DC/10.5 A pulse
Keysight B2911A Precision SMU, 1ch, 10 fA resolution, 210 V, 3A DC/10.5 A pulse
Keysight B2912A Precision SMU, 2ch, 10 fA resolution, 210 V, 3A DC/10.5 A pulse

The Keysight Technologies, Inc. B2901/02/11/12A Precision Source/Measure Unit is compact and cost-effective bench-top Source/Measure Unit (SMU) with the capability to output and measure both voltage and current. They cover currents from 10 fA to 3 A (DC)/10.5 A (pulse) and voltages from 100 nV to 210 V, which enables you to make a wide range of current versus voltage (IV) measurements more accurately and quickly than ever before. In addition, the B2900A Series of SMUs comes with an intuitive graphical user interface (GUI) and free PC-based application software that make it easy for you to begin making productive measurements immediately. These features make the B2900A Series of SMUs the best solution for accurate characterization of a wide variety of devices such as field effect transistors (FETs).

What is the B2900A Series of SMUs?

An SMU combines the capabilities of a current source, a voltage source, a current meter and a voltage meter along with the capability to switch easily between these various functions into a single instrument. This gives it the ability to evaluate the IV characteristics of devices across all four measurement quadrants without the need for any additional equipment.

Besides being able to output and measure voltage or current very accurately, SMUs also possess a compliance feature that allows a limit to be placed on the voltage or current output to prevent device damage. The members of the B2900A Series of SMUs are single or dual channel SMU units that offer a wide range of IV measurement capability for a variety of two-terminal and three-terminal devices. They cover currents from 10 fA to 3 A (DC)/10.5 A (pulse) and voltages from 100 nV to 210 V. In addition to their DC operation mode, the B2900A Series of SMUs also has the ability to perform pulsed measurements in order to prevent device self-heating from distorting the measurement results.

In general, FET evaluation requires applying different voltages and currents with the constant or the sweep condition to the gate and the drain terminal respectively in order to acquire the several parameters and characteristics.

The B2902A and B2912A have two SMU channels, with each channel possessing accurate IV measurement capabilities as well as the ability to supply either constant or swept voltage/current. This makes the B2902A and B2912A excellent choices for accurate IV FET characterization. As shown in Figure 1, you can easily measure three terminal devices with the B2902A and B2912A.

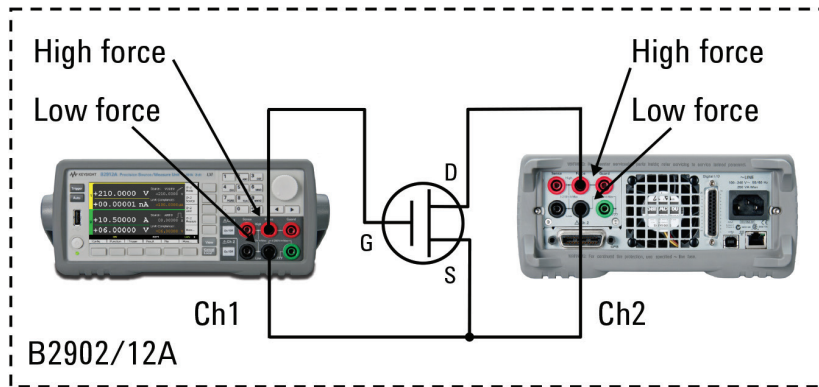


Figure 1. Using the B2902/12A to characterize a field effect transistor

Quick and easy IV characterization

During routine device evaluation it is often desirable to make a quick measurement from the instrument's front panel without having to go through the time and trouble of writing a test program. To meet this need, the B2900A Series of SMUs has a resident GUI that makes it easy to perform a variety of tests and save measurement data without having to write any code.

The wide QVGA LCD display of the B2900A Series of SMUs supports an easy-to-use GUI that provides easy instrument control from the front panel. The GUI of the B2900A Series of SMUs has the following multiple viewing modes: Single View, Dual View, Graph View and Roll View (for viewing time domain measurements). Single View mode allows you to easily set up not only constant voltage and current measurements but also swept voltage and current measurements for a single SMU channel. Dual View can perform similar functions for both channels simultaneously (for B2902A and B2912A). After measurement completion you can use the front panel GUI to graphically view measurement results such as IV curves using Graph View, and display a list of the measurement data using the Measure Result dialog window (please see Figure 2).

The B2900A Series of SMUs has a USB interface on the front panel so that a USB flash memory device can be used with the B2900A Series of SMUs to save and load measurement setups as well as to save measurement results. In addition, Graph View supports a Screen Dump function that enables you to save screen images (such as IV curves) to any attached USB flash memory device as JPEG files, making it easy to include graphical results in reports and presentations (please see Figure 3).

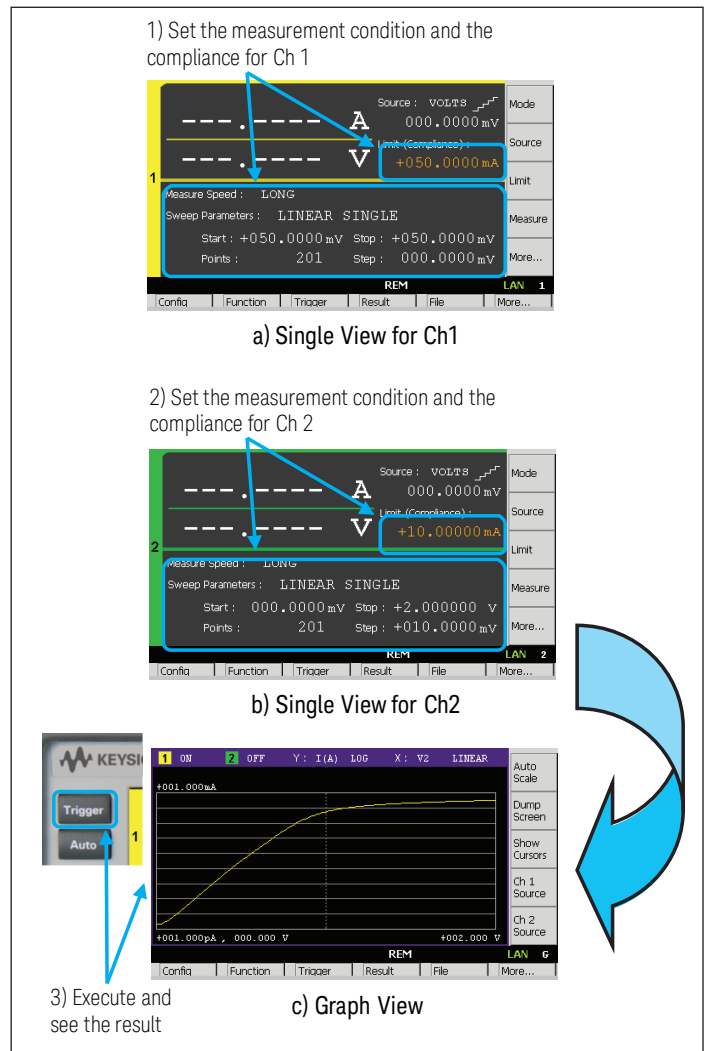


Figure 2. The GUI of the B2900A Series of SMUs makes it easy to take a quick measurement and display the results

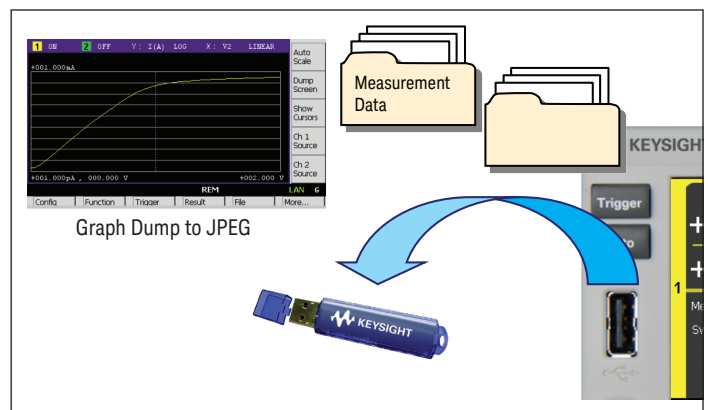


Figure 3. Measurement results and measurement setups can be saved to any attached USB flash memory device

Ready-to-use PC software

In addition to its powerful and easy-to-use GUI, the B2900A Series of SMUs comes with free PC application software to facilitate program development if you prefer PC-based instrument control. The Keysight B2900A Graphical Web Interface and the Keysight B2900A Quick I/V Measurement Software are both available for the B2900A Series of SMUs.

The Keysight B2900A Graphical Web Interface provides functionality to allow access to the B2900A Series of SMUs over a LAN connection. The B2900A Series of SMUs is fully compliant with the LXI class C specification and it contains a web server that provides a webpage with an interface to support the basic measurement functions of the B2900A Series of SMUs. You can quickly and easily make measurements using a standard web browser by just connecting the B2900A Series of SMUs to a PC using a LAN cable.

The Keysight B2900A Quick I/V Measurement Software has more powerful measurement capabilities to control the B2900A Series of SMUs over GPIB, USB or LAN connections (please see Figure 5).

1) Set the measurement condition for both channels

2) Perform the measurements

3) View the measurement results (Table)

3') View the measurement results (Graph)

The software interface includes a menu bar (File, Options, Help), a toolbar with buttons for Settings, Measure, Table, and Graph, and a main workspace with a graph and a data table. The 'Measure' button is highlighted in the first screenshot. The graph in the second screenshot shows a curve of current versus voltage. The data table in the third screenshot contains the following data:

SMU1 Voltage	SMU1 Current	SMU2 Voltage	SMU2 Current
1.1174	50000E-003	262.240E-006	1.730E+000
1.1175	50000E-003	262.260E-006	1.740E+000
1.1176	50000E-003	264.440E-006	1.760E+000
1.1177	50000E-003	264.810E-006	1.760E+000
1.1178	50000E-003	268.830E-006	1.770E+000
1.1179	50000E-003	270.870E-006	1.780E+000
1.1180	50000E-003	272.720E-006	1.790E+000
1.1181	50000E-003	274.730E-006	1.800E+000
1.1182	50000E-003	276.810E-006	1.810E+000
1.1183	50000E-003	278.840E-006	1.820E+000
1.1184	50000E-003	280.850E-006	1.830E+000
1.1185	50000E-003	282.870E-006	1.840E+000
1.1186	50000E-003	284.870E-006	1.850E+000
1.1187	50000E-003	286.8870E-006	1.860E+000
1.1188	50000E-003	288.850E-006	1.870E+000
1.1189	50000E-003	290.8110E-006	1.880E+000
1.1190	50000E-003	292.8110E-006	1.890E+000
1.1191	50000E-003	294.7620E-006	1.900E+000
1.1192	50000E-003	296.7530E-006	1.910E+000
1.1193	50000E-003	298.6660E-006	1.920E+000
1.1194	50000E-003	300.6110E-006	1.930E+000
1.1196	50000E-003	302.5920E-006	1.940E+000
1.1198	50000E-003	304.460E-006	1.950E+000
1.1197	50000E-003	306.3290E-006	1.960E+000
1.1199	50000E-003	308.2110E-006	1.970E+000
1.1200	50000E-003	310.100E-006	1.980E+000
1.1201	50000E-003	312.000E-006	1.990E+000
1.1201	50000E-003	313.900E-006	2.000E+000

Figure 4. It is easy to make a quick measurement on a PC using the Keysight B2900A Quick I/V Measurement Software

You can download this PC-based software from Keysight's web site for free. The Keysight B2900A Quick I/V Measurement Software supports a variety of functions such as a sweep measurement, a sampling measurement, graphical display functions and the ability to save test results into CSV files. The Keysight B2900A Quick I/V Measurement Software also allows you to control up to four SMU channels from the B2900A Series of SMUs so that devices requiring more than two SMU channels for characterization can be measured. In addition, the Keysight B2900A Quick I/V Measurement Software has the capability to make not only primary sweep measurements but also measurements where a second terminal is swept, making it easy to generate a variety of IV curves.

Summary

The Keysight B2901/02/11/12A Precision Source/Measure Unit is the best solution for IV characterization of FETs and a variety of other devices. Its wide current and voltage measurement ranges (from 10 fA/100 nV to 10.5 A/210 V) provide superior measurement performance and allow you to characterize devices more accurately and easily than ever before.

The easy-to-use GUI of the B2900A Series of SMUs has a variety of capabilities and features that make it easy to take measurements quickly and to save both the measurement setup conditions and data to USB-based flash memory devices.

In addition to being able to control the B2900A Series of SMUs remotely over GPIB, USB and LAN interfaces, Keysight supplies PC-based Keysight B2900A Graphical Web Interface and Keysight B2900A Quick I/V Measurement Software for free to simplify controlling the B2900A Series of SMUs from your PC.

For more detailed information on the various models of the B2900A Series of SMUs, please refer to the data sheet of the B2900A Series of SMUs (5990-7009EN).

The B2900A Series of SMUs enables you to quickly debug and accurately characterize a wide variety of devices using only a single bench-top SMU.

myKeysight

myKeysight

www.keysight.com/find/mykeysight

A personalized view into the information most relevant to you.



www.axiestandard.org

AdvancedTCA® Extensions for Instrumentation and Test (AXIe) is an open standard that extends the AdvancedTCA for general purpose and semiconductor test. Keysight is a founding member of the AXIe consortium. ATCA®, AdvancedTCA®, and the ATCA logo are registered US trademarks of the PCI Industrial Computer Manufacturers Group.



www.lxistandard.org

LAN eXtensions for Instruments puts the power of Ethernet and the Web inside your test systems. Keysight is a founding member of the LXI consortium.



www.pxisa.org

PCI eXtensions for Instrumentation (PXI) modular instrumentation delivers a rugged, PC-based high-performance measurement and automation system.



Three-Year Warranty

www.keysight.com/find/ThreeYearWarranty

Keysight's commitment to superior product quality and lower total cost of ownership. The only test and measurement company with three-year warranty standard on all instruments, worldwide.



Keysight Assurance Plans

www.keysight.com/find/AssurancePlans

Up to five years of protection and no budgetary surprises to ensure your instruments are operating to specification so you can rely on accurate measurements.



www.keysight.com/quality

Keysight Technologies, Inc.
DEKRA Certified ISO 9001:2008
Quality Management System

Keysight Channel Partners

www.keysight.com/find/channelpartners

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.



Keysight B2961A/B2962A 6.5 digit Low Noise Power Source

If you need more source capabilities, the best choice is Keysight Power Source. See our B2900A series lineup.

www.Keysight.com/find/b2900a

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: www.keysight.com/find/contactus

Americas

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

Europe & Middle East

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	0800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries:
www.keysight.com/find/contactus
(BP-07-10-14)

