

N2797A Extreme Temperature Active Probe




Ambient Operating Temperature: -40°C to $+85^{\circ}\text{C}$ (-40°F to $+185^{\circ}\text{F}$), otherwise specified

Visit the Probe Resource Center at www.keysight.com/find/PRC


Recommended Probe Configurations

- 1** Rigid Tip or Solderable Tip with Ground Blade



Bandwidth: 1.5 GHz

- 2** 6 cm Y-Leads with 0.1" Headers




Bandwidth: 1.0 GHz

- 3** Solderable Tip with Right-Angle Ground



Bandwidth: 800 MHz

- 4** 9 cm Y-Leads with 0.1" Headers

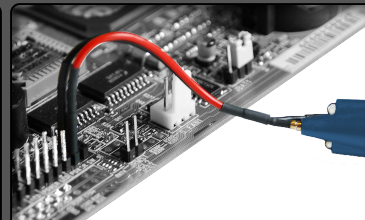

Bandwidth: 800 MHz

- 5** Y-Leads with Flexible Nose Clips or Pico Hook Tips




-20°C to $+80^{\circ}\text{C}$ (-4°F to $+176^{\circ}\text{F}$)

Bandwidth: 500 MHz

N2798A Accessory Kit

Quantities listed are also the quantities included with the probe.

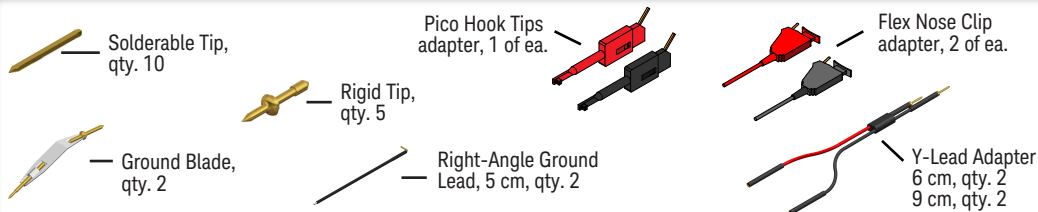

Keysight Technologies



N2797-92000