



# Agilent M9392A PXI Vector Signal Analyzer


**DISCOVER** the Alternatives...

## Industries and Applications

- Aerospace and defense
- Wireless communications
- Radar and wideband signal capture
- Digital pre-distortion (DPD)

## Product Description

The Agilent M9392A is a PXI Vector Signal Analyzer with frequency coverage from 50 MHz to 26.5 GHz with 250 MHz of instantaneous bandwidth and up to 100 MHz streamed analog bandwidth. When combined with the Agilent 89600 VSA software, you will experience a complete Microwave Vector Signal Analyzer solution enabling analysis of communications, radar, and avionics signals in a modular, open-system standard. The M9392A PXI Vector Signal Analyzer system consists of the M9202A PXIe IF Digitizer, M9302A PXI Local Oscillator, M9360A PXI Attenuator/Preselector, and the M9361A and M9351A PXI Downconverter Modules.

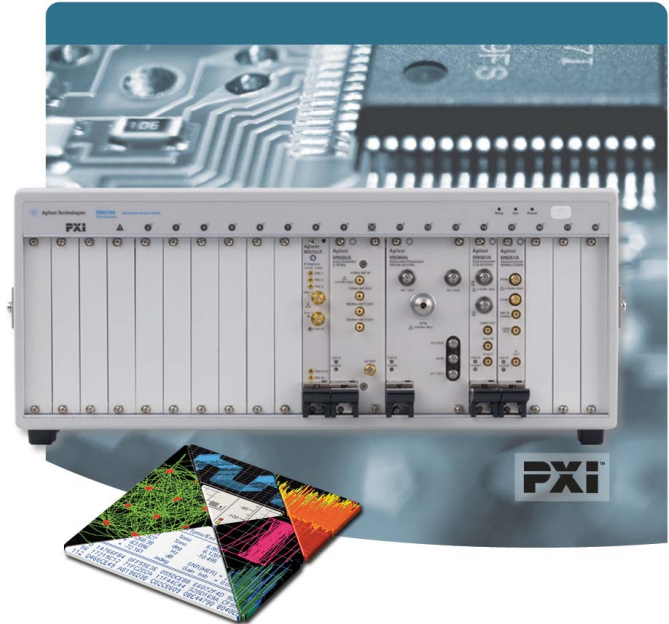

... Agilent **MODULAR** Products

### Models

M9392A Microwave Vector Signal Analyzer

## Main Features and Benefits

Product features	Your benefit
Frequency range	50 MHz to 26.5 GHz
12-bit, 2 GS/s digitizer	Measure broadband communications and radar signals
Real-time digital down-conversion (DDC) algorithm	Data decimation, analog performance improvement
Multiple programmatic interfaces	Easy integration into existing test environments and reduced development time
PXI form-factor	Conforms to Modular Open Systems Approach (MOSA)
Seamless integration with Agilent 89600 VSA software	Immediate access to the industry's broadest, most advanced general-purpose and standards-based demodulation and signal analysis

Chassis slot compatibility: cPCI (J1), PXI-1, PXI Hybrid

## Specifications

### Hardware

Size	7 or 8 slots-wide multiple modules
Sample rate	2 GS/s
3 dB bandwidth	35 MHz min (preselected, < 3 GHz) 40 MHz min (preselected, ≥ 3 GHz) 40 MHz min (< 2.75 GHz, bypass) 250 MHz min (≥ 2.75 GHz, bypass)
Maximum streamed analog bandwidth (configuration dependant)	up to 50 MHz (with V05 option) up to 100 MHz (with V10 option)
DANL	-158 dBm/Hz, ≤ 9.5 GHz, ( <i>nominal</i> ) -147 dBm/Hz, > 9.5 GHz, ( <i>nominal</i> )
Absolute amplitude accuracy	± 0.6 dB, < 2.75 GHz, ( <i>nominal</i> ), after field calibration (corrected) ± 0.5 dB, ≥ 2.75 GHz, ( <i>nominal</i> ), after field calibration (corrected) ± 2 dB, ( <i>nominal</i> ), without field calibration (uncorrected)



**Agilent Technologies**

## Software

The M9392A Vector Signal Analyzer is supplied with a comprehensive portfolio of module drivers, documentation, examples, and software tools to help you quickly develop test systems with your software platform of choice.

A soft front panel interface is provided to monitor and control the PXI Vector Signal Analyzer with the following functions:

- Setting input frequency, power, bandwidth and time span
- Setting trigger functions
- Displaying markers
- Formatting frequency and time displays
- Monitoring hardware status
- Streaming data to file

Supported operating systems	Microsoft Windows® XP (32-bit), Microsoft Windows® Vista (32/64-bit), Microsoft Windows® 7 (32/64-bit)
Standard compliant drivers	IVI-COM, IVI-C, LabVIEW, MATLAB
Supported application development environments (ADE)	VisualStudio® (VB.NET, C#, C/C++), VEE, LabVIEW, LabWindows/CVI, MATLAB
Agilent IO Libraries	Includes: VISA Libraries, Agilent Connection Expert, IO Monitor

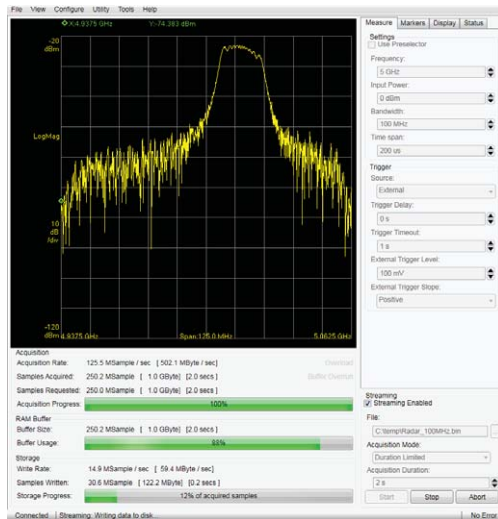


Figure 1. Agilent M9392A PXI Vector Signal Analyzer, software interface.

For more information on Agilent Technologies' products, applications, or services, please contact your local Agilent office. The complete list is available at: [www.agilent.com/find/contactus](http://www.agilent.com/find/contactus)

PICMG and the PICMG logo, CompactPCI and the CompactPCI logo, AdvancedTCA and the AdvancedTCA logo are US registered trademarks of the PCI Industrial Computers Manufacturers Group. "PCIe" and "PCI EXPRESS" are registered trademarks and/or service marks of PC-SIG. Microsoft, Windows, Visual Studio, Visual C++, Visual C#, and Visual Basic are either registered trademark or trademarks of Microsoft Corporation in the United States and/or other countries.

## Ordering Information

### Typical Product Configuration

Model	Description
M9392A	PXI Vector Signal Analyzer: 50 MHz to 26.5 GHz
89601B	89600 VSA Software, Transportable license
89601B-200	Basic Vector Signal Analysis
89601B-300	Hardware Connectivity
89601B-AYA	Vector modulation analysis
M9018A	18-slot PXIe Chassis

### Optional Module

M9351A	PXI Downconverter: 50 MHz to 2.9 GHz
--------	--------------------------------------

### Related products

M9302A	PXI Local Oscillator: 3 GHz to 10 GHz
M9202A	PXIe IF Digitizer: 12-bit, 2 GS/s
M9360A	PXI Attenuator/Preselector: 100 kHz to 26.5 GHz
M9361A	PXI Downconverter: 2.75 GHz to 26.5 GHz
M9036A	PXIe Embedded Controller

### Accessories

Software, example programs, and product information on CD

### Cables

### Advantage Services: Calibration and Warranty

Agilent Advantage Services is committed to your success throughout your equipment's lifetime.

R1282A	Annual calibration
R-51B-001-3C	1 year return-to-Agilent warranty extended to 3 years
R-51B-001-5C	1 year return-to-Agilent warranty extended to 5 years

## Discover Agilent ...

[www.agilent.com](http://www.agilent.com)

[www.agilent.com/find/modular](http://www.agilent.com/find/modular)

[www.agilent.com/find/m9392a](http://www.agilent.com/find/m9392a)

USA: (800) 829-4444



Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2011 Printed in USA, November 21, 2011  
5990-6051EN



**Agilent Technologies**