



Agilent 53000 Series Hardware Overview Remote Fiber Test Unit



Meeting the Challenges of the Modern Telecommunications Age

Technological developments and global economic changes are impacting every aspect of our lives. As with other industries, the telecommunication companies cannot escape unchanged. This puts many new demands on telecommunication companies if they are to survive and grow.

A telecommunication company must ensure that its core business processes operate efficiently and take full advantage of the latest technology. The demand for more complex optical fiber networks and flexible IP-traffic will increase exponentially as the demand for network services grows.

Your customers increasingly demand services tailored to their needs.

The optical fiber network must be flexible enough to respond quickly to the changing business conditions and allow gradual improvements towards an overall solutions strategy.

How does your current network system measure up to the challenges ahead? With Agilent 53000 Series - the breakthrough in optical fiber network monitoring - you can:

- Use our new four layer architecture - Information access, Analysis tools, Information structuring, and Automation tools - to create a monitoring system that is tailored to your needs.
- Purchase single point solutions that are addressing specific problems, but they operate as an overall system.
- Integrate and monitor information from other network elements and management systems.
- Do all this from one single workbench. Therefore, the need for training will minimize.

- Reduce the time to repair fiber breaks by about 50%.
- Reduce your operating and maintenance costs.
- Reach a new stage of reliability - with fewer mechanical components and internal connectors, no hard disk, and no backbone.

To summarize the key advantage, you are about to experience a fast return of investment (ROI).

Therefore, Agilent 53000 Series with the Remote Fiber Test Unit (RFTU) as a central component allows you to meet the challenges of the new telecommunications age, to continually adjust your business activities to reflect the constant shifts in market focus.

The Components of the RFTU

The Agilent 53000 Series functionality based on open standards is now integrated in a one-height unit device that consists of:

Optical Time Domain Reflectometer (OTDR)

You use an OTDR to determine the state of an optical fiber. To carry out test measurements, the OTDR is equipped with one or two built-in laser sources.

To determine the state of an optical fiber, the OTDR continuously launches an optical pulse into the fiber to measure the energy level of the backscatter that the fiber creates.

Optical Switch Module


An optical switch module is a software-controlled optical multiplexer that you must use if you want to monitor more than one optical fiber. An optical switch module has one input channel for the optical pulses that are generated by the optical time domain reflectometer (OTDR), and several output channels to which you attach the optical fibers you want to monitor.

Communication and Control Unit

The communication and control unit is the distribution and processing device of your RFTU. The software sends inquiries to the communication and control unit. The unit then transfers the inquiries through internal interfaces to the optical modules that are actually processing the measurement.

Figure 1 gives you an example of the embedded structure of the RFTU.

Figure 1 - Embedded RFTU Architecture

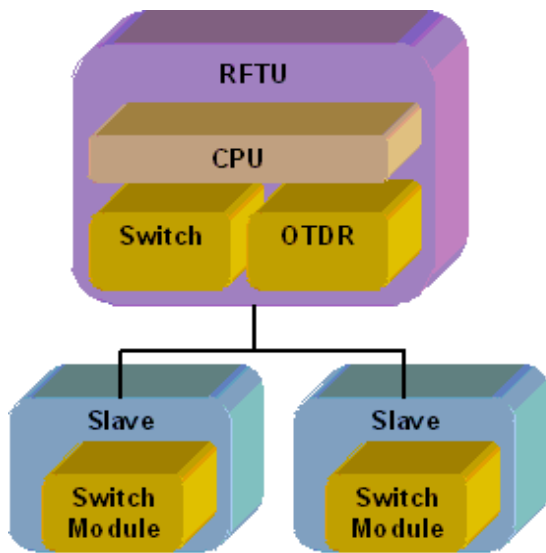

You can create an individual Remote Fiber Test Unit, by tailoring it to your needs. The following list will help you to select the components suitable for your network.

| Agilent Product Number N5330XX ^a | |
|---|----------------|
| OTDR | Switch |
| OTDR 1550 Medium Range | No switch |
| OTDR 1550 High Range | 4 port switch |
| OTDR 1625 Medium Range | 8 port switch |
| OTDR 1550/1625 Medium Range | 16 port switch |
| | 32 port switch |
| | 48 port switch |

a. XX denotes the type of OTDR and Switch.

Technical Specifications of the OTDR Module

Optical Performance^[1]

| Agilent Product Number | | N5350AX ^[2] | N5350BX | N5350CX | N5350DX | |
|--------------------------------------|--------|-----------------------------------|--------------|--------------|--------------|--------------|
| Central Wavelength [nm] Tolerance | | 1550 ± 25 | 1550 ± 25 | 1625 ± 15 | 1550 ± 25 | 1625 ± 15 |
| Attenuation Deadzone ^[3] | | 12 m | 12 m | 14 m | 12 m | 14 m |
| Event Deadzone ^[4] | | 3 m | | | | |
| Fiber Type | | Single mode | | | | |
| | | Dynamic Range [dB] ^[5] | | | | |
| Pulse width | 10 ns | 17 | 22 | 18 | 22 | 18 |
| | 100 ns | 22 | 27 | 24 | 27 | 24 |
| | 1 μs | 29 | 34 | 30 | 34 | 30 |
| | 10 μs | 37 | 41 | 37 | 41 | 37 |
| | 20 μs | 39 | 43 | 40 | 43 | 40 |

Loss/ Reflectance Accuracy

| Offset Error | Scale Error | Sampling Error |
|--------------|-------------------------------|------------------------|
| ± 1 m | ± 10 ⁻⁴ * distance | ± 0.5 sampling spacing |

| Horizontal Parameters | |
|------------------------------|--------------------|
| Start | 0 to 400 km |
| Span | 0.1 to 400 km |
| Readout Resolution | 0.1 m |
| Min. Sample Spacing | 0.08 m |
| Refractive Index | 1.00000 to 2.00000 |
| Length Units | km, feet, miles |

| Vertical Parameters | |
|----------------------------|--------------------------|
| Vertical Scale | 0.1 to 10.0 dB/div. |
| Readout Resolution | 0.001 dB |
| Backscatter Coefficient | 14 to 70 dB at 1 μ s |
| Reflectance Range | -14 to -70 dB |

| Scan Trace Events | |
|--------------------------------|--|
| Max. Number | 100 |
| Types | Reflective and non-reflective events |
| Reflective Event Threshold | -14.0 to -65.0 dB and 0.00 dB (disabled) Selectable in 0.1 dB steps |
| Non-Reflective Event Threshold | 0.0 to 5.0 dB Selectable in 0.01 dB steps |
| Fiber Break Threshold | 0.1 to 10 dB and 0.00 (disabled) Selectable in 0.1 dB steps |

Technical Specifications of the Optical Switch Module

| Product Number | Number of Channels |
|------------------------|--------------------|
| N5350XB ^[7] | 4 SC |
| N5350XC | 8 SC |
| N5350XA | 16 SC |
| N5350XE | 32 SC |
| N5350XF | 48 SC |

| Optical Specifications | |
|-------------------------|--|
| Insertion Loss | 2 dB max., typically 1 dB at 25 °C |
| Return Loss | 40 dB (typical) |
| Life Time | 10 ⁷ switch cycles, adjacent port to port |
| Isolation | > -80 dB |
| Optical Connector Types | Output SC |

[1] Guaranteed specifications measured at 22°C ± 3°C.

[2] X denotes the type of optical switch module.

[3] Typical specification @ Reflectance < -50 dB at a pulse width of 30 ns, span ≤ 4 km.
Guaranteed specification @ Reflectance ≤ -35 dB at a pulsewidth of 30 ns, and with a span of ≤ 4 km.

Resolution:

25m @ 1550 nm

28m @ 1625 nm

[4] Reflectance ≤ -35 dB at 10 ns pulse width, and with span ≤ 4 m at 8 cm sampling spacing.

[5] Measured with a standard single-mode fiber at SNR = 1 noise level and with 3 minutes averaging time.

[6] Distance accuracy: offset error + scale error * distance + sampling error.

[7] X denotes the type of OTDR.

System Specifications

| General Parameters | |
|-----------------------|-----------------------|
| Operating Temperature | 0°C to +55°C |
| Storage Temperature | -40°C to +70°C |
| Humidity | <= 95% RH 0 - 40°C |
| Input Voltage | -48 VDC |

How to Calculate the Dynamic Range of the RFTU


To calculate the dynamic range of the RFTU, subtract the insertion loss of your switch from the dynamic range of the OTDR in your RFTU. You need a reference environment to test all other optical parameters.

Safety Information

All laser sources specified by this data sheet are classified as class 1M or class 2 according to IEC 60825-1 (2001)

All laser sources comply with FDA 21 CFR 1040.10 except for deviations pursuant to Laser notice No. 50, dated 2001-July-26.

The class 1M laser sources bear the laser label.

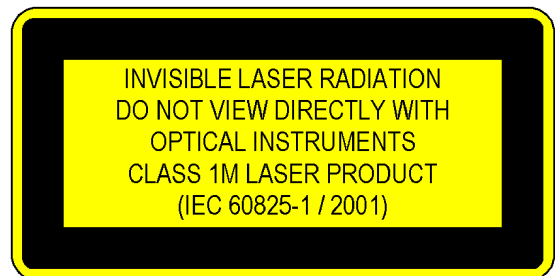

You must return malfunctioning laser modules to an Agilent Technologies Service Center for repair and calibration.

Agilent Technologies Test and Measurement Support, Services, and Assistance

Agilent Technologies aims to maximize the value you receive. We strive to ensure that you get the test and measurement capabilities you paid for and obtain the support you need. Our extensive support resources and services can help you to choose the right Agilent product for your application and apply them successfully. Every instrument and system we sell has a global warranty for at least five years beyond the production life of the product. Two concepts underlie Agilent's overall support policy: "Our Promise" and "Your Advantage".

Our Promise

Our Promise means your Agilent test and measurement equipment will meet its advertised

performance and functionality. When you are choosing new equipment, we will help you with product information, including realistic performance specifications and practical recommendations from experienced test engineer. When you use Agilent equipment, we can verify that it works properly, help with product operation, and provide basic measurement assistance for the use of specified capabilities, at no extra cost upon request. Many self-help tools are available.

Your Advantage

Your Advantage means that Agilent offers a wide range of additional expert test and measurement services, which you can purchase according to your unique technical and business need. Solve problems efficiently and gain a competitive edge by contracting with use for calibration, extra-cost upgrades, out-of-warranty repairs, and on-site training and education, as well as design, system integration, project management and other professional engineering services. Experienced Agilent engineers and technicians worldwide can help you maximize your productivity, optimize the return of investment of your Agilent instruments and settings, and obtain the dependable measurement accuracy for the life of those products.

For more information, visit our Web site at www.agilent.com/comms/accessFIBER, or contact one of the following support centers:

United States
Agilent Technologies
Test and Measurement Call Center
P.O. Box 4026
Englewood, CO 80155-4026
Phone +1 800 452 4844

Canada
Agilent Technologies Canada Inc.
5150 Spectrum Way
Mississauga, Ontario L4W 5G1
Phone +1 877 894 4414

Europe
Agilent Technologies
Test and Measurement
European Marketing Organization
P.O. Box 999, 1180 AZ Amstelveen
The Netherlands
Phone +31 20 547 2323

Japan
Agilent Technologies Japan Ltd.
Measurement Assistance Center
9-1, Takakura-Cho, Hachioji-Shi,
Tokyo 192-8510, Japan
Phone +81 426 56 7832

Latin America
Agilent Technologies
Latin American Region Headquarters
5200 Blue Lagoon Drive, Suite 950
Miami, Florida 33126, U.S.A
Phone +1 305 269 7500

Australia/New Zealand
Agilent Technologies Australia Pty Ltd.
347 Burwood Highway,
Forest Hill, Victoria 3131
Phone 1 800 629 485 (Australia)
Phone 0 800 738 378 (New Zealand)

Asia Pacific
Agilent Technologies, Inc.
24F Cityplaza One, 1111 King's Road
Taikoo Shing, Hong Kong (S.A.R.)
+852 3197 7777

Product specifications and descriptions in this document subject to change without notice.
Copyright © 2003 Agilent Technologies