

Technical Specifications

Agilent Technologies PNA Series Network Analyzers E8362B, E8363B, and E8364B



Agilent Technologies

Document Part Number: 5989-1078ENUS

Printed in USA

April 23, 2004

© Copyright 2004 Agilent Technologies, Inc. All rights reserved.

Documentation Warranty

THE MATERIAL CONTAINED IN THIS DOCUMENT IS PROVIDED "AS IS," AND IS SUBJECT TO BEING CHANGED, WITHOUT NOTICE, IN FUTURE EDITIONS. FURTHER, TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, AGILENT DISCLAIMS ALL WARRANTIES, EITHER EXPRESS OR IMPLIED WITH REGARD TO THIS MANUAL AND ANY INFORMATION CONTAINED HEREIN, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. AGILENT SHALL NOT BE LIABLE FOR ERRORS OR FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES IN CONNECTION WITH THE FURNISHING, USE, OR PERFORMANCE OF THIS DOCUMENT OR ANY INFORMATION CONTAINED HEREIN. SHOULD AGILENT AND THE USER HAVE A SEPARATE WRITTEN AGREEMENT WITH WARRANTY TERMS COVERING THE MATERIAL IN THIS DOCUMENT THAT CONFLICT WITH THESE TERMS, THE WARRANTY TERMS IN THE SEPARATE AGREEMENT WILL CONTROL.

DFARS/Restricted Rights Notice

If software is for use in the performance of a U.S. Government prime contract or subcontract, Software is delivered and licensed as "Commercial computer software" as defined in DFAR 252.227-7014 (June 1995), or as a "commercial item" as defined in FAR 2.101(a) or as "Restricted computer software" as defined in FAR 52.227-19 (June 1987) or any equivalent agency regulation or contract clause. Use, duplication or disclosure of Software is subject to Agilent Technologies' standard commercial license terms, and non-DOD Departments and Agencies of the U.S. Government will receive no greater than Restricted Rights as defined in FAR 52.227-19(c)(1-2) (June 1987). U.S. Government users will receive no greater than Limited Rights as defined in FAR 52.227-14 (June 1987) or DFAR 252.227-7015 (b)(2) (November 1995), as applicable in any technical data.

Contacting Agilent

Online assistance: www.agilent.com/find/assist

Americas			
Brazil <i>(tel)</i> (+55) 11 4197 3600 <i>(fax)</i> (+55) 11 4197 3800	Canada <i>(tel)</i> 877 894 4414 <i>(fax)</i> (+1) 905 282-6495	Mexico <i>(tel)</i> (+52) 55 5081 9469 <i>(alt)</i> 01800 5064 800 <i>(fax)</i> (+52) 55 5081 9467	United States <i>(tel)</i> 800 829 4444 <i>(alt)</i> (+1) 303 662 3998 <i>(fax)</i> 800 829 4433
Asia Pacific and Japan			
Australia <i>(tel)</i> 1800 629 485 <i>(alt)</i> 1800 143 243 <i>(fax)</i> 1800 142 134	China <i>(tel)</i> 800 810 0189 <i>(alt)</i> (+86) 10800 650 0021 <i>(fax)</i> 800 820 2816	Hong Kong <i>(tel)</i> 800 930 871 <i>(alt)</i> (+852) 3197 7889 <i>(fax)</i> (+852) 2 506 9233	India <i>(tel)</i> 1600 112 929 <i>(fax)</i> 000800 650 1101
Japan <i>(tel)</i> 0120 421 345 <i>(alt)</i> (+81) 426 56 7832 <i>(fax)</i> 0120 421 678	Malaysia <i>(tel)</i> 1800 888 848 <i>(alt)</i> 1800 828 848 <i>(fax)</i> 1800 801 664	Singapore <i>(tel)</i> 1800 375 8100 <i>(alt)</i> (+65) 6 375 8100 <i>(fax)</i> (+65) 6836 0252	South Korea <i>(tel)</i> 080 769 0800 <i>(alt)</i> (+82) 2 2004 5004 <i>(fax)</i> (+82) 2 2004 5115
Taiwan <i>(tel)</i> 0800 047 866 <i>(alt)</i> 00801 651 317 <i>(fax)</i> 0800 286 331	Thailand <i>(tel)</i> 1800 226 008 <i>(alt)</i> (+66) 2 268 1345 <i>(fax)</i> (+66) 2 661 3714		
Europe			
Austria <i>(tel)</i> 0820 87 44 11* <i>(fax)</i> 0820 87 44 22	Belgium <i>(tel)</i> (+32) (0)2 404 9340 <i>(alt)</i> (+32) (0)2 404 9000 <i>(fax)</i> (+32) (0)2 404 9395	Denmark <i>(tel)</i> (+45) 7013 1515 <i>(alt)</i> (+45) 7013 7313 <i>(fax)</i> (+45) 7013 1555	Finland <i>(tel)</i> (+358) 10 855 2100 <i>(fax)</i> (+358) 10 855 2923
France <i>(tel)</i> 0825 010 700* <i>(alt)</i> (+33) (0)1 6453 5623 <i>(fax)</i> 0825 010 701*	Germany <i>(tel)</i> 01805 24 6333* <i>(alt)</i> 01805 24 6330* <i>(fax)</i> 01805 24 6336*	Ireland <i>(tel)</i> (+353) (0)1 890 924 204 <i>(alt)</i> (+353) (0)1 890 924 206 <i>(fax)</i> (+353) (0)1 890 924 024	Israel <i>(tel)</i> (+972) 3 9288 500 <i>(fax)</i> (+972) 3 9288 501
Italy <i>(tel)</i> (+39) (0)2 9260 8484 <i>(fax)</i> (+39) (0)2 9544 1175	Luxemburg <i>(tel)</i> (+32) (0)2 404 9340 <i>(alt)</i> (+32) (0)2 404 9000 <i>(fax)</i> (+32) (0)2 404 9395	Netherlands <i>(tel)</i> (+31) (0)20 547 2111 <i>(alt)</i> (+31) (0)20 547 2000 <i>(fax)</i> (+31) (0)20 547 2190	Russia <i>(tel)</i> (+7) 095 797 3963 <i>(alt)</i> (+7) 095 797 3900 <i>(fax)</i> (+7) 095 797 3901
Spain <i>(tel)</i> (+34) 91 631 3300 <i>(alt)</i> (+34) 91 631 3000 <i>(fax)</i> (+34) 91 631 3301	Sweden <i>(tel)</i> 0200 88 22 55* <i>(alt)</i> (+46) (0)8 5064 8686 <i>(fax)</i> 020 120 2266*	Switzerland (French) <i>(tel)</i> 0800 80 5353 opt. 2* <i>(alt)</i> (+33) (0)1 6453 5623 <i>(fax)</i> (+41) (0)22 567 5313	Switzerland (German) <i>(tel)</i> 0800 80 5353 opt. 1* <i>(alt)</i> (+49) (0)7031 464 6333 <i>(fax)</i> (+41) (0)1 272 7373
Switzerland (Italian) <i>(tel)</i> 0800 80 5353 opt. 3* <i>(alt)</i> (+39) (0)2 9260 8484 <i>(fax)</i> (+41) (0)22 567 5314	United Kingdom <i>(tel)</i> (+44) (0)7004 666666 <i>(alt)</i> (+44) (0)7004 123123 <i>(fax)</i> (+44) (0)7004 444555		
<i>(tel)</i> = primary telephone number; <i>(alt)</i> = alternate telephone number; <i>(fax)</i> = FAX number; * = in country number			

This page intentionally left blank.

Technical Specifications for the E8362B, E8363B, E8364B

Definitions	3
Corrected System Performance	4
Table 1. System Dynamic Range.....	4
Table 2. Receiver Dynamic Range.....	6
E8363/4B Corrected System Performance with 2.4mm Connectors	7
Table 3. 85056A Cal Kit Std Configuration & Std Power Range (E8363/4B).....	7
Table 4. 85056A Cal Kit Fully Optioned (E836xB - Option 014, UNL, 016, 080, & 081).....	10
Table 5. 85056D Cal Kit Std Configuration & Std Power Range (E8363/4B).....	13
Table 6. 85056D Cal Kit Fully Optioned (E836xB - Option 014, UNL, 016, 080, & 081).....	16
E8363/4B Corrected System Performance with 2.92mm Connectors	19
Table 7. 85056K Cal Kit Std Configuration & Std Power Range (E8363/4B).....	19
Table 8. 85056K Cal Kit Fully Optioned (E836xB - Option 014, UNL, 016, 080, & 081).....	22
E836xB Corrected System Performance with 3.5mm Connectors	25
Table 9. 85052B Cal Kit Std Configuration & Std Power Range (E836xB).....	25
Table 10. 85052B Cal Kit Fully Optioned (E836xB - Option 014, UNL, 016, 080, & 081).....	28
Table 11. 85052C Cal Kit Std Configuration & Std Power Range (E836xB).....	31
Table 12. 85052C Cal Kit Fully Optioned (E836xB - Option 014, UNL, 016, 080, & 081).....	34
Table 13. 85052D Cal Kit Std Configuration & Std Power Range (E836xB).....	37
Table 14. 85052D Cal Kit Fully Optioned (E836xB - Option 014, UNL, 016, 080, & 081).....	40
E836xB Corrected System Performance with 7mm Connectors	43
Table 15. 85050B Cal Kit Std Configuration & Std Power Range (E836xB).....	43
Table 16. 85050B Cal Kit Fully Optioned (E836xB - Option 014, UNL, 016, 080, & 081).....	46
Table 17. 85050C Cal Kit Std Configuration & Std Power Range (E836xB).....	49
Table 18. 85050C Cal Kit Fully Optioned (E836xB - Option 014, UNL, 016, 080, & 081).....	52
Table 19. 85050D Cal Kit Std Configuration & Std Power Range (E836xB).....	55
Table 20. 85050D Cal Kit Fully Optioned (E836xB - Option 014, UNL, 016, 080, & 081).....	58
E836xB Corrected System Performance with Type-N Connectors	61
Table 21. 85054B Cal Kit Std Configuration & Std Power Range (E836xB).....	61
Table 22. 85054B Cal Kit Fully Optioned (E836xB - Option 014, UNL, 016, 080, & 081).....	64
Table 23. 85054D Cal Kit Std Configuration & Std Power Range (E836xB).....	67
Table 24. 85054D Cal Kit Fully Optioned (E836xB - Option 014, UNL, 016, 080, & 081).....	70
E8363/4B Corrected System Performance with WR-28 Connectors	73
Table 25. R11644A Cal Kit Std Configuration & Std Power Range (E8363/4B).....	73
Table 26. R11644A Cal Kit Fully Optioned (E836xB - Option 014, UNL, 016, 080, & 081).....	76
E8363/4B Corrected System Performance with WR-42 Connectors	79
Table 27. K11644A Cal Kit Std Configuration & Std Power Range (E8363/4B).....	79
Table 28. K11644A Cal Kit Fully Optioned (E836xB - Option 014, UNL, 016, 080, & 081).....	82
E836xB Corrected System Performance with WR-62 Connectors	85
Table 29. P11644A Cal Kit Std Configuration & Std Power Range (E836xB).....	85
Table 30. P11644A Cal Kit Fully Optioned (E836xB - Option 014, UNL, 016, 080, & 081).....	88
E836xB Corrected System Performance with WR-90 Connectors	91
Table 31. X11644A Cal Kit Std Configuration & Std Power Range (E836xB).....	91

Table 32. X11644A Cal Kit Fully Optioned (E836xB - Option 014, UNL, 016, 080, & 081).....	94
Table 33. Uncorrected System Performance	97
Table 34. Test Port Output	100
Table 35: Test Port Input.....	104
Table 36. Dynamic Accuracy (Specification).....	111
Table 37. Test Port Input (Group Delay).....	115
General Information	116
Table 38. Miscellaneous Information	116
Table 39. Front Panel Information.....	116
Table 40. Rear Panel Information.....	116
Table 41. Analyzer Environment & Dimensions.....	119
Measurement Throughput Summary	120
Table 42 Typical Cycle Time (ms) for Measurement Completion.....	120
Table 43. Cycle Time vs IF B&width	121
Table 44. Cycle Time vs Number of Points.....	122
Table 45. Data Transfer Time (ms)	122
Specifications: Front-Panel Jumpers	123
Table 46: Measurement Receiver Inputs (Rcvr A In, Rcvr B In).....	123
Table 47: Reference Receiver Inputs (Rcvr R1, Rcvr R2).....	125
Table 48: Reference Outputs (Reference 1 Source Out, Reference 2 Source Out).....	126
Table 49: Source Outputs (Port 1 Source Out, Port 2 Source Out).....	127
Table 50: Coupler Inputs (Port 1 Cplr Thru, Port 2 Cplr Thru).....	129
Table 51: Coupler Outputs (Port 1 Cplr Arm, Port 2 Cplr Arm).....	130
Test Set Block Diagrams	131
E836xB - Std Configuration & Std Power Range	131
E836xB - Option UNL Std Configuration with Extended Power Range & Bias - Tees	131
E836xB - Option UNL Std Configuration with Extended Power Range & Bias - Tees, & Option 016, Receiver Attenuators.....	132
Test Set with Option 014 Block Diagrams	133
E836xB - Option 014 Configurable Test Set & Std Power Range.....	133
E836xB - Option 014 Configurable Test Set & Std Power Range, & Option 081 Reference Channel Transfer Switch.....	134
E836xB - Option 014 Configurable Test Set, & Option UNL Extended Power Range & Bias - Tees.....	135
E836xB - Option 014 Configurable Test Set, & Option UNL Extended Power Range & Bias - Tees, & Option 081 Reference Channel Transfer Switch.....	136
E836xB - Option 014 Configurable Test Set & Option UNL, Extended Power Range & Bias - Tees & Option 016 Receiver Attenuators	137
E836xB - Option 014 Configurable Test Set, & Option UNL Extended Power Range & Bias - Tees, & Option 016 Receiver Attenuators, & Option 081 Reference Channel Transfer Switch.....	138

This is a complete list of the E8362B, E8363B, and E8364B network analyzer technical specifications.

- To optimize viewing of uncertainty curves, click the Maximize button.
- To view or print the Data Sheet (a condensed version of the specifications), visit our web site at <http://www.agilent.com/find/pna>, click "Library," and then click "PNA Series Microwave Network Analyzers Data Sheet."
- The uncertainty curves contained in this document apply only to the setup conditions listed. Please download our free Uncertainty Calculator from http://www.agilent.com/find/na_calculator to generate the curves for your PNA setup. View the [equations](#) used to generate the uncertainty curves.

Definitions

All specifications and characteristics apply over a 25 °C \pm 5 °C range (unless otherwise stated) and 90 minutes after the instrument has been turned on.

Specification (spec.): Warranted performance. Specifications include guardbands to account for the expected statistical performance distribution, measurement uncertainties, and changes in performance due to environmental conditions.

Characteristic (char.): A performance parameter that the product is expected to meet before it leaves the factory, but that is not verified in the field and is not covered by the product warranty. A characteristic includes the same guardbands as a specification.

Typical (typ.): Expected performance of an average unit which does not include guardbands. It is not covered by the product warranty.

Nominal (nom.): A general, descriptive term that does not imply a level of performance. It is not covered by the product warranty.

Calibration: The process of measuring known standards to characterize a network analyzer's systematic (repeatable) errors.

Corrected (residual): Indicates performance after **error correction** (calibration). It is determined by the quality of calibration standards and how well "known" they are, plus system repeatability, stability, and noise.

Uncorrected (raw): Indicates instrument performance without error correction. The uncorrected performance affects the stability of a **calibration**.

Standard: When referring to the analyzer, this includes no options unless noted otherwise.

Corrected System Performance

The specifications in this section apply for measurements made with the E836xB analyzer with the following conditions:

- 10 Hz IF bandwidth
- No averaging applied to data
- Isolation calibration with an averaging factor of 8

Table 1. System Dynamic Range^a

Description	Specification (dB) at Test Port ^b	Typical (dB) at Direct Receiver Access Input ^c	Supplemental Information
Dynamic Range (in a 10 Hz BW)			
Standard Configuration and Standard Power Range (E836xB - Standard)			
10 MHz to 45 MHz ^d	79	NA	
45 MHz to 500 MHz ^e	94	NA	
500 MHz to 2 GHz	119	NA	
2 GHz to 10 GHz	122	NA	
10 GHz to 20 GHz	123	NA	
20 GHz to 30 GHz	114	NA	
30 GHz to 40 GHz	110	NA	
40 GHz to 45 GHz	109	NA	
45 GHz to 50 GHz	104	NA	
Configurable Test Set and Standard Power Range (E836xB - Option 014)			
10 MHz to 45 MHz ^d	79	129	Option 016 degrades performance by 2 dB.
45 MHz to 500 MHz ^e	94	132	
500 MHz to 2 GHz	119	138	
2 GHz to 10 GHz	122	137	
10 GHz to 20 GHz	121	136	
20 GHz to 30 GHz	111	123	
30 GHz to 40 GHz	107	119	
40 GHz to 45 GHz	105	116	
45 GHz to 50 GHz	100	111	
Standard Configuration and Extended Power Range & Bias-Tees (E836xB - Option UNL)			
10 MHz to 45 MHz ^d	79	NA	Option 016 degrades performance by 2 dB.
45 MHz to 500 MHz ^e	92	NA	
500 MHz to 2 GHz	117	NA	
2 GHz to 10 GHz	120	NA	
10 GHz to 20 GHz	121	NA	
20 GHz to 30 GHz	112	NA	
30 GHz to 40 GHz	108	NA	
40 GHz to 45 GHz	105	NA	
45 GHz to 50 GHz	99	NA	

Description	Specification (dB) at Test Port ^b	Typical (dB) at Direct Receiver Access Input ^c	Supplemental Information
Configurable Test Set and Extended Power Range & Bias-Tees (E836xB - Option 014/UNL)			
10 MHz to 45 MHz ^d	79	129	Option 016 degrades performance by 2 dB.
45 MHz to 500 MHz ^{e, f}	92	130	
500 MHz to 2 GHz ^f	117	136	
2 GHz to 10 GHz ^f	120	135	
10 GHz to 20 GHz ^g	119	134	
20 GHz to 30 GHz	109	121	
30 GHz to 40 GHz	105	117	
40 GHz to 45 GHz	101	112	
45 GHz to 50 GHz	95	106	

^a The system dynamic range is calculated as the difference between the noise floor and the source maximum output power. System Dynamic Range is a specification when the source is set to Port 1, and a characteristic when the source is set to Port 2. The effective dynamic range must take measurement uncertainties and interfering signals into account as well as the insertion loss resulting from a thru cable connected between Port 1 and Port 2.

^b The test port system dynamic range is calculated as the difference between the test port noise floor and the source maximum output power. The effective dynamic range must take measurement uncertainties and interfering signals into account as well as the insertion loss resulting from a thru cable connected between Port 1 and Port 2.

^c The direct receiver access input system dynamic range is calculated as the difference between the receiver access input noise floor and the source maximum output power. The effective dynamic range must take measurement uncertainties and interfering signals into account. This set-up should only be used when the receiver input will never exceed its damage level. When the analyzer is in segment sweep mode, the analyzer can have predefined frequency segments which will output a higher power level when the extended dynamic range is required (i.e. devices with high insertion loss), and reduced power when receiver damage may occur (i.e. devices with low insertion loss). The extended range is only available in one-path transmission measurements.

^d Typical performance.

^e May be limited to 100 dB at particular frequencies below 500 MHz due to spurious receiver residuals. Methods are available to regain the full dynamic range.

^f E8362B only: Option H11 decreases value by 1 dB.

^g E8362B only: Option H11 decreases value by 2 dB.

Table 2. Receiver Dynamic Range^a

Description	Specification (dB) at Test Port ^b	Typical (dB) at Direct Receiver Access Input ^c	
Dynamic Range (in a 10 Hz BW)			
Standard Configuration and Standard Power Range (E836xB - Standard)			
OR			
Standard Configuration and Extended Power Range & Bias Tees (E836xB - Option UNL)			
10 MHz to 45 MHz ^d	82	NA	
45 MHz to 500 MHz ^e	94	NA	
500 MHz to 2 GHz	119	NA	
2 GHz to 10 GHz	122	NA	
10 GHz to 20 GHz	125	NA	
20 GHz to 30 GHz	114	NA	Option 016 degrades performance by 2 dB.
30 GHz to 40 GHz	111	NA	
40 GHz to 50 GHz	111	NA	
Configurable Test Set and Standard Power Range (E836xB - Option 014)			
OR			
Configurable Test Set and Extended Power Range & Bias Tees (E836xB - Option 014/UNL)			
10 MHz to 45 MHz ^d	82	132	
45 MHz to 500 MHz ^e	94	132	
500 MHz to 2 GHz	119	138	
2 GHz to 10 GHz	122	137	
10 GHz to 20 GHz	124	139	
20 GHz to 30 GHz	113	125	Option 016 degrades performance by 2 dB.
30 GHz to 40 GHz	110	122	
40 GHz to 50 GHz	109	120	

^a The receiver dynamic range is calculated as the difference between the noise floor and the receiver maximum output power. The effective dynamic range must take measurement uncertainties and interfering signals into account.

^b The test port receiver dynamic range is calculated as the difference between the test port noise floor and the receiver maximum input level. The effective dynamic range must take measurement uncertainties and interfering signals into account.

^c The direct receiver access input receiver dynamic range is calculated as the difference between the direct receiver access input noise floor and the receiver maximum input level. The effective dynamic range must take measurement uncertainties and interfering signals into account. This set-up should only be used when the receiver input will never exceed its compression or damage level. When the analyzer is in segment sweep mode, the analyzer can have predefined frequency segments which will output a higher power level when the extended dynamic range is required (i.e. devices with high insertion loss), and reduced power when compression or receiver damage may occur (i.e. devices with low insertion loss). The extended range is only available in one-path transmission measurements.

^d Typical performance.

^e May be degraded by 10 dB at particular frequencies (multiples of 5 MHz) below 500 MHz due to spurious receiver residuals. Methods are available to regain the full dynamic range.

Note: This E836xB document provides technical specifications for the following calibration kits only: 85056A, 85056D, 85056K, 85052B, 85052C, 85052D, 85050B, 85050C, 85050D, 85054B, 85054D, K11644A, P11644A, R11644A, and the X11644A.

E8363/4B Corrected System Performance with 2.4mm Connectors

Table 3. 85056A Calibration Kit
Standard Configuration and Standard Power Range
 (E8363/4B)


Applies to the E8363/4B analyzers, 85056A (2.4mm) calibration kit, 85133F flexible test port cable set, and a full 2-port calibration. Also applies to the following condition:

Environmental temperature 23° ±3 °C, with < 1 °C deviation from calibration temperature


Description	Specification (dB)			
	45 MHz to 2 GHz	2 to 20 GHz	20 to 40 GHz	40 to 50 GHz
Directivity	42	42	38	36
Source Match	41	38	33	31
Load Match	42	42	37	35
Reflection Tracking	±0.001 +0.02/°C	±0.008 +0.02/°C	±0.020 +0.02/°C	±0.027 +0.03/°C
Transmission Tracking	±0.010 +0.02/°C	±0.049 +0.02/°C	±0.105 +0.02/°C	±0.170 +0.03/°C

Transmission Uncertainty (Specifications)

Magnitude

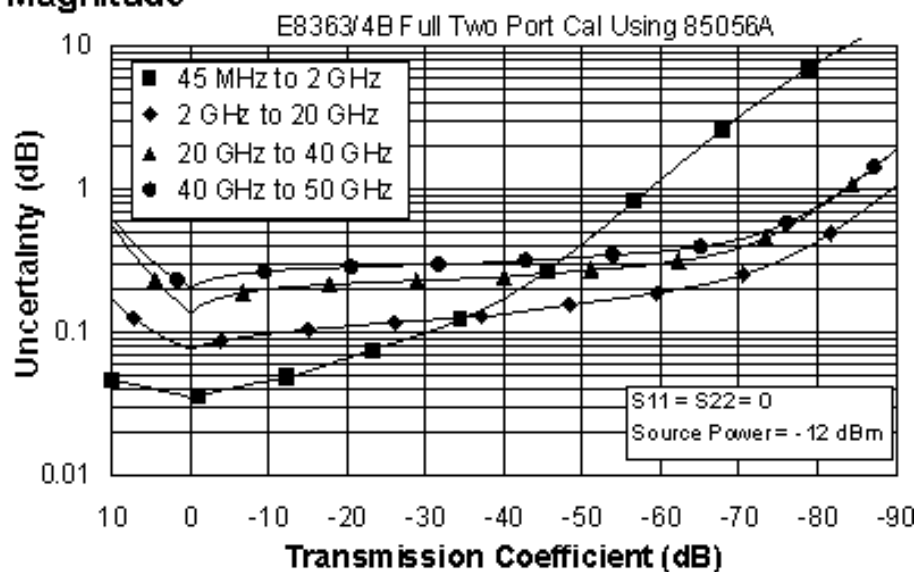


Phase

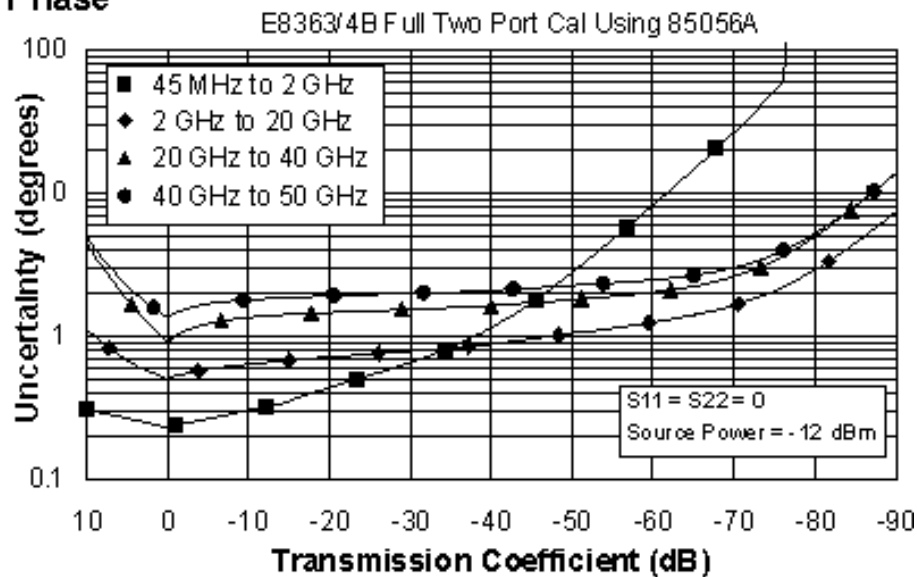

Reflection Uncertainty (Specifications)

Magnitude

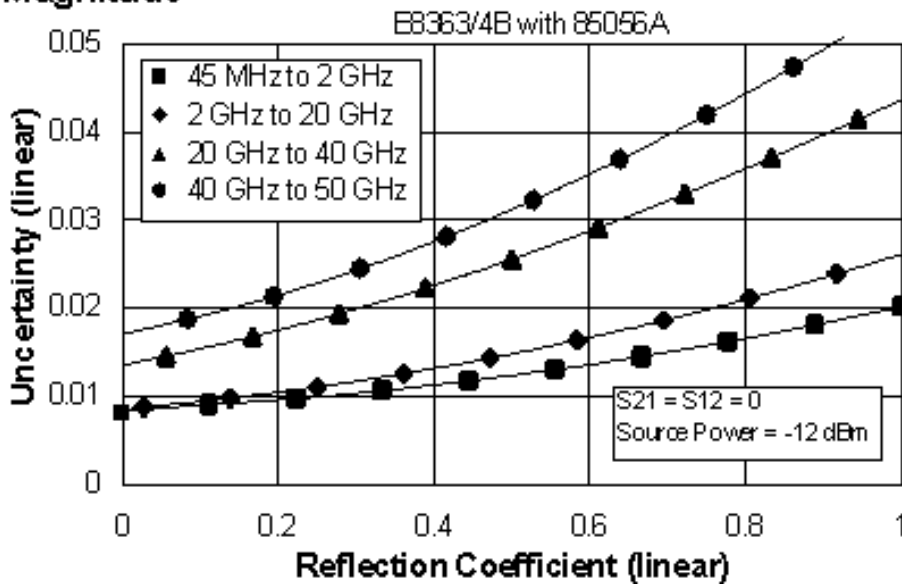

Phase

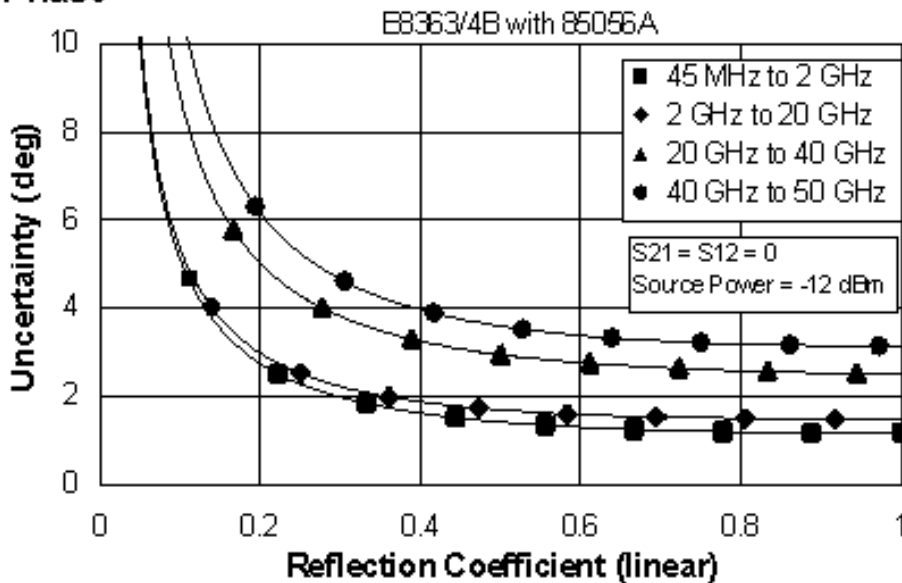


Table 4. 85056A Calibration Kit

Fully Optioned (E836xB - Option 014, UNL, 016, 080, and 081)

Configurable Test Set, Extended Power Range & Bias-Tees, Receiver Attenuators, Frequency Offset Mode, and Reference Channel Transfer Switch

Applies to the, E8363/4B analyzers, 85056A (2.4mm) calibration kit, 85133F flexible test port cable set, and a full 2-port calibration. Also applies to the following condition:


Environmental temperature 23° ±3 °C, with < 1 °C deviation from calibration temperature

Description	Specification (dB)			
	45 MHz to 2 GHz	2 to 20 GHz	20 to 40 GHz	40 to 50 GHz
Directivity	42	42	38	36
Source Match	41	38	33	31
Load Match	42	42	37	35
Reflection Tracking	±0.001 +0.02/°C	±0.008 +0.02/°C	±0.020 +0.02/°C	±0.027 +0.03/°C
Transmission Tracking	±0.019 +0.02/°C	±0.053 +0.02/°C	±0.109 +0.02/°C	±0.182 +0.03/°C

Transmission Uncertainty (Specifications)


Magnitude

E8363/4B Fully Optioned* Full Two Port Cal Using 85056A

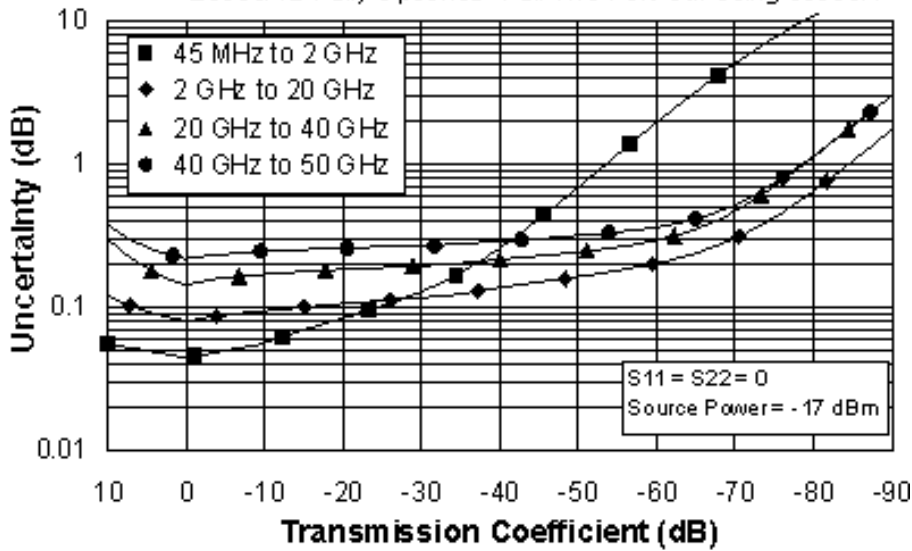

Phase

E8363/4B Fully Optioned* Full Two Port Cal Using 85056A

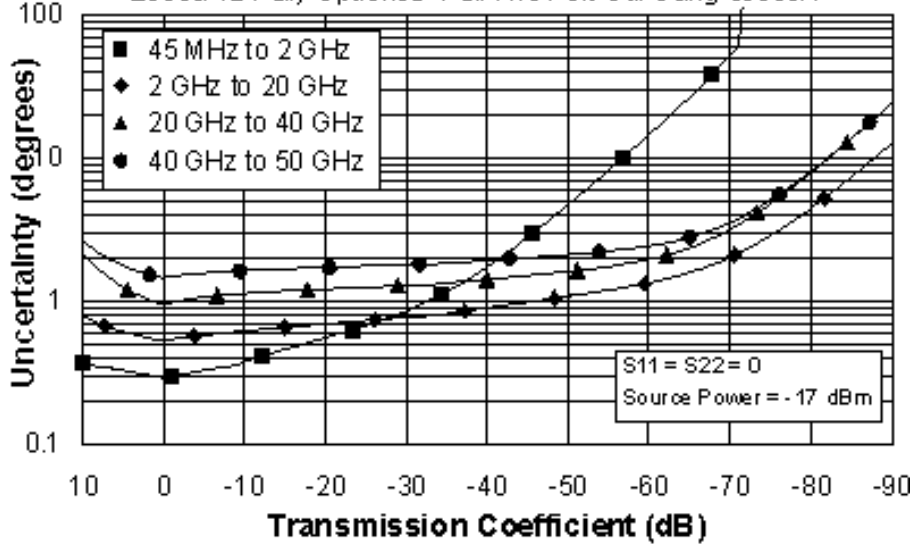


* Configurable Test Set, Extended Power Range & Bias-Tees, Receiver Attenuators, Frequency Offset Mode, and Reference Channel Transfer Switch (E836xB - Option 014, UNL, 016, 080, and 081)

Reflection Uncertainty (Specifications)


Magnitude

E8363/4B Fully Optioned* with 85056A

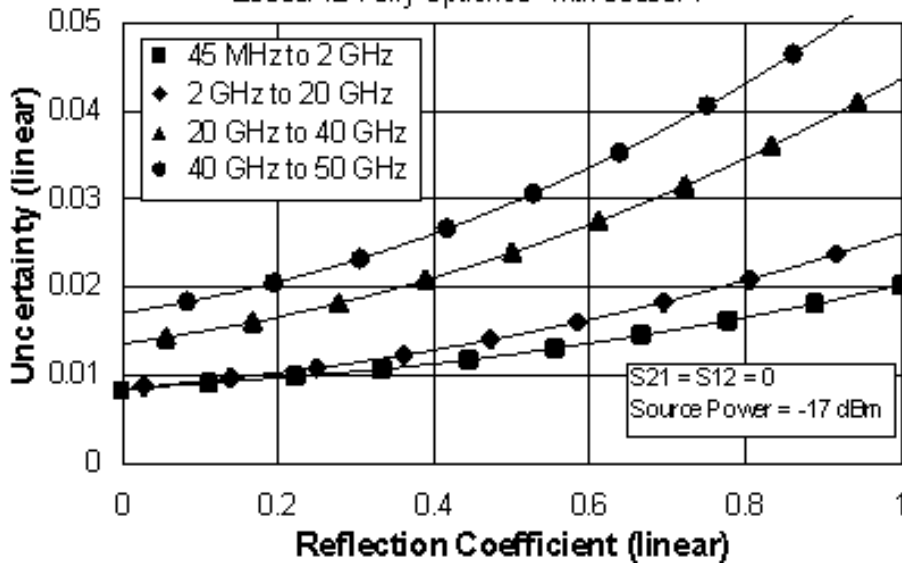

Phase

E8363/4B Fully Optioned* with 85056A

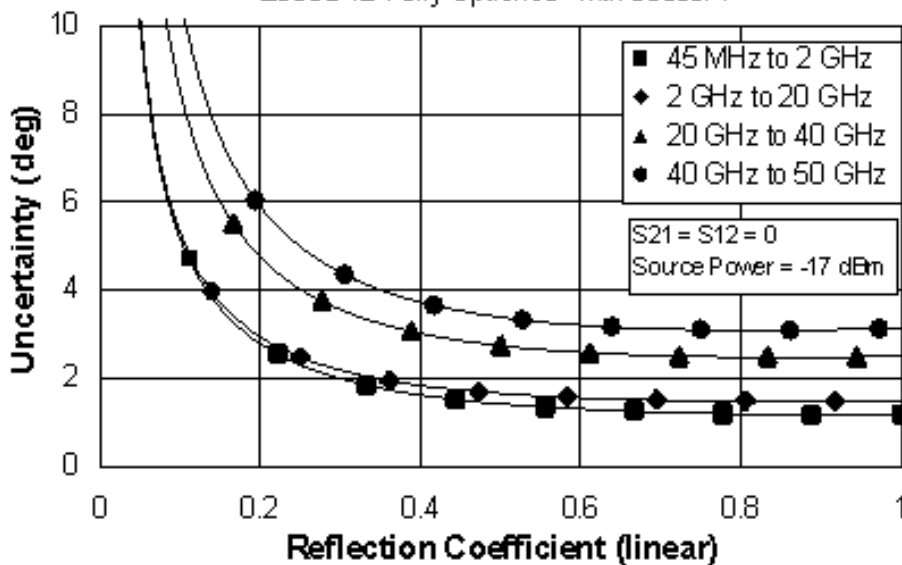

* Configurable Test Set, Extended Power Range & Bias-Tees, Receiver Attenuators, Frequency Offset Mode, and Reference Channel Transfer Switch (E836xB - Option 014, UNL, 016, 080, and 081)

Table 5. 85056D Calibration Kit
Standard Configuration and Standard Power Range
(E8363/4B)


Applies to the, E8363/4B analyzers, 85056D (2.4mm) calibration kit, 85133F flexible test port cable set, and a full 2-port calibration. Also applies to the following condition:

Environmental temperature 23° ±3 °C, with < 1 °C deviation from calibration temperature


Description	Specification (dB)			
	45 MHz to 2 GHz	2 to 20 GHz	20 to 40 GHz	40 to 50 GHz
Directivity	42	34	26	26
Source Match	40	30	24	23
Load Match	42	33	25	25
Reflection Tracking	±0.002 +0.02/°C	±0.029 +0.02/°C	±0.079 +0.02/°C	±0.075 +0.03/°C
Transmission Tracking	±0.011 +0.02/°C	±0.121 +0.02/°C	±0.347 +0.02/°C	±0.462 +0.03/°C

Transmission Uncertainty (Specifications)

Magnitude

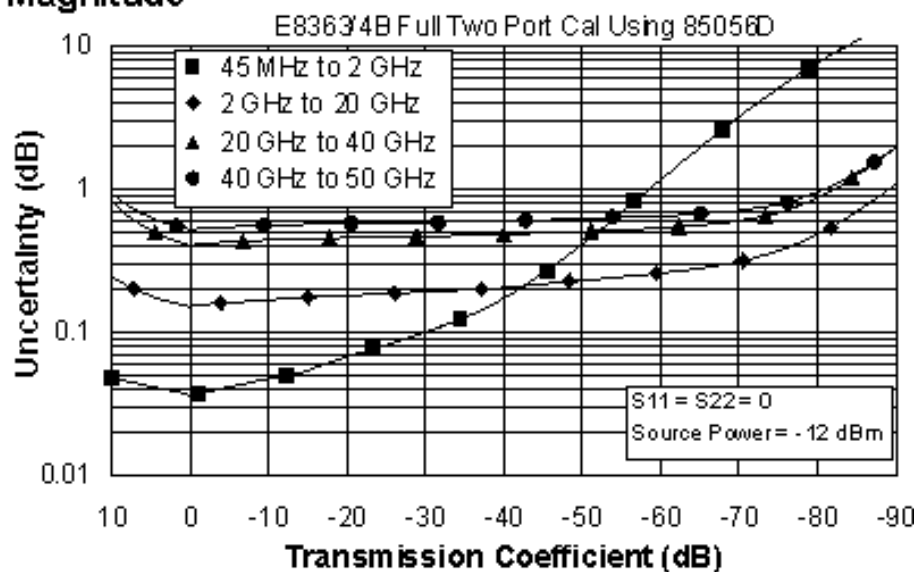


Phase

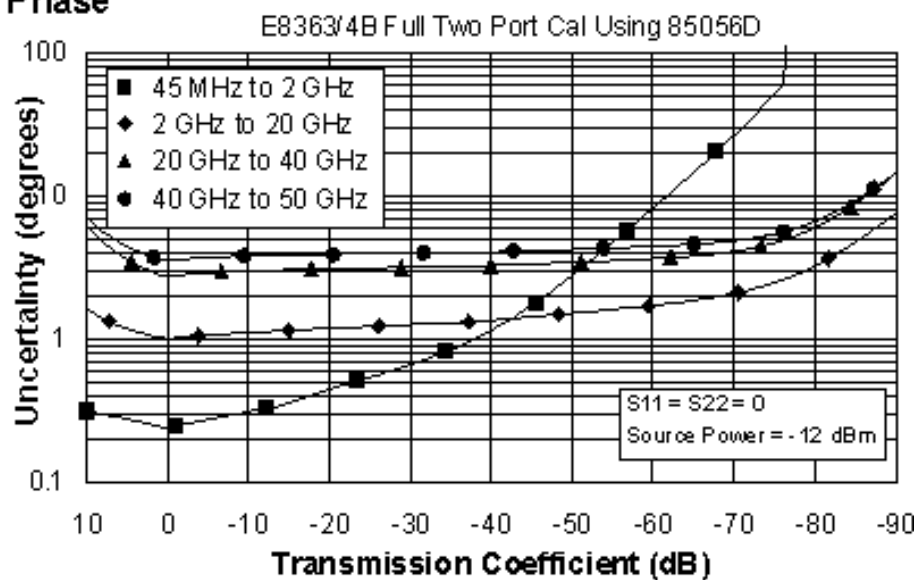

Reflection Uncertainty (Specifications)

Magnitude

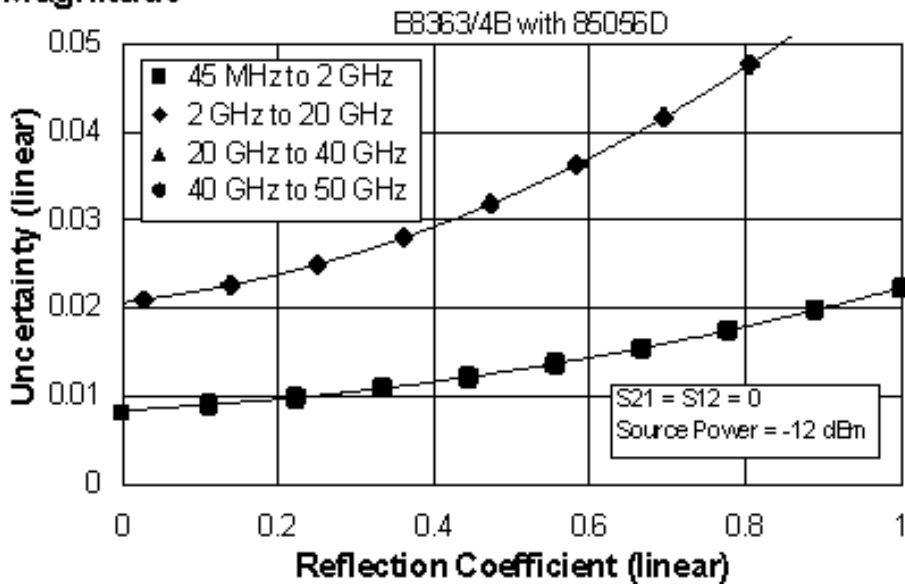

Phase

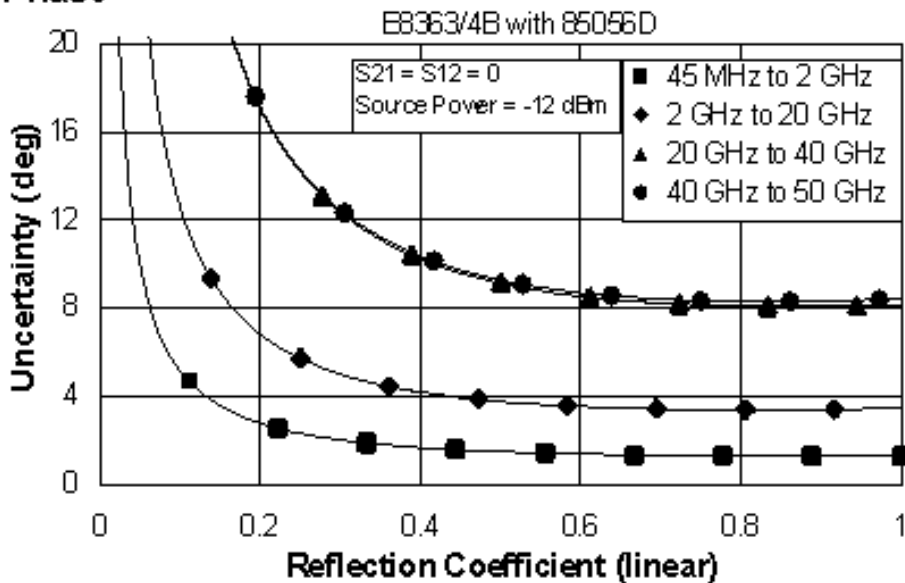


Table 6. 85056D Calibration Kit

Fully Optioned (E836xB - Option 014, UNL, 016, 080, and 081)

Configurable Test Set, Extended Power Range & Bias-Tees, Receiver Attenuators, Frequency Offset Mode, and Reference Channel Transfer Switch


Applies to the, E8363/4B analyzers, 85056D (2.4mm) calibration kit, 85133F flexible test port cable set, and a full 2-port calibration. Also applies to the following condition:

Environmental temperature 23° ±3 °C, with < 1 °C deviation from calibration temperature


Description	Specification (dB)			
	45 MHz to 2 GHz	2 to 20 GHz	20 to 40 GHz	40 to 50 GHz
Directivity	42	34	26	26
Source Match	40	30	24	23
Load Match	42	33	25	25
Reflection Tracking	±0.002 +0.02/°C	±0.029 +0.02/°C	±0.079 +0.02/°C	±0.075 +0.03/°C
Transmission Tracking	±0.022 +0.02/°C	±0.130 +0.02/°C	±0.365 +0.02/°C	±0.498 +0.03/°C

Transmission Uncertainty (Specifications)

Magnitude

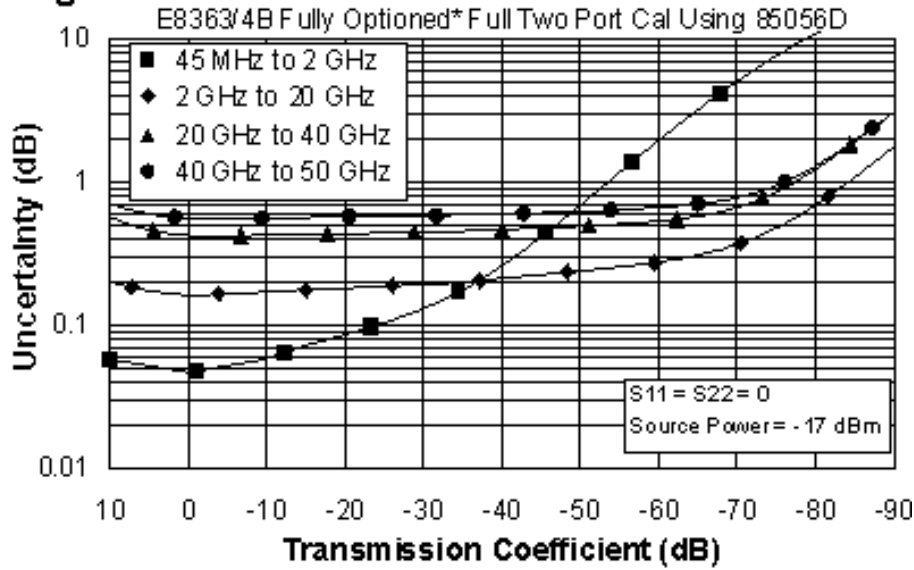


Phase

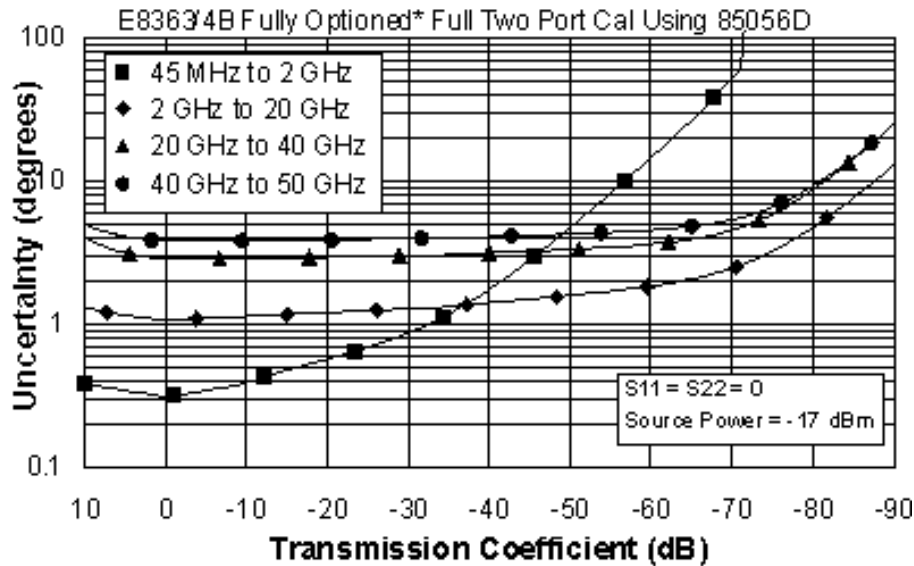


* Configurable Test Set, Extended Power Range & Bias-Tees, Receiver Attenuators, Frequency Offset Mode, and Reference Channel Transfer Switch (E836xB - Option 014, UNL, 016, 080, and 081)

Reflection Uncertainty (Specifications)

Magnitude

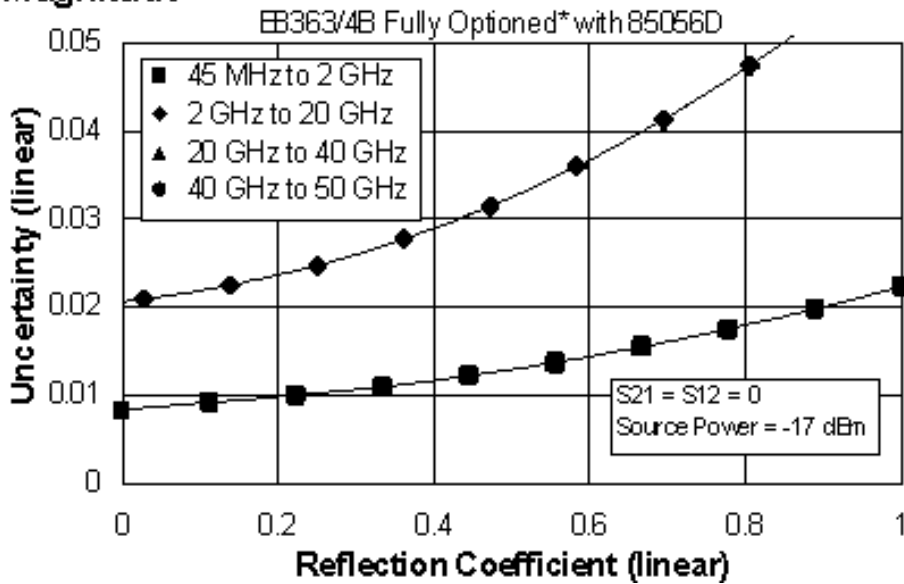

Phase

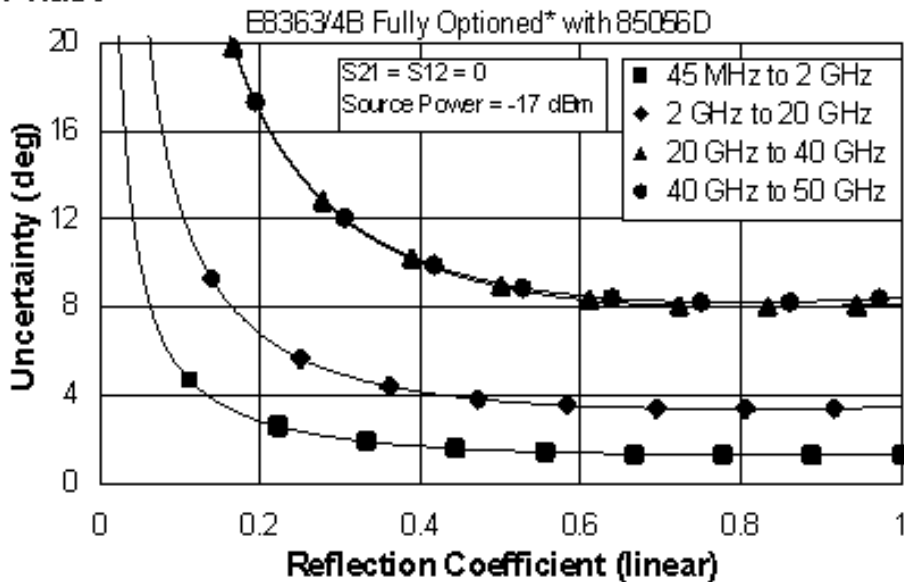

* Configurable Test Set, Extended Power Range & Bias-Tees, Receiver Attenuators, Frequency Offset Mode, and Reference Channel Transfer Switch (E836xB - Option 014, UNL, 016, 080, and 081)

E8363/4B Corrected System Performance with 2.92mm Connectors

Table 7. 85056K Calibration Kit
 Standard Configuration and Standard Power Range
 (E8363/4B)


Applies to the, E8363/4B analyzers, 85056K (2.92mm) calibration kit, 85133F flexible test port cable set, and a full 2-port calibration. Also applies to the following condition:

Environmental temperature 23° ±3 °C, with < 1 °C deviation from calibration temperature


Description	Specification (dB)		
	0.045 to 2 GHz	2 to 20 GHz	20 to 40 GHz
Directivity	42	42	40
Source Match	40	40	35
Load Match	42	41	38
Reflection Tracking	±0.018 +0.02/°C	±0.018 +0.02/°C	±0.067 +0.03/°C
Transmission Tracking	±0.011 +0.02/°C	±0.042 +0.02/°C	±0.089 +0.03/°C

Transmission Uncertainty (Specifications)

Magnitude

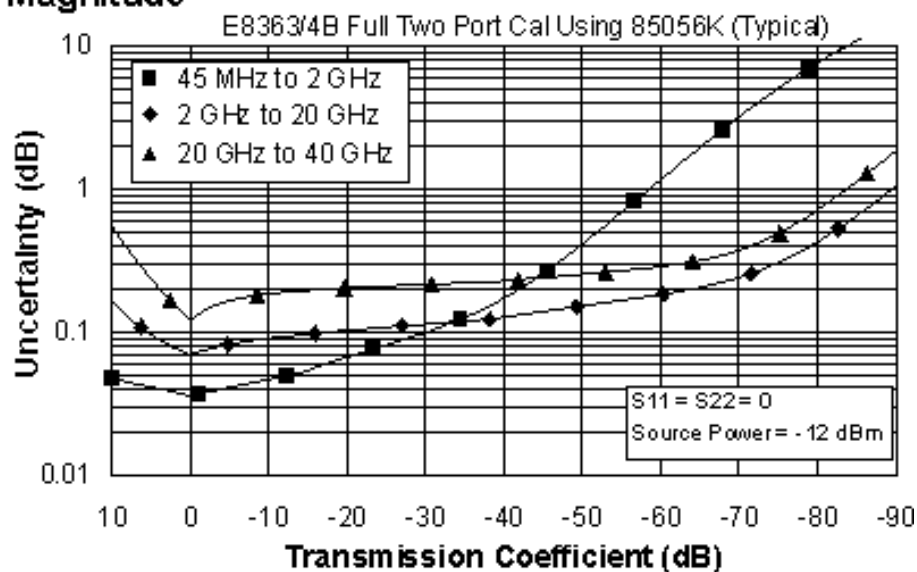


Phase

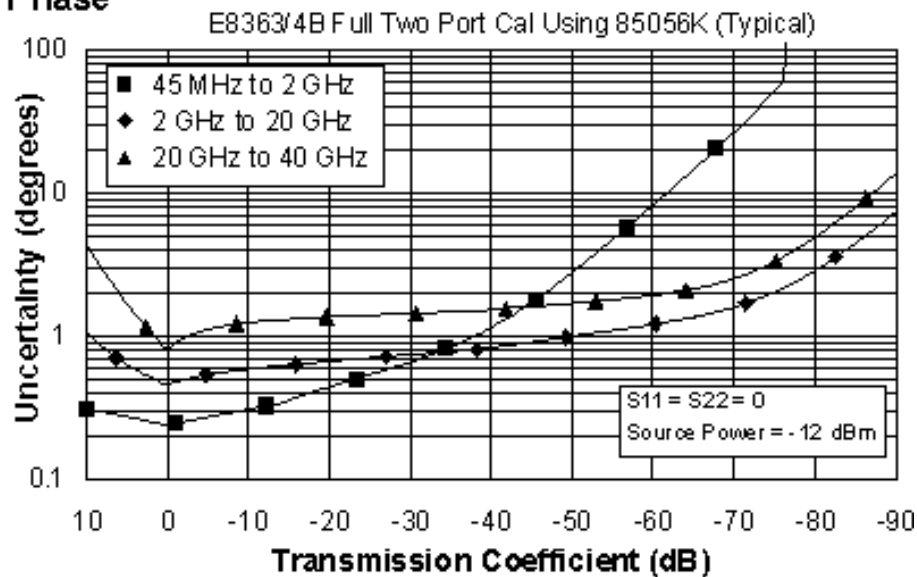

Reflection Uncertainty (Specifications)

Magnitude

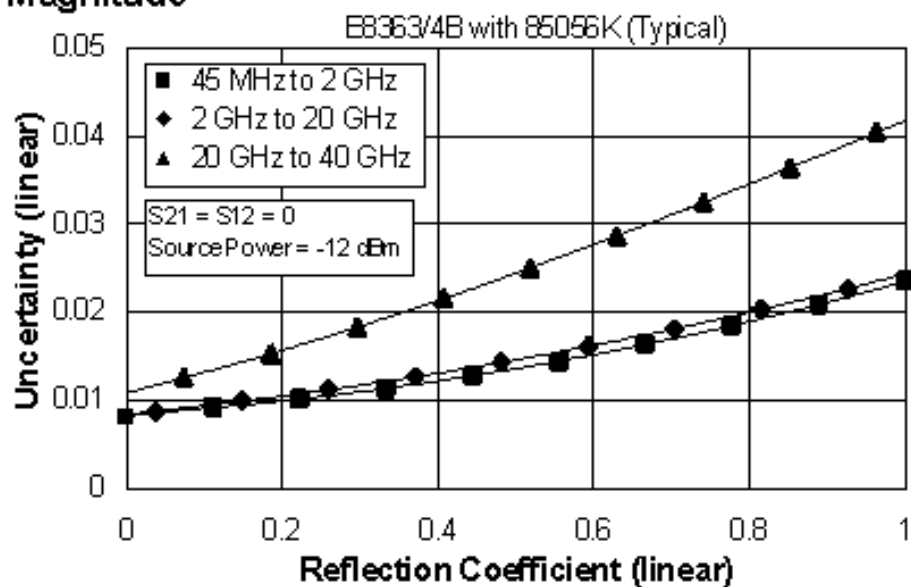

Phase

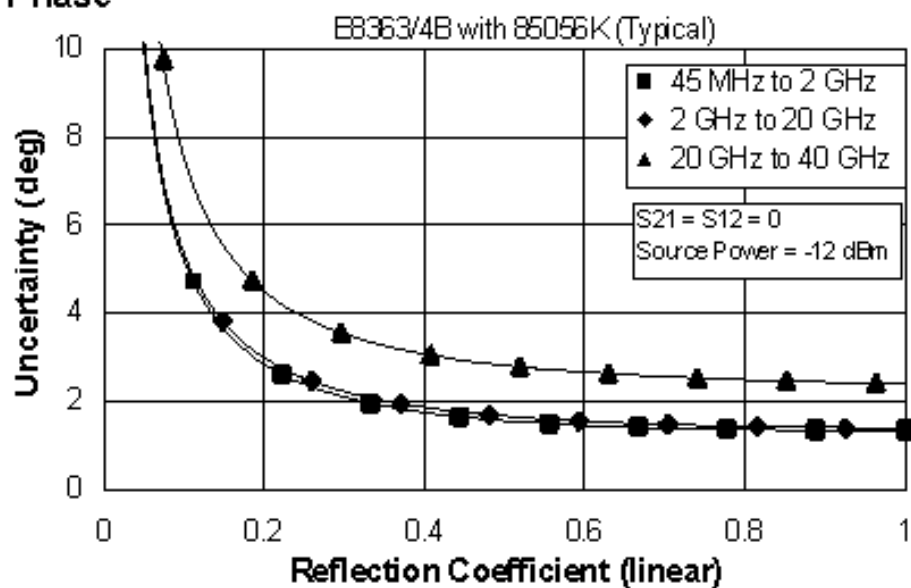


Table 8. 85056K Calibration Kit

Fully Optioned (E836xB - Option 014, UNL, 016, 080, and 081)

Configurable Test Set, Extended Power Range & Bias-Tees, Receiver Attenuators, Frequency Offset Mode, and Reference Channel Transfer Switch


Applies to the, E8363/4B analyzers, 85056K (2.92mm) calibration kit, 85133F flexible test port cable set, and a full 2-port calibration. Also applies to the following condition:

Environmental temperature 23° ±3 °C, with < 1 °C deviation from calibration temperature


Description	Specification (dB)		
	0.045 to 2 GHz	2 to 20 GHz	20 to 40 GHz
Directivity	42	42	40
Source Match	40	40	35
Load Match	42	41	38
Reflection Tracking	±0.018 +0.02/°C	±0.018 +0.02/°C	±0.067 +0.03/°C
Transmission Tracking	±0.021 +0.02/°C	±0.046 +0.02/°C	±0.094 +0.03/°C

Transmission Uncertainty (Specifications)

Magnitude

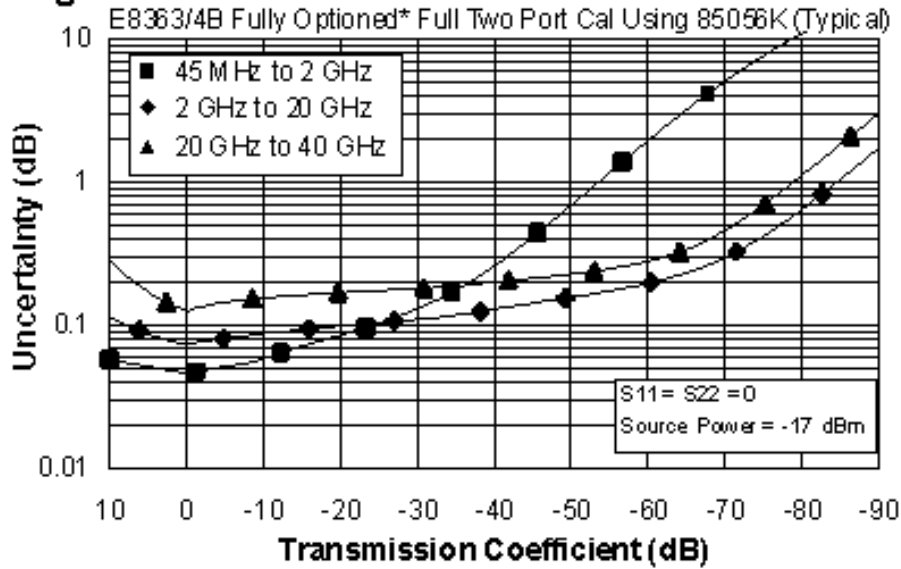


Phase

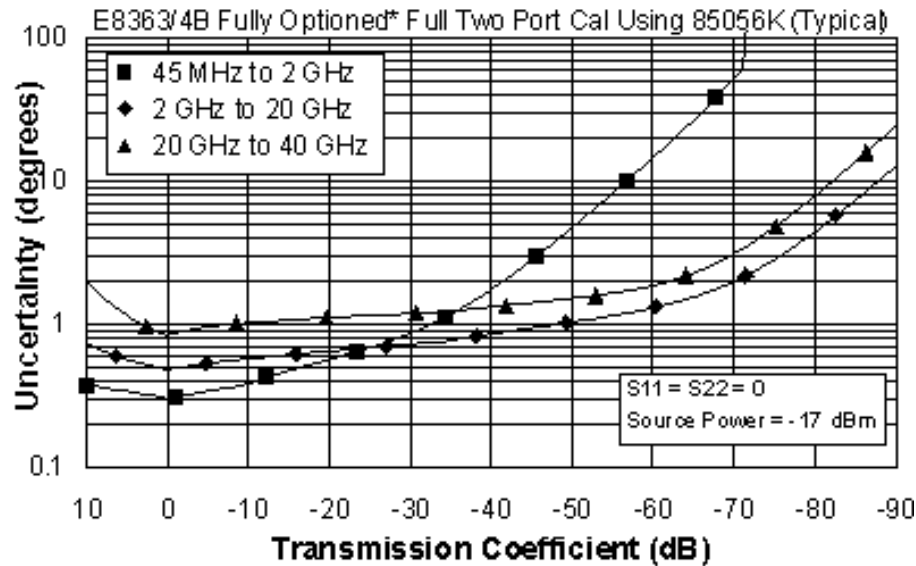


* Configurable Test Set, Extended Power Range & Bias-Tees, Receiver Attenuators, Frequency Offset Mode, and Reference Channel Transfer Switch (E836xB - Option 014, UNL, 016, 080, and 081)

Reflection Uncertainty (Specifications)

Magnitude

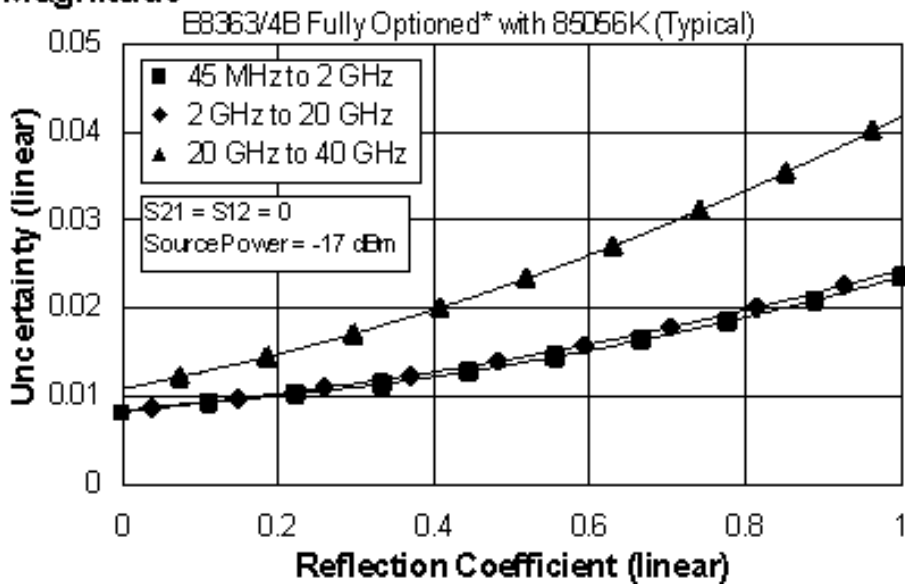

Phase

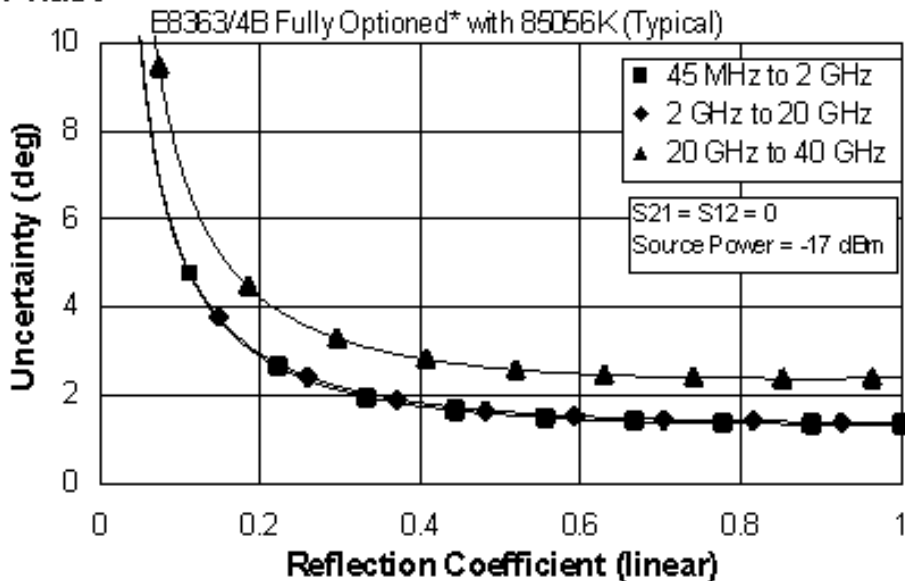

* Configurable Test Set, Extended Power Range & Bias-Tees, Receiver Attenuators, Frequency Offset Mode, and Reference Channel Transfer Switch (E836xB - Option 014, UNL, 016, 080, and 081)

E836xB Corrected System Performance with 3.5mm Connectors

Table 9. 85052B Calibration Kit
Standard Configuration and Standard Power Range
 (E836xB)


Applies to the, E836xB analyzers, 85052B (3.5mm) calibration kit, 85131F flexible test port cable set, and a full 2-port calibration. Also applies to the following condition:

Environmental temperature 23° ±3 °C, with < 1 °C deviation from calibration temperature


Description	Specification (dB)		
	45 MHz to 2 GHz	2 to 20 GHz	20 to 26.5 GHz
Directivity	48	44	44
Source Match	40	31	31
Load Match	48	44	44
Reflection Tracking	±0.003 +0.02/°C	±0.006 +0.02/°C	±0.006 +0.03/°C
Transmission Tracking	±0.009 +0.02/°C	±0.088 +0.02/°C	±0.104 +0.03/°C

Transmission Uncertainty (Specifications)

Magnitude

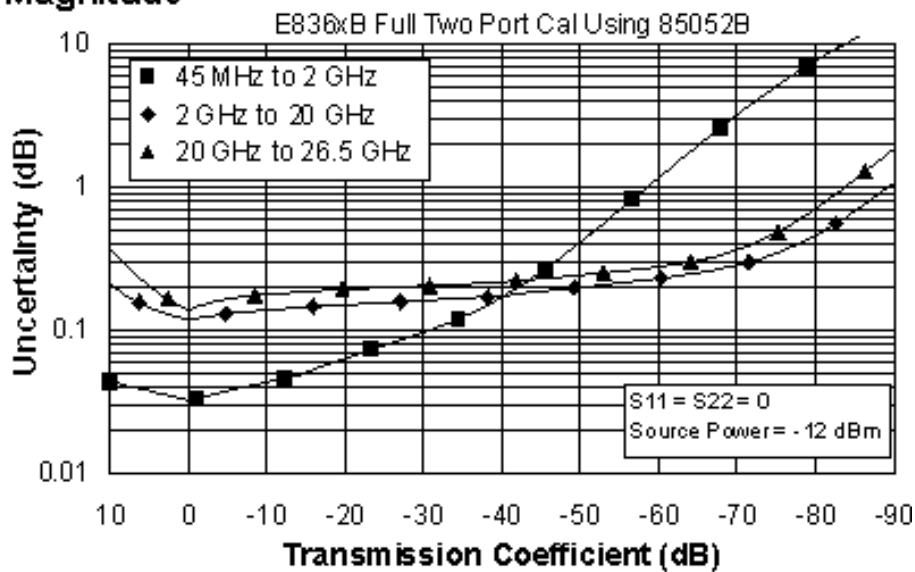


Phase

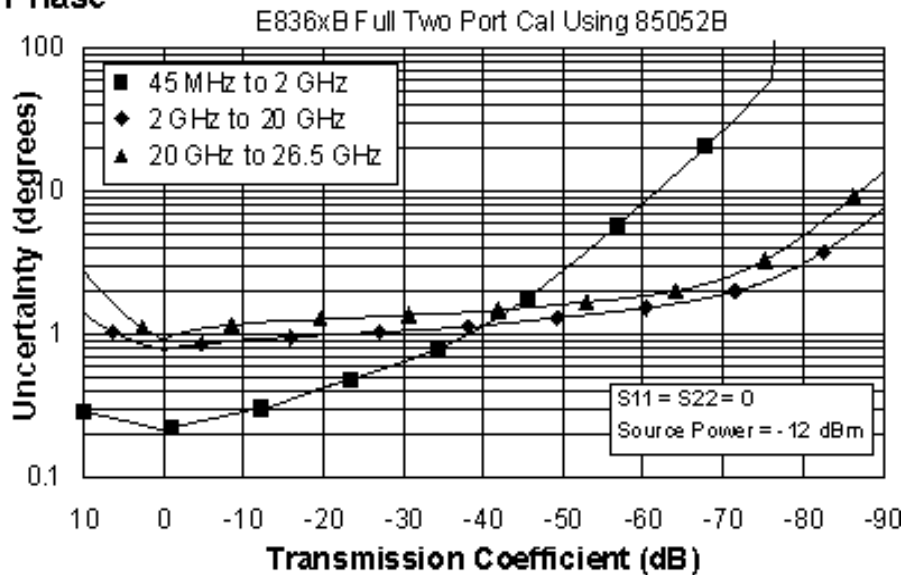

Reflection Uncertainty (Specifications)

Magnitude

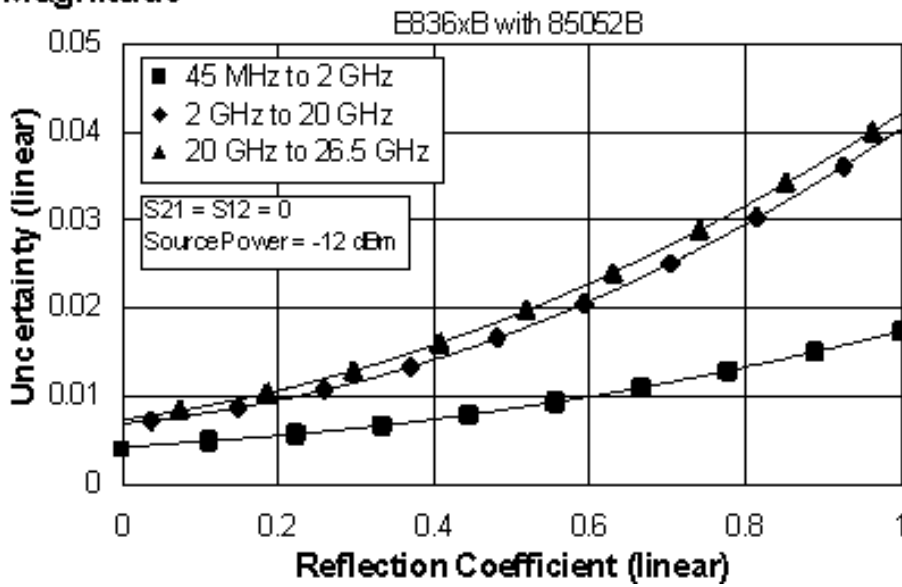

Phase

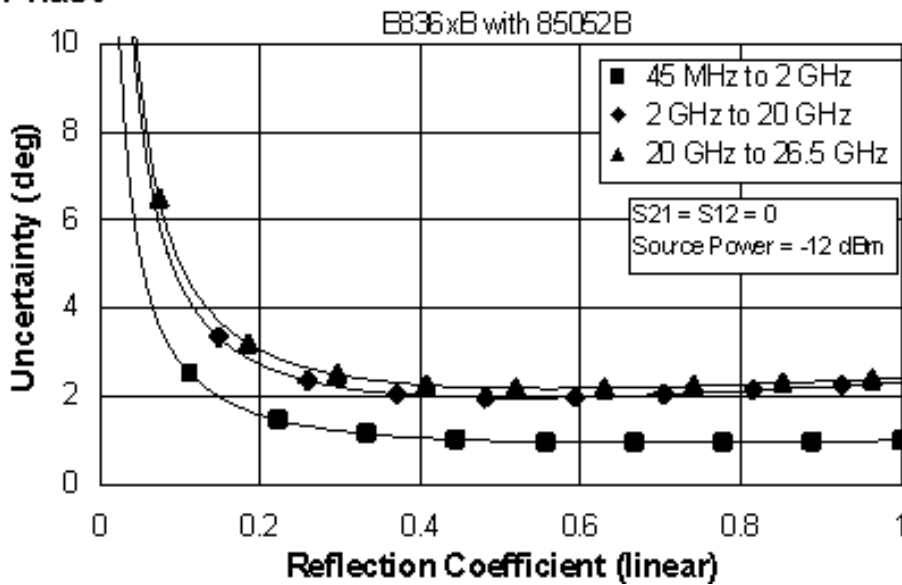


Table 10. 85052B Calibration Kit

Fully Optioned (E836xB - Option 014, UNL, 016, 080, and 081)

Configurable Test Set, Extended Power Range & Bias-Tees, Receiver Attenuators, Frequency Offset Mode, and Reference Channel Transfer Switch

Applies to the, E836xB analyzers, 85052B (3.5mm) calibration kit, 85131F flexible test port cable set, and a full 2-port calibration. Also applies to the following condition:


Environmental temperature 23° ±3 °C, with < 1 °C deviation from calibration temperature

Description	Specification (dB)		
	45 MHz to 2 GHz	2 to 20 GHz	20 to 26.5 GHz
Directivity	48	44	44
Source Match	40	31	31
Load Match	48	44	44
Reflection Tracking	±0.003 +0.02/°C	±0.006 +0.02/°C	±0.006 +0.03/°C
Transmission Tracking	±0.017 +0.02/°C	±0.091 +0.02/°C	±0.106 +0.03/°C

Transmission Uncertainty (Specifications)


Magnitude

E836xB Fully Optioned* Full Two Port Cal Using 85052B

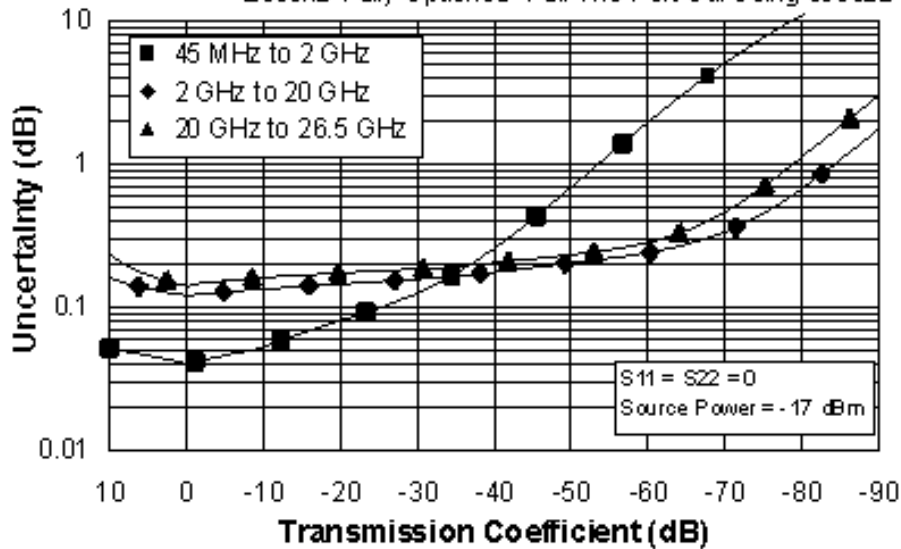

Phase


E836xB Fully Optioned* Full Two Port Cal Using 85052B

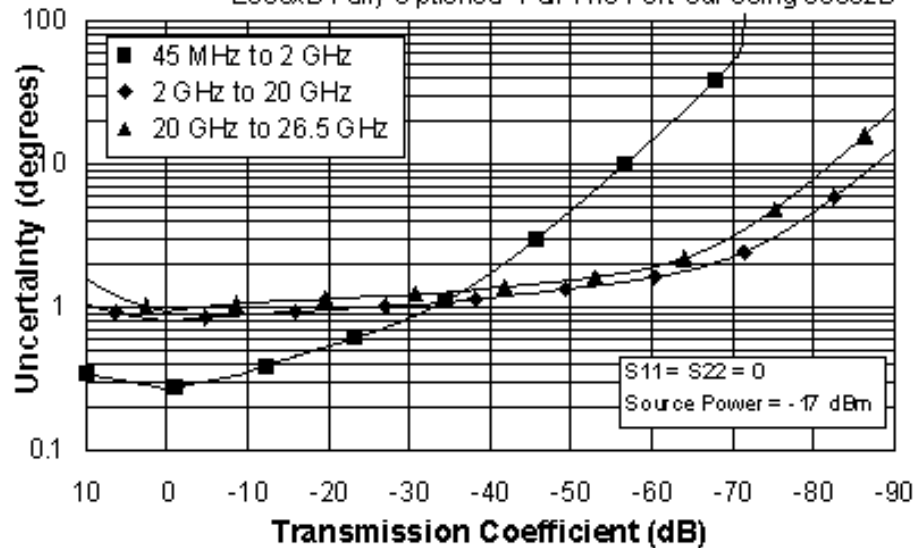


* Configurable Test Set, Extended Power Range & Bias-Tees, Receiver Attenuators, Frequency Offset Mode, and Reference Channel Transfer Switch
(E836xB - Option 014, UNL, 016, 080, and 081)

Reflection Uncertainty (Specifications)

Magnitude

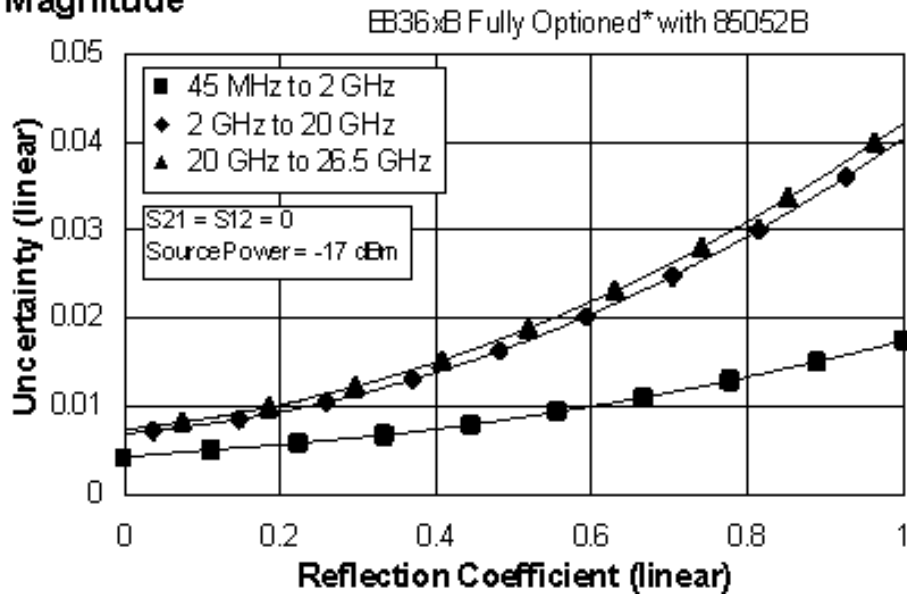

Phase

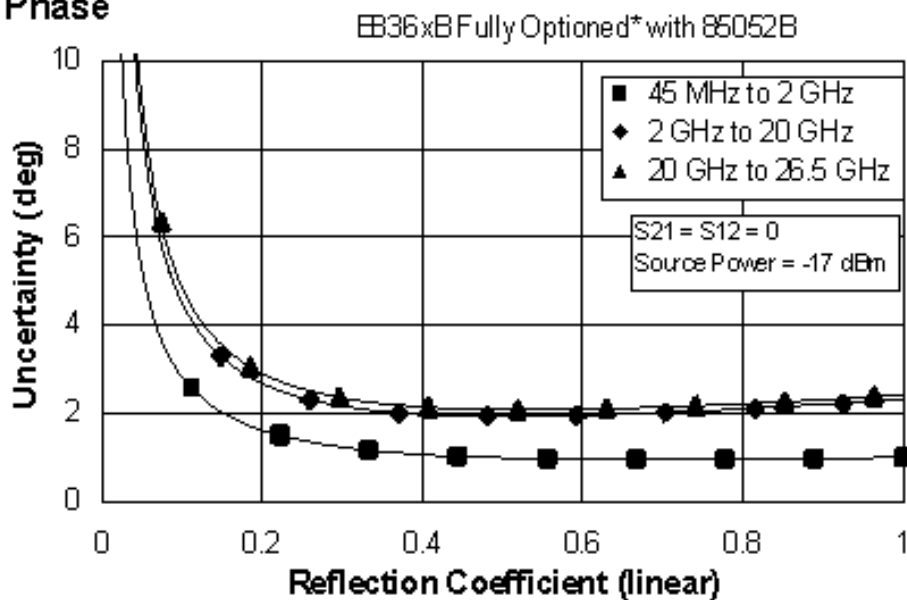

* Configurable Test Set, Extended Power Range & Bias-Tees, Receiver Attenuators, Frequency Offset Mode, and Reference Channel Transfer Switch
(E836xB - Option 014, UNL, 016, 080, and 081)

**Table 11. 85052C Calibration Kit
Standard Configuration and Standard Power Range
(E836xB)**


Applies to the, E836xB analyzers, 85052C (3.5mm) calibration kit, 85131F flexible test port cable set, and a full 2-port calibration. Also applies to the following condition:

Environmental temperature 23° ±3 °C, with < 1 °C deviation from calibration temperature


Description	Specification (dB)		
	45 MHz to 2 GHz	2 to 20 GHz	20 to 26.5 GHz
Directivity	48	50	50
Source Match	40	50	50
Load Match	48	50	50
Reflection Tracking	±0.003 +0.02/°C	±0.000 +0.02/°C	±0.000 +0.03/°C
Transmission Tracking	±0.009 +0.02/°C	±0.014 +0.02/°C	±0.018 +0.03/°C

Transmission Uncertainty (Specifications)

Magnitude

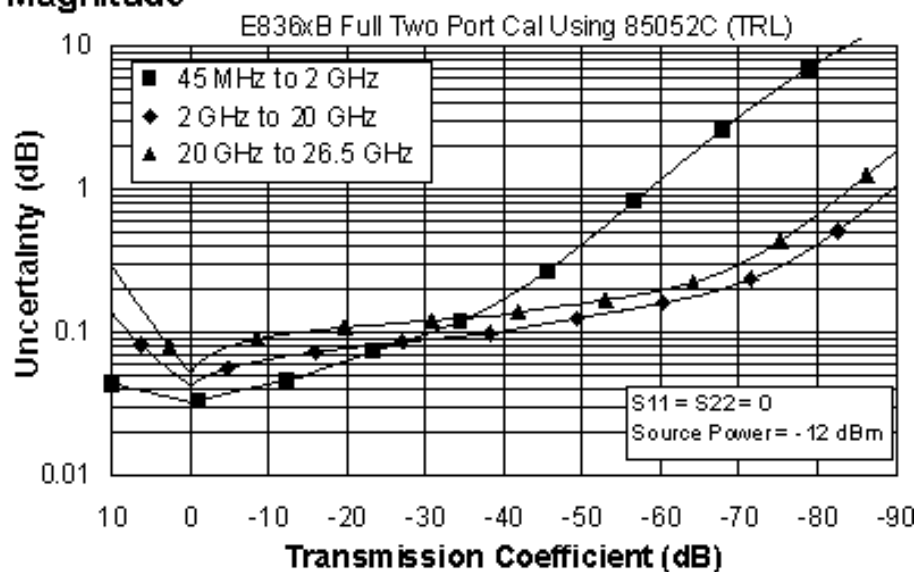


Phase

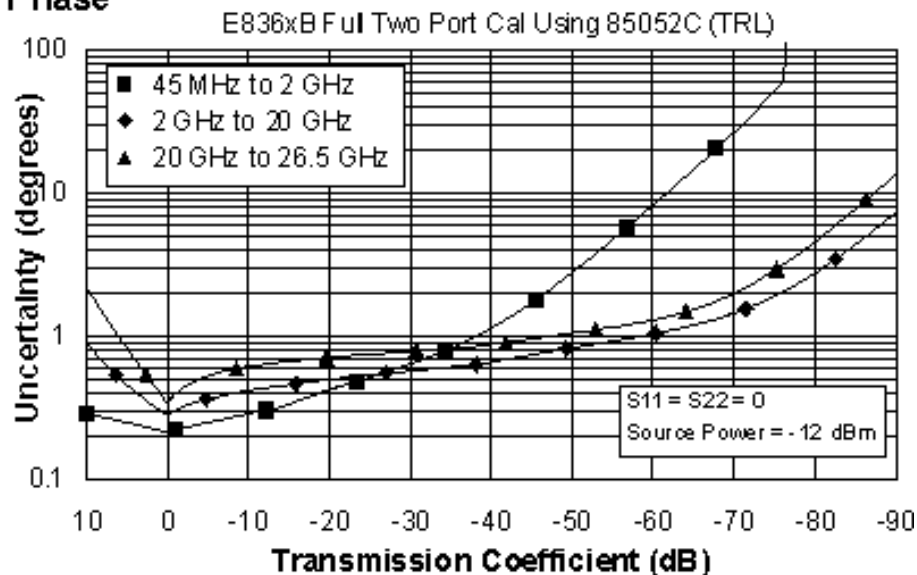

Reflection Uncertainty (Specifications)

Magnitude

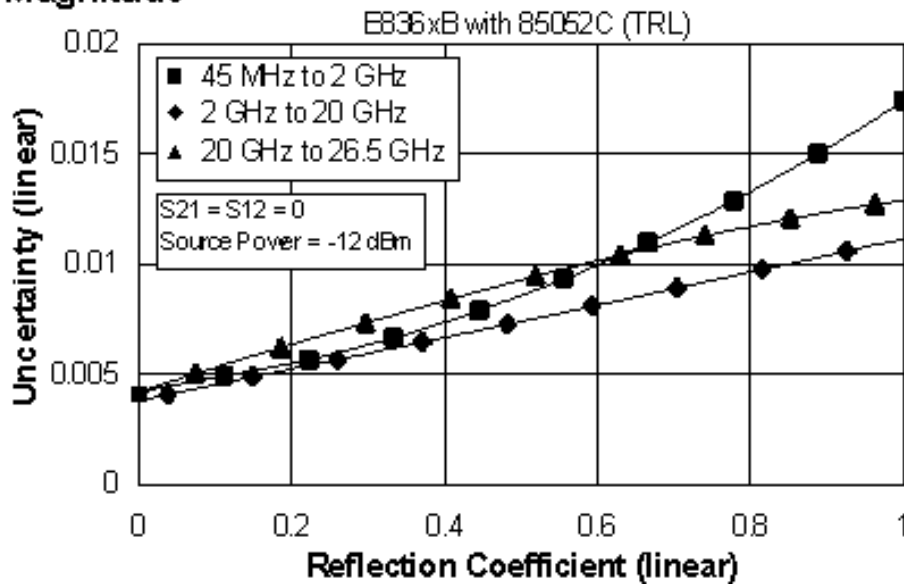

Phase

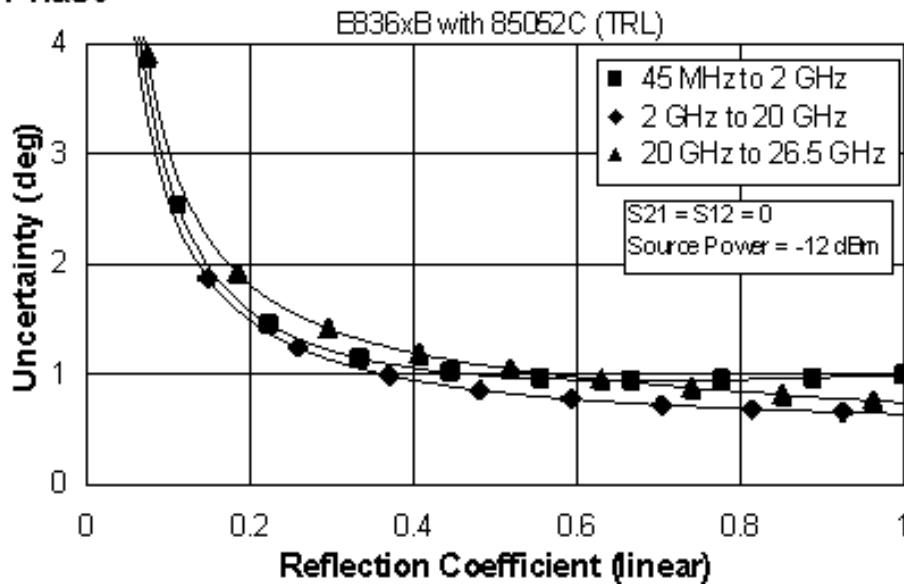


Table 12. 85052C Calibration Kit

Fully Optioned (E836xB - Option 014, UNL, 016, 080, and 081)

Configurable Test Set, Extended Power Range & Bias-Tees, Receiver Attenuators, Frequency Offset Mode, and Reference Channel Transfer Switch


Applies to the, E836xB analyzers, 85052C (3.5mm) calibration kit, 85131F flexible test port cable set, and a full 2-port calibration. Also applies to the following condition:

Environmental temperature 23° ±3 °C, with < 1 °C deviation from calibration temperature


Description	Specification (dB)		
	45 MHz to 2 GHz	2 to 20 GHz	20 to 26.5 GHz
Directivity	48	50	50
Source Match	40	50	50
Load Match	48	50	50
Reflection Tracking	±0.003 +0.02/°C	±0.000 +0.02/°C	±0.000 +0.03/°C
Transmission Tracking	±0.017 +0.02/°C	±0.016 +0.02/°C	±0.019 +0.03/°C

Transmission Uncertainty (Specifications)

Magnitude

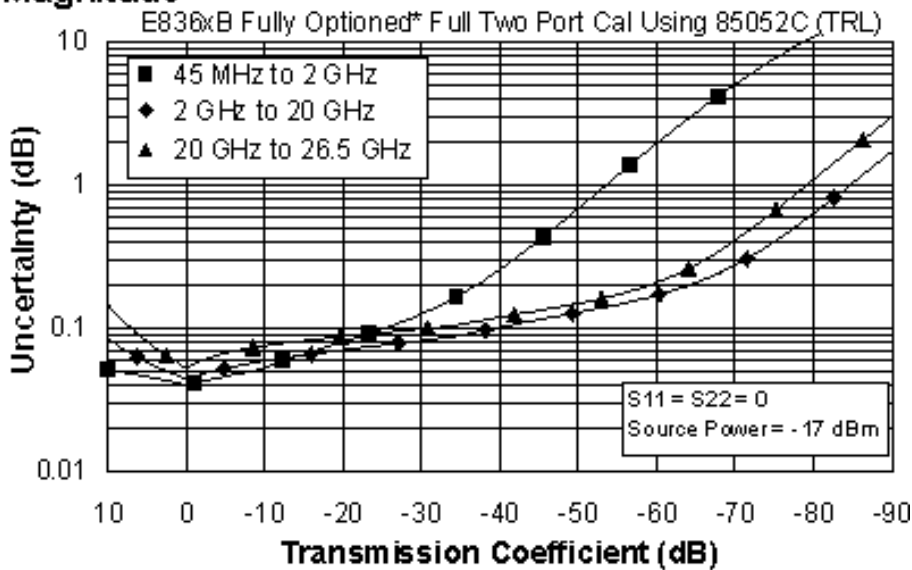


Phase

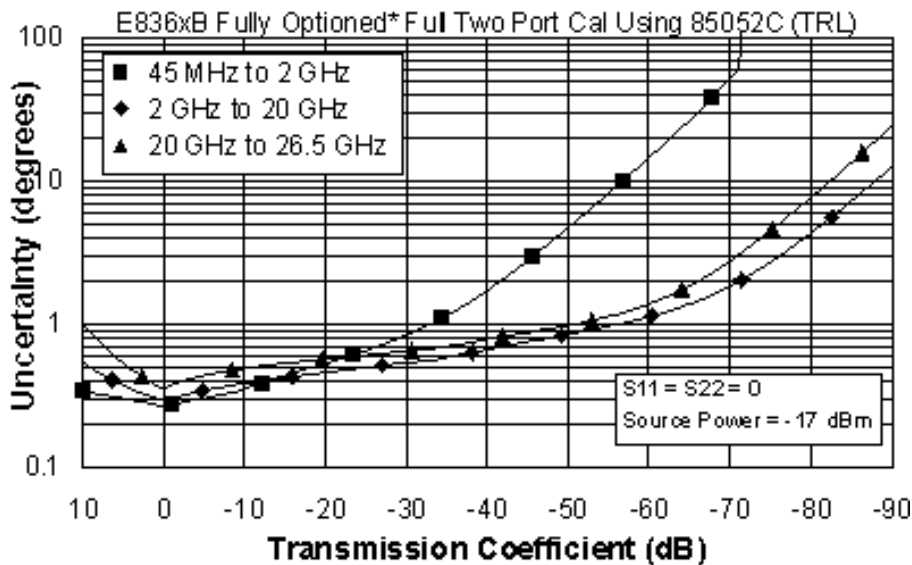


* Configurable Test Set, Extended Power Range & Bias-Tees, Receiver Attenuators, Frequency Offset Mode, and Reference Channel Transfer Switch
(E836xB - Option 014, UNL, 016, 080, and 081)

Reflection Uncertainty (Specifications)

Magnitude

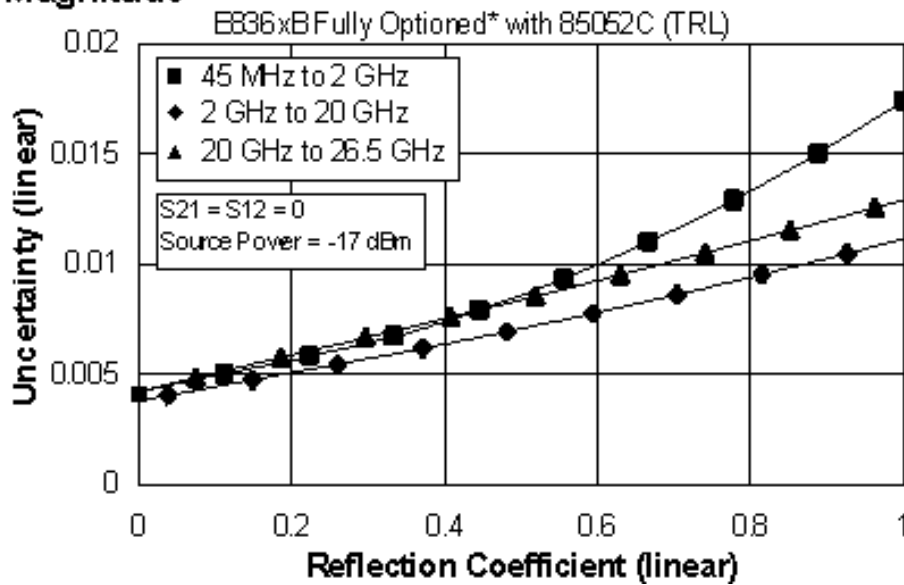

Phase

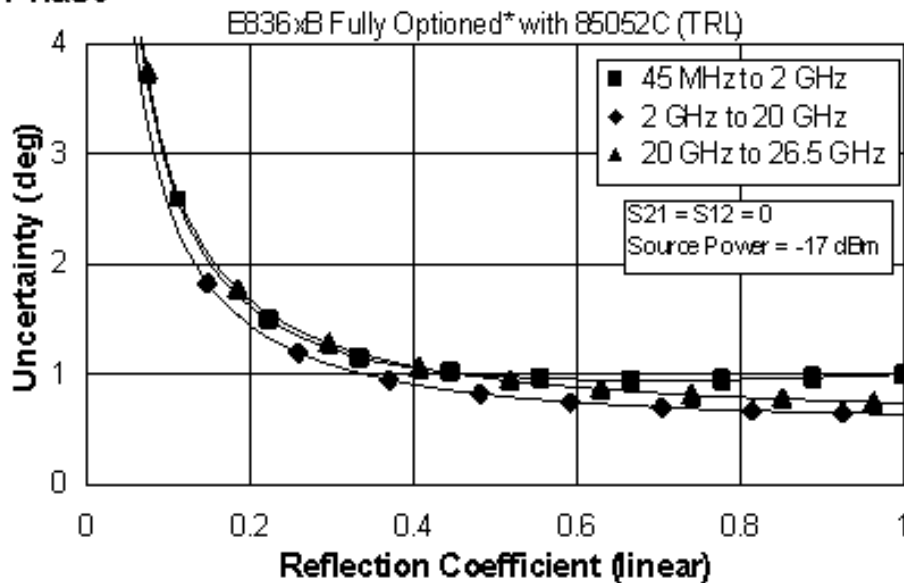

* Configurable Test Set, Extended Power Range & Bias-Tees, Receiver Attenuators, Frequency Offset Mode, and Reference Channel Transfer Switch
(E836xB - Option 014, UNL, 016, 080, and 081)

**Table 13. 85052D Calibration Kit
Standard Configuration and Standard Power Range
(E836xB)**


Applies to the, E836xB analyzers, 85052D (3.5mm) calibration kit, 85131F flexible test port cable set, and a full 2-port calibration. Also applies to the following condition:

Environmental temperature 23° ±3 °C, with < 1 °C deviation from calibration temperature


Description	Specification (dB)		
	45 MHz to 2 GHz	2 to 20 GHz	20 to 26.5 GHz
Directivity	42	36	30
Source Match	37	28	25
Load Match	42	36	30
Reflection Tracking	±0.003 +0.02/°C	±0.008 +0.02/°C	±0.011 +0.03/°C
Transmission Tracking	±0.014 +0.02/°C	±0.131 +0.02/°C	±0.250 +0.03/°C

Transmission Uncertainty (Specifications)

Magnitude

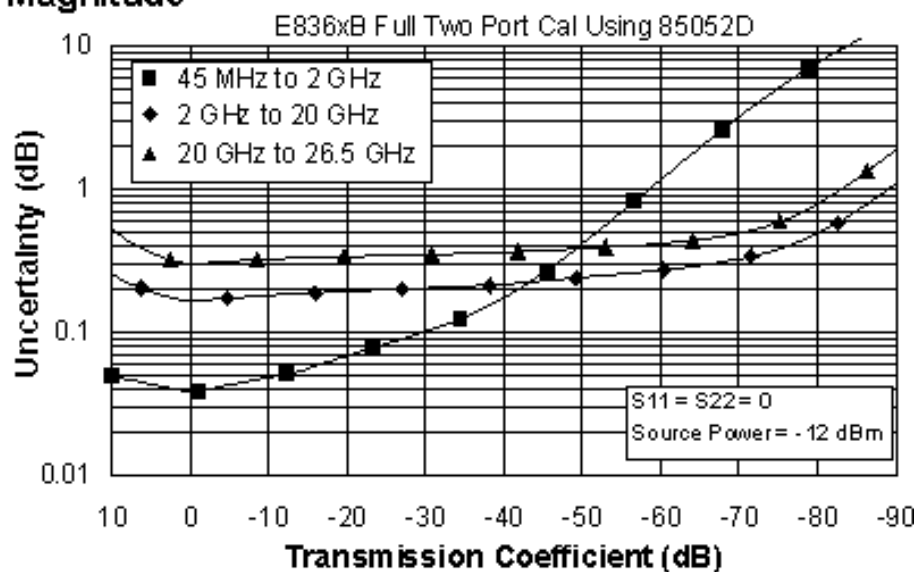


Phase

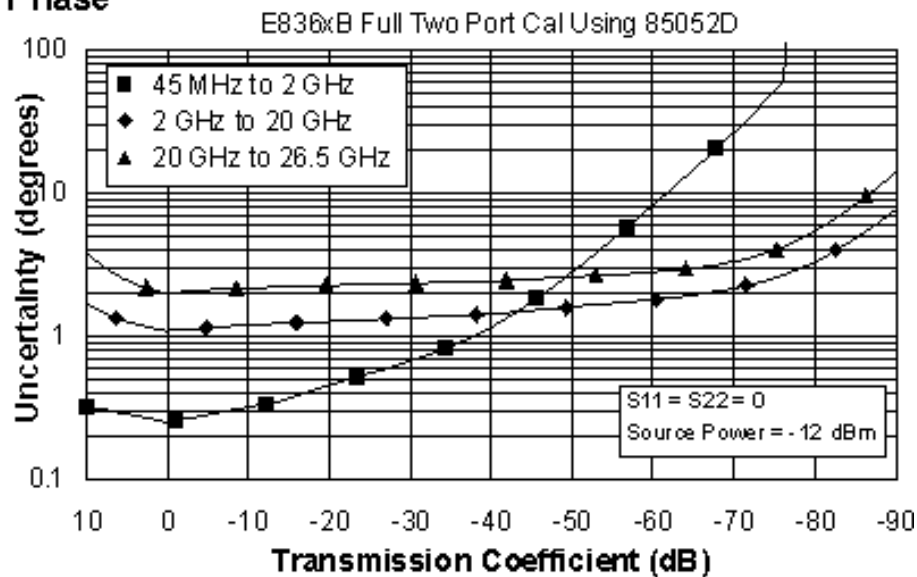

Reflection Uncertainty (Specifications)

Magnitude

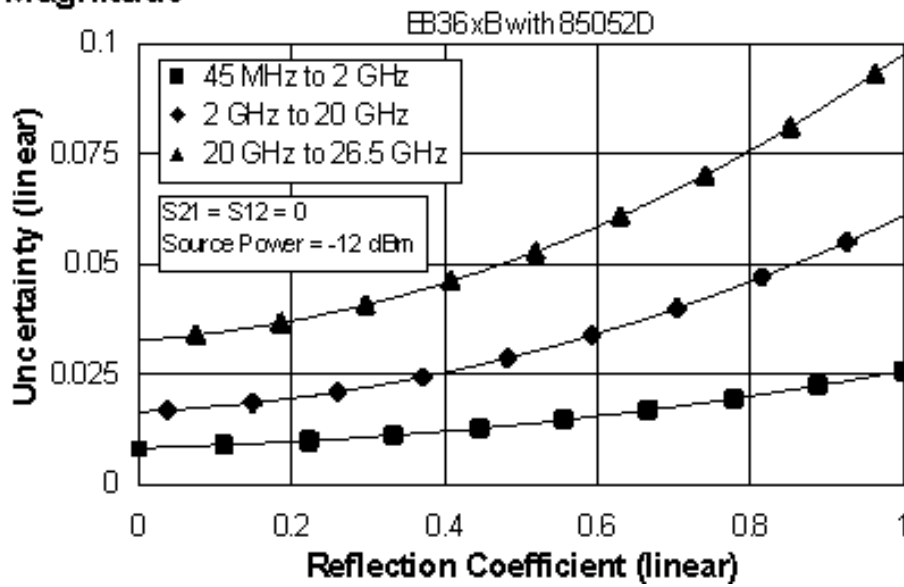

Phase

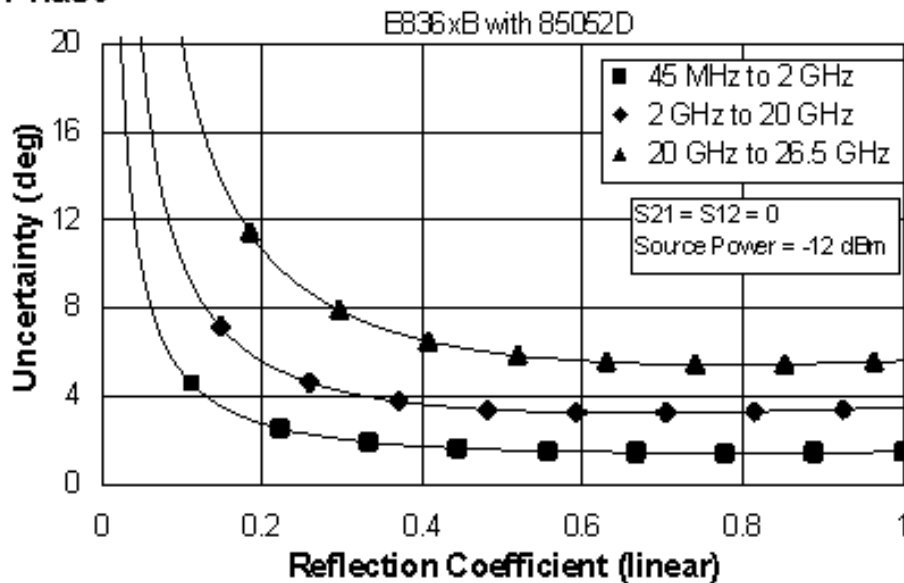


Table 14. 85052D Calibration Kit

Fully Optioned (E836xB - Option 014, UNL, 016, 080, and 081)

Configurable Test Set, Extended Power Range & Bias-Tees, Receiver Attenuators, Frequency Offset Mode, and Reference Channel Transfer Switch


Applies to the, E836xB analyzers, 85052D (3.5mm) calibration kit, 85131F flexible test port cable set, and a full 2-port calibration. Also applies to the following condition:

Environmental temperature 23° ±3 °C, with < 1 °C deviation from calibration temperature


Description	Specification (dB)		
	45 MHz to 2 GHz	2 to 20 GHz	20 to 26.5 GHz
Directivity	42	36	30
Source Match	37	28	25
Load Match	42	36	30
Reflection Tracking	±0.003 +0.02/°C	±0.008 +0.02/°C	±0.011 +0.03/°C
Transmission Tracking	±0.026 +0.02/°C	±0.138 +0.02/°C	±0.261 +0.03/°C

Transmission Uncertainty (Specifications)

Magnitude

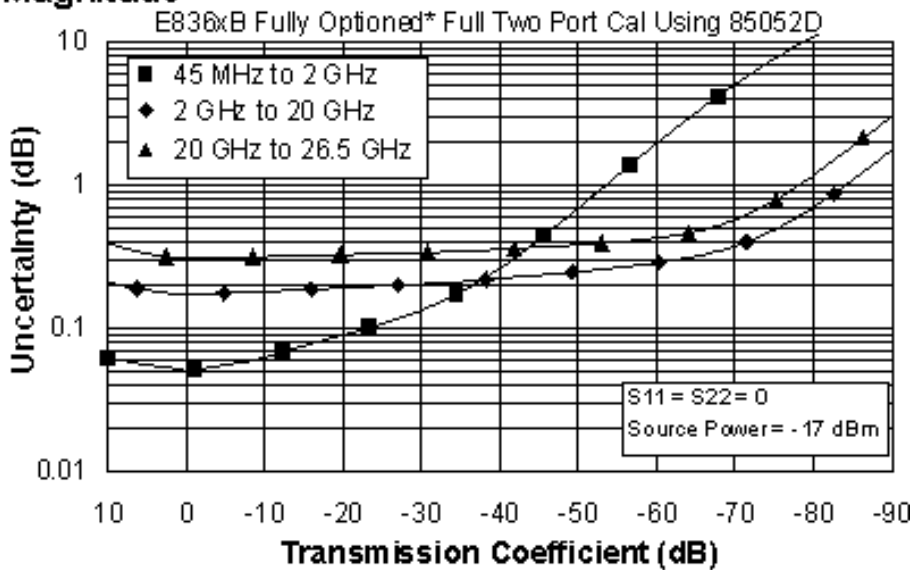


Phase

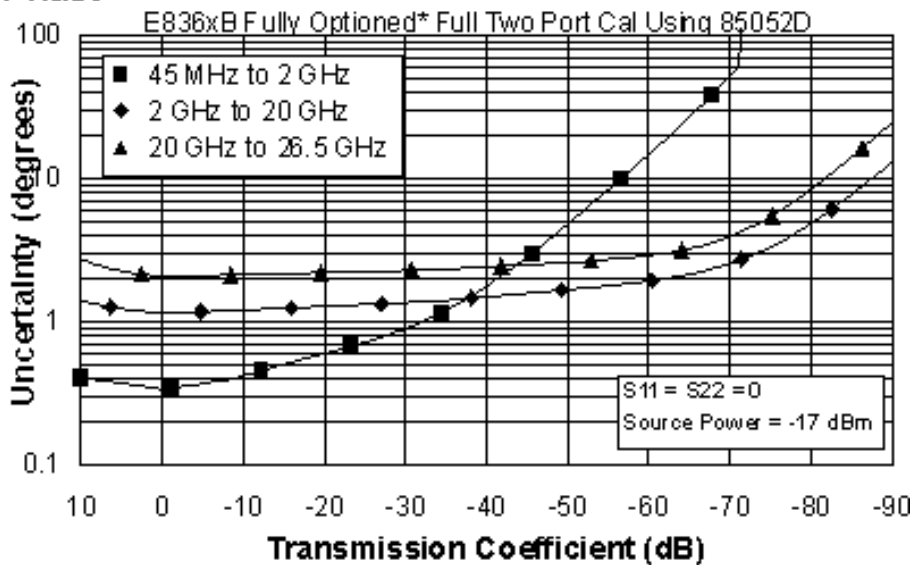


* Configurable Test Set, Extended Power Range & Bias-Tees, Receiver Attenuators, Frequency Offset Mode, and Reference Channel Transfer Switch
(E836xB - Option 014, UNL, 016, 080, and 081)

Reflection Uncertainty (Specifications)

Magnitude

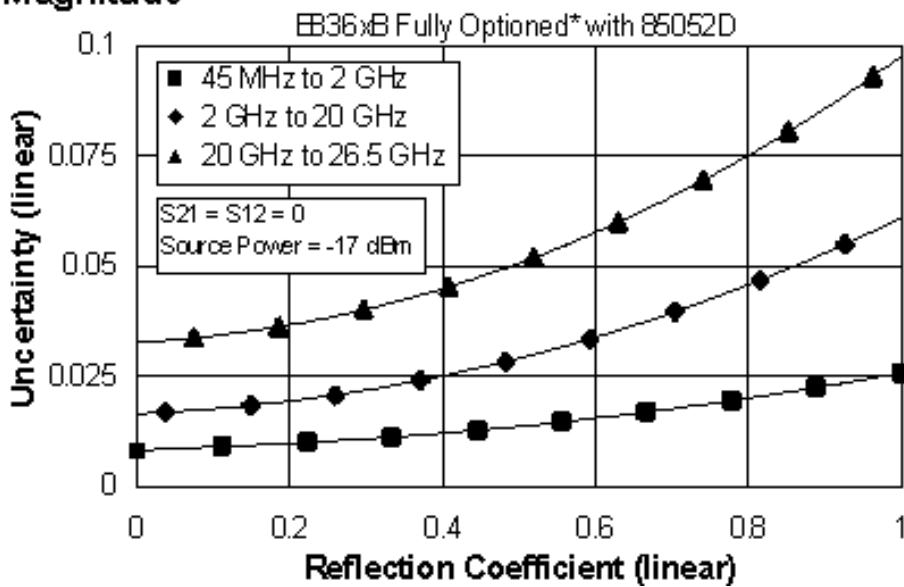

Phase

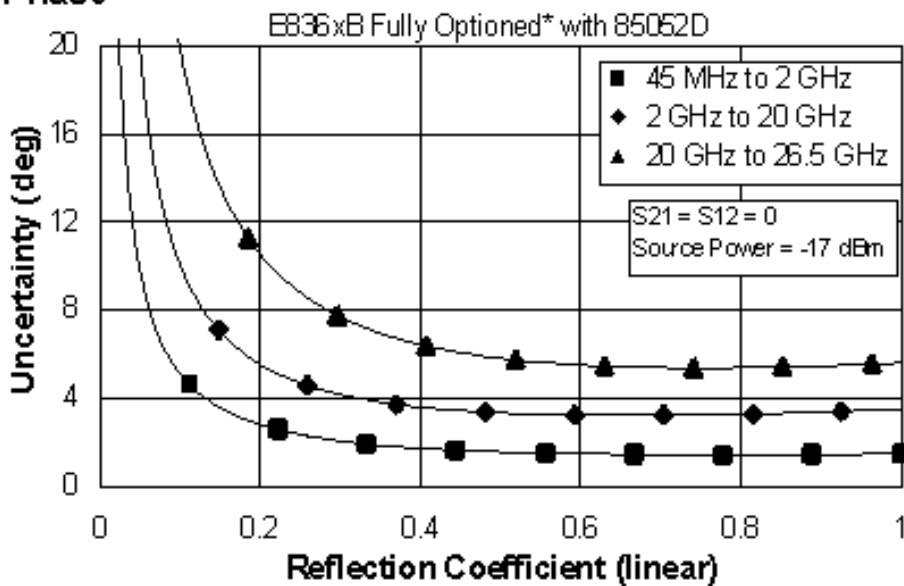

* Configurable Test Set, Extended Power Range & Bias-Tees, Receiver Attenuators, Frequency Offset Mode, and Reference Channel Transfer Switch (E836xB - Option 014, UNL, 016, 080, and 081)

E836xB Corrected System Performance with 7mm Connectors

Table 15. 85050B Calibration Kit
 Standard Configuration and Standard Power Range
 (E836xB)


Applies to the, E836xB analyzers, 85050B (7mm) calibration kit, 85132F flexible test port cable set, and a full 2-port calibration. Also applies to the following condition:

Environmental temperature 23° ±3 °C, with < 1 °C deviation from calibration temperature


Description	Specification (dB)	
	0.045 to 2 GHz	2 to 18 GHz
Directivity	52	52
Source Match	48	41
Load Match	52	47
Reflection Tracking	±0.003 +0.02/°C	±0.047 +0.02/°C
Transmission Tracking	±0.004 +0.02/°C	±0.032 +0.02/°C

Transmission Uncertainty (Specifications)

Magnitude

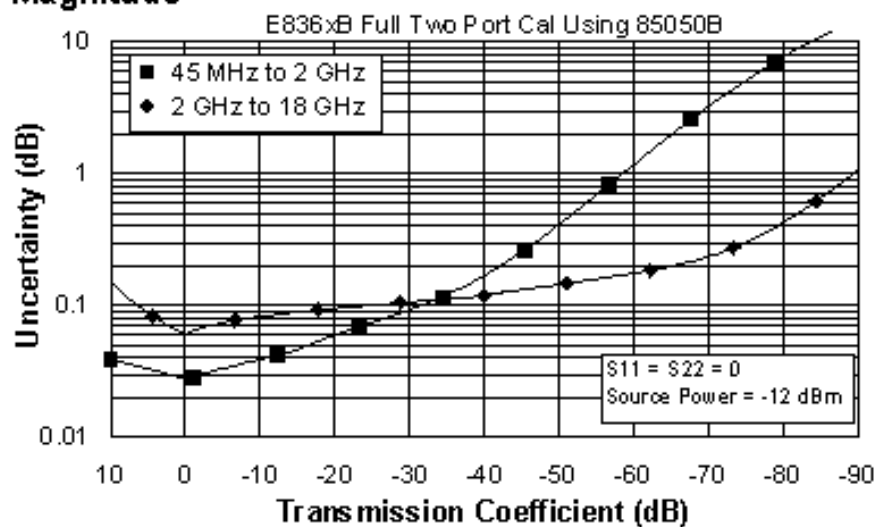


Phase

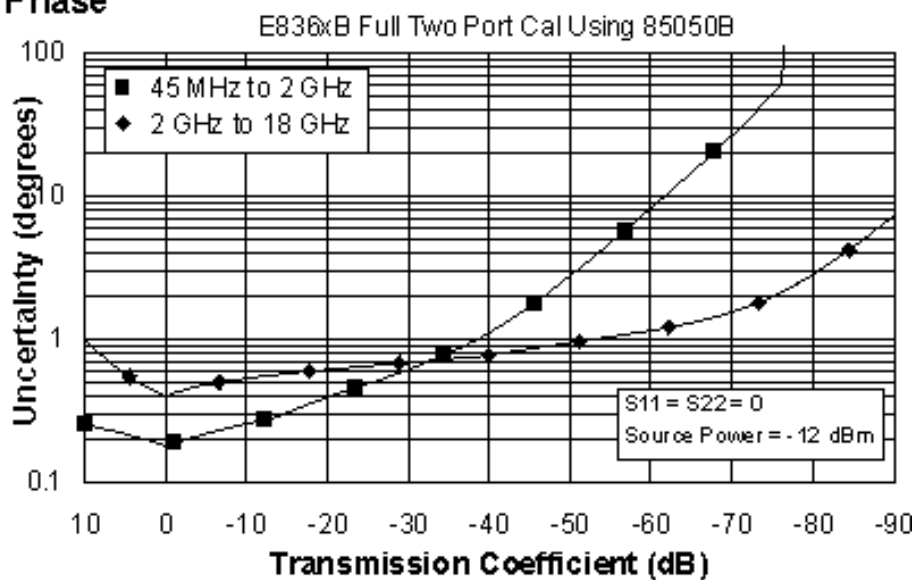

Reflection Uncertainty (Specifications)

Magnitude

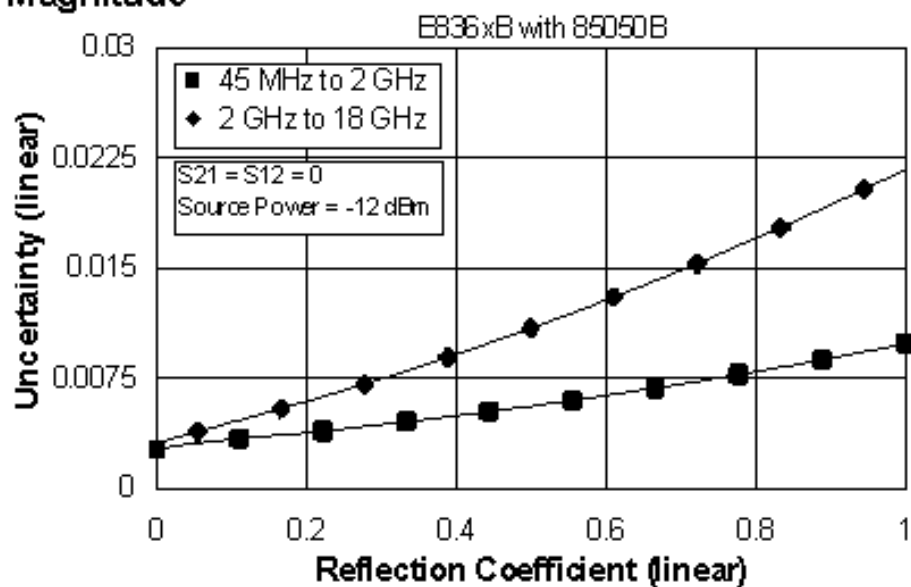

Phase

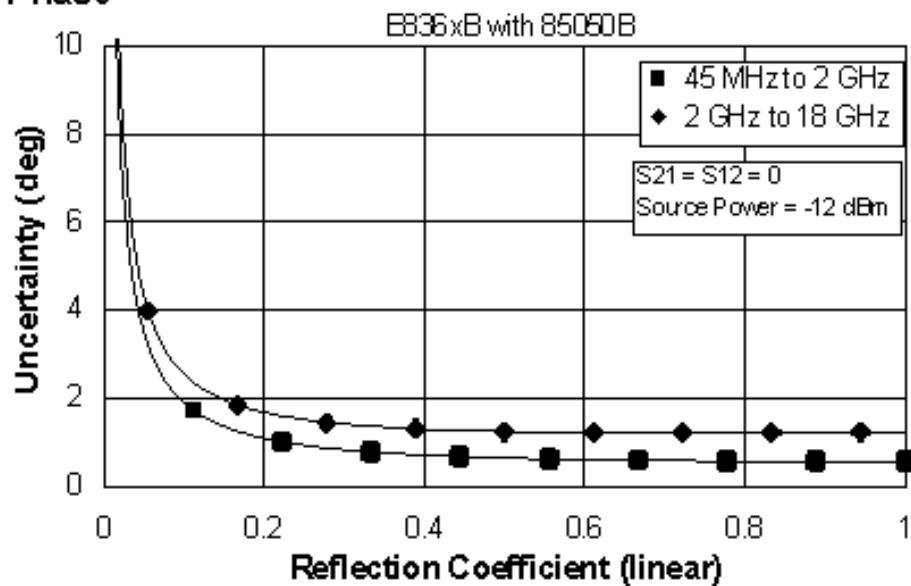


Table 16. 85050B Calibration Kit

Fully Optioned (E836xB - Option 014, UNL, 016, 080, and 081)

Configurable Test Set, Extended Power Range & Bias-Tees, Receiver Attenuators, Frequency Offset Mode, and Reference Channel Transfer Switch


Applies to the, E836xB analyzers, 85050B (7mm) calibration kit, 85132F flexible test port cable set, and a full 2-port calibration. Also applies to the following condition:

Environmental temperature 23° ±3 °C, with < 1 °C deviation from calibration temperature


Description	Specification (dB)	
	0.045 to 2 GHz	2 to 18 GHz
Directivity	52	52
Source Match	48	41
Load Match	52	47
Reflection Tracking	±0.003 +0.02/°C	±0.047 +0.02/°C
Transmission Tracking	±0.008 +0.02/°C	±0.034 +0.02/°C

Transmission Uncertainty (Specifications)

Magnitude

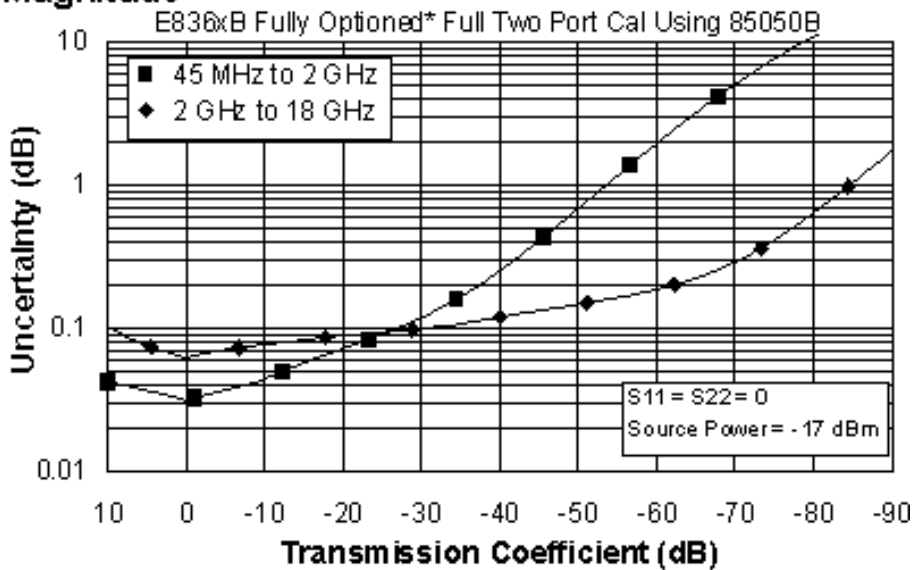


Phase

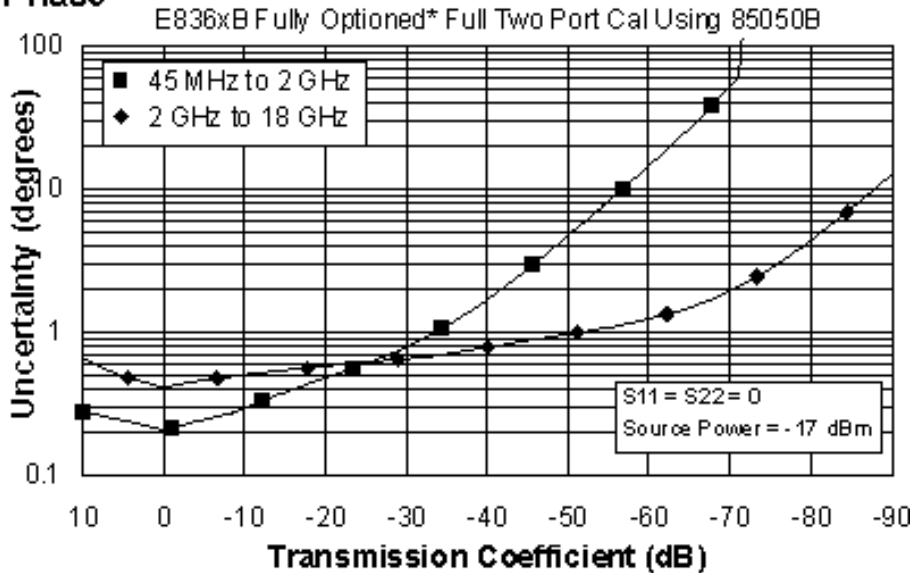


*Configurable Test Set, Extended Power Range & Bias-Tees, Receiver Attenuators, Frequency Offset Mode, and Reference Channel Transfer Switch (E836xB - Option 014, UNL, 016, 080, and 081)

Reflection Uncertainty (Specifications)

Magnitude

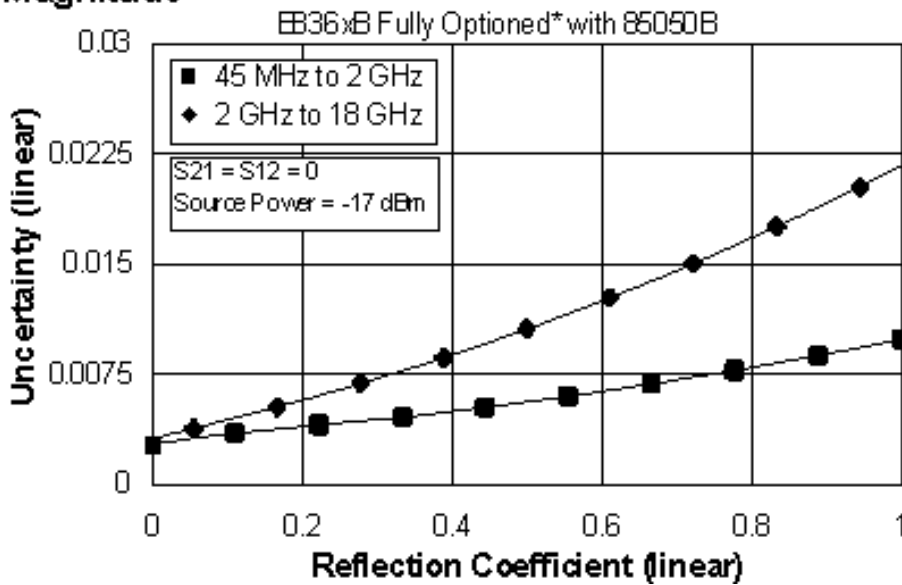

Phase

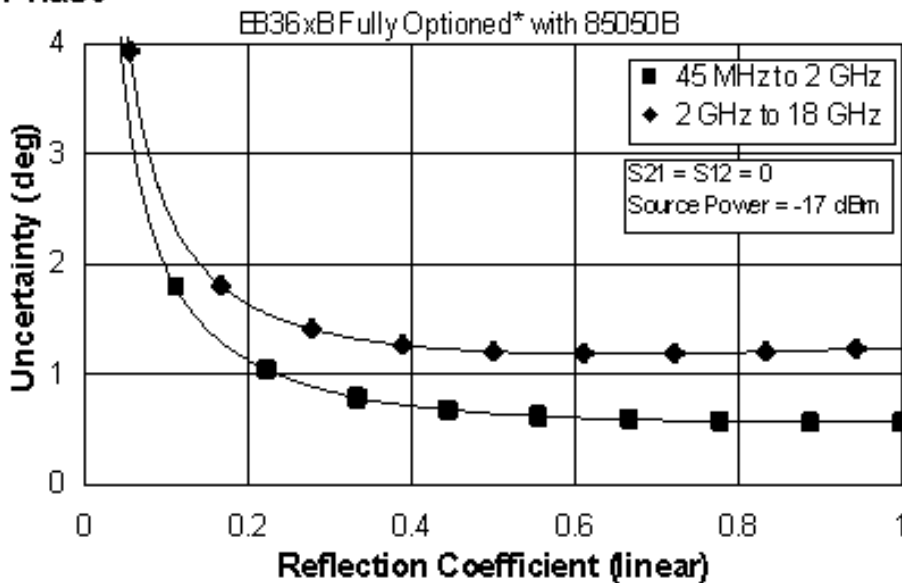

*Configurable Test Set, Extended Power Range & Bias-Tees, Receiver Attenuators, Frequency Offset Mode, and Reference Channel Transfer Switch (E836xB - Option 014, UNL, 016, 080, and 081)

Table 17. 85050C Calibration Kit
Standard Configuration and Standard Power Range
(E836xB)


Applies to the, E836xB analyzers, 85050C (7mm) calibration kit, 85132F flexible test port cable set, and a full 2-port calibration. Also applies to the following condition:

Environmental temperature $23^{\circ} \pm 3^{\circ} \text{C}$, with $< 1^{\circ} \text{C}$ deviation from calibration temperature


Description	Specification (dB)	
	0.045 to 2 GHz	2 to 18 GHz
Directivity	52	60
Source Match	48	60
Load Match	52	60
Reflection Tracking	± 0.003 $+0.02/^{\circ}\text{C}$	± 0.000 $+0.02/^{\circ}\text{C}$
Transmission Tracking	± 0.004 $+0.02/^{\circ}\text{C}$	± 0.004 $+0.02/^{\circ}\text{C}$

Transmission Uncertainty (Specifications)

Magnitude

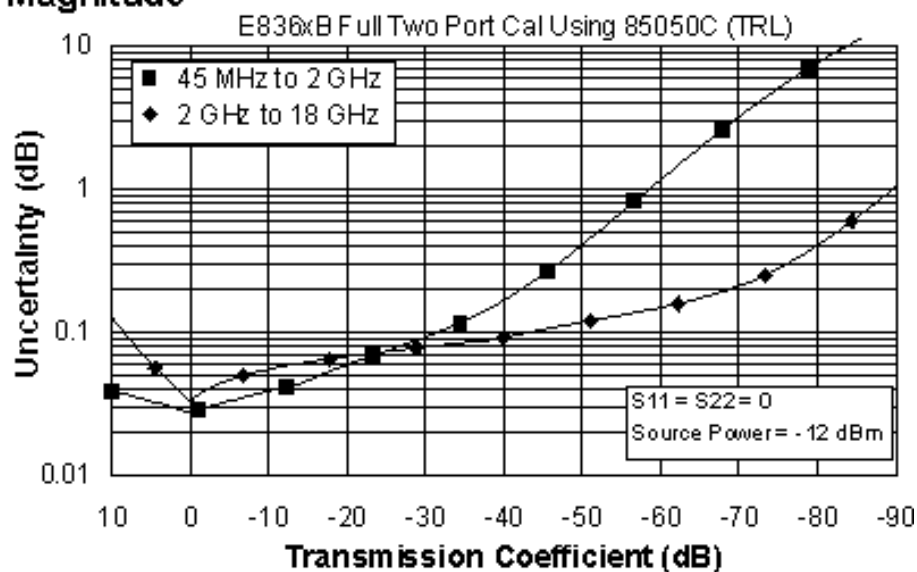


Phase

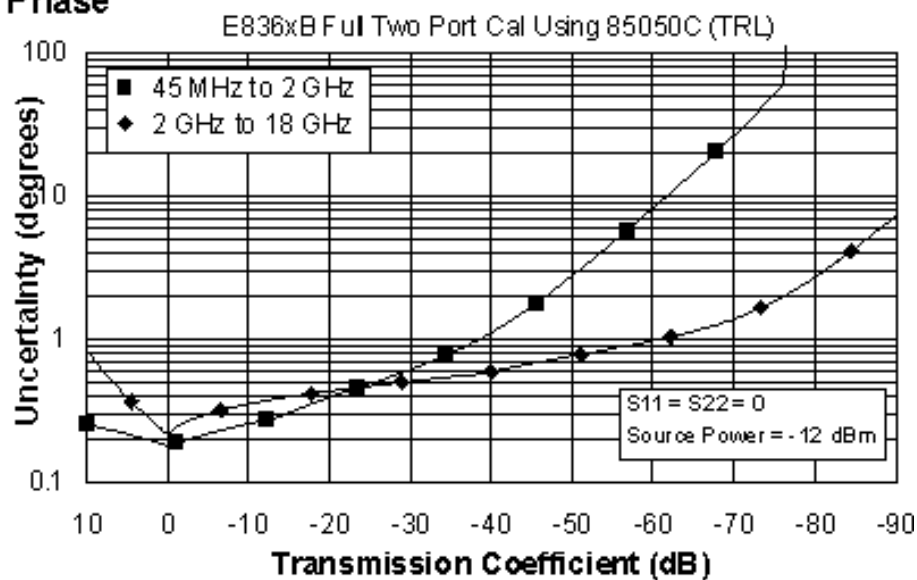

Reflection Uncertainty (Specifications)

Magnitude

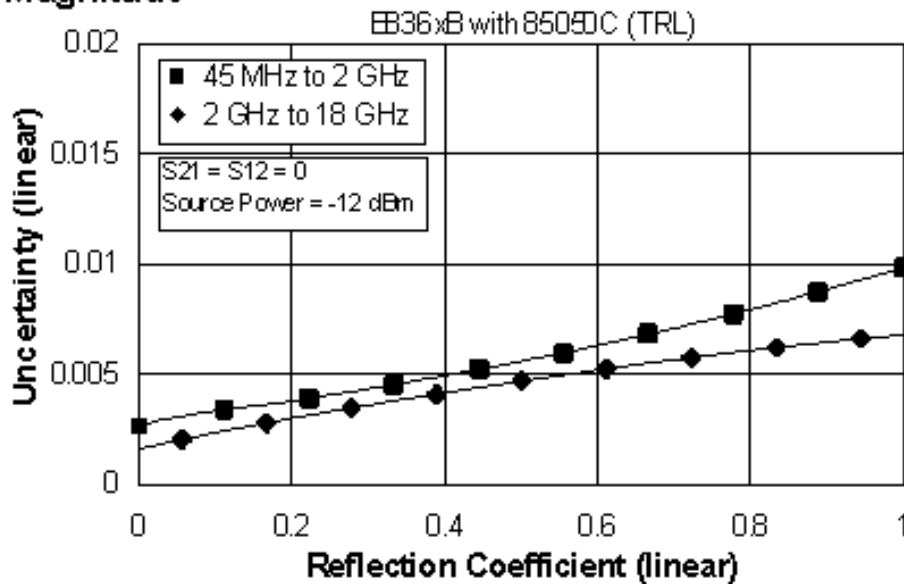

Phase

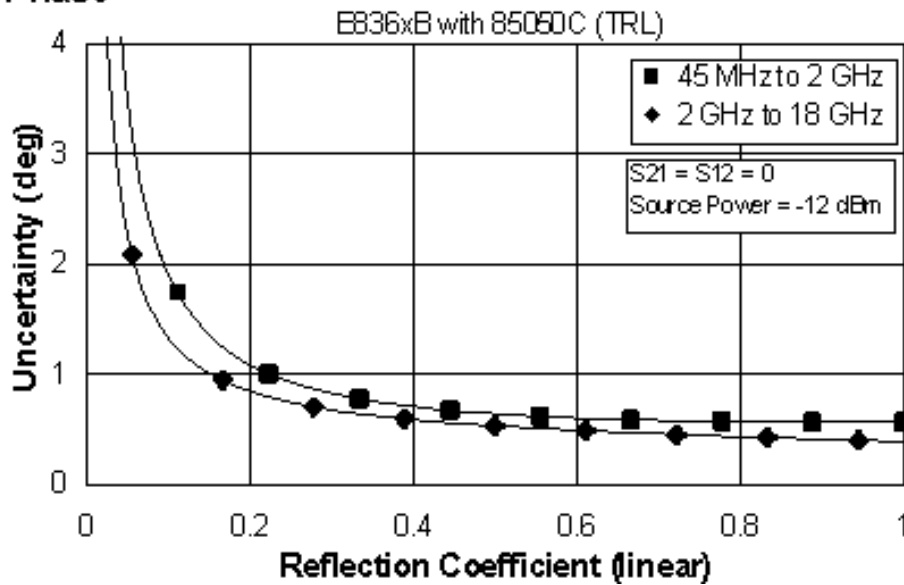


Table 18. 85050C Calibration Kit
Fully Optioned (E836xB - Option 014, UNL, 016, 080, and 081)

Configurable Test Set, Extended Power Range & Bias-Tees, Receiver Attenuators, Frequency Offset Mode, and Reference Channel Transfer Switch


Applies to the, E836xB analyzers, 85050C (7mm) calibration kit, 85132F flexible test port cable set, and a full 2-port calibration. Also applies to the following condition:

Environmental temperature 23° ±3 °C, with < 1 °C deviation from calibration temperature


Description	Specification (dB)	
	0.045 to 2 GHz	2 to 18 GHz
Directivity	52	60
Source Match	48	60
Load Match	52	60
Reflection Tracking	±0.003 +0.02/°C	±0.000 +0.02/°C
Transmission Tracking	±0.008 +0.02/°C	±0.005 +0.02/°C

Transmission Uncertainty (Specifications)

Magnitude

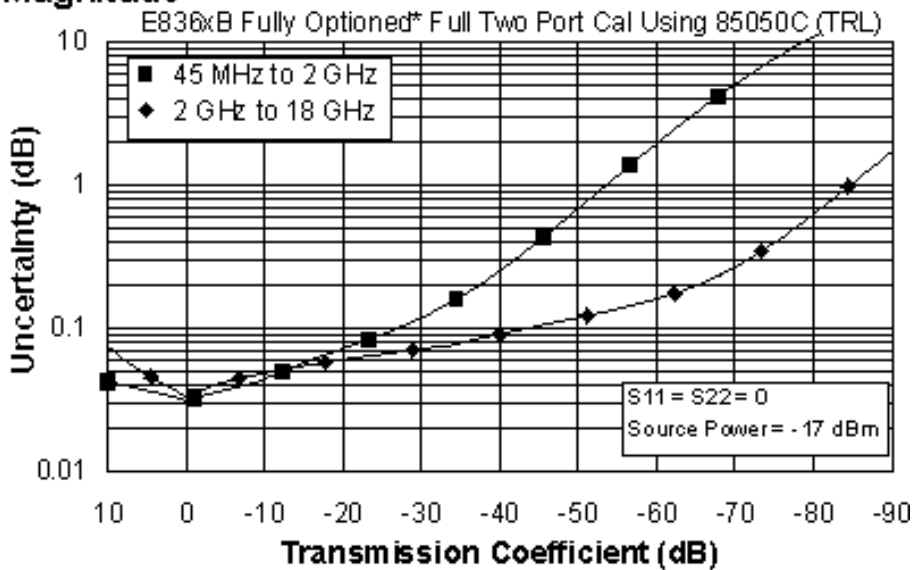


Phase

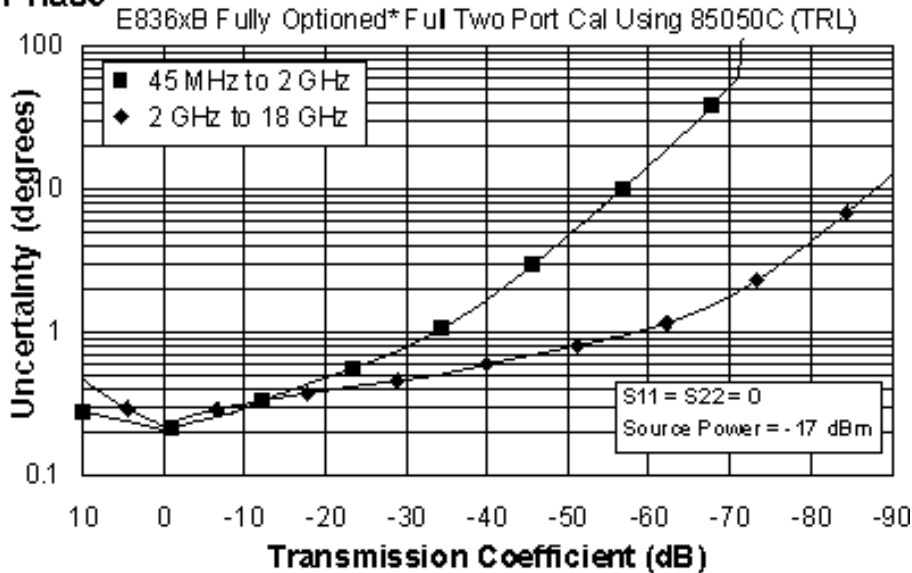


*Configurable Test Set, Extended Power Range & Bias-Tees, Receiver Attenuators, Frequency Offset Mode, and Reference Channel Transfer Switch (E836xB - Option 014, UNL, 016, 080, and 081)

Reflection Uncertainty (Specifications)

Magnitude

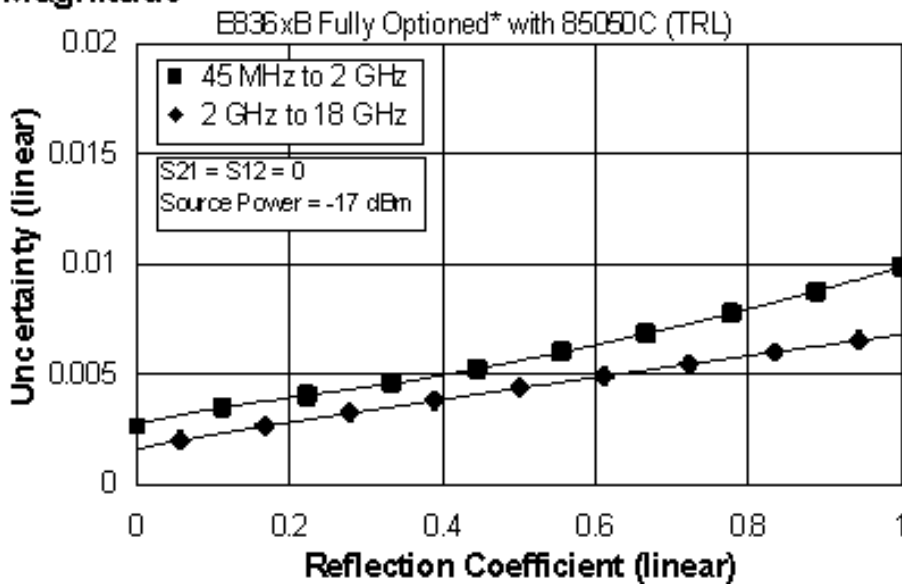

Phase

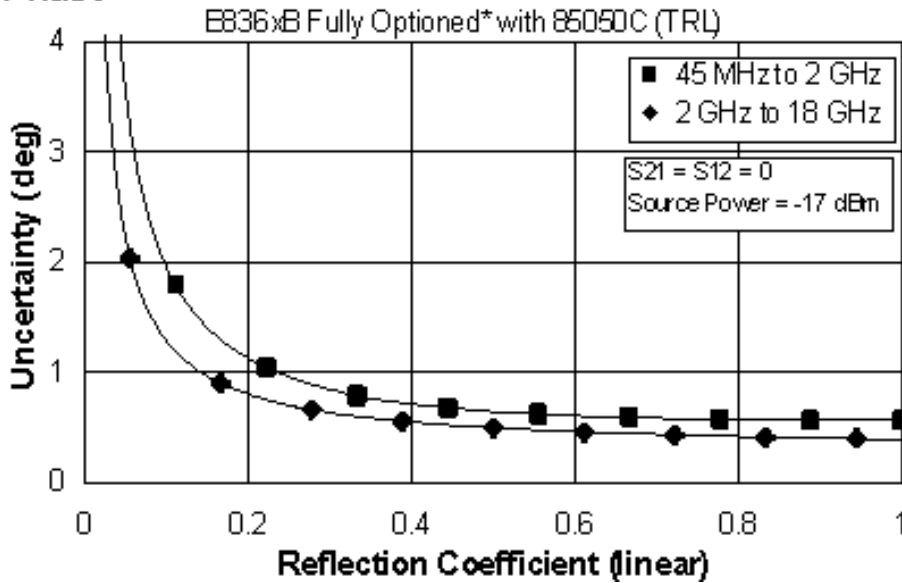

*Configurable Test Set, Extended Power Range & Bias-Tees, Receiver Attenuators, Frequency Offset Mode, and Reference Channel Transfer Switch (E836xB - Option 014, UNL, 016, 080, and 081)

Table 19. 85050D Calibration Kit
Standard Configuration and Standard Power Range
(E836xB)


Applies to the, E836xB analyzers, 85050D (7mm) calibration kit, 85132F flexible test port cable set, and a full 2-port calibration. Also applies to the following condition:

Environmental temperature 23° ±3 °C, with < 1 °C deviation from calibration temperature


Description	Specification (dB)	
	0.045 to 2 GHz	2 to 18 GHz
Directivity	40	40
Source Match	39	35
Load Match	40	37
Reflection Tracking	±0.010 +0.02/°C	±0.100 +0.02/°C
Transmission Tracking	±0.013 +0.02/°C	±0.072 +0.02/°C

Transmission Uncertainty (Specifications)

Magnitude

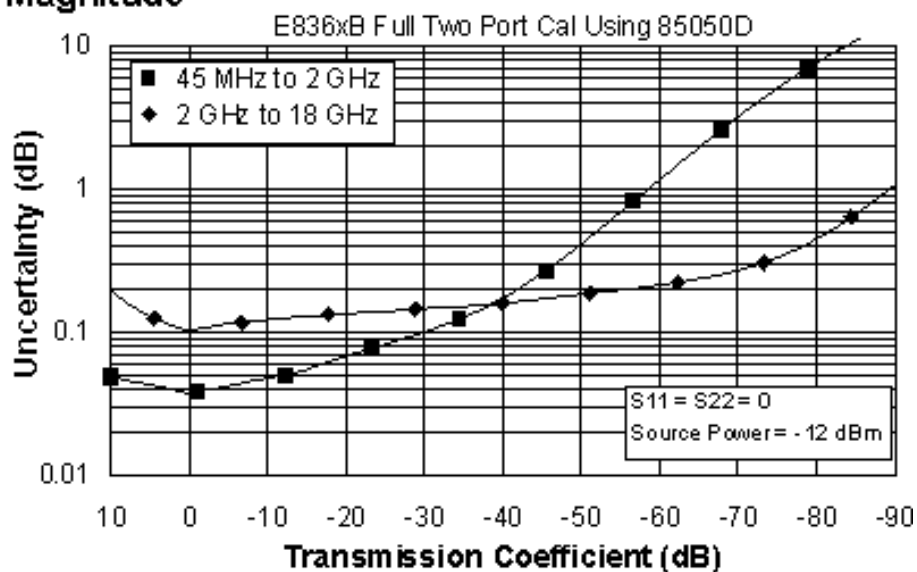


Phase

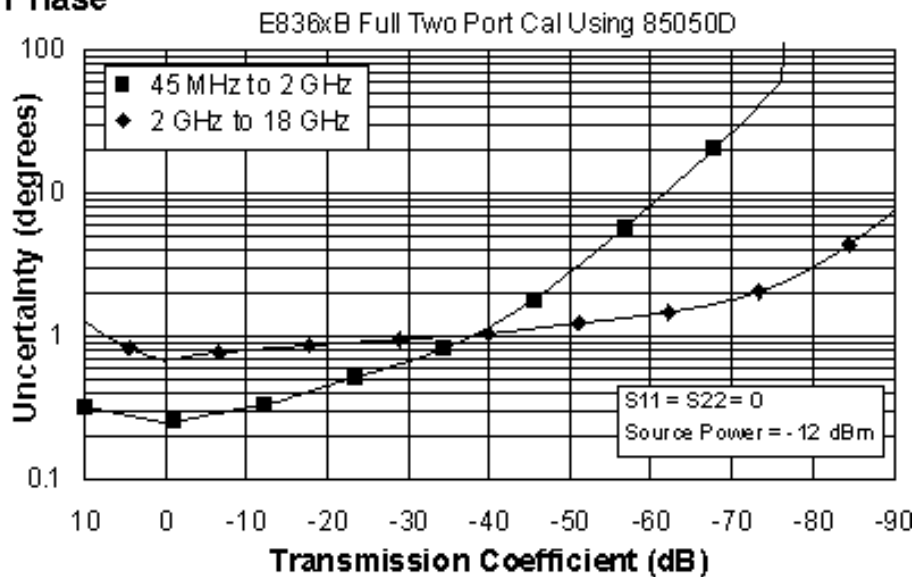

Reflection Uncertainty (Specifications)

Magnitude

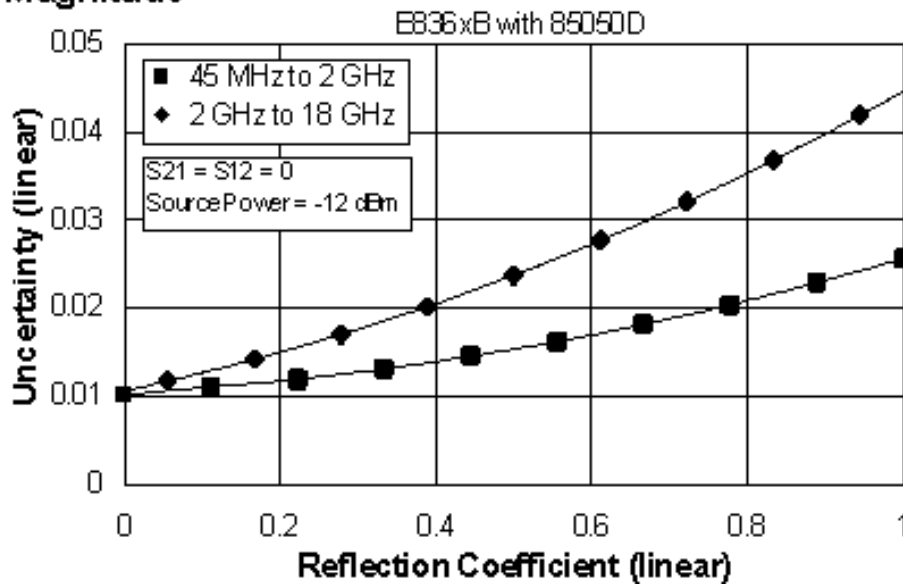

Phase

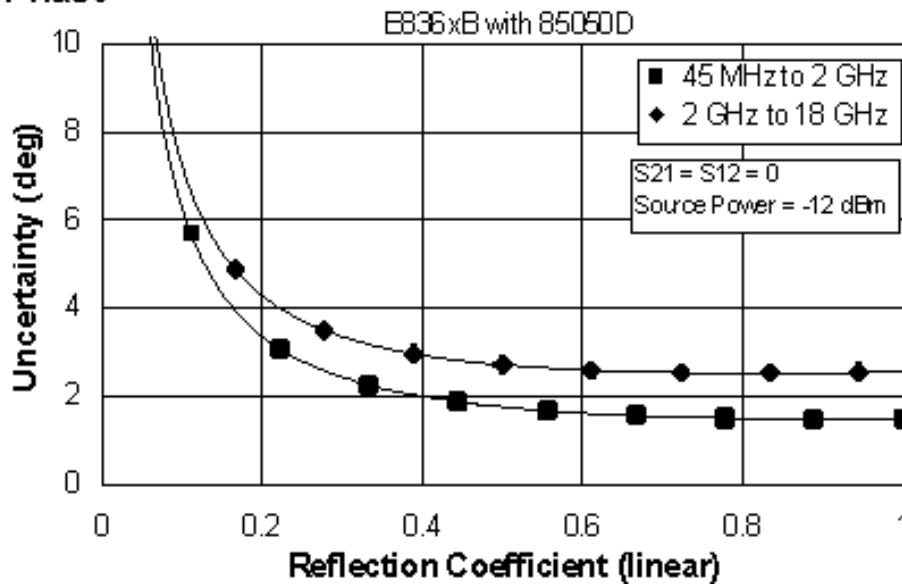


Table 20. 85050D Calibration Kit
Fully Optioned (E836xB - Option 014, UNL, 016, 080, and 081)

Configurable Test Set, Extended Power Range & Bias-Tees, Receiver Attenuators, Frequency Offset Mode, and Reference Channel Transfer Switch


Applies to the, E836xB analyzers, 85050D (7mm) calibration kit, 85132F flexible test port cable set, and a full 2-port calibration. Also applies to the following condition:

Environmental temperature 23° ±3 °C, with < 1 °C deviation from calibration temperature


Description	Specification (dB)	
	0.045 to 2 GHz	2 to 18 GHz
Directivity	40	40
Source Match	39	35
Load Match	40	37
Reflection Tracking	±0.010 +0.02/°C	±0.100 +0.02/°C
Transmission Tracking	±0.025 +0.02/°C	±0.078 +0.02/°C

Transmission Uncertainty (Specifications)

Magnitude

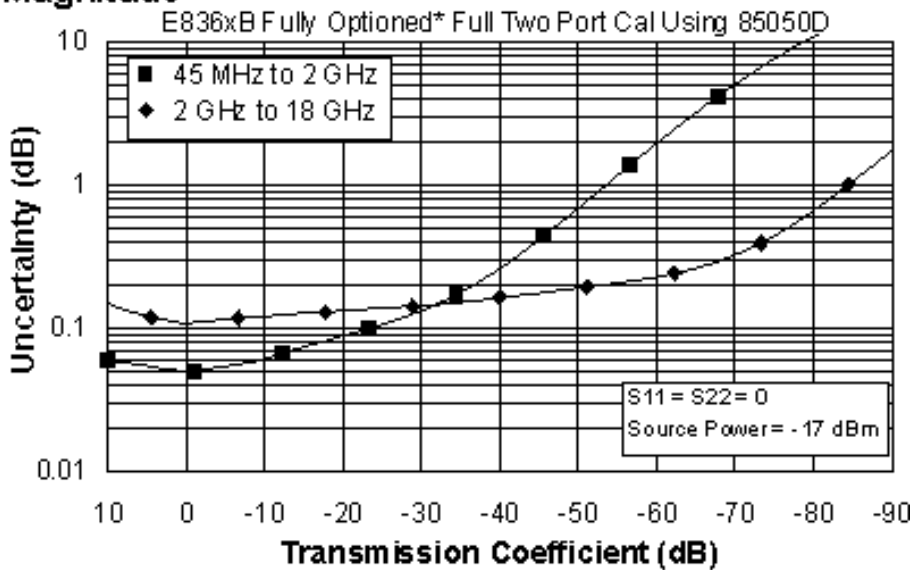


Phase

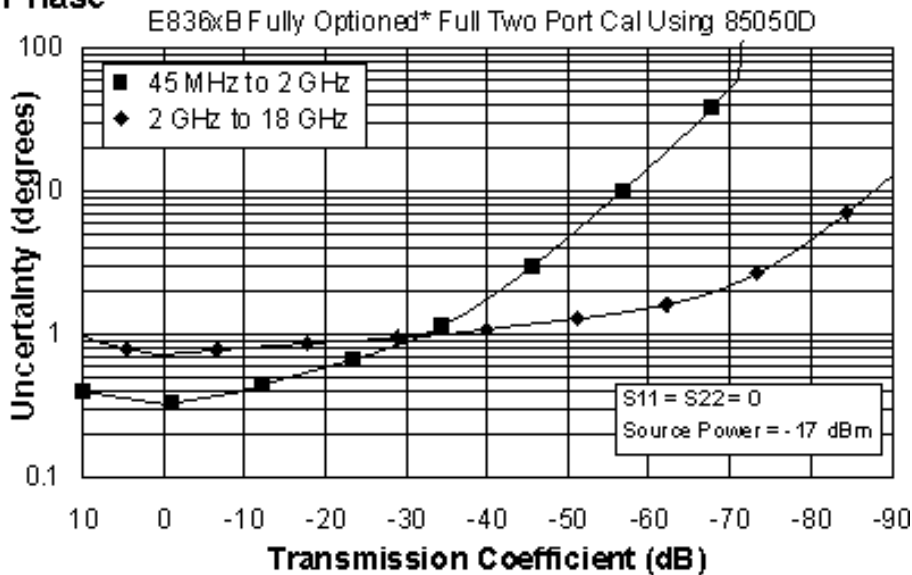


*Configurable Test Set, Extended Power Range & Bias-Tees, Receiver Attenuators, Frequency Offset Mode, and Reference Channel Transfer Switch (E836xB - Option 014, UNL, 016, 080, and 081)

Reflection Uncertainty (Specifications)

Magnitude

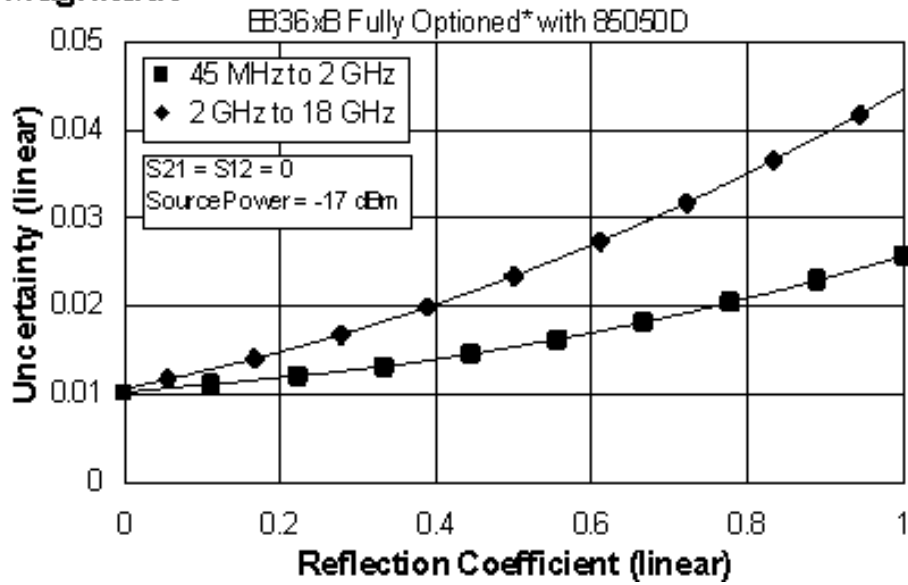

Phase

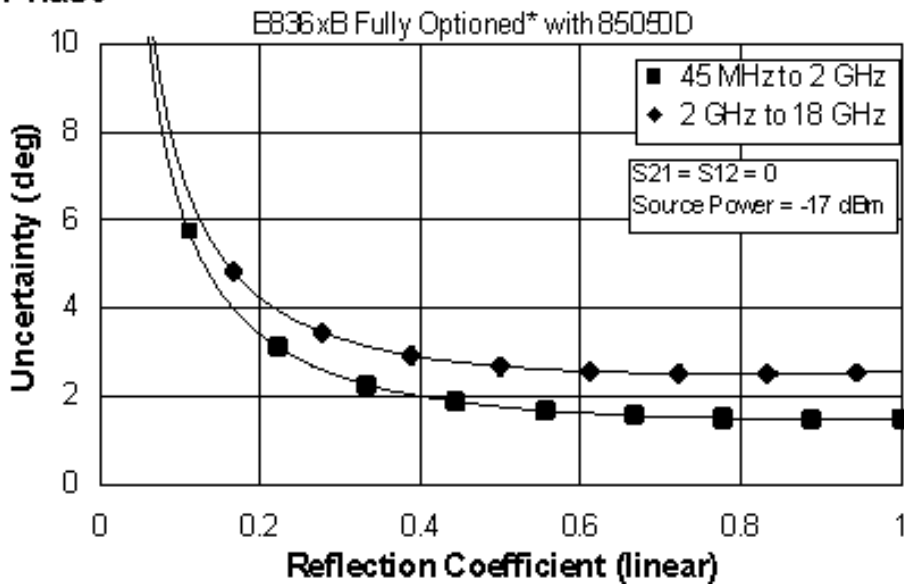

*Configurable Test Set, Extended Power Range & Bias-Tees, Receiver Attenuators, Frequency Offset Mode, and Reference Channel Transfer Switch (E836xB - Option 014, UNL, 016, 080, and 081)

E836xB Corrected System Performance with Type-N Connectors

Table 21. 85054B Calibration Kit
Standard Configuration and Standard Power Range
(E836xB)


Applies to the, E836xB analyzers, 85054B (Type-N) calibration kit, 85132F flexible test port cable set with 85130C adapter set, and a full 2-port calibration. Also applies to the following condition:

Environmental temperature $23^{\circ} \pm 3^{\circ} \text{C}$, with $< 1^{\circ} \text{C}$ deviation from calibration temperature


Description	Specification (dB)	
	0.045 to 2 GHz	2 to 18 GHz
Directivity	48	42
Source Match	45	33
Load Match	48	41
Reflection Tracking	± 0.001 $+0.02/^{\circ}\text{C}$	± 0.015 $+0.02/^{\circ}\text{C}$
Transmission Tracking	± 0.006 $+0.02/^{\circ}\text{C}$	± 0.079 $+0.02/^{\circ}\text{C}$

Transmission Uncertainty (Specifications)

Magnitude

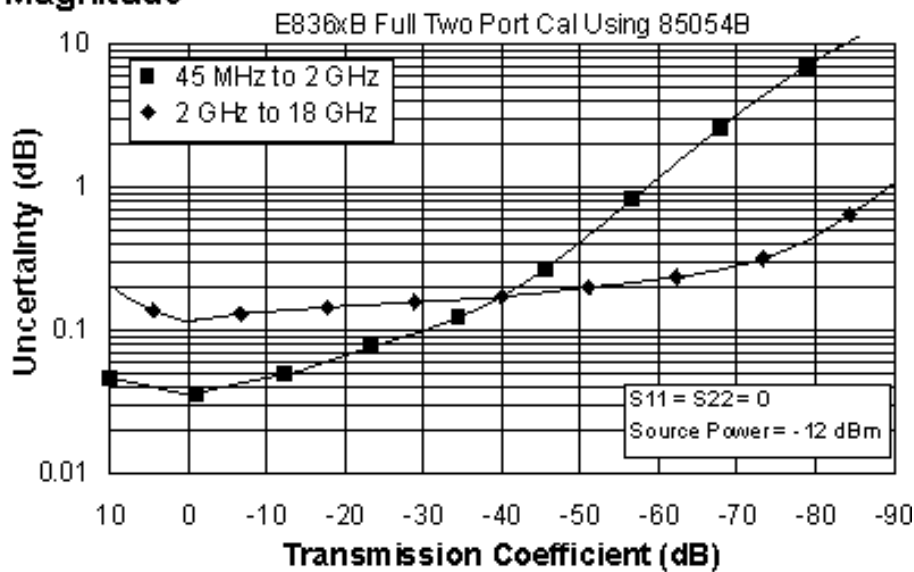


Phase

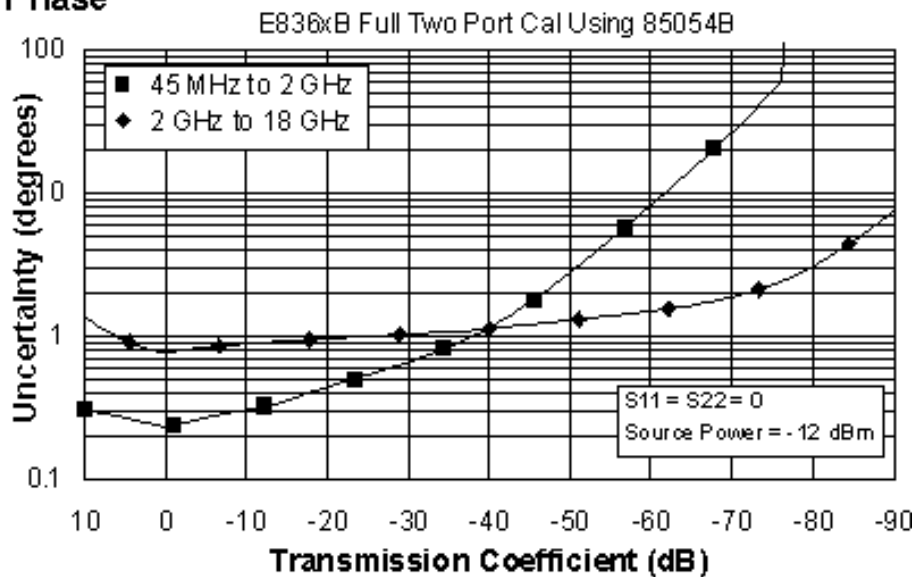

Reflection Uncertainty (Specifications)

Magnitude

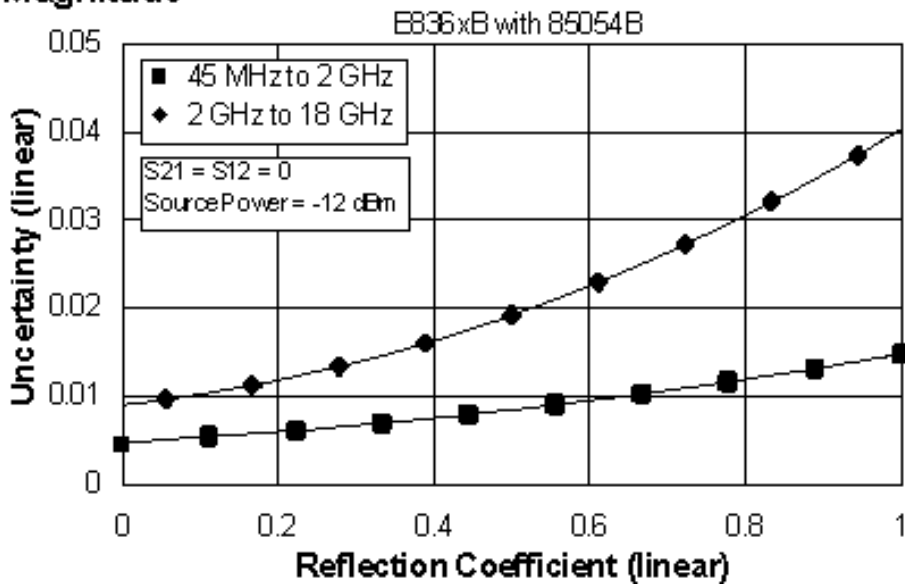

Phase

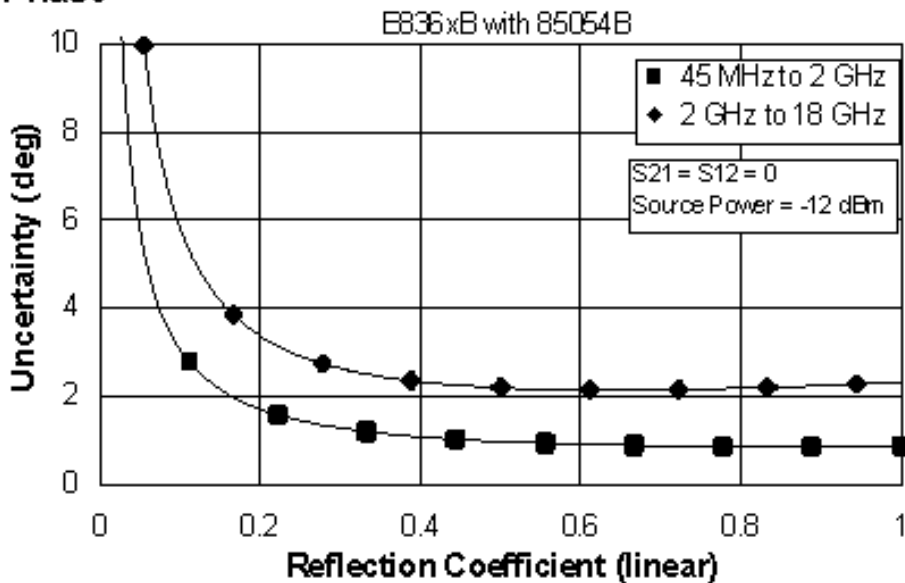


Table 22. 85054B Calibration Kit**Fully Optioned (E836xB - Option 014, UNL, 016, 080, and 081)****Configurable Test Set, Extended Power Range & Bias-Tees, Receiver Attenuators, Frequency Offset Mode, and Reference Channel Transfer Switch**


Applies to the, E836xB analyzers, 85054B (Type-N) calibration kit, 85132F flexible test port cable set with 85130C adapter set, and a full 2-port calibration. Also applies to the following condition:

Environmental temperature 23° ±3 °C, with < 1 °C deviation from calibration temperature


Description	Specification (dB)	
	0.045 to 2 GHz	2 to 18 GHz
Directivity	48	42
Source Match	45	33
Load Match	48	41
Reflection Tracking	±0.001 +0.02/°C	±0.015 +0.02/°C
Transmission Tracking	±0.011 +0.02/°C	±0.083 +0.02/°C

Transmission Uncertainty (Specifications)

Magnitude

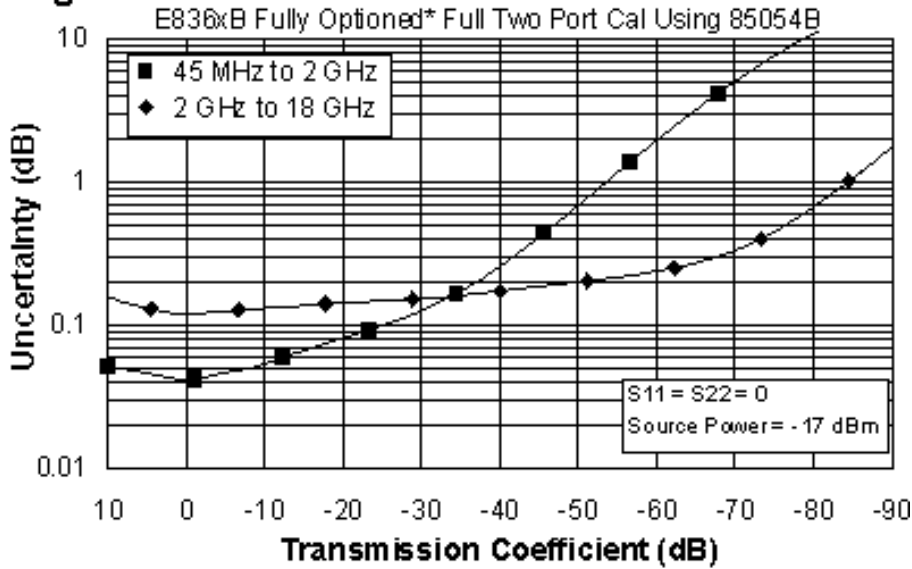


Phase

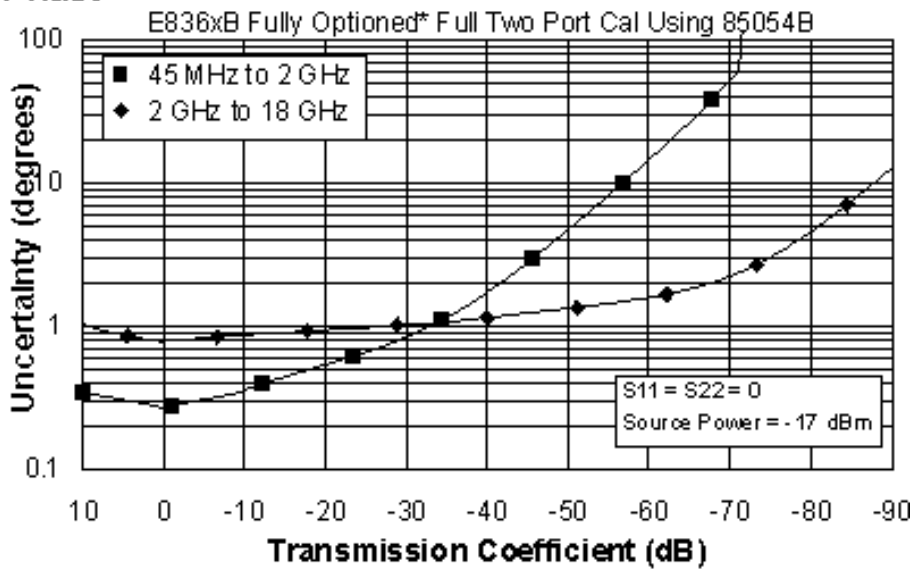


* Configurable Test Set, Extended Power Range & Bias-Tees, Receiver Attenuators, Frequency Offset Mode, and Reference Channel Transfer Switch
 (E836xB - Option 014, UNL, 016, 080, and 081)

Reflection Uncertainty (Specifications)

Magnitude

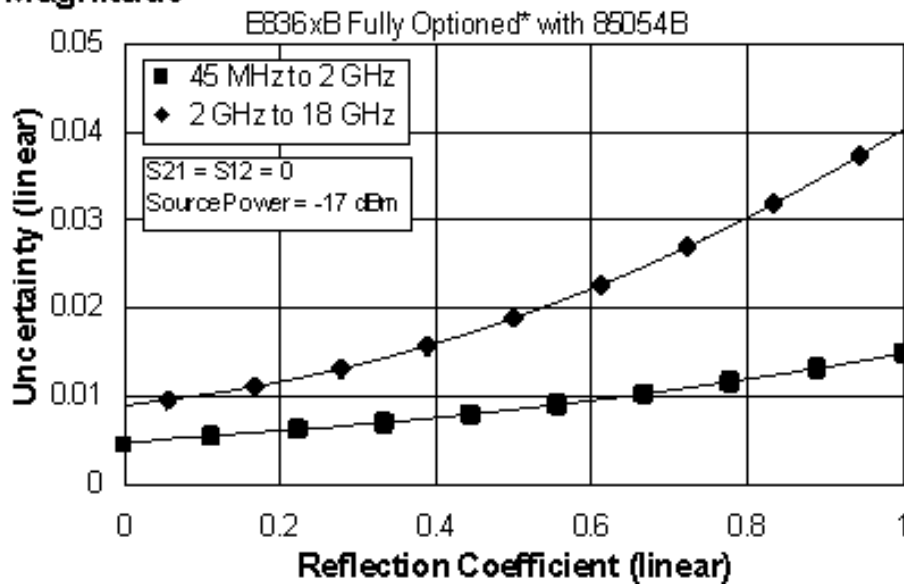

Phase

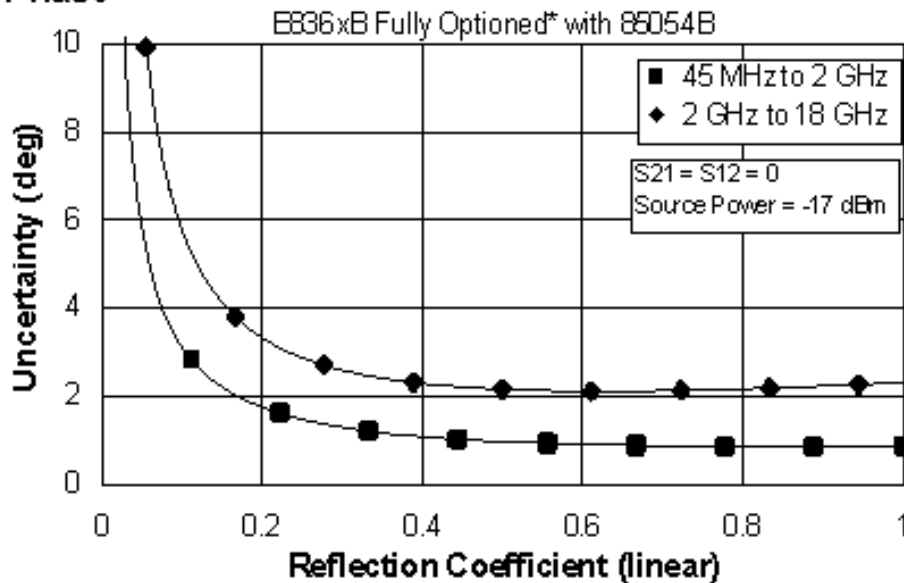

* Configurable Test Set, Extended Power Range & Bias-Tees, Receiver Attenuators, Frequency Offset Mode, and Reference Channel Transfer Switch
 (E836xB - Option 014, UNL, 016, 080, and 081)

Table 23. 85054D Calibration Kit
Standard Configuration and Standard Power Range
(E836xB)


Applies to the, E836xB analyzers, 85054D (Type-N) calibration kit, 85132F flexible test port cable set with 85130C adapter set, and a full 2-port calibration. Also applies to the following condition:

Environmental temperature $23^{\circ} \pm 3^{\circ} \text{C}$, with $< 1^{\circ} \text{C}$ deviation from calibration temperature


Description	Specification (dB)	
	0.045 to 2 GHz	2 to 18 GHz
Directivity	40	34
Source Match	39	29
Load Match	40	34
Reflection Tracking	± 0.003 $+0.02/^{\circ}\text{C}$	± 0.027 $+0.02/^{\circ}\text{C}$
Transmission Tracking	± 0.013 $+0.02/^{\circ}\text{C}$	± 0.136 $+0.02/^{\circ}\text{C}$

Transmission Uncertainty (Specifications)

Magnitude

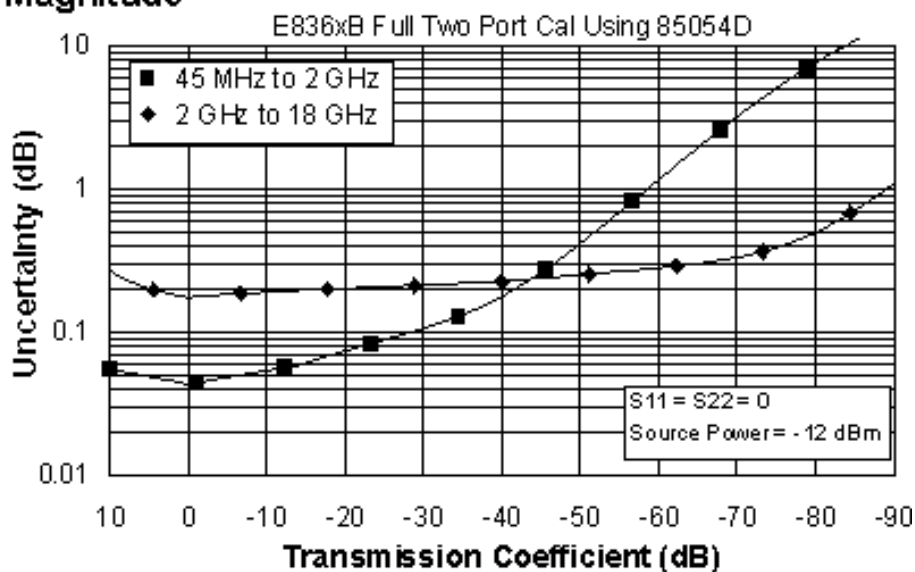


Phase

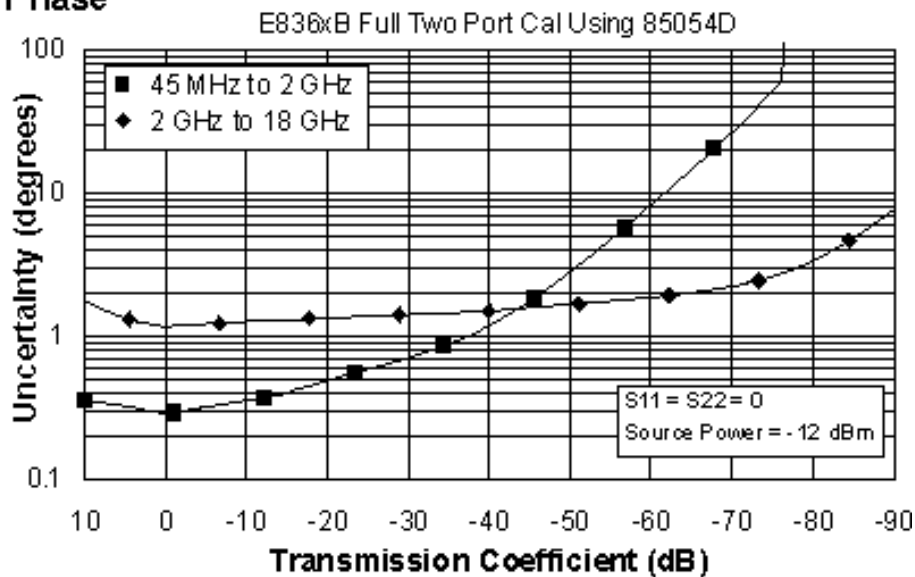

Reflection Uncertainty (Specifications)

Magnitude

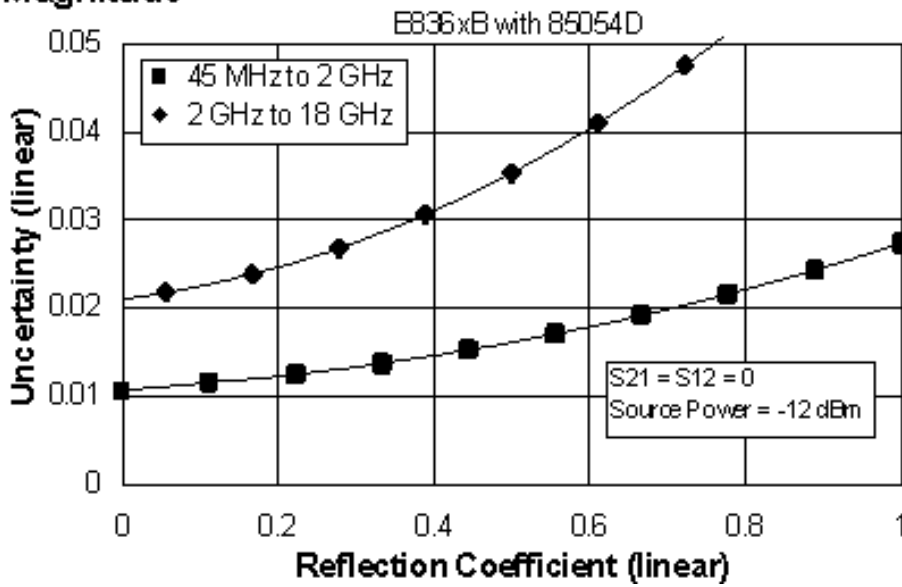

Phase

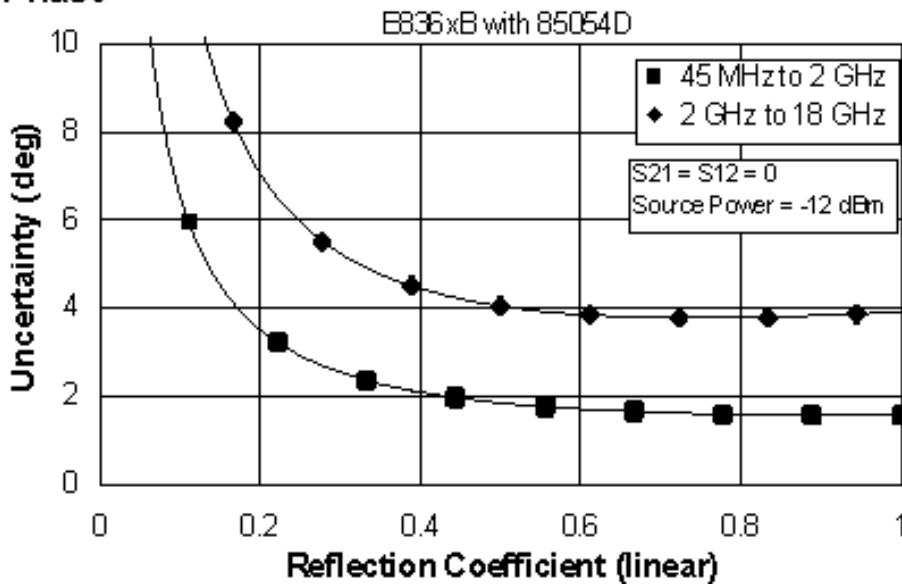


Table 24. 85054D Calibration Kit

Fully Optioned (E836xB - Option 014, UNL, 016, 080, and 081)

Configurable Test Set, Extended Power Range & Bias-Tees, Receiver Attenuators, Frequency Offset Mode, and Reference Channel Transfer Switch


Applies to the, E836xB analyzers, 85054D (Type-N) calibration kit, 85132F flexible test port cable set with 85130C adapter set, and a full 2-port calibration. Also applies to the following condition:

Environmental temperature 23° ±3 °C, with < 1 °C deviation from calibration temperature


Description	Specification (dB)	
	0.045 to 2 GHz	2 to 18 GHz
Directivity	40	34
Source Match	39	29
Load Match	40	34
Reflection Tracking	±0.003 +0.02/°C	±0.027 +0.02/°C
Transmission Tracking	±0.025 +0.02/°C	±0.145 +0.02/°C

Transmission Uncertainty (Specifications)

Magnitude

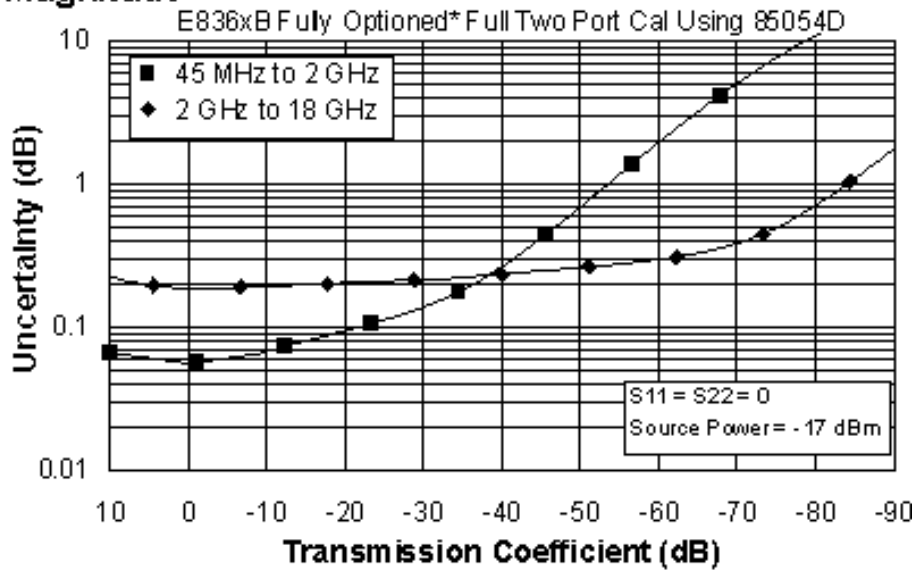


Phase

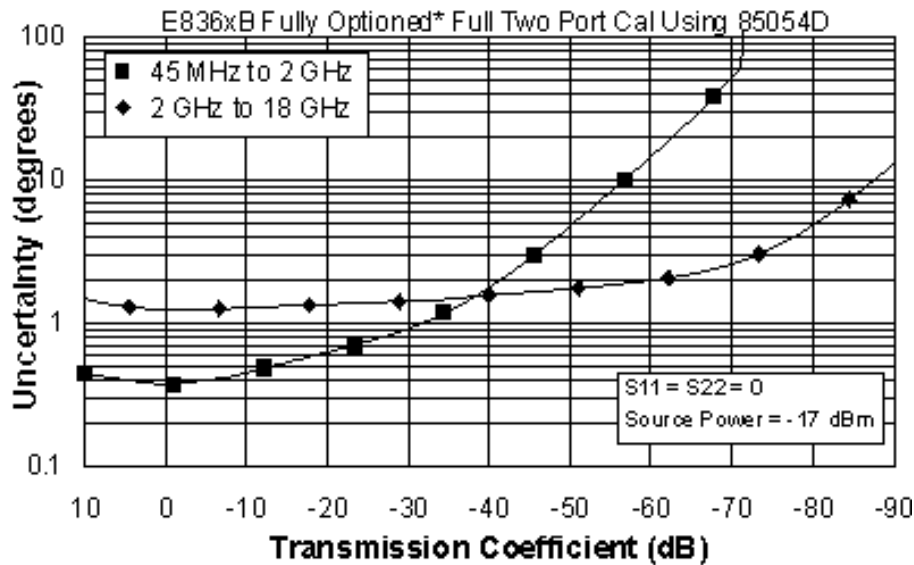


* Configurable Test Set, Extended Power Range & Bias-Tees, Receiver Attenuators, Frequency Offset Mode, and Reference Channel Transfer Switch
(E836xB - Option 014, UNL, 016, 080, and 081)

Reflection Uncertainty (Specifications)

Magnitude

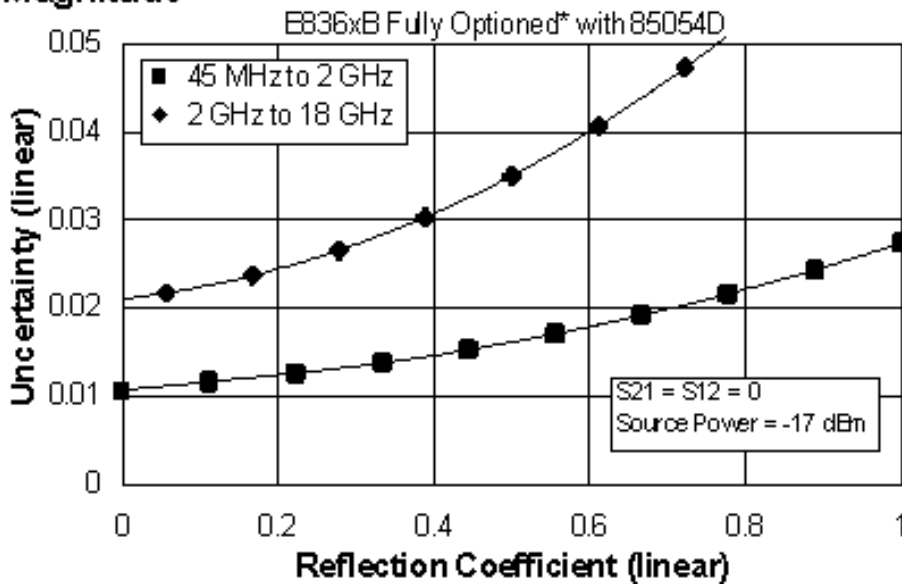

Phase

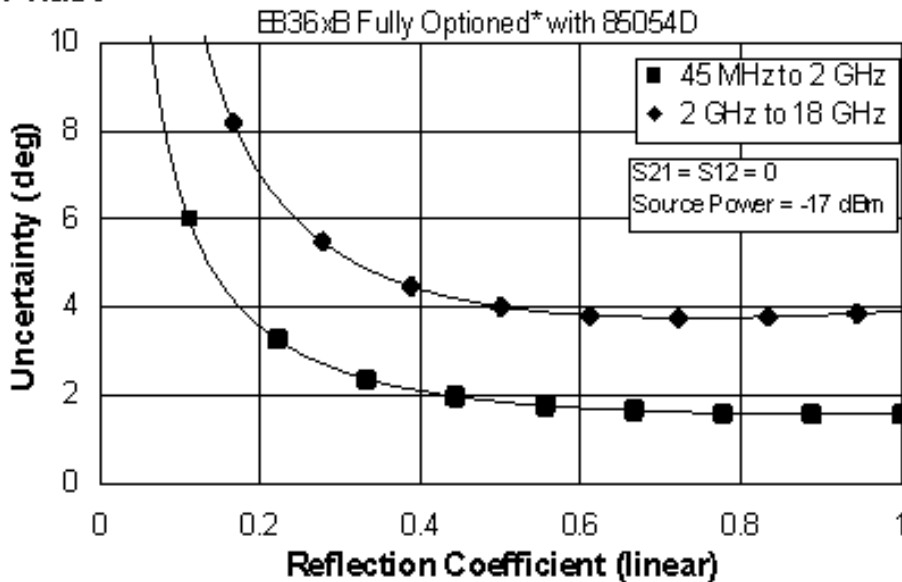

* Configurable Test Set, Extended Power Range & Bias-Tees, Receiver Attenuators, Frequency Offset Mode, and Reference Channel Transfer Switch
(E836xB - Option 014, UNL, 016, 080, and 081)

E8363/4B Corrected System Performance with WR-28 Connectors

Table 25. R11644A Calibration Kit
Standard Configuration and Standard Power Range
(E8363/4B)


Applies to the, E8363/4B analyzers, R11644A (WR-28) calibration kit, 85133F flexible test port cable set with the R281A and R281B launch sets, and a full 2-port calibration. Also applies to the following condition:

Environmental temperature $23^{\circ} \pm 3^{\circ} \text{C}$, with $< 1^{\circ} \text{C}$ deviation from calibration temperature


Description	Specification (dB)
	26.5 to 40 GHz
Directivity	50
Source Match	50
Load Match	50
Reflection Tracking	± 0.000 $+0.03/^{\circ}\text{C}$
Transmission Tracking	± 0.018 $+0.03/^{\circ}\text{C}$

Transmission Uncertainty (Specifications)

Magnitude

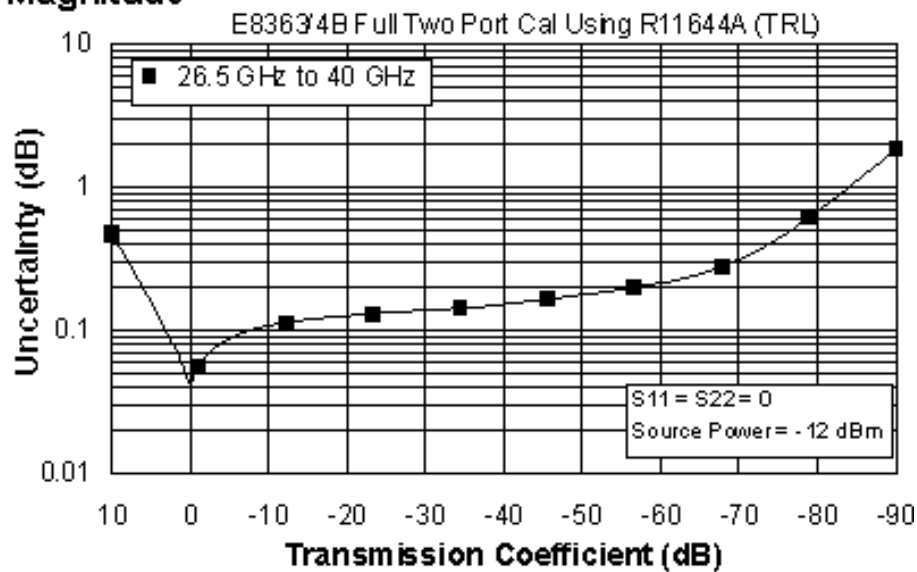


Phase

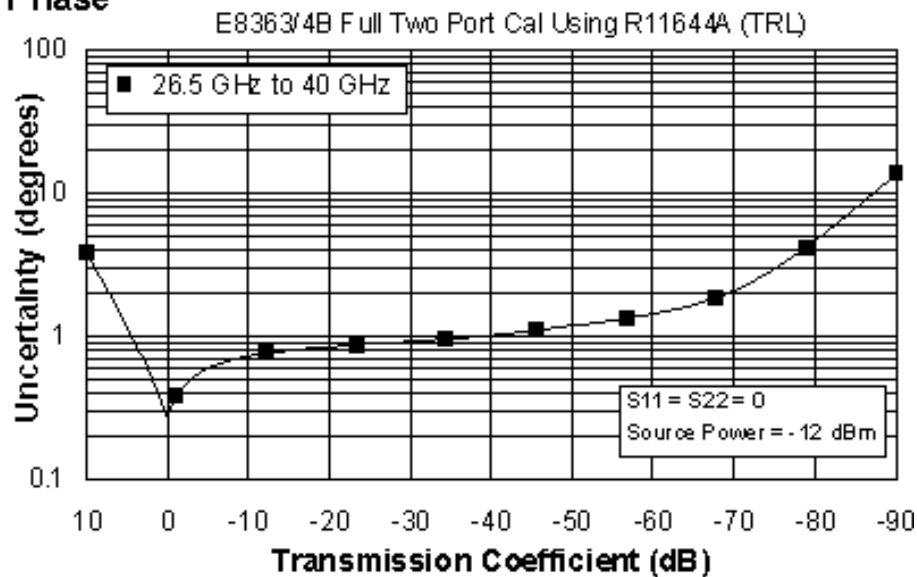

Reflection Uncertainty (Specifications)

Magnitude

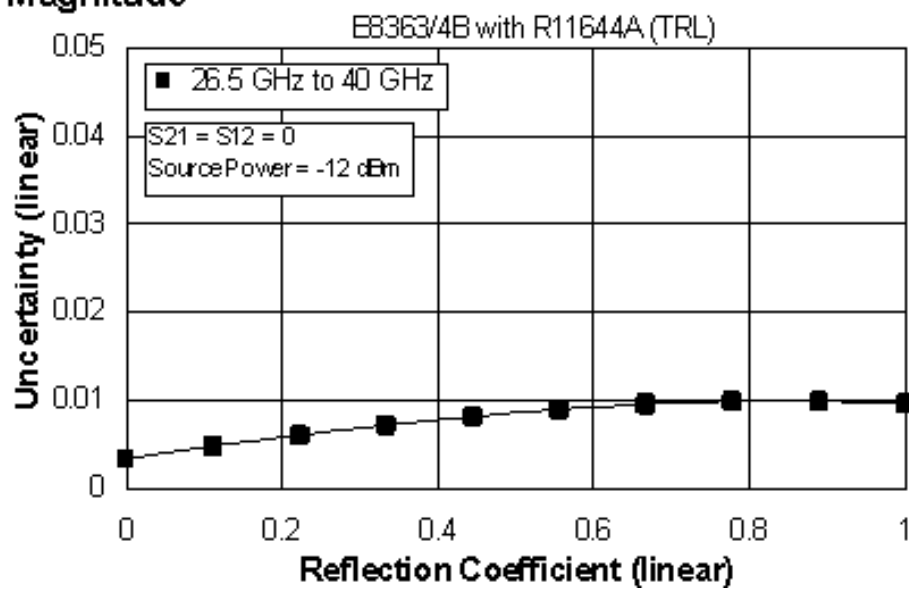

Phase

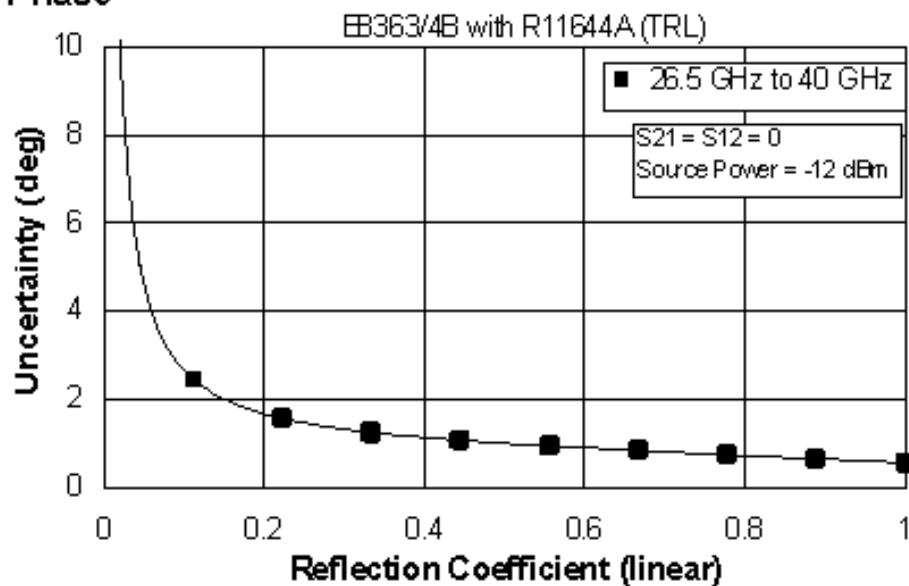


Table 26. R11644A Calibration Kit

Fully Optioned (E836xB - Option 014, UNL, 016, 080, and 081)

Configurable Test Set, Extended Power Range & Bias-Tees, Receiver Attenuators, Frequency Offset Mode, and Reference Channel Transfer Switch


Applies to the, E8363/4B analyzers, R11644A (WR-28) calibration kit, 85133F flexible test port cable set with the R281A and R281B launch sets, and a full 2-port calibration. Also applies to the following condition:

Environmental temperature 23° ±3 °C, with < 1 °C deviation from calibration temperature


Description	Specification (dB)
	26.5 to 40 GHz
Directivity	50
Source Match	50
Load Match	50
Reflection Tracking	±0.000
	+0.03/°C
Transmission Tracking	±0.019
	+0.03/°C

Transmission Uncertainty (Specifications)

Magnitude

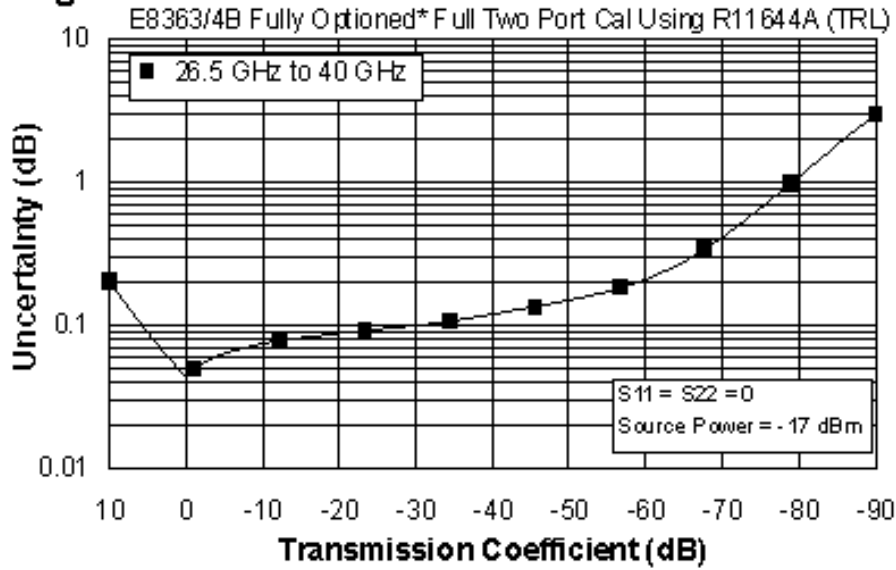


Phase

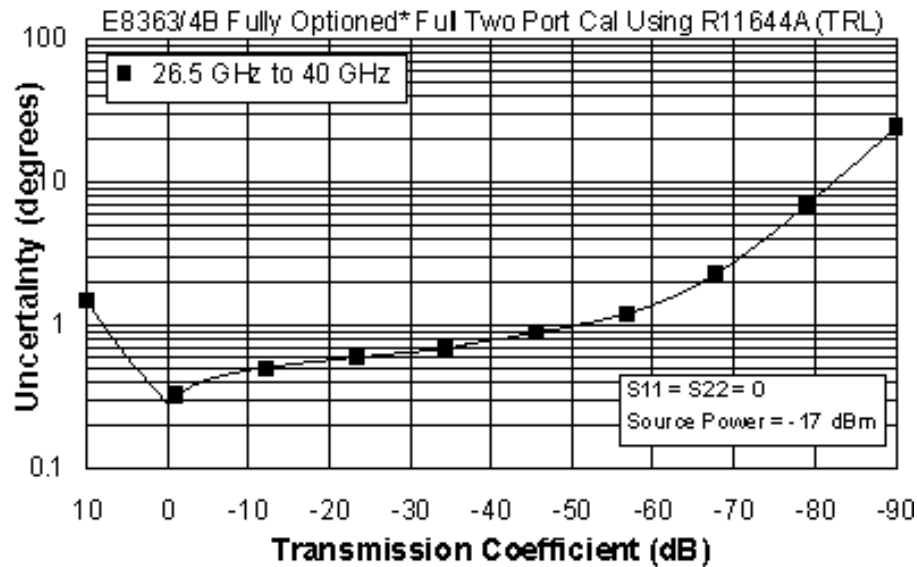


* Configurable Test Set, Extended Power Range & Bias-Tees, Receiver Attenuators, Frequency Offset Mode, and Reference Channel Transfer Switch (E836xB - Option 014, UNL, 016, 080, and 081)

Reflection Uncertainty (Specifications)

Magnitude

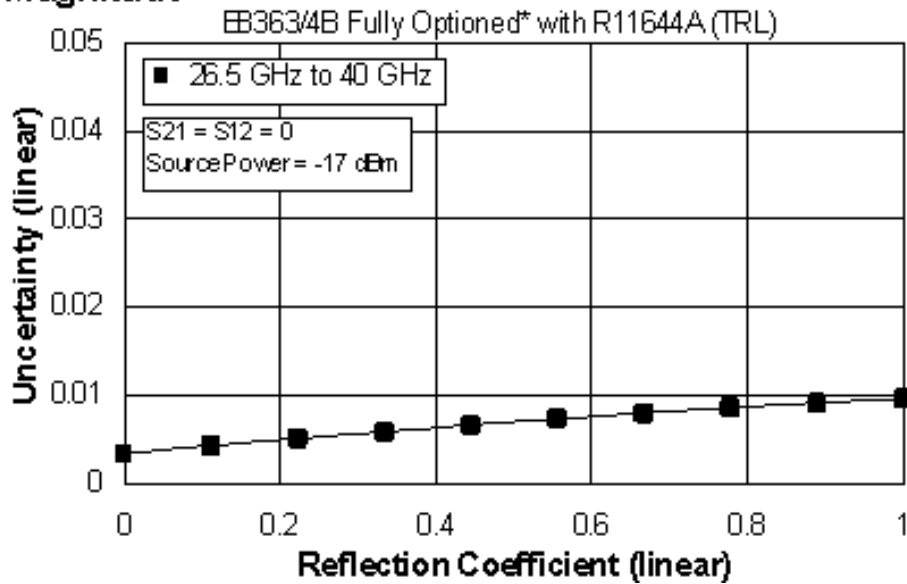

Phase

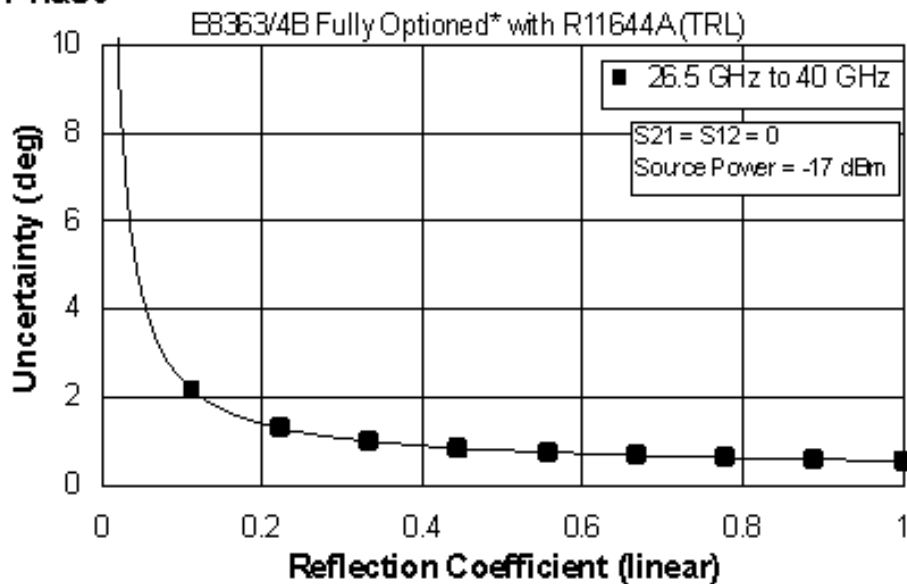

* Configurable Test Set, Extended Power Range & Bias-Tees, Receiver Attenuators, Frequency Offset Mode, and Reference Channel Transfer Switch (E836xB - Option 014, UNL, 016, 080, and 081)

E8363/4B Corrected System Performance with WR-42 Connectors

Table 27. K11644A Calibration Kit
Standard Configuration and Standard Power Range
(E8363/4B)


Applies to the, E8363/4B analyzers, K11644A (WR-42) calibration kit, 85134F flexible test port cable set with the K281C launch set,, and a full 2-port calibration. Also applies to the following condition:

Environmental temperature $23^{\circ} \pm 3^{\circ} \text{C}$, with $< 1^{\circ} \text{C}$ deviation from calibration temperature


Description	Specification (dB)	
	18 to 20 GHz	20 to 26.5 GHz
Directivity	50	50
Source Match	50	50
Load Match	50	50
Reflection Tracking	± 0.000 $+0.02/^{\circ}\text{C}$	± 0.000 $+0.02/^{\circ}\text{C}$
Transmission Tracking	± 0.014 $+0.02/^{\circ}\text{C}$	± 0.018 $+0.02/^{\circ}\text{C}$

Transmission Uncertainty (Specifications)

Magnitude

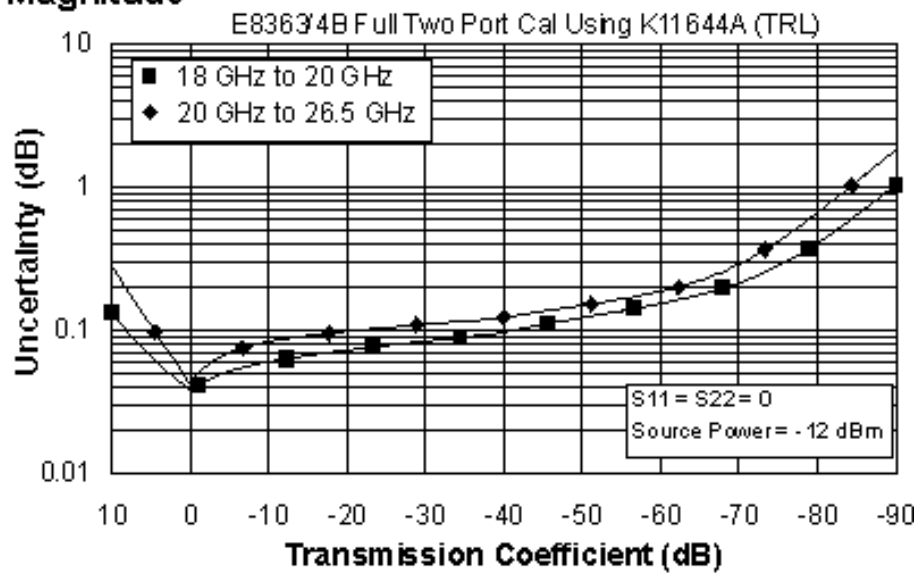


Phase

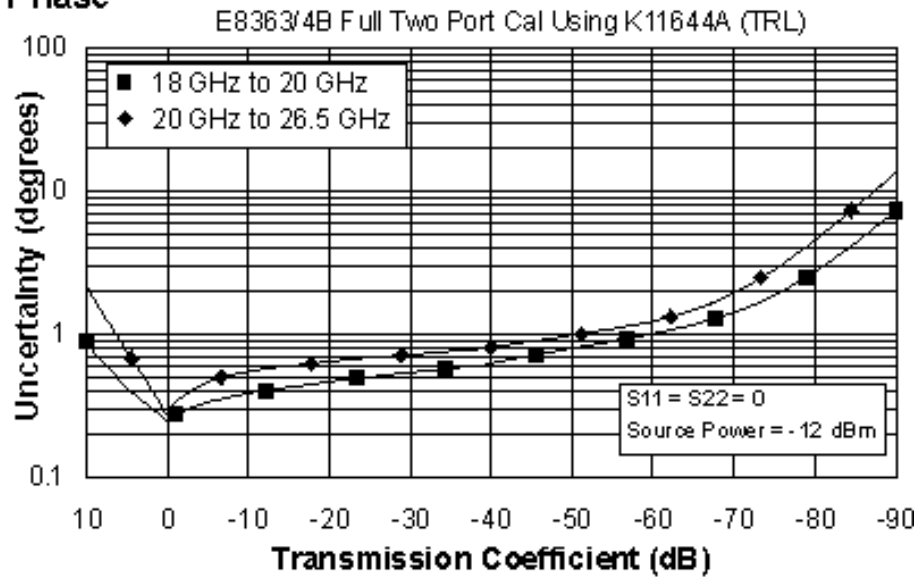

Reflection Uncertainty (Specifications)

Magnitude

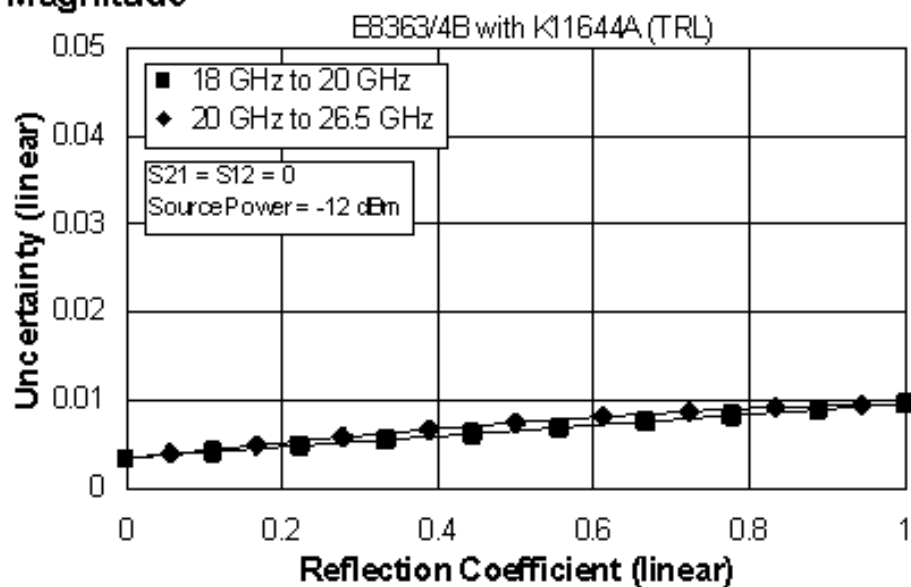

Phase

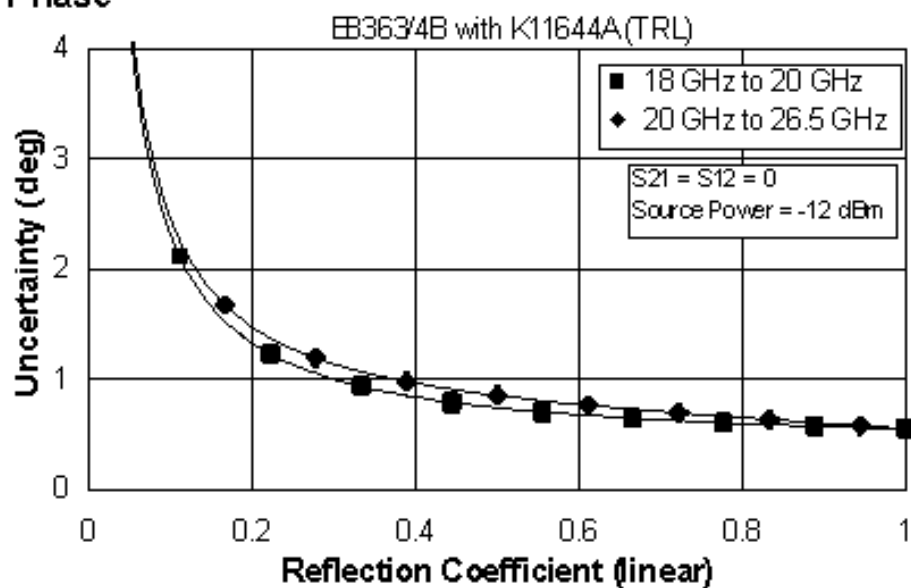


Table 28. K11644A Calibration Kit

Fully Optioned (E836xB - Option 014, UNL, 016, 080, and 081)

Configurable Test Set, Extended Power Range & Bias-Tees, Receiver Attenuators, Frequency Offset Mode, and Reference Channel Transfer Switch


Applies to the, E8363/4B analyzers, K11644A (WR-42) calibration kit, 85134F flexible test port cable set with the K281C launch set., and a full 2-port calibration. Also applies to the following condition:

Environmental temperature 23° ±3 °C, with < 1 °C deviation from calibration temperature


Description	Specification (dB)	
	18 to 20 GHz	20 to 26.5 GHz
Directivity	50	50
Source Match	50	50
Load Match	50	50
Reflection Tracking	±0.000 +0.02/°C	±0.000 +0.02/°C
Transmission Tracking	±0.016 +0.02/°C	±0.019 +0.02/°C

Transmission Uncertainty (Specifications)

Magnitude

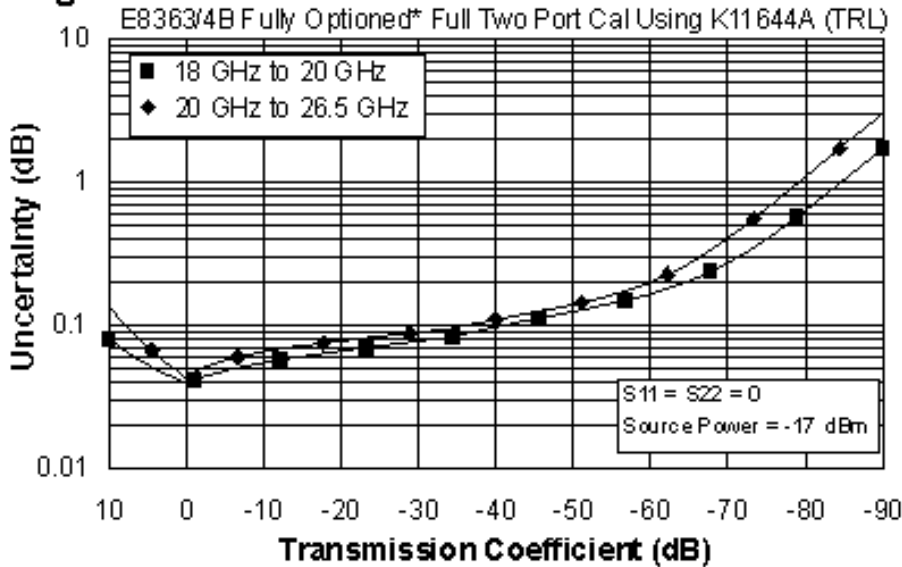


Phase

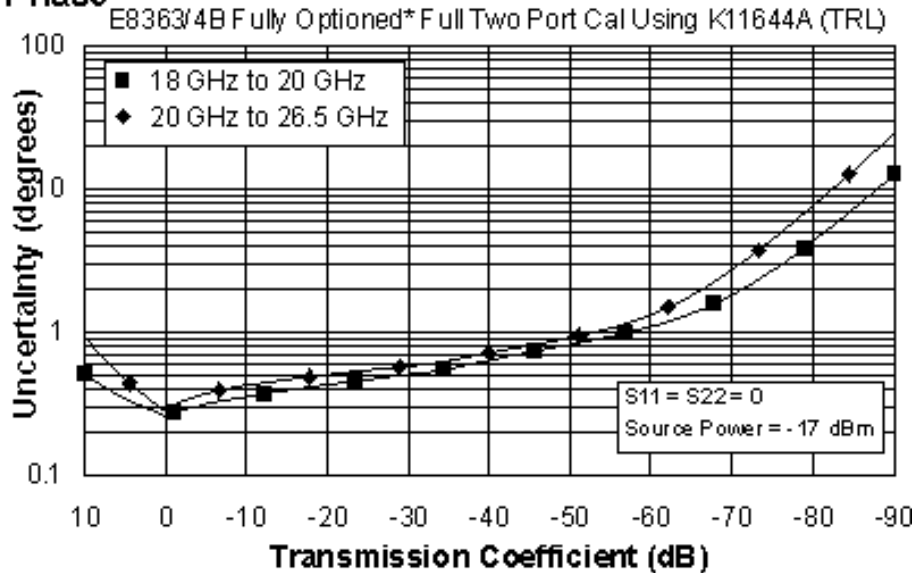


* Configurable Test Set, Extended Power Range & Bias-Tees, Receiver Attenuators, Frequency Offset Mode, and Reference Channel Transfer Switch (E836xB - Option 014, UNL, 016, 080, and 081)

Reflection Uncertainty (Specifications)

Magnitude

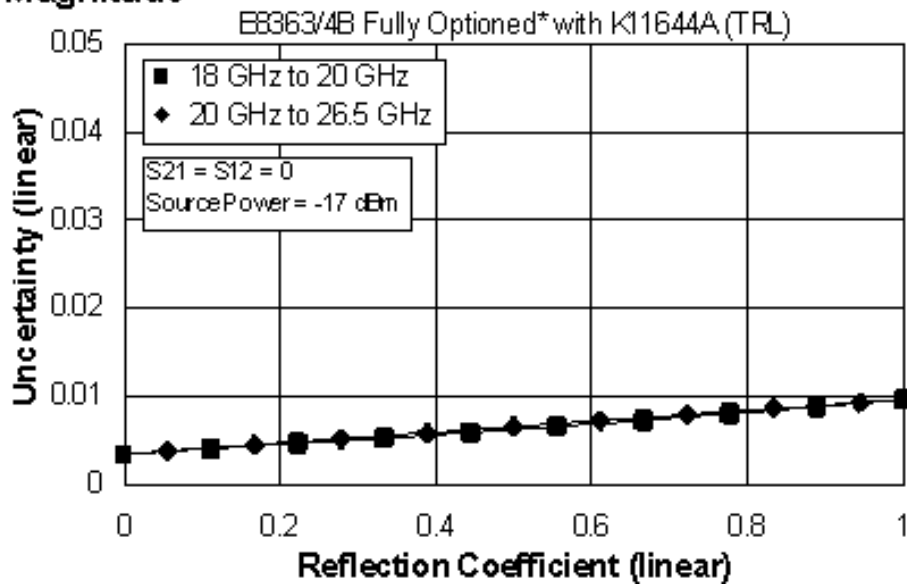

Phase

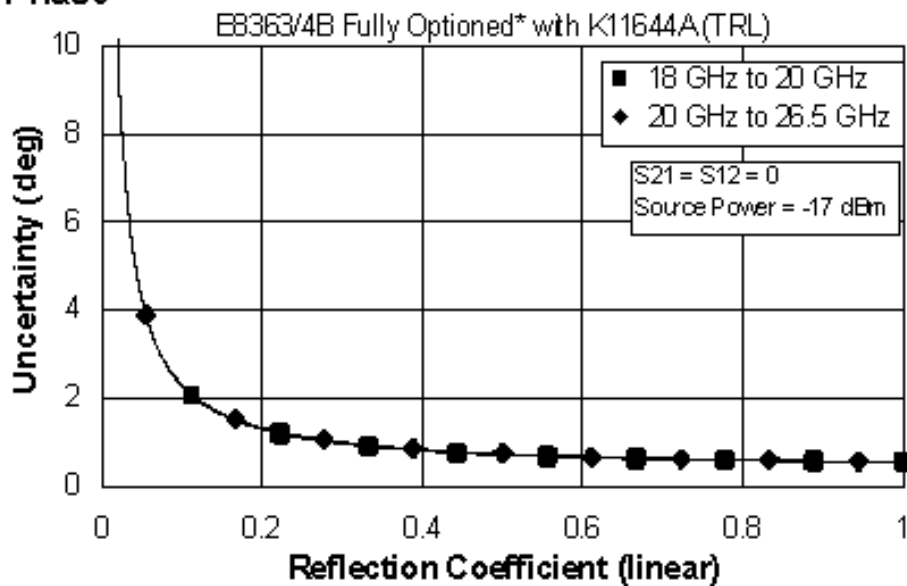

* Configurable Test Set, Extended Power Range & Bias-Tees, Receiver Attenuators, Frequency Offset Mode, and Reference Channel Transfer Switch (E836xB - Option 014, UNL, 016, 080, and 081)

E836xB Corrected System Performance with WR-62 Connectors

Table 29. P11644A Calibration Kit
Standard Configuration and Standard Power Range
(E836xB)


Applies to the, E836xB analyzers, P11644A (WR-62) calibration kit, 85132F flexible test port cable set with the P281B and P281C launch sets, and a full 2-port calibration. Also applies to the following condition:

Environmental temperature $23^{\circ} \pm 3^{\circ} \text{C}$, with $< 1^{\circ} \text{C}$ deviation from calibration temperature


Description	Specification (dB)
	12.4 to 18 GHz
Directivity	50
Source Match	50
Load Match	50
Reflection Tracking	± 0.000 $+0.02/^{\circ}\text{C}$
Transmission Tracking	± 0.014 $+0.02/^{\circ}\text{C}$

Transmission Uncertainty (Specifications)

Magnitude

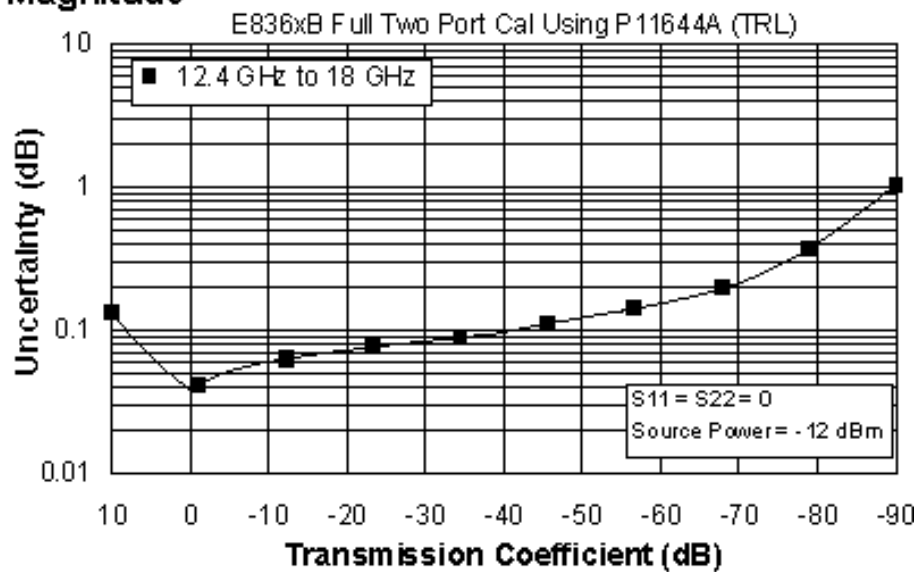


Phase

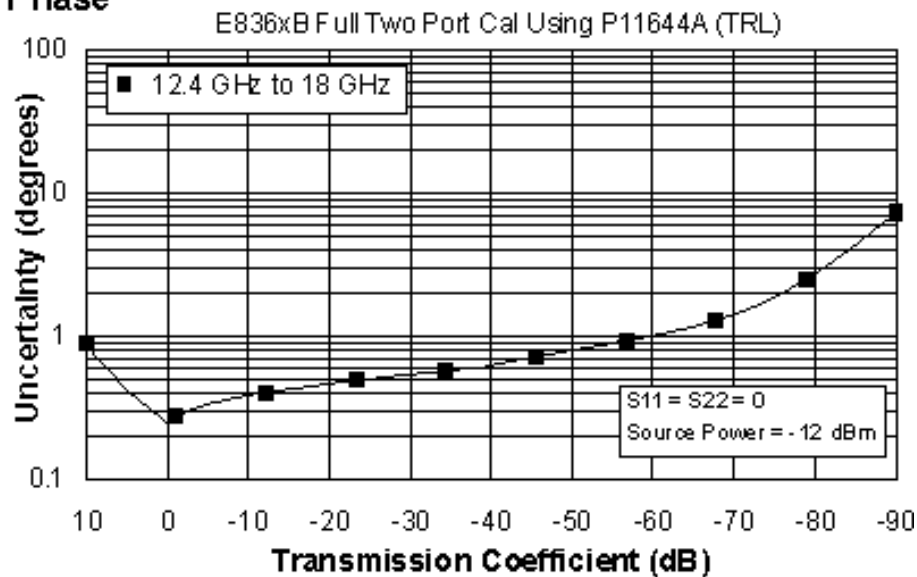

Reflection Uncertainty (Specifications)

Magnitude

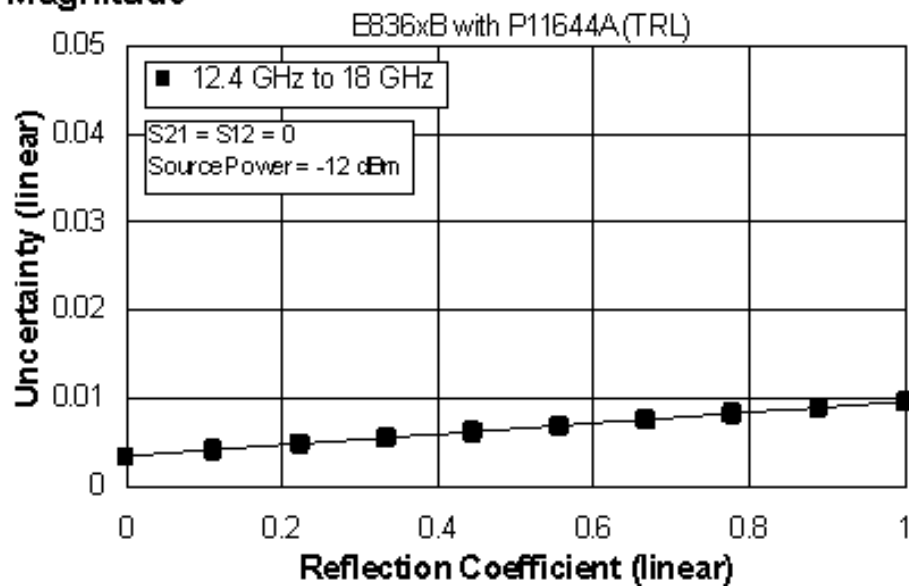

Phase

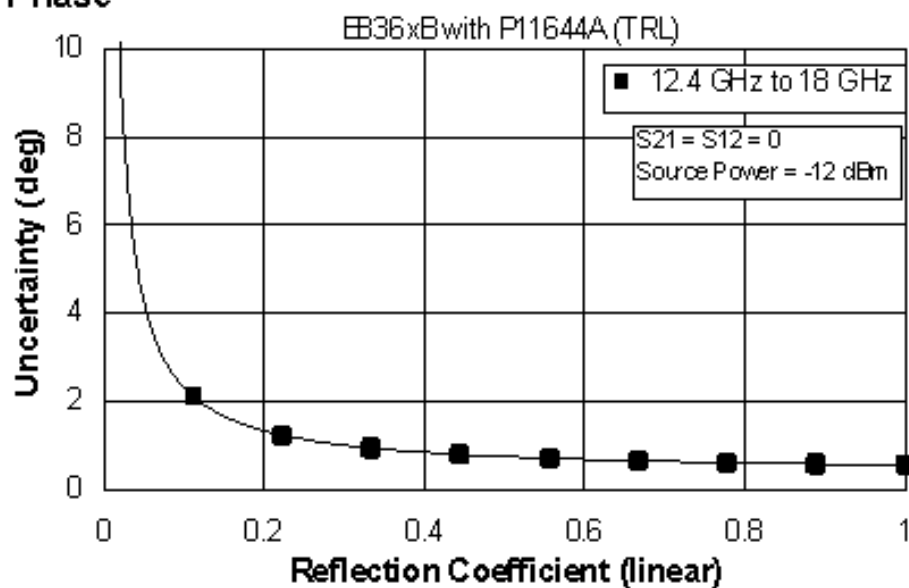


Table 30. P11644A Calibration Kit

Fully Optioned (E836xB - Option 014, UNL, 016, 080, and 081)

Configurable Test Set, Extended Power Range & Bias-Tees, Receiver Attenuators, Frequency Offset Mode, and Reference Channel Transfer Switch


Applies to the, E836xB analyzers, P11644A (WR-62) calibration kit, 85132F flexible test port cable set with the P281B and P281C launch sets, and a full 2-port calibration. Also applies to the following condition:

Environmental temperature 23° ±3 °C, with < 1 °C deviation from calibration temperature


Description	Specification (dB)
	12.4 to 18 GHz
Directivity	50
Source Match	50
Load Match	50
Reflection Tracking	±0.000 +0.02/°C
Transmission Tracking	±0.016 +0.02/°C

Transmission Uncertainty (Specifications)

Magnitude

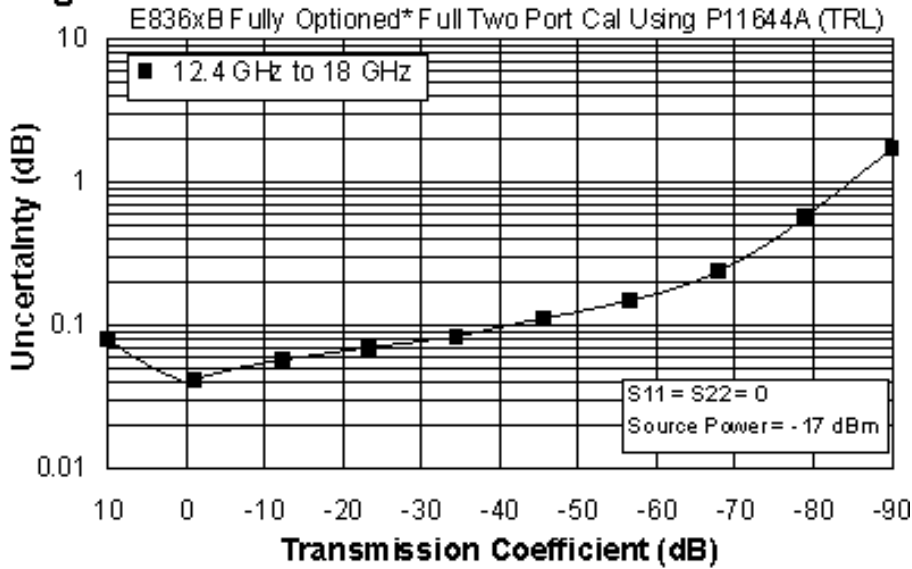


Phase

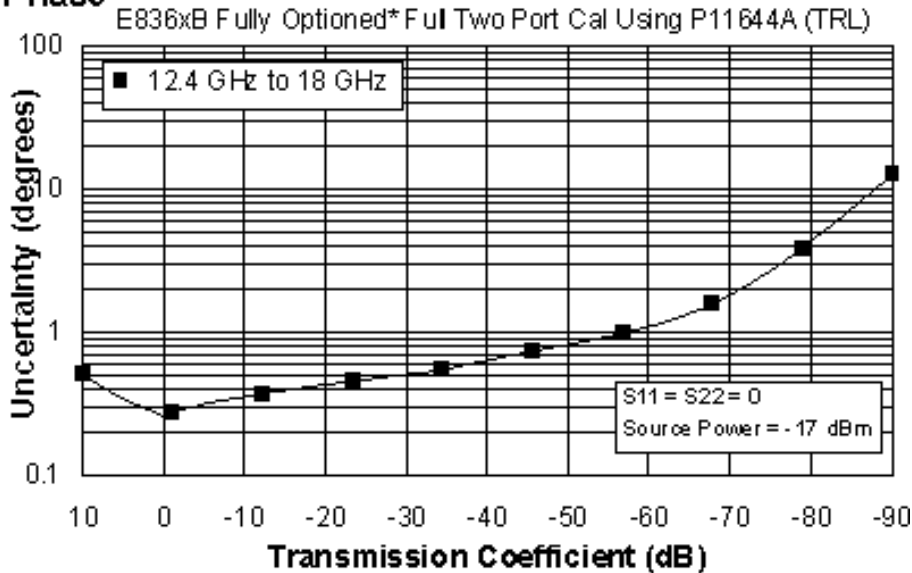


* Configurable Test Set, Extended Power Range & Bias-Tees, Receiver Attenuators, Frequency Offset Mode, and Reference Channel Transfer Switch (E836xB - Option 014, UNL, 016, 080, and 081)

Reflection Uncertainty (Specifications)

Magnitude

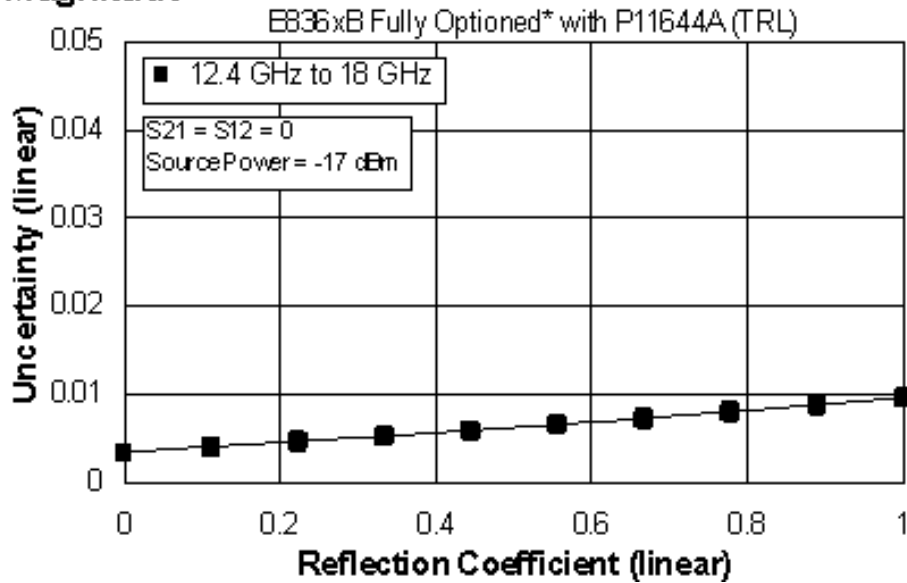

Phase

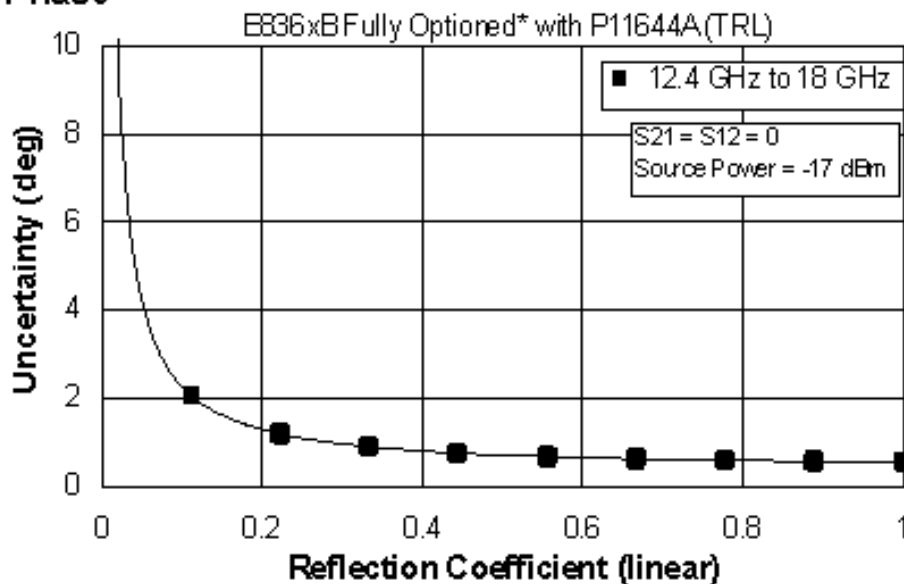

* Configurable Test Set, Extended Power Range & Bias-Tees, Receiver Attenuators, Frequency Offset Mode, and Reference Channel Transfer Switch (E836xB - Option 014, UNL, 016, 080, and 081)

E836xB Corrected System Performance with WR-90 Connectors

Table 31. X11644A Calibration Kit
Standard Configuration and Standard Power Range
(E836xB)


Applies to the, E836xB analyzers, X11644A (WR-90) calibration kit, 85133F flexible test port cable set with the X281A and X281C launch sets, and a full 2-port calibration. Also applies to the following condition:

Environmental temperature 23° ±3 °C, with < 1 °C deviation from calibration temperature


Description	Specification (dB)
	8.2 to 12.4 GHz
Directivity	50
Source Match	50
Load Match	50
Reflection Tracking	±0.000 +0.02/°C
Transmission Tracking	±0.014 +0.02/°C

Transmission Uncertainty (Specifications)

Magnitude

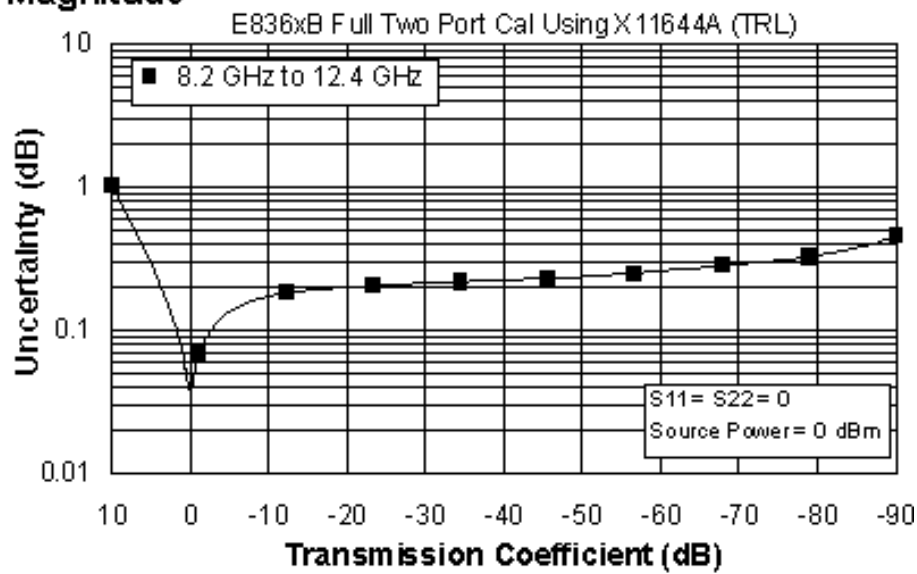


Phase

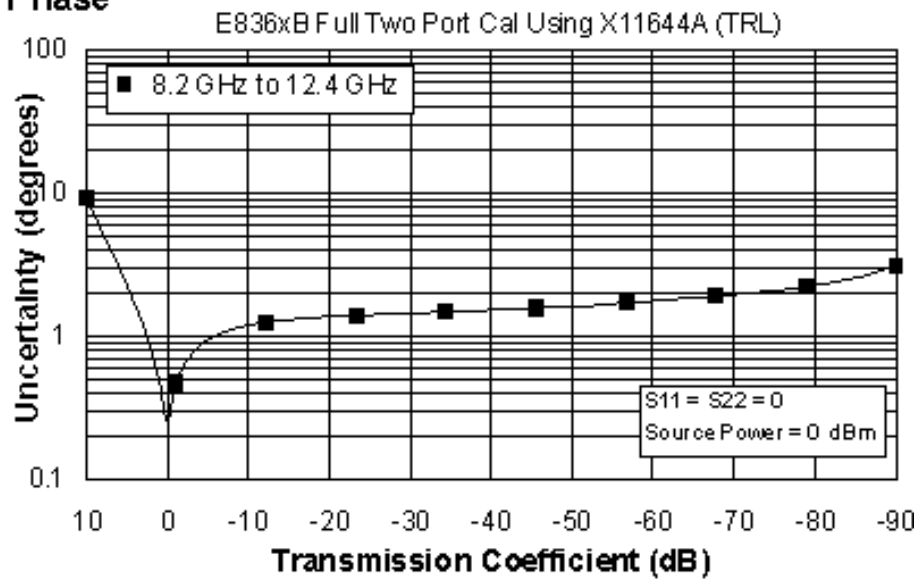

Reflection Uncertainty (Specifications)

Magnitude

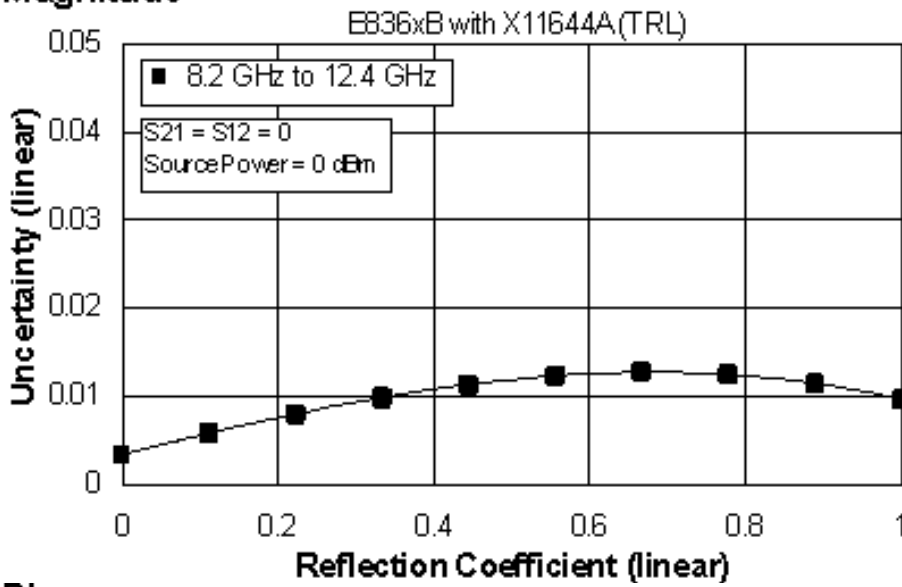

Phase

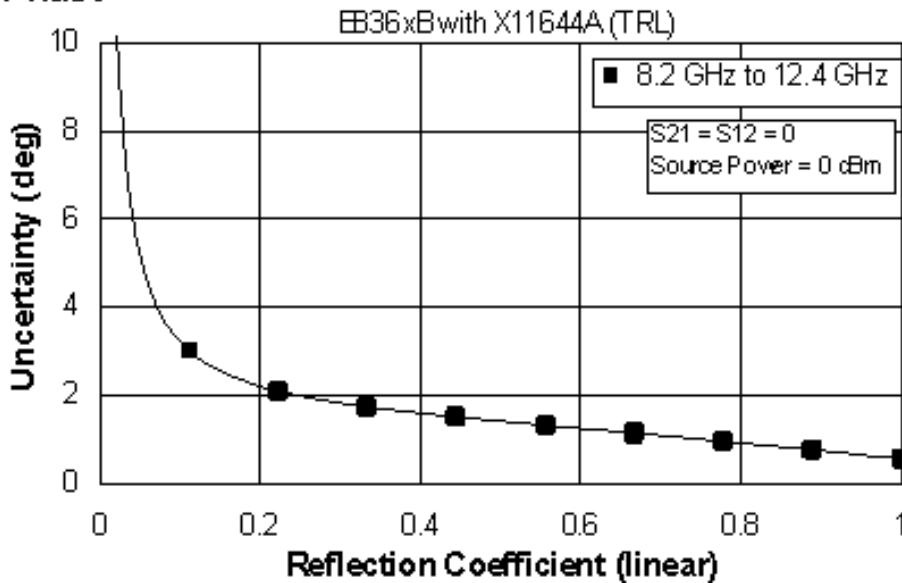


Table 32. X11644A Calibration Kit

Fully Optioned (E836xB - Option 014, UNL, 016, 080, and 081)

Configurable Test Set, Extended Power Range & Bias-Tees, Receiver Attenuators, Frequency Offset Mode, and Reference Channel Transfer Switch


Applies to the, E836xB analyzers, X11644A (WR-90) calibration kit, 85133F flexible test port cable set with the X281A and X281C launch sets, and a full 2-port calibration. Also applies to the following condition:

Environmental temperature 23° ±3 °C, with < 1 °C deviation from calibration temperature


Description	Specification (dB)
	8.2 to 12.4 GHz
Directivity	50
Source Match	50
Load Match	50
Reflection Tracking	±0.000 +0.02/°C
Transmission Tracking	±0.016 +0.02/°C

Transmission Uncertainty (Specifications)

Magnitude

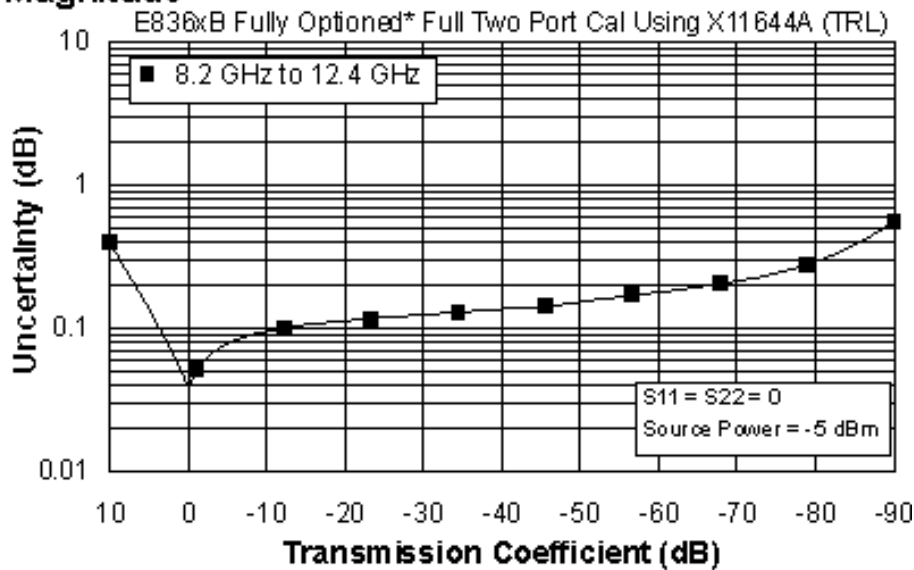


Phase

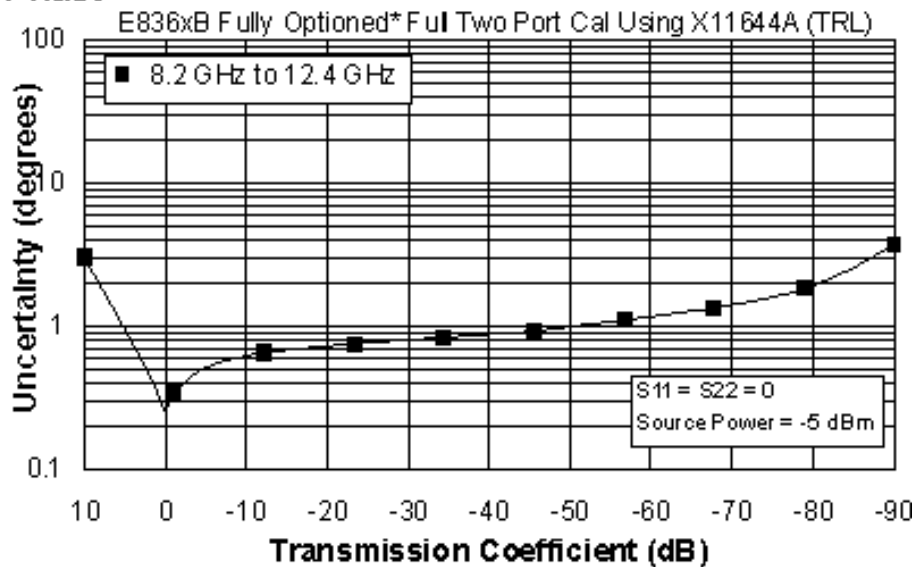


* Configurable Test Set, Extended Power Range & Bias-Tees, Receiver Attenuators, Frequency Offset Mode, and Reference Channel Transfer Switch (E836xB - Option 014, UNL, 016, 080, and 081)

Reflection Uncertainty (Specifications)

Magnitude

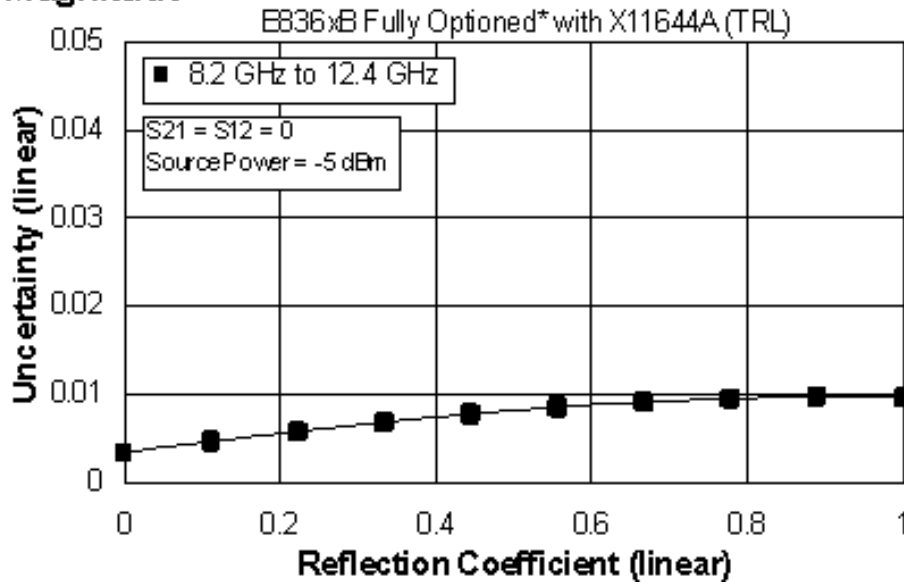

Phase

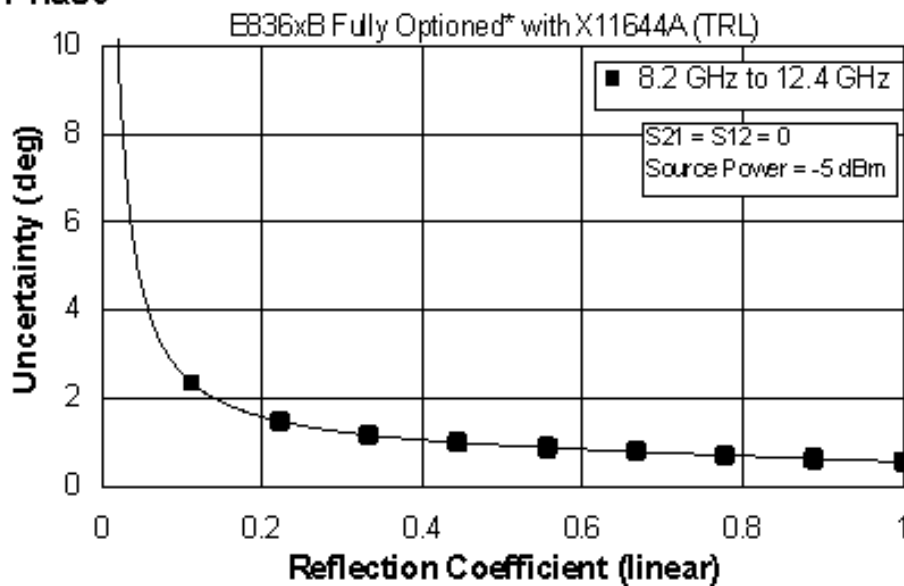

* Configurable Test Set, Extended Power Range & Bias-Tees, Receiver Attenuators, Frequency Offset Mode, and Reference Channel Transfer Switch (E836xB - Option 014, UNL, 016, 080, and 081)

Table 33. Uncorrected System Performance^a

Specifications apply over environmental temperature of 23° ±3 °C, with < 1 °C deviation from the calibration temperature

Description	Specification	Supplemental Information
Directivity		
10 MHz to 45 MHz ^b	23 dB	
45 MHz to 2 GHz	24 dB	
2 GHz to 10 GHz	22 dB	
10 GHz to 20 GHz	16 dB	
20 GHz to 40 GHz	16 dB	
40 GHz to 45 GHz	15 dB	
45 GHz to 50 GHz	13 dB	
Source Match - Standard		
10 MHz to 45 MHz ^b	11 dB	
45 MHz to 2 GHz	23 dB	
2 GHz to 10 GHz	16 dB	
10 GHz to 20 GHz	14 dB	
20 GHz to 40 GHz	10 dB	
40 GHz to 45 GHz	9 dB	
45 GHz to 50 GHz	7.5 dB	
Source Match - Opt UNL, 014 or 014/UNL		
10 MHz to 45 MHz ^b	11 dB	
45 MHz to 2 GHz	18 dB	
2 GHz to 10 GHz	14 dB	
10 GHz to 20 GHz	12 dB	
20 GHz to 40 GHz	9 dB	
40 GHz to 45 GHz	8 dB	
45 GHz to 50 GHz	6 dB	
Load Match - Standard		
10 MHz to 45 MHz ^b	11 dB	
45 MHz to 2 GHz	23 dB	
2 GHz to 10 GHz	14 dB	
10 GHz to 20 GHz	10 dB	
20 GHz to 40 GHz	9 dB	
40 GHz to 45 GHz	9 dB	
45 GHz to 50 GHz	8 dB	
Load Match - Opt UNL, 014 or 014/UNL		
10 MHz to 45 MHz ^b	11 dB	
45 MHz to 2 GHz	17 dB	
2 GHz to 10 GHz	13 dB	
10 GHz to 20 GHz	10 dB	
20 GHz to 40 GHz	9 dB	
40 GHz to 45 GHz	9 dB	
45 GHz to 50 GHz	7 dB	

Description	Specification	Supplemental Information
Reflection Tracking		
		Typical:
10 MHz to 45 MHz		±1.5 dB
45 MHz to 20 GHz		±1.5 dB
20 GHz to 40 GHz		±1.5 dB
40 GHz to 50 GHz		±2.0 dB
Transmission Tracking^c		
		Typical:
10 MHz to 45 MHz		±3.0 dB
45 MHz to 2 GHz		±1.5 dB
2 GHz to 10 GHz		±2.0 dB
10 GHz to 20 GHz		±2.5 dB
20 GHz to 40 GHz		±3.5 dB
40 GHz to 45 GHz		±4.0 dB
45 GHz to 50 GHz		±4.5 dB
Crosstalk^d - Standard		
10 MHz to 45 MHz ^b	-65 dB	
45 MHz to 1 GHz	-85 dB	
1 GHz to 2 GHz	-100 dB	
2 GHz to 20 GHz	-110 dB	
20 GHz to 40 GHz	-108 dB	
40 GHz to 45 GHz	-105 dB	
45 GHz to 50 GHz	-100 dB	
Crosstalk^d - Option UNL or 014		
10 MHz to 45 MHz ^b	-65 dB	
45 MHz to 1 GHz	-85 dB	
1 GHz to 2 GHz	-100 dB	
2 GHz to 20 GHz	-109 dB	
20 GHz to 40 GHz	-106 dB	
40 GHz to 45 GHz	-103 dB	
45 GHz to 50 GHz	-98 dB	
Crosstalk^d - Option 014/UNL		
10 MHz to 45 MHz ^b	-65 dB	
45 MHz to 1 GHz	-85 dB	
1 GHz to 2 GHz	-98 dB	
2 GHz to 10 GHz	-108 dB	
10 GHz to 20 GHz	-107 dB	
20 GHz to 40 GHz	-104 dB	
40 GHz to 45 GHz	-100 dB	
45 GHz to 50 GHz	-95 dB	

Description	Specification	Supplemental Information
Crosstalk - Option 080 enabled^{b,e}		
		Typical:
10 MHz to 45 MHz		-65
45 MHz to 1 GHz		-85
1 GHz to 2 GHz		-100
2 GHz to 10 GHz		-109
10 GHz to 20 GHz		-110
20 GHz to 40 GHz		-106
40 GHz to 45 GHz		-103
45 GHz to 50 GHz		-98

^a Specifications apply over environment temperature of 23°C +/- 3°C, with less than 1°C deviation from the calibration temperature.

^b Typical performance.

^c Transmission tracking performance is strongly dependent on cable used. These typical specifications are based on the use of the Agilent thru cable (part number 85133-60016).

^d Measurement conditions: normalized to a thru, measured with two shorts, 10 Hz IF bandwidth, averaging factor of 16, alternate mode, source power set to the lesser of the maximum power out or the maximum receiver power.

^e 0 Hz offset.

Table 34. Test Port Output

Description	Specification				Supplemental
	Standard	Opt 014	Opt UNL	Opt 014/UNL	
Frequency Range					
E8362B	10 MHz to 20 GHz				
E8363B	10 MHz to 40 GHz				
E8364B	10 MHz to 50 GHz				
Nominal Power^c					
E8362B	0 dBm	-5 dBm	-5 dBm	-5 dBm	
E8363/4B	-12 dBm	-17 dBm	-17 dBm	-17 dBm	
Frequency Resolution					
	1 Hz				
CW Accuracy					
	+/-1 ppm				
Frequency Stability					
					+/-0.05 ppm. -10° to 70° C, typical; +/-0.1 ppm/yr. maximum, typical
Power Level Accuracy^a					
10 MHz to 45 MHz ^b	+/-2.0 dB	+/-2.0 dB	+/-2.0 dB	+/-2.0 dB	Variation from nominal power in range 0 (step attenuator at 0 dB)
45 MHz to 10 GHz	+/-1.5 dB	+/-1.5 dB	+/-1.5 dB	+/-1.5 dB	
10 GHz to 20 GHz	+/-2.0 dB	+/-2.0 dB	+/-2.0 dB	+/-2.0 dB	
20 GHz to 40 GHz	+/-3.0 dB	+/-3.0 dB	+/-3.0 dB	+/-3.0 dB	
40 GHz to 45 GHz	+/-3.0 dB	+/-3.5 dB	+/-3.0 dB	+/-3.5 dB	
45 GHz to 50 GHz	+/-3.0 dB	+/-4.0 dB	+/-3.0 dB	+/-4.0 dB	
Power Level Linearity^d					
10 MHz to 45 MHz ^b	+/-1.0 dB ^g				Test reference is at the nominal power level (step attenuator at 0 dB)
45 MHz to 20 GHz	+/-1.0 dB ^g				
20 GHz to 40 GHz	+/-1.0 dB ^g				
40 GHz to 50 GHz	+/-1.0 dB ^g				

Description	Specification				Supplemental
	Standard	Opt 014	Opt UNL	Opt 014/UNL	
Power Range ^{a, e, f}					
10 MHz to 45 MHz ^b	-25 to +2 dBm	-25 to +2 dBm	-87 to +2 dBm	-87 to +2 dBm	
45 MHz to 10 GHz	-25 to +5 dBm	-25 to +5 dBm	-87 to +3 dBm	-87 to +3 dBm ^h	
10 GHz to 20 GHz	-24 to +3 dBm	-25 to +2 dBm	-86 to +1 dBm	-87 to 0 dBm ⁱ	
20 GHz to 30 GHz	-23 to 0 dBm	-25 to -2 dBm	-85 to -2 dBm	-87 to -4 dBm	
30 GHz to 40 GHz	-23 to -4 dBm	-25 to -6 dBm	-85 to -6 dBm	-87 to -8 dBm	
40 GHz to 45 GHz	-25 to -5 dBm	-27 to -7 dBm	-87 to -9 dBm	-87 to -11 dBm	
45 GHz to 50 GHz	-25 to -10 dBm	-27 to -12 dBm	-87 to -15 dBm	-87 to -17 dBm	
Power Sweep Range (ALC)					
10 MHz to 45 MHz ^b	27 dB	27 dB	29 dB	29 dB	ALC range starts at maximum leveled output power and decreases by power level indicated in the table.
45 MHz to 10 GHz	30 dB	30 dB	30 dB	30 dB ^j	
10 GHz to 20 GHz	27 dB	27 dB	27 dB	27 dB ^k	
20 GHz to 30 GHz	23 dB	23 dB	23 dB	23 dB	
30 GHz to 40 GHz	19 dB	19 dB	19 dB	19 dB	
40 GHz to 45 GHz	20 dB	20 dB	18 dB	16 dB	
45 GHz to 50 GHz	15 dB	15 dB	12 dB	10 dB	
Power Resolution					
	0.01 dB				
Phase Noise					
1 kHz offset from center frequency, nominal power at test port					
					Typical:
10 MHz to 10 GHz					-60 dBc
10 GHz to 20 GHz					-55 dBc
20 GHz to 50 GHz					-50 dBc

Description	Specification				Supplemental
	Standard	Opt 014	Opt UNL	Opt 014/UNL	
Phase Noise					
1 kHz offset from center frequency, nominal power at test port - Option 080 enabled					
					Typical:
10 MHz to 10 GHz					-60 dBc
10 GHz to 20 GHz					-60 dBc
20 GHz to 50 GHz					-50 dBc
10 kHz offset from center frequency, nominal power at test port					
					Typical:
10 MHz to 45 MHz					-70 dBc
45 MHz to 10 GHz					-70 dBc
10 GHz to 20 GHz					-65 dBc
20 GHz to 40 GHz					-55 dBc
40 GHz to 50 GHz					-55 dBc
10 kHz offset from center frequency, nominal power at test port - Option 080 enabled					
					Typical:
10 MHz to 45 MHz					-70 dBc
45 MHz to 10 GHz					-70 dBc
10 GHz to 20 GHz					-65 dBc
20 GHz to 40 GHz					-55 dBc
40 GHz to 50 GHz					-55 dBc
100 kHz offset from center frequency, nominal power at test port					
					Typical:
10 MHz to 10 GHz					-60 dBc
10 GHz to 20 GHz					-55 dBc
20 GHz to 50 GHz					-50 dBc
100 kHz offset from center frequency, nominal power at test port - Option 080 enabled					
					Typical:
10 MHz to 10 GHz					-75 dBc
10 GHz to 20 GHz					-70 dBc
20 GHz to 50 GHz					-65 dBc

Description	Specification				Supplemental
	Standard	Opt 014	Opt UNL	Opt 014/UNL	
1 MHz offset from center frequency, nominal power at test port					
					Typical:
10 MHz to 10 GHz					-106 dBc
10 GHz to 20 GHz					-103 dBc
20 GHz to 50 GHz					-90 dBc
1 MHz offset from center frequency, nominal power at test port - Option 080 enabled					
					Typical:
10 MHz to 10 GHz					-103 dBc
10 GHz to 20 GHz					-97 dBc
20 GHz to 50 GHz					-85 dBc
Harmonics (2nd or 3rd)					
					-23 dBc typical, in power range 0
Non-Harmonic Spurious (at Nominal Output Power)					
10 MHz to 45 MHz					-50 dBc typical, for offset frequency > 1 kHz
45 MHz to 20 GHz					-50 dBc typical, for offset frequency > 1 kHz
20 GHz to 40 GHz					-30 dBc typical, for offset frequency > 1 kHz
40 GHz to 50 GHz					-30 dBc typical, for offset frequency > 1 kHz

^a Test port output is a specification when the source is set to Port 1 and a characteristic when the source is set to Port 2.

^b Typical performance

^c Preset power.

^d Power Level Linearity is a specification when the source is set to Port 1, and a typical when the source is set to Port 2.

^e Text port power is specified into nominal 50 ohms.

^f Power to which the source can be set and phase lock is assured.

^g ±1.5 dB for power ≤ -23 dBm

^h E8362B only: Option H11 decreases maximum power level by 1 dB.

ⁱ E8362B only: Option H11 decreases maximum power level by 2 dB.

^j E8362B only: Option H11 decreases power level by 1 dB.

^k E8362B only: Option H11 decreases power level by 2 dB.

Table 35: Test Port Input

Description	Specification				Supplemental
	Standard	Opt 014	Opt UNL	Opt 014/UNL	
Test Port Noise Floor^a					
10 Hz IF Bandwidth					
10 MHz to 45 MHz ^b	<-77 dBm	<-77 dBm	<-77 dBm	<-77 dBm	
45 MHz to 500 MHz ^c	<-89 dBm	<-89 dBm	<-89 dBm	<-89 dBm	
500 MHz to 2 GHz	<-114 dBm	<-114 dBm	<-114 dBm	<-114 dBm	
2 GHz to 10 GHz	<-117 dBm	<-117 dBm	<-117 dBm	<-117 dBm	
10 GHz to 20 GHz	<-120 dBm	<-119 dBm	<-120 dBm	<-119 dBm	
20 GHz to 40 GHz	<-114 dBm	<-113 dBm	<-114 dBm	<-113 dBm	Option 016 degrades performance by 2 dB.
40 GHz to 50 GHz	<-114 dBm	<-112 dBm	<-114 dBm	<-112 dBm	
1 KHz IF Bandwidth					
10 MHz to 45 MHz ^b	<-57 dBm	<-57 dBm	<-57 dBm	<-57 dBm	
45 MHz to 500 MHz ^c	<-69 dBm	<-69 dBm	<-69 dBm	<-69 dBm	
500 MHz to 2 GHz	<-94 dBm	<-94 dBm	<-94 dBm	<-94 dBm	
2 GHz to 10 GHz	<-97 dBm	<-97 dBm	<-97 dBm	<-97 dBm	
10 GHz to 20 GHz	<-100 dBm	<-99 dBm	<-100 dBm	<-99 dBm	
20 GHz to 40 GHz	<-94 dBm	<-93 dBm	<-94 dBm	<-93 dBm	Option 016 degrades performance by 2 dB.
40 GHz to 50 GHz	<-94 dBm	<-92 dBm	<-94 dBm	<-92 dBm	

Description	Specification				Supplemental
	Standard	Opt 014	Opt UNL	Opt 014/UNL	
Test Port Noise Floor^{a,b} Option 080 enabled^d					
10 Hz IF Bandwidth					
10 MHz to 45 MHz ^b	<-77 dBm	<-77 dBm	<-77 dBm	<-77 dBm	
45 MHz to 500 MHz ^c	<-88 dBm	<-88 dBm	<-88 dBm	<-88 dBm	
500 MHz to 2 GHz	<-113 dBm	<-113 dBm	<-113 dBm	<-113 dBm	
2 GHz to 10 GHz	<-116 dBm	<-116 dBm	<-116 dBm	<-116 dBm	
10 GHz to 20 GHz	<-118 dBm	<-118 dBm	<-118 dBm	<-118 dBm	
20 GHz to 40 GHz	<-112 dBm	<-112 dBm	<-112 dBm	<-112 dBm	Option 016 degrades performance by 2 dB.
40 GHz to 50 GHz	<-111 dBm	<-111 dBm	<-111 dBm	<-111 dBm	
1 KHz IF Bandwidth					
10 MHz to 45 MHz ^b	<-57 dBm	<-57 dBm	<-57 dBm	<-57 dBm	
45 MHz to 500 MHz ^c	<-68 dBm	<-68 dBm	<-68 dBm	<-68 dBm	
500 MHz to 2 GHz	<-93 dBm	<-93 dBm	<-93 dBm	<-93 dBm	
2 GHz to 10 GHz	<-96 dBm	<-96 dBm	<-96 dBm	<-96 dBm	
10 GHz to 20 GHz	<-98 dBm	<-98 dBm	<-98 dBm	<-98 dBm	
20 GHz to 40 GHz	<-92 dBm	<-92 dBm	<-92 dBm	<-92 dBm	Option 016 degrades performance by 2 dB.
40 GHz to 50 GHz	<-91 dBm	<-91 dBm	<-91 dBm	<-91 dBm	
Direct Receiver Access Input Noise Floor^{a,b}					
10 Hz IF Bandwidth					
10 MHz to 45 MHz		<-127 dBm		<-127 dBm	
45 MHz to 500 MHz ^c		<-127 dBm		<-127 dBm	
500 MHz to 2 GHz		<-133 dBm		<-133 dBm	
2 GHz to 10 GHz		<-132 dBm		<-132 dBm	
10 GHz to 20 GHz		<-134 dBm		<-134 dBm	

Description	Specification				Supplemental
	Standard	Opt 014	Opt UNL	Opt 014/UNL	
20 GHz to 40 GHz		<-125 dBm		<-125 dBm	Option 016 degrades performance by 2 dB.
40 GHz to 50 GHz		<-123 dBm		<-123 dBm	
1 KHz IF Bandwidth					
10 MHz to 45 MHz		<-107 dBm		<-107 dBm	
45 MHz to 500 MHz ^c		<-107 dBm		<-107 dBm	
500 MHz to 2 GHz		<-113 dBm		<-113 dBm	
2 GHz to 10 GHz		<-112 dBm		<-112 dBm	
10 GHz to 20 GHz		<-114 dBm		<-114 dBm	
20 GHz to 40 GHz		<-105 dBm		<-105 dBm	Option 016 degrades performance by 2 dB.
40 GHz to 50 GHz		<-103 dBm		<-103 dBm	
Direct Receiver Access Input Noise Floor^{a,b} - Option 080 enabled^d					
10 Hz IF Bandwidth					
10 MHz to 45 MHz		<-127 dBm		<-127 dBm	
45 MHz to 500 MHz ^c		<-126 dBm		<-126 dBm	
500 MHz to 2 GHz		<-132 dBm		<-132 dBm	
2 GHz to 10 GHz		<-131 dBm		<-131 dBm	
10 GHz to 20 GHz		<-133 dBm		<-133 dBm	
20 GHz to 40 GHz		<-124 dBm		<-124 dBm	Option 016 degrades performance by 2 dB.
40 GHz to 50 GHz		<-122 dBm		<-122 dBm	

Description	Specification				Supplemental
	Standard	Opt 014	Opt UNL	Opt 014/UNL	
1 KHz IF Bandwidth					
10 MHz to 45 MHz		<-107 dBm		<-107 dBm	
45 MHz to 500 MHz ^c		<-106 dBm		<-106 dBm	
500 MHz to 2 GHz		<-112 dBm		<-112 dBm	
2 GHz to 10 GHz		<-111 dBm		<-111 dBm	
10 GHz to 20 GHz		<-113 dBm		<-113 dBm	
20 GHz to 40 GHz		<-104 dBm		<-104 dBm	Option 016 degrades performance by 2 dB.
40 GHz to 50 GHz		<-102 dBm		<-102 dBm	
Receiver Compression Level					
10 MHz to 20 GHz	<0.1 dB at -5 dBm ⁹ and <0.45 dB at +5 dBm				
20 GHz to 30 GHz	<0.1 dB at -9.5 dBm ⁹ and <0.45 dB at 0 dBm				
30 GHz to 40 GHz	<0.1 dB at -12.5 dBm ⁹ and <0.45 dB at -3 dBm				
40 GHz to 50 GHz	<0.1 dB at -12.5 dBm ⁹ and <0.45 dB at -3 dBm				
System Compression Level					
	maximum output power				See <u>dynamic accuracy table</u>
Third Order Intercept - Tone spacing from 100 kHz - 5 MHz					
					Typical
10 MHz to 150 MHz					+33 dBm
150 MHz to 300 MHz					+34 dBm
300 MHz to 500 MHz					+30 dBm
500 MHz to 20 GHz					+24 dBm
20 to 40 GHz					+18 dBm
40 to 50 GHz					+15 dBm

Description	Specification			Supplemental
	Standard	Opt 014	Opt UNL	
Third Order Intercept - Tone spacing from 5 MHz - 20 MHz				
				Typical
10 MHz to 500 MHz				+20 dBm
500 MHz to 20 GHz				+20 dBm
20 to 40 GHz				+16 dBm
40 to 50 GHz				+15 dBm
Third Order Intercept - Tone spacing from 20 MHz - 50 MHz				
				Typical
10 MHz to 500 MHz				+26 dBm
500 MHz to 20 GHz				+26 dBm
20 to 40 GHz				+20 dBm
40 to 50 GHz				+19 dBm
Trace Noise Magnitude				
1 kHz IF bandwidth. Ratio measurement, nominal power at test port.				
10 MHz to 45 MHz ^b	<0.050 dB rms			
45 MHz to 500 MHz ^e	<0.010 dB rms			
500 MHz to 20 GHz	<0.006 dB rms			
20 GHz to 40 GHz	<0.006 dB rms			
40 GHz to 50 GHz	<0.006 dB rms			
Trace Noise Magnitude - Option 080 enabled^{b,d}				
1 kHz IF bandwidth. Ratio measurement, nominal power at test port.				
10 MHz to 45 MHz ^b	<0.060 dB rms			
45 MHz to 500 MHz ^e	<0.010 dB rms			
500 MHz to 20 GHz	<0.006 dB rms			
20 GHz to 40 GHz	<0.007 dB rms			
40 GHz to 50 GHz	<0.008 dB rms			

Description	Specification				Supplemental
	Standard	Opt 014	Opt UNL	Opt 014/UNL	
Trace Noise Phase					
1 kHz IF bandwidth. Ratio measurement, nominal power at test port.					
10 MHz to 45 MHz ^b	<0.350° rms				
45 MHz to 500 MHz	<0.100° rms				
500 MHz to 20 GHz	<0.060° rms				
20 GHz to 40 GHz	<0.100° rms				
40 GHz to 50 GHz	<0.100° rms				
Trace Noise Phase - Option 080 enabled^{b,d}					
1 kHz IF bandwidth. Ratio measurement, nominal power at test port.					
10 MHz to 45 MHz	<0.350° rms				
45 MHz to 500 MHz ^e	<0.100° rms				
500 MHz to 20 GHz	<0.060° rms				
20 GHz to 40 GHz	<0.100° rms				
40 GHz to 50 GHz	<0.100° rms				
Reference Level Magnitude					
Range	+/-200 dB				
Resolution	0.001 dB				
Reference Level Phase					
Range	+/-500°				
Resolution	0.01°				
Stability Magnitude^d					
Typical ratio measurement, made at the test port.					
10 MHz to 45 MHz					+/-0.05 dB/°C
45 MHz to 20 GHz					+/-0.02 dB/°C
20 GHz to 40 GHz					+/-0.03 dB/°C
40 GHz to 50 GHz					+/-0.04 dB/°C

Description	Specification				Supplemental
	Standard	Opt 014	Opt UNL	Opt 014/UNL	
Stability Phase^d					
Typical ratio measurement, measured at the test port.					
10 MHz to 45 MHz					+/-0.5°/°C
45 MHz to 20 GHz					+/-0.2°/°C
20 GHz to 40 GHz					+/-0.5°/°C
40 GHz to 50 GHz					+/-0.8°/°C
Damage Input Level					
Test Port 1 and 2					+30 dBm or +/-40 VDC, typical
R1, R2 in					+15 dBm or +/-15 VDC, typical
A, B in					+15 dBm or +/-15 VDC, typical
Coupler Thru (Option 014 or UNL/014)					+30 dBm or +/-40 VDC, typical
Coupler Arm (Option 014 or UNL/014)					+30 dBm or +/-7 VDC, typical

^aTotal average (rms) noise power calculated as the mean value of a linear magnitude trace expressed in dBm.

^bTypical performance.

^cNoise floor may be degraded by 10 dB at particular frequencies (multiples of 5 MHz) due to spurious receiver residuals.

^d0 Hz offset

^eTrace noise magnitude may be degraded to 20 mdB rms at harmonic frequencies of the first IF (8.33 MHz) below 80 MHz.


^fStability is defined as a ratio measurement made at the test port.

^gThis compression level comes from the dynamic accuracy curve with -30 dBm reference test port power.


Table 36. Dynamic Accuracy (Specification^a)

Accuracy of the test port input power reading relative to the reference input power level.

Magnitude^{*}

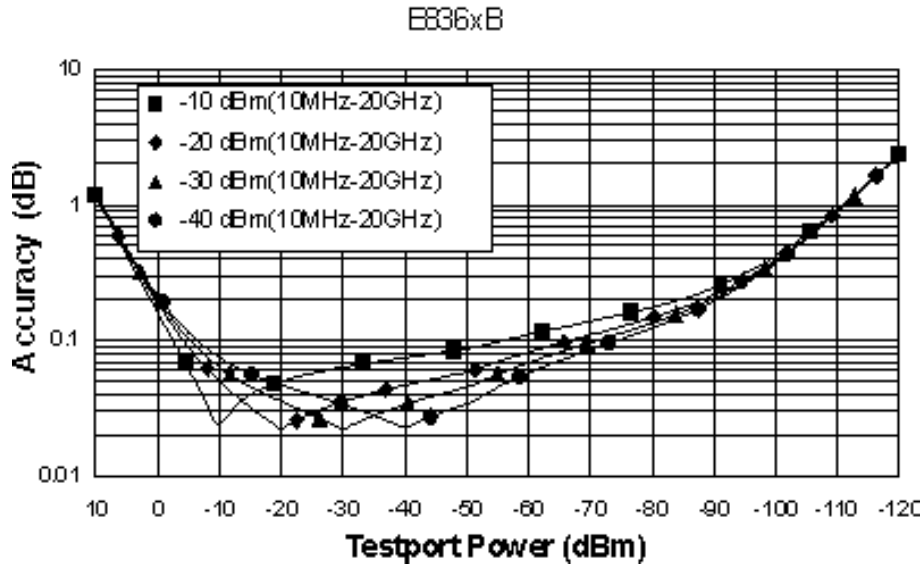


Phase^{*}

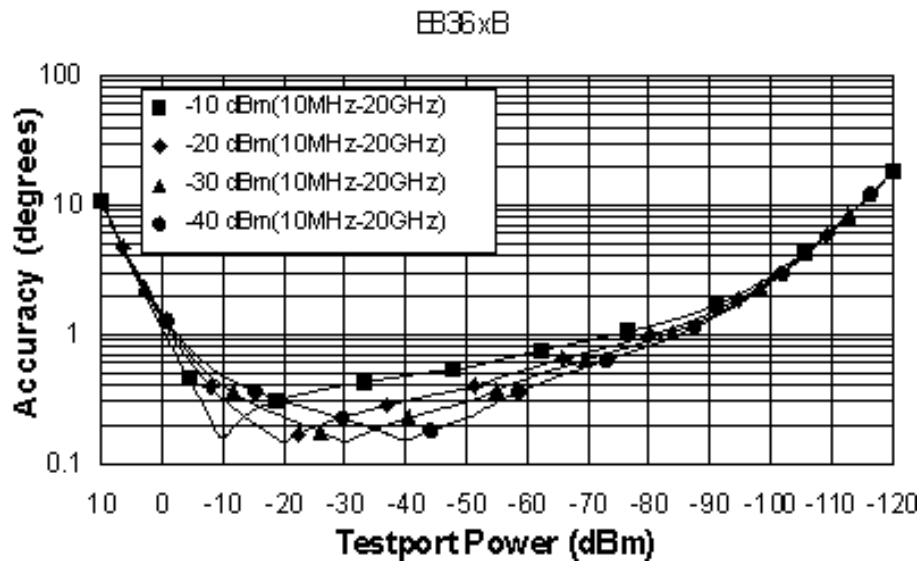


^{*}Below 800 MHz the coupling factor rolls off 20 dB per decade causing a shift in the dynamic accuracy curves. Please see the Uncertainty Calculator (http://www.agilent.com/find/na_calculator) for detailed compression values.


Magnitude

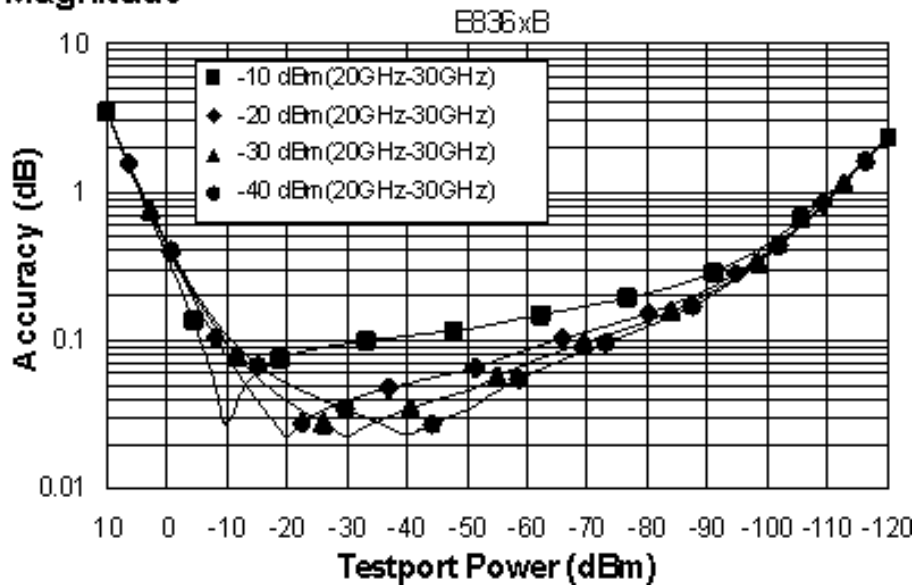


Phase

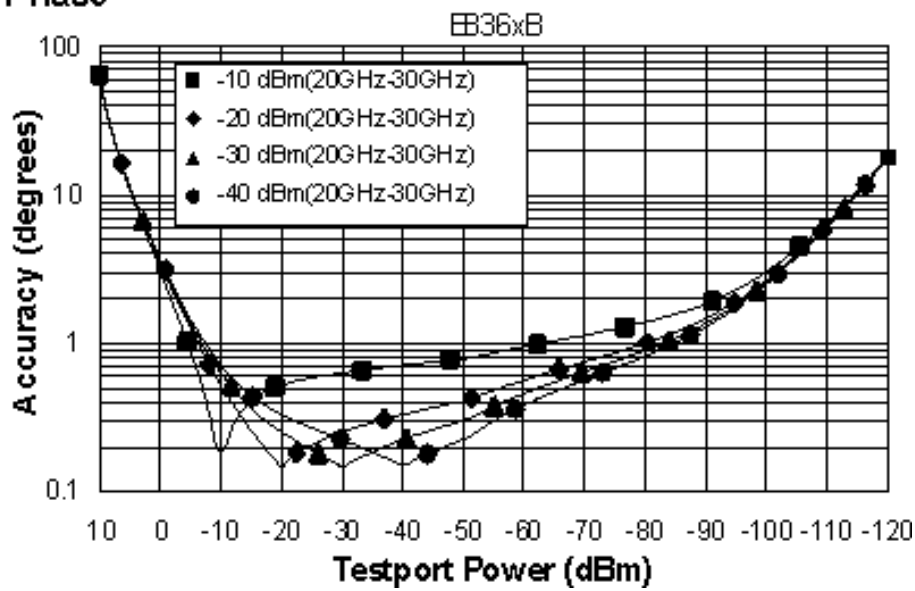


Magnitude

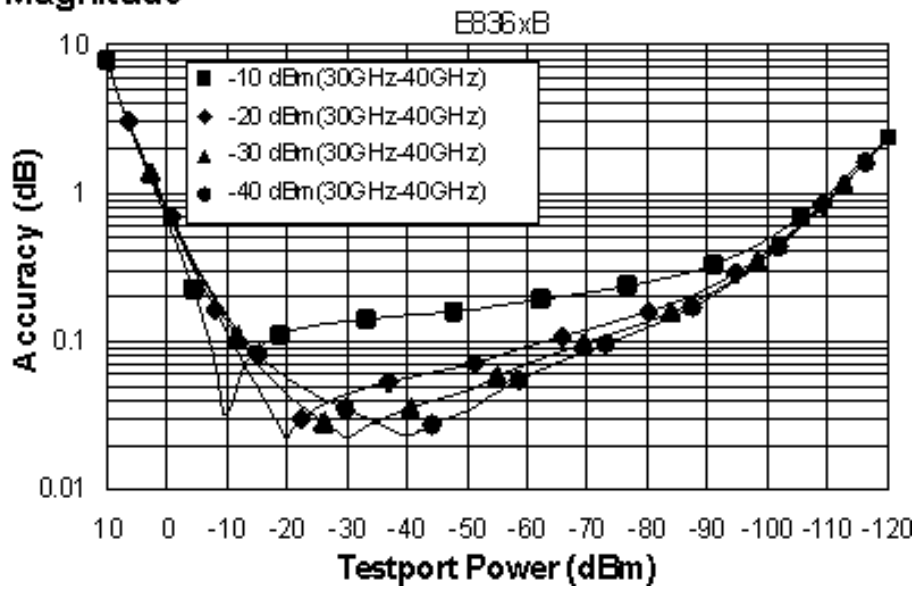


Phase

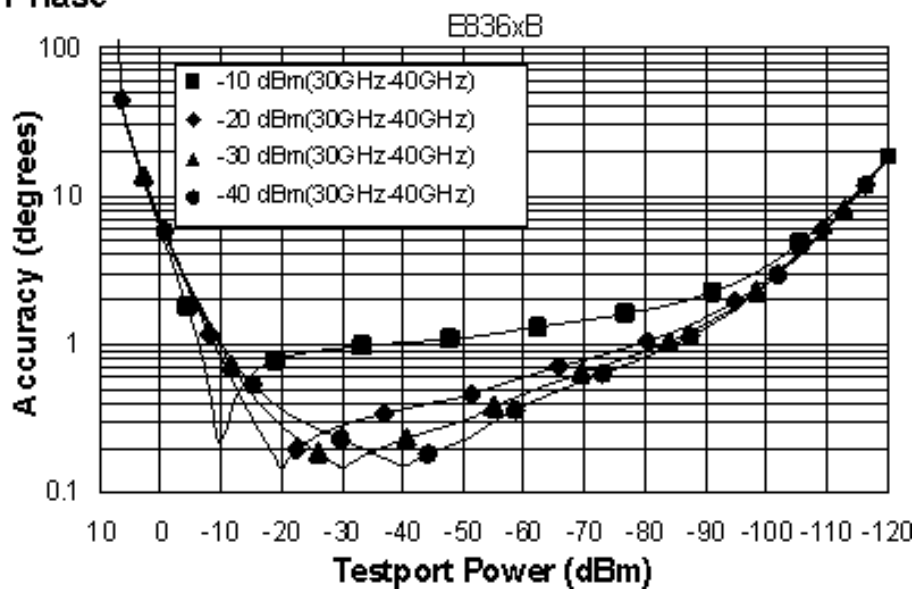

Magnitude

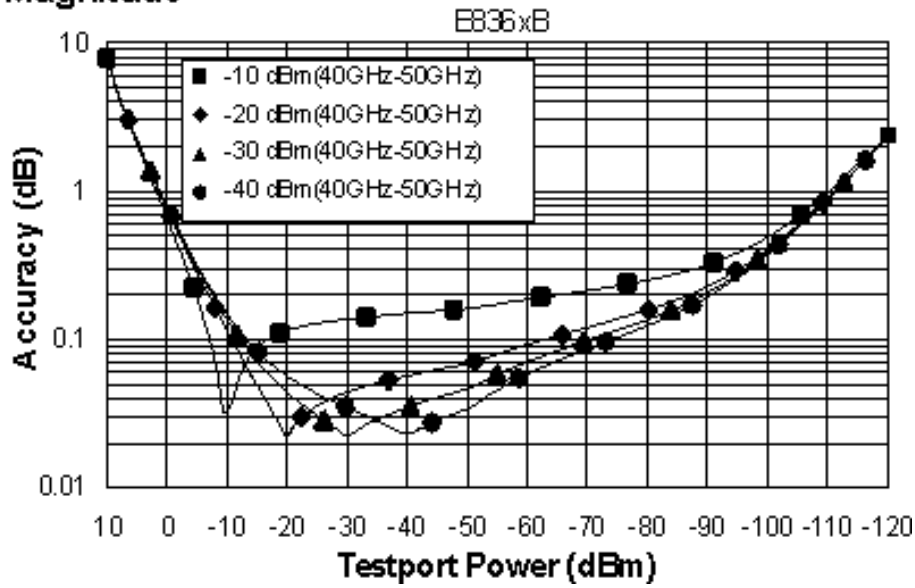

Phase

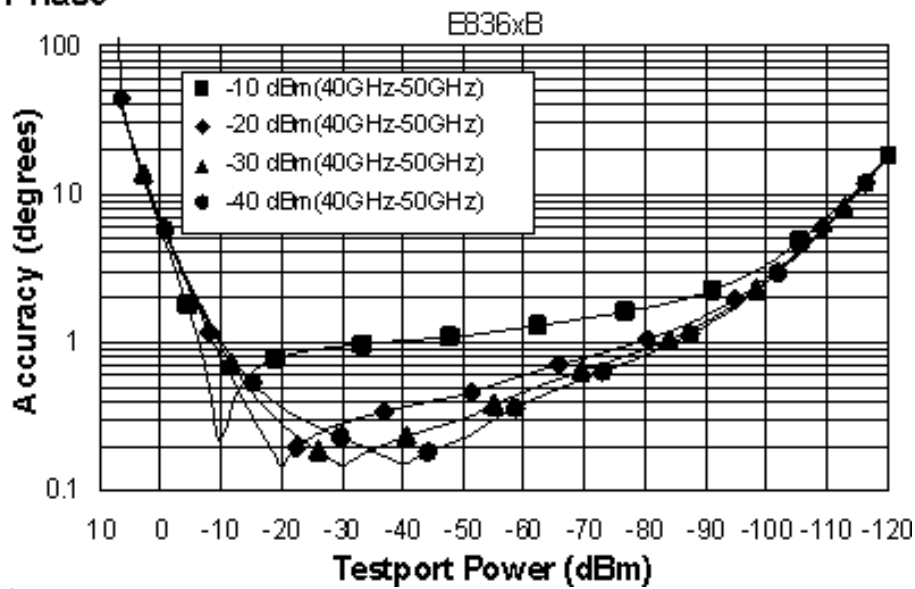

^a Dynamic accuracy is verified with the following measurements:


- Compression over frequency
- IF linearity at a single frequency of 1.195 GHz and a reference level of -20 dBm for an input power range of 0 to -120 dBm

Table 37. Test Port Input (Group Delay)^a

Description	Specification	Supplemental Information (typ.)
Aperture (selectable)		(frequency span)/(number of points -1)
Maximum Aperture		20% of frequency span
Range		0.5 x (1/minimum aperture)
Maximum Delay		Limited to measuring no more than 180° of phase change within the minimum aperture.)
Accuracy		See graph below. Char.

The following graph shows characteristic group delay accuracy with full 2-port calibration and a 10 Hz IF bandwidth. Insertion loss is assumed to be < 2 dB and electrical length to be ten meters.

Group Delay (Typical)

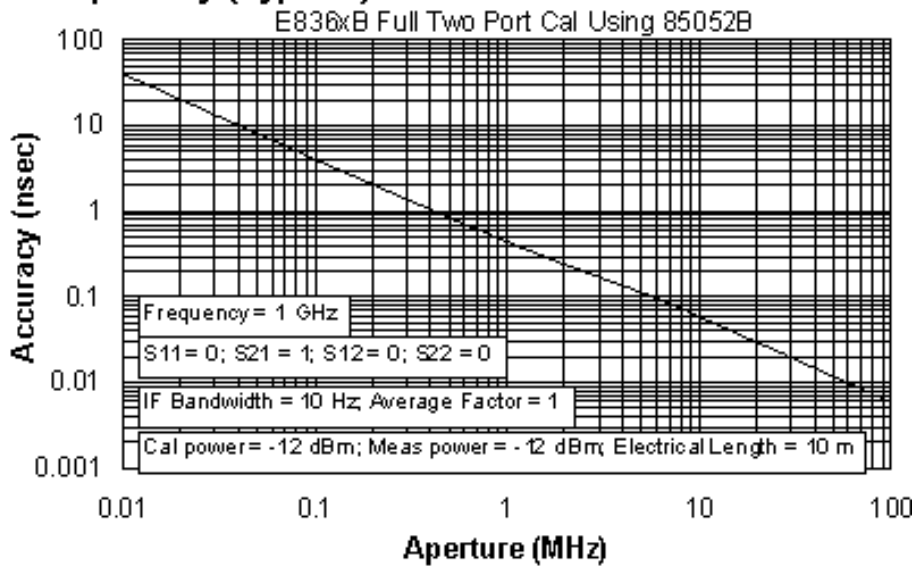

In general, the following formula can be used to determine the accuracy, in seconds, of specific group delay measurement:

$$\pm \text{Phase Accuracy (deg)} / [360 \times \text{Aperture (Hz)}]$$

Depending on the aperture and device length, the phase accuracy used is either incremental phase accuracy or worst case phase accuracy.

^a Group delay is computed by measuring the phase change within a specified frequency step (determined by the frequency span and the number of points per sweep).

General Information

Table 38. Miscellaneous Information

Description	Specification	Supplemental Information
System IF Bandwidth Range		1 Hz to 40 kHz, nominal
CPU		Intel® 500 MHz Pentium® III

Table 39. Front Panel Information

Description	Supplemental Information
RF Connectors	
E8362B	
Type	3.5 mm (male), 50 ohm, (nominal)
Center Pin Recession	0.002 in. (characteristic)
E8363/4B	
Type	2.4 mm (male), 50 ohm, (nominal)
Center Pin Recession	0.002 in. (characteristic)
Display	
Size	21.3 cm (8.4 in) diagonal color active matrix LCD; 640 (horizontal) X 480 (vertical) resolution; 59.83 Hz vertical refresh rate; 31.41 Hz horizontal refresh rate
Refresh Rate	Vertical 59.83 Hz; Horizontal 31.41 kHz
Display Range	
Magnitude	±200 dB (at 20 dB/div), max
Phase	±500°, max
Polar	10 pUnits, min 1000 Units, max
Display Resolution	
Magnitude	0.001 dB/div, min
Phase	0.01°/div, min
Marker Resolution	
Magnitude	0.001 dB, min
Phase	0.01°, min
Polar	0.01 mUnit, min; 0.01°, min

Table 40. Rear Panel Information

Description	Supplemental Information
10 MHz Reference In	
Connector	BNC, female
Input Frequency	10 MHz ± 10 ppm, typical
Input Level	-15 dBm to +20 dBm, typical
Input Impedance	200 Ω, nom.
10 MHz Reference Out	
Connector	BNC, female
Output Frequency	10 MHz ± 1 ppm, typical
Signal Type	Sine Wave, typical
Output Level	+10 dBm ± 4 dB into 50 Ω, typical
Output Impedance	50 Ω, nominal
Harmonics	<-40 dBc, typical

Description	Supplemental Information
Option H11 Rear Panel Connectors	
IF Connectors	A, R1, R2, B (BNC Connectors)
IF Connector Input Frequency	8 1/3 MHz
Nominal Input Impedance at IF Inputs	50 ohms
RF Damage Level to IF Connector Inputs	-20.0 dBm
DC Damage Level to IF Connector Inputs	25 volts
0.1 dB Compression Point at IF Inputs	-27.0 dBm
Pulse Input Connectors ^a	A, R1, R2, B (BNC Connectors)
Nominal Input Impedance at Pulse Inputs	1 Kohm
Minimum IF Gate Width	20 ns for less than 1 dB deviation from theoretical performance
DC Damage Level to Pulse Connector Inputs	5.5 Volts
Drive Voltage	TTL (0, +5.0) Volts
VGA Video Output	
Connector	15-pin mini D-Sub; Drives VGA compatible monitors
Devices Supported:	
	Resolutions:
Flat Panel (TFT)	1024 X 768, 800 X 600, 640 X 480
Flat Panel (DSTN)	800 X 600, 640 X 480
CRT Monitor	1280 X 1024, 1024 X 768, 800 X 600, 640 X 480
	Simultaneous operation of the internal and external displays is allowed, but with 640 X 480 resolution only. If you change resolution, you can only view the external display (internal display will "white out").
Bias Input Connectors (Option UNL)	
Bias current	500 mA, maximum
Bias voltage	40 Volts, maximum
Test Set IO	
	25-pin D-Sub connector, available for external test set control
Aux IO	
	25-pin D-Sub connector, male, analog and digital IO
Handler IO	
	36-pin parallel I/O port; all input/output signals are default set to negative logic; can be reset to positive logic via GPIB command
GPIB	
	24-pin D-sub (Type D-24), female; compatible with IEEE-488.
Parallel Port (LPT1)	
	25-pin D-Sub miniature connector, female; provides connection to printers or any other parallel port peripherals
Serial Port (COM 1)	
	9-pin D-Sub, male; compatible with RS-232

Description	Supplemental Information
USB Port	
	One port on front panel and five ports on rear panel. Universal Serial Bus jack, Type A configuration (4 contacts inline, contact 1 on left); female
Contact 1	Vcc: 4.75 to 5.25 VDC, 500 mA, maximum
Contact 2	-Data
Contact 3	+Data
Contact 4	Ground
LAN	
	10/100BaseT Ethernet, 8-pin configuration; auto selects between the two data rates
Line Power^c	
Frequency	48 Hz to 66 Hz
Voltage at 115 V Setting	90 to 132 VAC; 120 VAC, nominal
Voltage at 220 V Setting	198 to 264 VAC; 240 VAC, nominal
VA Max	600 VA maximum

^a Pulse input connectors are operational only with Option H08 (Pulse Measurement Capability) enabled.

^b Based on deviation from signal reduction equation: Signal Reduction (dB) = $20\log_{10}(\text{Duty_cycle})$
= $20\log_{10}(\text{pulse_width/period})$. Measured at Pulse Repetition Frequency (PFR) of 1 MHz.

^c A third-wire ground is required.

Table 41. Analyzer Environment and Dimensions

Description	Supplemental Information		
General Environmental			
RFI/EMI Susceptibility	Defined by CISPR Pub. 11, Group 1, Class A, and IEC 50082-1		
ESD	Minimize using static-safe work procedures and an antistatic bench mat		
Dust	Minimize for optimum reliability		
Operating Environment			
Temperature	0 °C to +40 °C Instrument powers up, phase locks, and displays no error messages within this temperature range (except for "source unlevelled" error message that may occur at temperature extremes).		
Error-Corrected Temperature Range	23°C ± 3°C with less than 1°C deviation from calibration temp.		
Humidity	5% to 95% at +40 °C		
Altitude	0 to 4500 m (14,760 ft.)		
Non-Operating Storage Environment			
Temperature	-40 °C to +70 °C		
Humidity	0% to 90% at +65 °C (non-condensing)		
Altitude	0 to 15,240 m (50,000 ft.)		
Cabinet Dimensions			
	Height	Width	Depth
Excluding front and rear panel hardware and feet	267 mm 10.5 in	426 mm 16.75 in	427 mm 16.8 in
As shipped - includes front panel connectors, rear panel bumpers, and feet.	280 mm 11.0 in	435 mm 17.1 in	470 mm 18.5 in
As shipped plus handles	280 mm 11.0 in	458 mm 18 in	501 mm 19.70 in
As shipped plus rack-mount flanges	280 mm 11.0 in	483 mm 19 in	470 mm 18.5 in
As shipped plus handles and flanges	280 mm 11.0 in	483 mm 19 in	501 mm 19.70 in
Weight			
Net			
E8362B	28.6 kg (63.5 lb), nominal		
E8363/4B	29 kg (64 lb), nominal		
Shipping			
E8362B	35.8 kg (79.5 lb), nominal		
E8363/4B	36.3 kg (80 lb), nominal		

Measurement Throughput Summary

Table 42 Typical Cycle Time^{a,b} (ms) for Measurement Completion

	Number of Points			
	201	401	1601	16,001
Start 28 GHz, Stop 30 GHz, 35 kHz IF bandwidth				
Uncorrected, 1-port cal	12	19	55	503
2-Port cal	29	44	124	1112
Start 10 MHz, Stop 10 GHz, 35 kHz IF bandwidth				
Uncorrected, 1-port cal	86	93	121	583
2-Port cal	179	199	267	1301
Start 10 MHz, Stop 20 GHz, 35 kHz IF bandwidth				
Uncorrected, 1-port cal	126	130	153	597
2-Port cal	264	275	335	1321
Start 10 MHz, Stop 40 GHz, 35 kHz IF bandwidth				
Uncorrected, 1-port cal	185	190	213	621
2-Port cal	382	401	459	1374
Start 10 MHz, Stop 50 GHz, 35 kHz IF bandwidth				
Uncorrected, 1-port cal	210	216	243	643
2-Port cal	436	450	522	1405
Start 10 MHz, Stop 67 GHz, 35 kHz IF bandwidth				
Uncorrected 1-Port cal	244	254	300	645
2-Port cal	502	524	591	1423

^a Typical performance.

^b Includes sweep time, retrace time and band-crossing time. Analyzer display turned off with DISPLAY:ENABLE OFF. Add 21 ms for display on. Data for one trace (S11) measurement.

Table 43. Cycle Time vs IF Bandwidth^a

Applies to the Preset condition (201 points, correction off) except for the following changes:

- CF = 28 GHz
- Span = 100 MHz
- Display off (add 21 ms for display on)

IF Bandwidth (Hz)	Cycle Time (ms) ^b	Cycle Time (ms) Option 080 enabled
40,000	11	100
35,000	12	101
30,000	13	102
20,000	16	106
10,000	30	127
7000	38	138
5000	50	152
3000	74	182
1000	274	326
300	694	782
100	1905	2054
30	6091	6355
10	17916	18372

^a Typical performance.

^b Cycle time includes sweep and retrace time.

Table 44. Cycle Time vs Number of Points^a

Applies to the Preset condition (35 kHz IF bandwidth, correction off) except for the following changes:

- CF = 28 GHz
- Span = 100 MHz
- Display off (add 21 ms for display on)

Number of Points	Cycle Time (ms) ^b
3	6
11	6
51	7
101	9
201	12
401	18
801	30
1601	55
16,001	497

^a Typical performance.

^b Cycle time includes sweep and retrace time.

Table 45. Data Transfer Time (ms)^a

	Number of Points			
	201	401	1601	16,001
SCPI over GPIB				
(program executed on external PC)				
32-bit floating point	7	12	43	435
64-bit floating point	12	22	84	856
ASCII	64	124	489	5054
SCPI				
(program executed in the analyzer)				
32-bit floating point	1	2	3	30
64-bit floating point	2	2	4	40
ASCII	29	56	222	2220
COM (program executed in the analyzer)				
32-bit floating point	1	1	1	6
Variant type	1	2	6	68
DCOM over LAN				
(program executed on external PC)				
32-bit floating point	1	1	2	121
Variant type	3	6	19	939

^a Typical performance

Note: Specifications for Recall & Sweep Speed are not provided for the E836xB analyzers.

Specifications: Front-Panel Jumpers

Models E8362A/B, E8363A/B, and E8364A/B Option 014

NOTE: The standard E8362/3/4A/B has no front-panel jumpers.

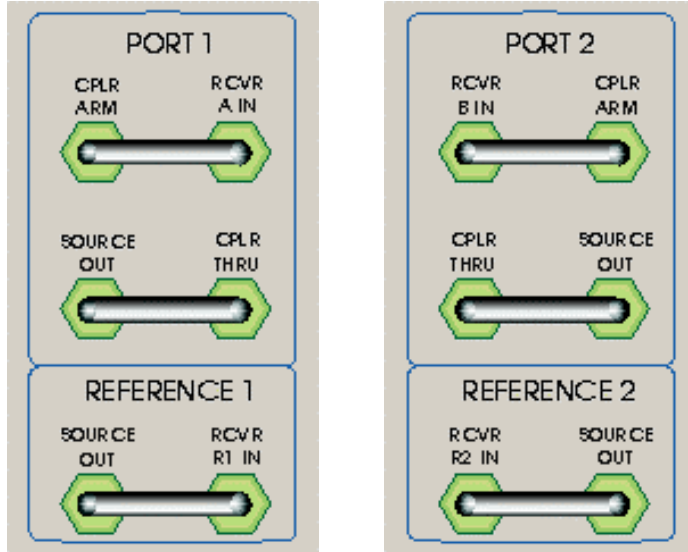


Table 46: Measurement Receiver Inputs (Rcvr A In, Rcvr B In)

Description	Specification	Supplemental Information
Maximum Input Level		
E8362A/B:		
45 MHz to 500 MHz		-15 dBm, typical
500 MHz to 2 GHz		-11 dBm, typical
2 GHz to 10 GHz		-11 dBm, typical
10 GHz to 20 GHz		-11 dBm, typical
E8363A/B:		
45 MHz to 500 MHz		-14 dBm, typical
500 MHz to 2 GHz		-10 dBm, typical
2 GHz to 10 GHz		-10 dBm, typical
10 GHz to 20 GHz		-10 dBm, typical
20 GHz to 30 GHz		-14.5 dBm, typical
30 GHz to 40 GHz		-16.5 dBm, typical
E8364A/B:		
45 MHz to 500 MHz		- 14 dBm, typical
500 MHz to 2 GHz		- 10 dBm, typical
2 GHz to 10 GHz		- 10 dBm, typical
10 GHz to 20 GHz		- 10 dBm, typical
20 GHz to 30 GHz		- 14.5 dBm, typical
30 GHz to 40 GHz		- 16.5 dBm, typical
40 GHz to 45 GHz		- 16 dBm, typical
45 GHz to 50 GHz		- 15 dBm, typical

Description	Specification	Supplemental Information
Noise Floor		
E8362A/B:		
	10 Hz IF Bandwidth	
45 MHz to 500 MHz	< -109 dBm	
500 MHz to 2 GHz	< -130 dBm	
2 GHz to 10 GHz	< -133 dBm	
10 GHz to 20 GHz	< -135 dBm	
	1 kHz IF Bandwidth	
45 MHz to 500 MHz	< -89 dBm	
500 MHz to 2 GHz	< -110 dBm	
2 GHz to 10 GHz	< -113 dBm	
10 GHz to 20 GHz	< -115 dBm	
E8363A/B:		
	10 Hz IF Bandwidth	
45 MHz to 500 MHz	< -127 dBm	
500 MHz to 2 GHz	< -133 dBm	
2 GHz to 10 GHz	< -132 dBm	
10 GHz to 20 GHz	< -134 dBm	
20 GHz to 40 GHz	< -125 dBm	
	1 kHz IF Bandwidth	
45 MHz to 500 MHz	< -107 dBm	
500 MHz to 2 GHz	< -113 dBm	
2 GHz to 10 GHz	< -112 dBm	
10 GHz to 20 GHz	< -114 dBm	
20 GHz to 40 GHz	< -105 dBm	
E8364A/B:		
	10 Hz IF Bandwidth	
45 MHz to 500 MHz	< - 127 dBm	
500 MHz to 2 GHz	< - 133 dBm	
2 GHz to 10 GHz	< - 132 dBm	
10 GHz to 20 GHz	< - 134 dBm	
20 GHz to 40 GHz	< - 125 dBm	
40 GHz to 50 GHz	< - 123 dBm	
	1 kHz IF Bandwidth	
45 MHz to 500 MHz	< -107 dBm	
500 MHz to 2 GHz	< -113 dBm	
2 GHz to 10 GHz	< -112 dBm	
10 GHz to 20 GHz	< -114 dBm	
20 GHz to 40 GHz	< -105 dBm	
40 GHz to 50 GHz	< -103 dBm	
Damage Level		
E8362A/B		+ 15 dBm, typical
E8363A/B		+ 15 dBm, typical
E8364A/B		+ 15 dBm, typical

Description	Specification	Supplemental Information
Maximum DC Level		
E8362A/B		+ 15 V, typical
E8363A/B		+ 15 V, typical
E8364A/B		+ 15 V, typical

Table 47: Reference Receiver Inputs (Rcvr R1, Rcvr R2)

Description	Specification	Supplemental Information
Maximum Input Level		
E8362A/B:		
45 MHz to 500 MHz		-15 dBm, typical
500 MHz to 2 GHz		-11 dBm, typical
2 GHz to 10 GHz		-11 dBm, typical
10 GHz to 20 GHz		-11 dBm, typical
E8363A/B:		
45 MHz to 500 MHz		-14 dBm, typical
500 MHz to 2 GHz		-10 dBm, typical
2 GHz to 10 GHz		-10 dBm, typical
10 GHz to 20 GHz		-9.5 dBm, typical
20 GHz to 30 GHz		-14 dBm, typical
30 GHz to 40 GHz		-15.5 dBm, typical
E8364A/B:		
45 MHz to 500 MHz		- 14 dBm, typical
500 MHz to 2 GHz		- 10 dBm, typical
2 GHz to 10 GHz		- 10 dBm, typical
10 GHz to 20 GHz		- 9.5 dBm, typical
20 GHz to 30 GHz		- 14 dBm, typical
30 GHz to 40 GHz		- 15.5 dBm, typical
40 GHz to 45 GHz		- 14 dBm, typical
45 GHz to 50 GHz		- 15 dBm, typical
Damage Level		
E8362A/B		+ 15 dBm, typical
E8363A/B		+ 15 dBm, typical
E8364A/B		+ 15 dBm, typical
Maximum DC Level		
E8362A/B		+/- 15 V, typical
E8363A/B		+/- 15 V, typical
E8364A/B		+/- 15 V, typical

Table 48: Reference Outputs (Reference 1 Source Out, Reference 2 Source Out)

Description	Specification	Supplemental Information
Maximum Output Level		
E8362A/B:		
45 MHz to 500 MHz		-24 dBm, typical
500 MHz to 2 GHz		-23 dBm, typical
2 GHz to 10 GHz		-23 dBm, typical
10 GHz to 20 GHz		-26 dBm, typical
E8363A/B:		
45 MHz to 500 MHz		-11.5 dBm, typical
500 MHz to 2 GHz		-10.5 dBm, typical
2 GHz to 10 GHz		-11 dBm, typical
10 GHz to 20 GHz		-11 dBm, typical
20 GHz to 30 GHz		-11 dBm, typical
30 GHz to 40 GHz		-11 dBm, typical
E8364A/B:		
45 MHz to 500 MHz		- 11.5 dBm, typical
500 MHz to 2 GHz		- 10.5 dBm, typical
2 GHz to 10 GHz		- 11 dBm, typical
10 GHz to 20 GHz		- 11 dBm, typical
20 GHz to 30 GHz		- 11 dBm, typical
30 GHz to 40 GHz		- 11 dBm, typical
40 GHz to 45 GHz		- 11 dBm, typical
45 GHz to 50 GHz		- 15 dBm, typical
Damage Level		
E8362A/B		+ 20 dBm, typical
E8363A/B		+ 20 dBm, typical
E8364A/B		+ 20 dBm, typical
Maximum DC Level		
E8362A/B		+/- 15 V, typical
E8363A/B		+/- 15 V, typical
E8364A/B		+/- 15 V, typical

Table 49: Source Outputs (Port 1 Source Out, Port 2 Source Out)

Description	Specification	Supplemental Information
Maximum Output Level		
E8362A/B, Option 014:		
45 MHz to 500 MHz		6 dBm, typical
500 MHz to 2 GHz		7 dBm, typical
2 GHz to 10 GHz		7 dBm, typical
10 GHz to 20 GHz		4 dBm, typical
E8362A/B, Option 014 and UNL:		
45 MHz to 500 MHz		4 dBm, typical
500 MHz to 2 GHz		5 dBm, typical
2 GHz to 10 GHz		5 dBm, typical
10 GHz to 20 GHz		2 dBm, typical
E8363A/B, Option 014:		
45 MHz to 500 MHz		5.5 dBm, typical
500 MHz to 2 GHz		6.5 dBm, typical
2 GHz to 10 GHz		6.5 dBm, typical
10 GHz to 20 GHz		4 dBm, typical
20 GHz to 30 GHz		10 dBm, typical
30 GHz to 40 GHz		-2 dBm, typical
E8363A/B, Option 014 and UNL:		
45 MHz to 500 MHz		3.5 dBm, typical
500 MHz to 2 GHz		5 dBm, typical
2 GHz to 10 GHz		5 dBm, typical
10 GHz to 20 GHz		3.5 dBm, typical
20 GHz to 30 GHz		0 dBm, typical
30 GHz to 40 GHz		-2.5 dBm, typical
E8364A/B, Option 014:		
45 MHz to 500 MHz		5.5 dBm, 0typical
500 MHz to 2 GHz		6.5 dBm, typical
2 GHz to 10 GHz		6.5 dBm, typical
10 GHz to 20 GHz		4 dBm, typical
20 GHz to 30 GHz		1 dBm, typical
30 GHz to 40 GHz		-2 dBm, typical
40 GHz to 45 GHz		-3 dBm, typical
45 GHz to 50 GHz		-7.5 dBm, typical

Description	Specification	Supplemental Information
E8364A/B, Option 014 and UNL:		
45 MHz to 500 MHz		3.5 dBm, typical
500 MHz to 2 GHz		5 dBm, typical
2 GHz to 10 GHz		5 dBm, typical
10 GHz to 20 GHz		3.5 dBm, typical
20 GHz to 30 GHz		0 dBm, typical
30 GHz to 40 GHz		-2.5 dBm, typical
40 GHz to 45 GHz		-5 dBm, typical
45 GHz to 50 GHz		-10 dBm, typical
Damage Level		
E8362A/B		20 dBm, typical
E8363A/B		20 dBm, typical
E8364A/B		20 dBm, typical
Maximum DC Level		
E8362A/B		0 V, typical
E8363A/B		0 V, typical
E8364A/B		0 V, typical

Table 50: Coupler Inputs (Port 1 Cplr Thru, Port 2 Cplr Thru)

Description	Specification	Supplemental Information
Insertion Loss to Test Port		
E8362A/B, Option 014:		
45 MHz to 500 MHz		0.5 dB, typical
500 MHz to 2 GHz		1.5 dB, typical
2 GHz to 10 GHz		1.5 dB, typical
10 GHz to 20 GHz		1.5 dB, typical
E8362A/B, Option 014 and UNL:		
45 MHz to 500 MHz		1 dB, typical
500 MHz to 2 GHz		2 dB, typical
2 GHz to 10 GHz		2 dB, typical
10 GHz to 20 GHz		2 dB, typical
E8363A/B, Option 014:		
45 MHz to 500 MHz		0.5 dB, typical
500 MHz to 2 GHz		0.5 dB, typical
2 GHz to 10 GHz		1.5 dB, typical
10 GHz to 20 GHz		2 dB, typical
20 GHz to 30 GHz		3 dB, typical
30 GHz to 40 GHz		3.5 dB, typical
E8363A/B, Option 014 and UNL:		
45 MHz to 500 MHz		0.5 dB, typical
500 MHz to 2 GHz		1 dB, typical
2 GHz to 10 GHz		2 dB, typical
10 GHz to 20 GHz		3 dB, typical
20 GHz to 30 GHz		4 dB, typical
30 GHz to 40 GHz		5 dB, typical
E8364A/B, Option 014:		
45 MHz to 500 MHz		0.5 dB, typical
500 MHz to 2 GHz		0.5 dB, typical
2 GHz to 10 GHz		1.5 dB, typical
10 GHz to 20 GHz		2 dB, typical
20 GHz to 30 GHz		3 dB, typical
30 GHz to 40 GHz		3.5 dB, typical
40 GHz to 45 GHz		3.5 dB, typical
45 GHz to 50 GHz		4 dB, typical


Description	Specification	Supplemental Information
E8364A/B, Option 014 and UNL:		
45 MHz to 500 MHz		0.5 dB, typical
500 MHz to 2 GHz		1 dB, typical
2 GHz to 10 GHz		2 dB, typical
10 GHz to 20 GHz		3 dB, typical
20 GHz to 30 GHz		4 dB, typical
30 GHz to 40 GHz		5 dB, typical
40 GHz to 45 GHz		5.5 dB, typical
45 GHz to 50 GHz		6 dB, typical
Damage Level		
E8362A/B		+ 30 dBm, typical
E8363A/B		+ 30 dBm, typical
E8364A/B		+ 30 dBm, typical
Maximum DC Level		
E8362A/B		+/- 40 V, typical
E8363A/B		+/- 40 V, typical
E8364A/B		+/- 40 V, typical

Table 51: Coupler Outputs (Port 1 Cplr Arm, Port 2 Cplr Arm)


Description	Specification	Supplemental Information
Damage Level		
E8362A/B		+ 30 dBm, typical
E8363A/B		+ 30 dBm, typical
E8364A/B		+ 30 dBm, typical
Maximum DC Level		
E8362A/B		+/- 7 V, typical
E8363A/B		+/- 7 V, typical
E8364A/B		+/- 7 V, typical

Test Set Block Diagrams


E836xB - Standard Configuration and Standard Power Range

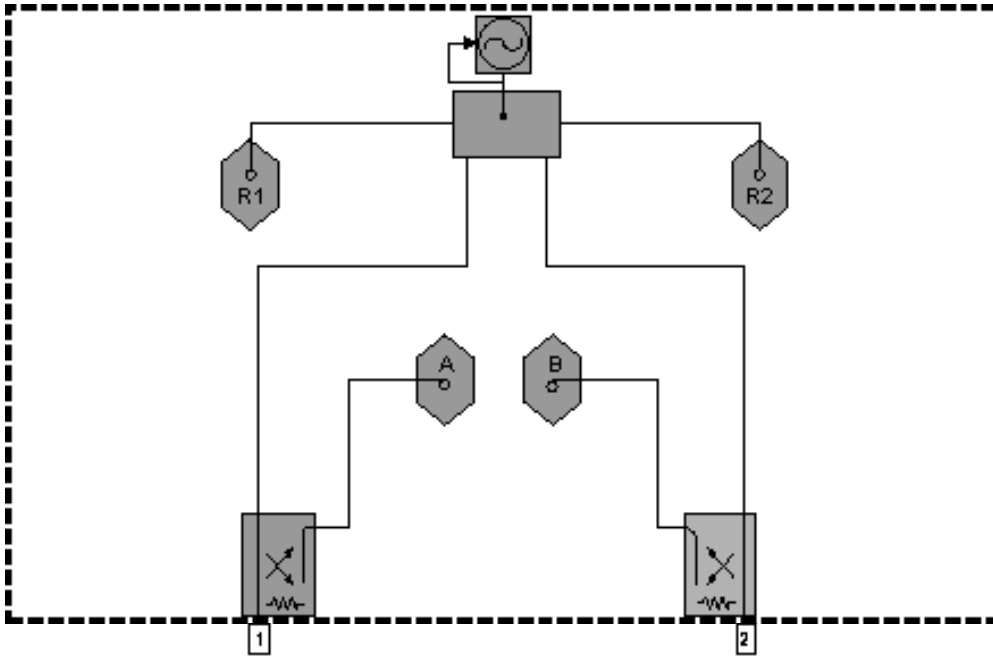

E836xB - Option UNL Standard Configuration with Extended Power Range and Bias - Tees

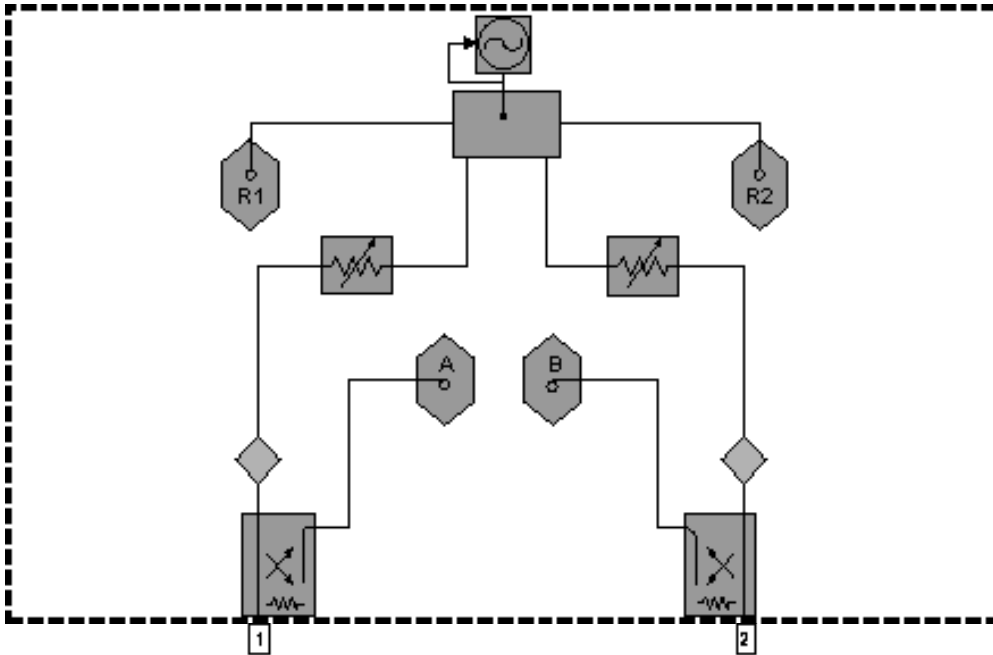


E836xB - Option UNL Standard Configuration with Extended Power Range and Bias - Tees, and Option 016, Receiver Attenuators

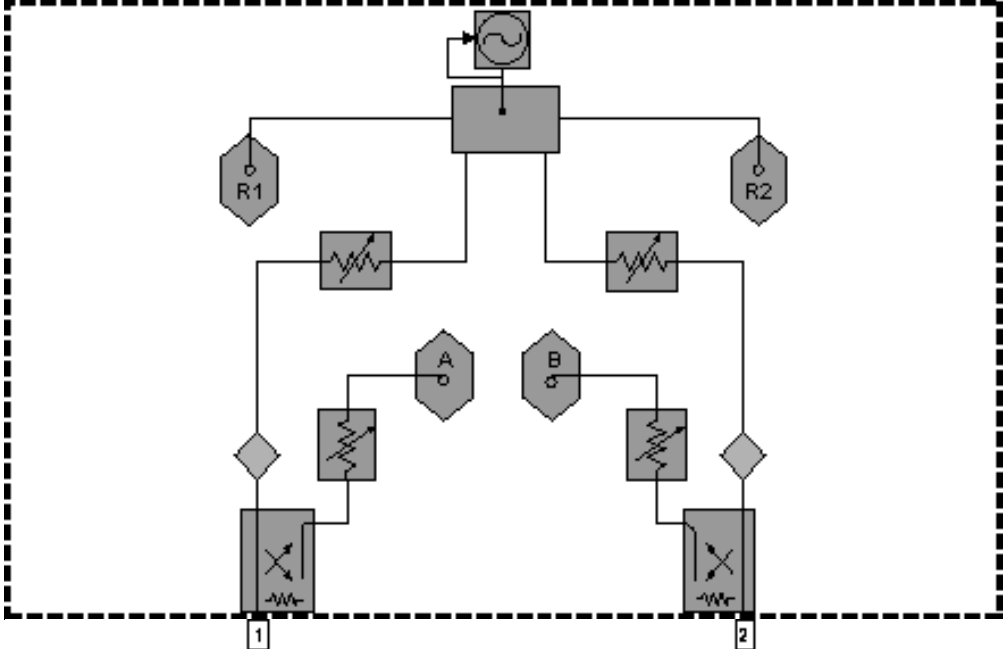


Test Set with Option 014 Block Diagrams

E836xB - Option 014 Configurable Test Set and Standard Power Range

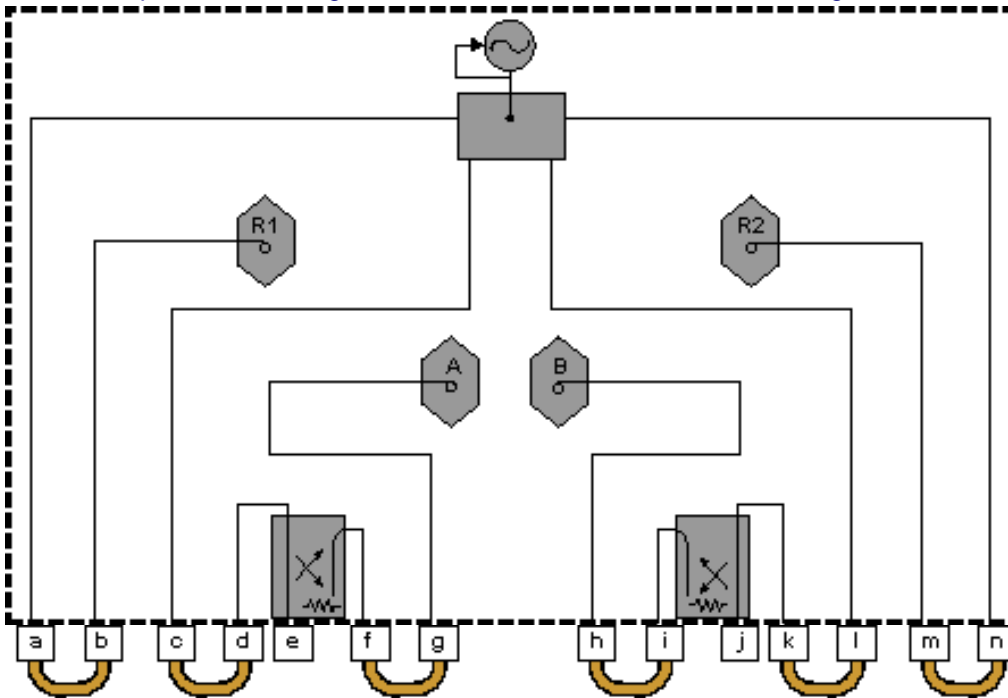


Item	Description	Item	Description
a	SOURCE OUT	h	RCVR B IN
b	RCVR R1 IN	i	CPLR ARM
c	SOURCE OUT	j	PORT 2
d	CPLR THRU	k	CPLR THRU
e	PORT 1	l	SOURCE OUT
f	CPLR ARM	m	RCVR R2 IN
g	RCVR A IN	n	SOURCE OUT

E836xB - Option 014 Configurable Test Set and Standard Power Range, and Option 081 Reference Channel Transfer Switch

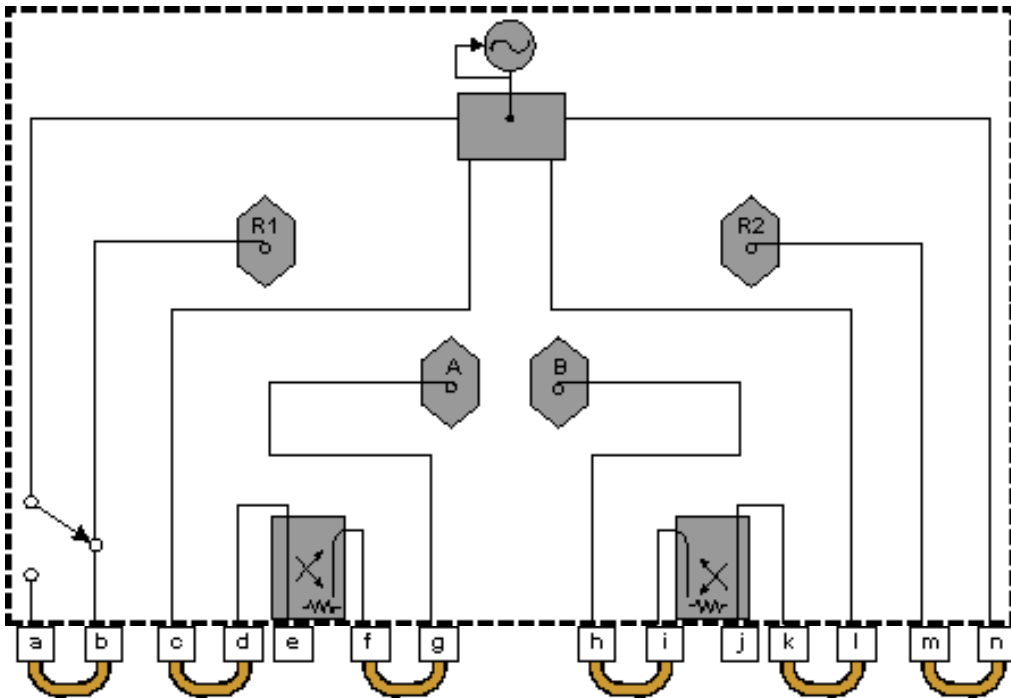


Item	Description	Item	Description
a	SOURCE OUT	h	RCVR B IN
b	RCVR R1 IN	i	CPLR ARM
c	SOURCE OUT	j	PORT 2
d	CPLR THRU	k	CPLR THRU
e	PORT 1	l	SOURCE OUT
f	CPLR ARM	m	RCVR R2 IN
g	RCVR A IN	n	SOURCE OUT

E836xB - Option 014 Configurable Test Set, and Option UNL Extended Power Range and Bias - Tees

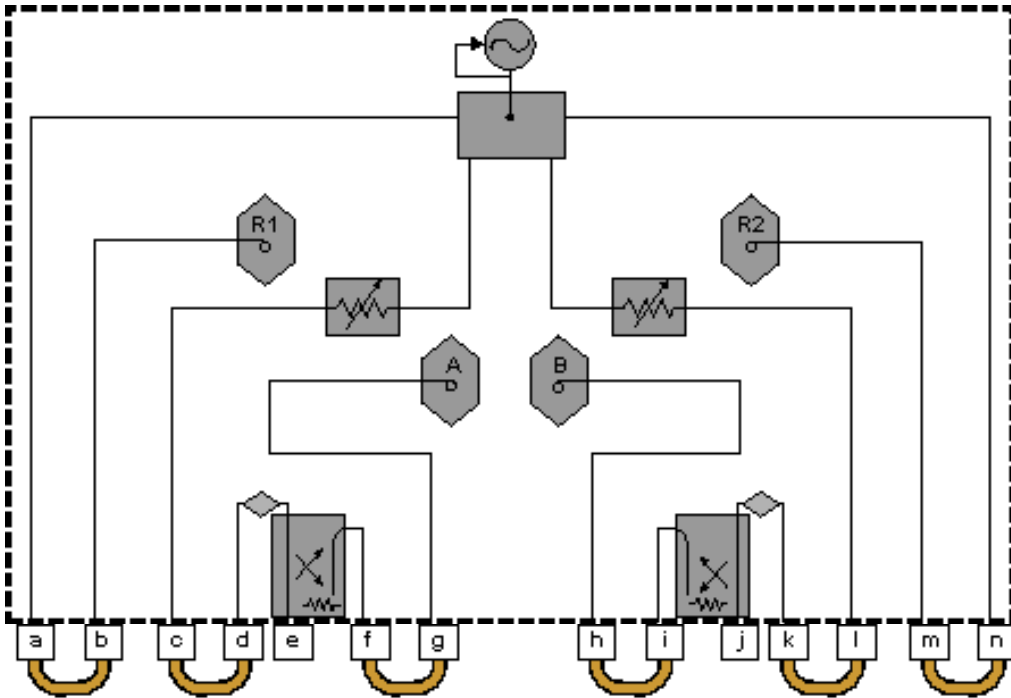


Item	Description	Item	Description
a	SOURCE OUT	h	RCVR B IN
b	RCVR R1 IN	i	CPLR ARM
c	SOURCE OUT	j	PORT 2
d	CPLR THRU	k	CPLR THRU
e	PORT 1	l	SOURCE OUT
f	CPLR ARM	m	RCVR R2 IN
g	RCVR A IN	n	SOURCE OUT

E836xB - Option 014 Configurable Test Set, and Option UNL Extended Power Range and Bias - Tees, and Option 081 Reference Channel Transfer Switch

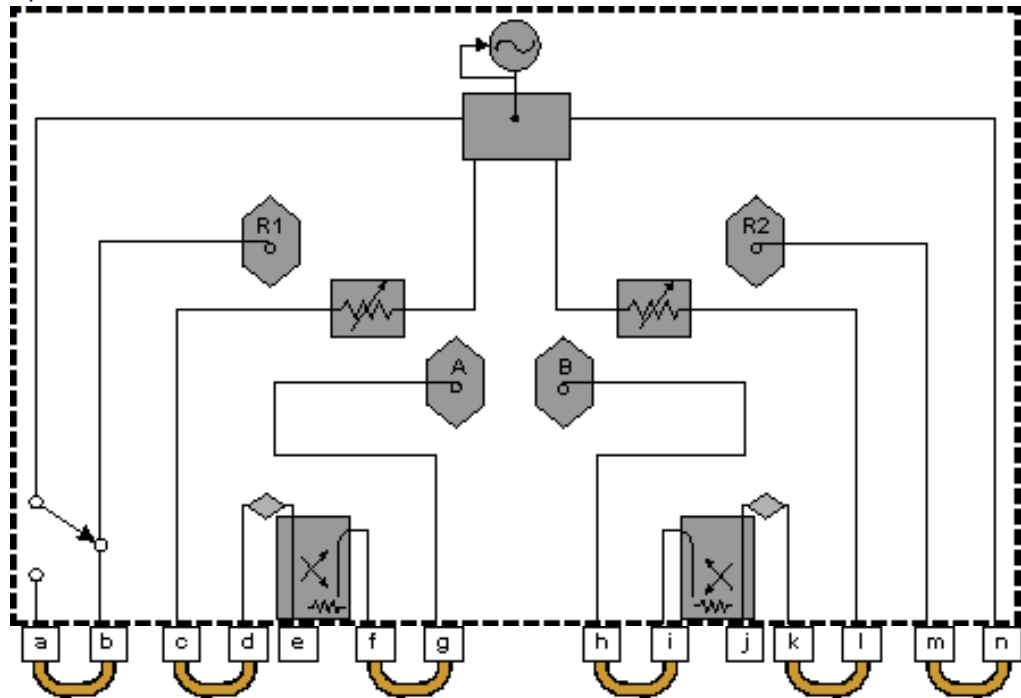


Item	Description	Item	Description
a	SOURCE OUT	h	RCVR B IN
b	RCVR R1 IN	i	CPLR ARM
c	SOURCE OUT	j	PORT 2
d	CPLR THRU	k	CPLR THRU
e	PORT 1	l	SOURCE OUT
f	CPLR ARM	m	RCVR R2 IN
g	RCVR A IN	n	SOURCE OUT

E836xB - Option 014 Configurable Test Set and Option UNL, Extended Power Range and Bias - Tees and Option 016 Receiver Attenuators

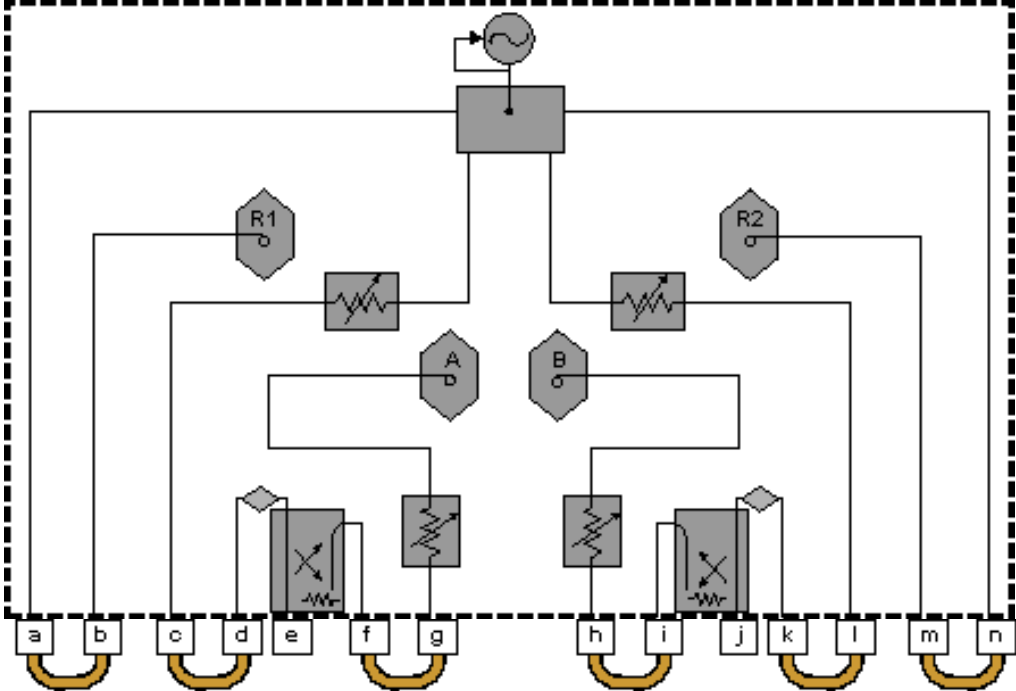

Item	Description	Item	Description
a	SOURCE OUT	h	RCVR B IN
b	RCVR R1 IN	i	CPLR ARM
c	SOURCE OUT	j	PORT 2
d	CPLR THRU	k	CPLR THRU
e	PORT 1	l	SOURCE OUT
f	CPLR ARM	m	RCVR R2 IN
g	RCVR A IN	n	SOURCE OUT

E836xB - Option 014 Configurable Test Set, and Option UNL Extended Power Range and Bias - Tees, and Option 016 Receiver Attenuators, and Option 081 Reference Channel Transfer Switch

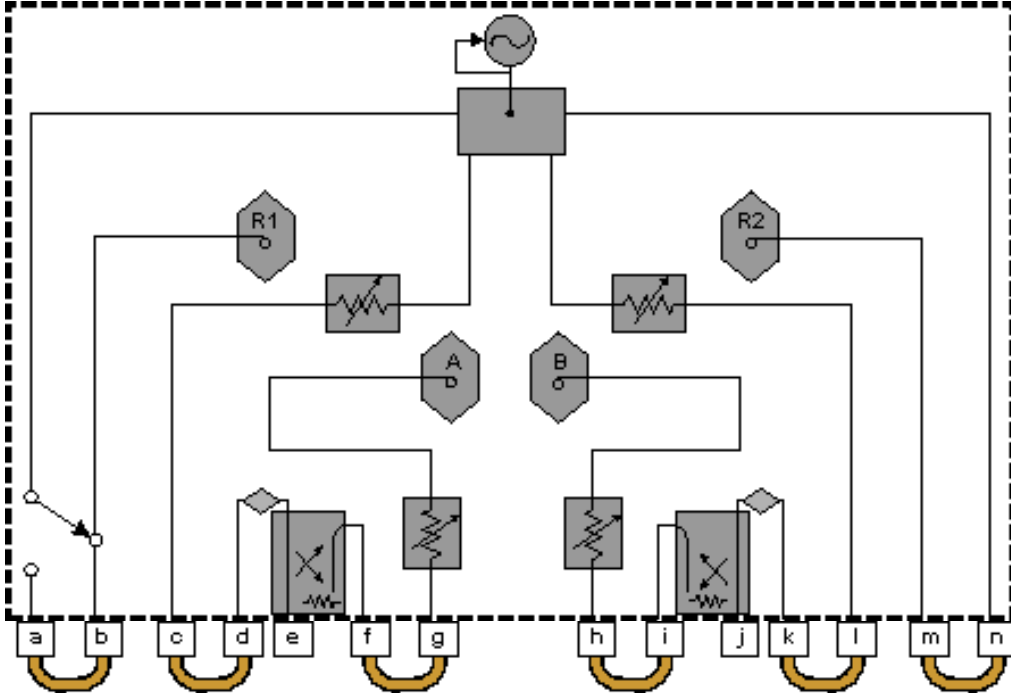

Item	Description	Item	Description
a	SOURCE OUT	h	RCVR B IN
b	RCVR R1 IN	i	CPLR ARM
c	SOURCE OUT	j	PORT 2
d	CPLR THRU	k	CPLR THRU
e	PORT 1	l	SOURCE OUT
f	CPLR ARM	m	RCVR R2 IN
g	RCVR A IN	n	SOURCE OUT