
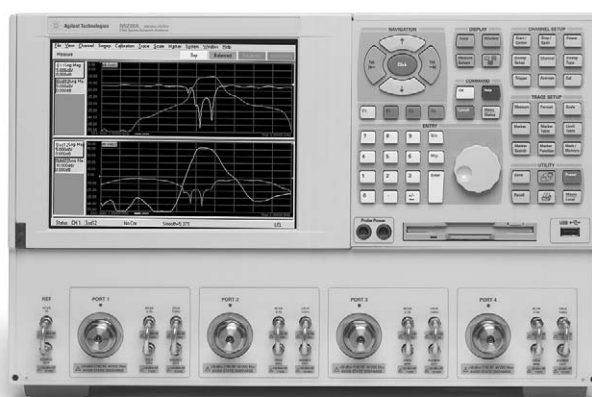


Agilent 4-Port PNA-L Microwave Network Analyzer

N5230A

300 kHz to 13.5, 20 GHz

Data Sheet

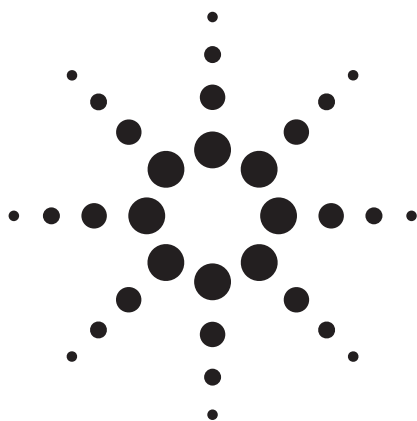

Note:

Specification information in this document is also available within the PNA-L network analyzer's internal Help system.



Agilent Technologies

Table of Contents

| | |
|--|-----------|
| Definitions | 3 |
| Corrected System Performance | 4 |
| Table 1. System dynamic range | 4 |
| Table 2. Extended dynamic range | 5 |
| N5230A Option 245 | |
| Corrected system performance with 3.5mm connectors | 6 |
| Table 3. 85052B Calibration kit N5230A – Configurable test set and extended power range (Option 245) | 6 |
| Table 4. N4691B Electronic calibration module N5230A – Configurable test set and extended power range (Option 245) | 8 |
| Table 5. Uncorrected system performance | 10 |
| Table 6. Test port output | 11 |
| Table 7: Test port input | 13 |
| Table 8. Dynamic accuracy | 16 |
| Table 9. Test port input (group delay) | 21 |
| General Information | 22 |
| Table 10. Miscellaneous information | 22 |
| Table 11. Front panel information | 22 |
| Table 12. Rear panel information | 23 |
| Table 13. Analyzer environment and dimensions | 24 |
| Measurement Throughput Summary | 25 |
| Table 14. Typical cycle time (ms) for measurement completion | 25 |
| Table 15. Cycle time vs IF bandwidth | 26 |
| Table 16. Cycle time vs number of points | 27 |
| Table 17. Data transfer time (ms) | 28 |
| Specifications: Front-Panel Jumpers | 29 |
| Table 18: Measurement receiver inputs, 0.1 dB typical compression .. | 29 |
| Table 19: Reference receiver input at max. specified output power .. | 29 |
| Table 20: Reference output at max. specified output power | 29 |
| Table 21: Source outputs at max. specified output power | 30 |
| Table 22: Coupler inputs, insertion loss of coupler thru | 30 |
| Table 23: Coupler outputs | 30 |
| Test Set Block Diagrams | 31 |
| N5230A Option 140 or 240 (standard test set and standard power range) network analyzer ... | 31 |
| N5230A Option 145 or 245 (configurable test set and extended power range) network analyzer .. | 31 |
| N5230A Option 146 or 246 (configurable test set, extended power range, and internal second source network analyzer | 31 |
| Web Resources | 32 |

This is a subset of technical specifications for the N5230A Option 140, 145, 146, 240, 245, and 246 network analyzer.

- **Option 140**, 300 kHz to 13.5 GHz, 4-port with standard test set
- **Option 145**, 300 kHz to 13.5 GHz, 4-port with configurable test set
- **Option 146**, 300 kHz to 13.5 GHz, 4-port with configurable test set and internal second source
- **Option 240**, 300 kHz to 20 GHz, 4-port with standard test set
- **Option 245**, 300 kHz to 20 GHz, 4-port with configurable test set
- **Option 246**, 300 kHz to 20 GHz, 4-port with configurable test set and internal second source

To view or print the N5230A technical specifications, visit our web site at www.agilent.com/find/pnal

This N5230A document provides technical specifications for the following calibration kit and ECal module only: 85052B and N4691B. Please download our free Uncertainty Calculator from www.agilent.com/find/na_calculator to generate the curves for your calibration kit and PNA setup.

Definitions

All specifications and characteristics apply over a 25 °C \pm 5 °C range (unless otherwise stated) and 90 minutes after the instrument has been turned on.

Specification (spec.): Warranted performance. Specifications include guardbands to account for the expected statistical performance distribution, measurement uncertainties, and changes in performance due to environmental conditions.

Characteristic (char.): A performance parameter that the product is expected to meet before it leaves the factory, but that is not verified in the field and is not covered by the product warranty. A characteristic includes the same guardbands as a specification.

Typical (typ.): Expected performance of an average unit which does not include guardbands. It is not covered by the product warranty.

Nominal (nom.): A general, descriptive term that does not imply a level of performance. It is not covered by the product warranty.

Calibration: The process of measuring known standards to characterize a network analyzer's systematic (repeatable) errors.

Corrected (residual): Indicates performance after error correction (calibration). It is determined by the quality of calibration standards and how well "known" they are, plus system repeatability, stability, and noise.

Uncorrected (raw): Indicates instrument performance without error correction. The uncorrected performance affects the stability of a calibration.

Standard: When referring to the analyzer, this includes no options unless noted otherwise.

Corrected System Performance

The specifications in this section apply for measurements made with the N5230A Options 140, 145, 146, 240, 245, and 246 analyzer with the following conditions:

- 10 Hz IF bandwidth
- No averaging applied to data
- Isolation calibration with an averaging factor of 8

Table 1. System dynamic range at test port¹

Standard configuration and standard power range (Options 140, 240)

| Description | Specification (dB) at test port | Typical (dB) at test port |
|--------------------------------|------------------------------------|------------------------------|
| 300 kHz to 10 MHz ² | | 111 |
| 10 MHz to 4 GHz ² | 120 | 128 |
| 4 to 6 GHz | 118 | 129 |
| 6 to 10.5 GHz | 115 | 127 |
| 10.5 to 13.5 GHz | 107 | 119 |
| 13.5 to 15 GHz | 107 | 119 |
| 15 to 20 GHz | 103 | 116 |

Configurable test set and extended power range (Options 145, 245)

Configurable test set, extended power range, and internal second source (Options 146, 246)

| Description | Specification (dB) at test port | Typical (dB) at test port |
|--------------------------------|------------------------------------|------------------------------|
| 300 kHz to 10 MHz ² | | 111 |
| 10 MHz to 4 GHz ² | 120 | 128 |
| 4 to 6 GHz | 118 | 128 |
| 6 to 10.5 GHz | 113 | 125 |
| 10.5 to 13.5 GHz | 105 | 117 |
| 13.5 to 15 GHz | 105 | 117 |
| 15 to 20 GHz | 98 | 115 |

1. The system dynamic range is calculated as the difference between the noise floor and the specified source maximum output power. The effective dynamic range must take measurement uncertainties and interfering signals into account.
2. May be degraded by 10 dB at particular frequencies (multiples of 5 MHz) below 500 MHz due to spurious receiver residuals. Methods are available to regain the full dynamic range.

Table 2. Extended dynamic range¹

**Configurable test set and extended power range (Options 145, 245)
 Configurable test set, extended power range, and internal second source
 (Options 146, 246)**

| Description | Specification (dB) at direct receiver access input | Typical (dB) at direct receiver access input |
|--------------------------------|--|--|
| 300 kHz to 10 MHz ² | | 127 |
| 10 MHz to 4 GHz ² | 136 | |
| 4 to 6 GHz | 134 | |
| 6 to 10.5 GHz | 129 | |
| 10.5 to 13.5 GHz | 121 | |
| 13.5 to 15 GHz | 121 | |
| 15 to 20 GHz | 114 | |

1. The direct receiver access input extended dynamic range is calculated as the difference between the direct receiver access input noise floor and the source maximum output power. The effective dynamic range must take measurement uncertainties and interfering signals into account. This set-up should only be used when the receiver input will never exceed its compression or damage level. When the analyzer is in segment sweep mode, it can have predefined frequency segments which will output a higher power level when the extended dynamic range is required (i.e. devices with high insertion loss), and reduced power when receiver compression or damage may occur (i.e. devices with low insertion loss). The extended range is only available in one-path transmission measurements.
2. May be degraded by 10 dB at particular frequencies (multiples of 5 MHz) below 500 MHz due to spurious receiver residuals. Methods are available to regain the full dynamic range.

N5230A Option 245

Corrected system performance with 3.5 mm connectors¹

Note: For any S_{ij} reflection measurement:

$$S_{ji} = 0$$

For any S_{ij} transmission measurement:

$$S_{ji} = S_{ij} \text{ when } S_{ij} \leq 1$$

$$S_{ji} = 1/S_{ij} \text{ when } S_{ij} \geq 1$$

$$S_{kk} = 0 \text{ for all } k$$

Table 3. 85052B Calibration kit


N5230A – configurable test set and extended power range (Option 245)

Applies to the N5230A Option 245 analyzers, 85052B (3.5mm) calibration kit, 85131F flexible test port cable set, and a full 2-port calibration. Also applies to the following condition: Environmental temperature $23^\circ \pm 3^\circ \text{C}$, with $< 1^\circ \text{C}$ deviation from calibration temperature.

| Description | Specification (dB) | | | |
|-----------------------|---------------------------|---------------------------|---------------------------|---------------------------|
| | 10 to 500 MHz | 500 MHz to 2 GHz | 2 to 8 GHz | 8 to 20 GHz |
| Directivity | 48 | 48 | 44 | 44 |
| Source match | 40 | 40 | 33 | 31 |
| Load match | 48 | 48 | 44 | 44 |
| Reflection tracking | ± 0.003 (+0.01/°C) | ± 0.003 (+0.01/°C) | ± 0.003 (+0.02/°C) | ± 0.006 (+0.03/°C) |
| Transmission tracking | ± 0.017 (+0.01/°C) | ± 0.017 (+0.01/°C) | ± 0.062 (+0.02/°C) | ± 0.125 (+0.03/°C) |

Transmission uncertainty (specifications)

Magnitude

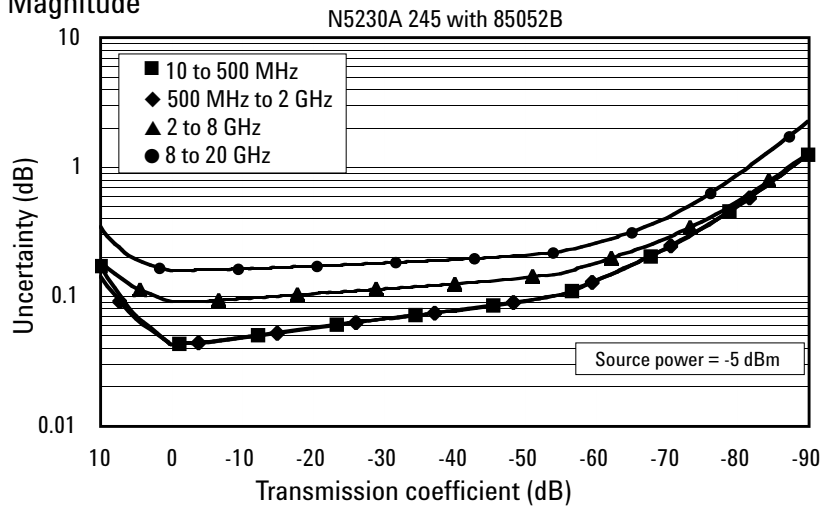


1. From 300 kHz to 10 MHz, performance is characterized as "typical". To generate these typical values, please download our free Uncertainty Calculator from www.agilent.com/find/na_calculator.

85052B Calibration kit (continued)


N5230A – configurable test set and extended power range (Option 245)

Phase

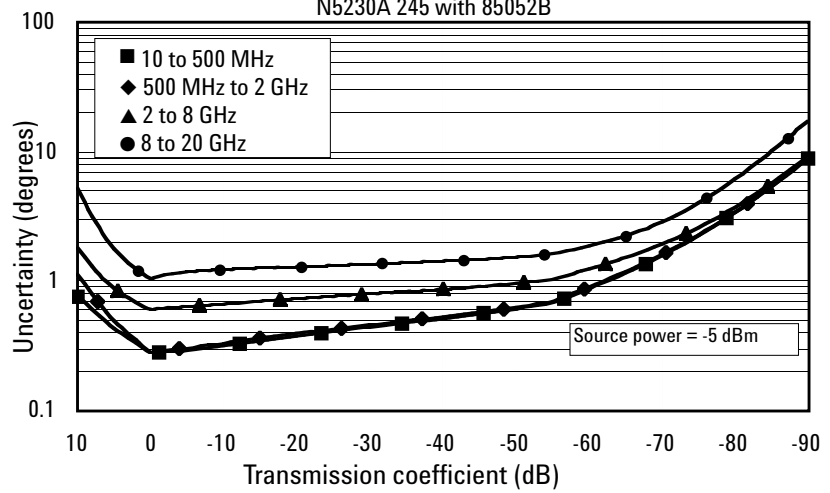


Reflection uncertainty (specifications)

Magnitude

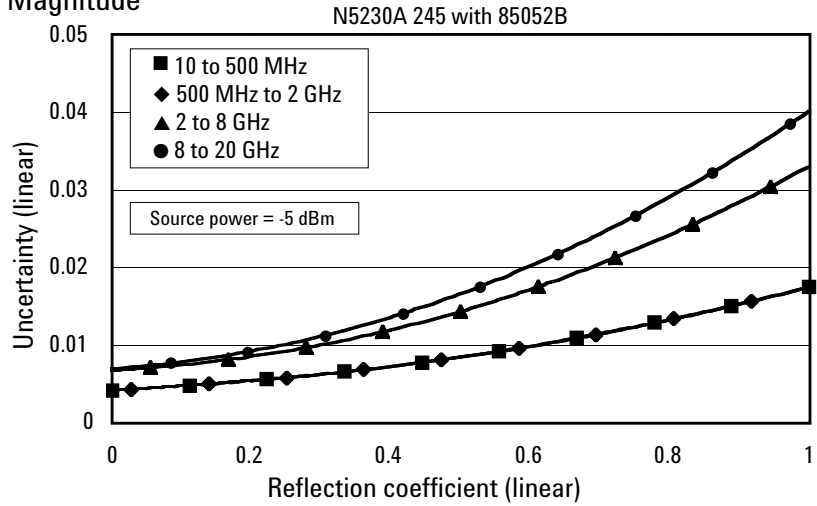

Phase

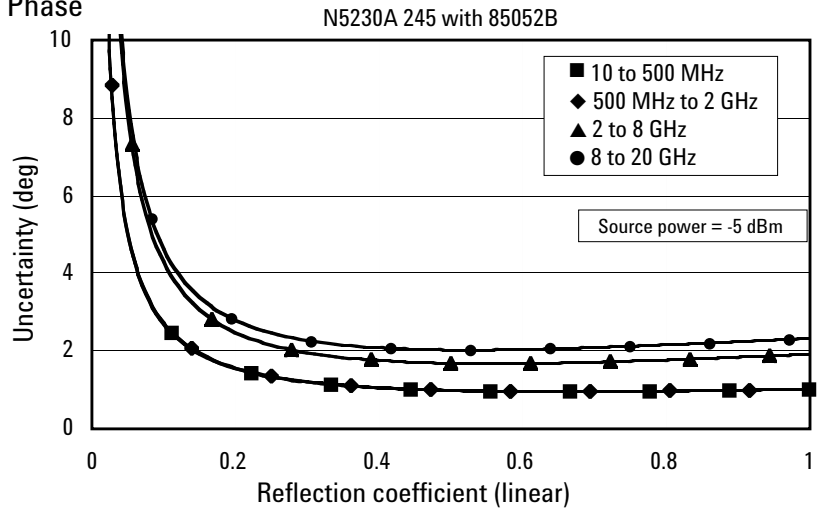

N5230A Option 245

Corrected system performance with 3.5 mm connectors¹ (continued)

Table 4. N4691B Electronic calibration module


N5230A – configurable test set and extended power range (Option 245)

Applies to the N5230A Option 245 analyzers, N4691B electronic calibration module, 85131F flexible test port cable set, and a full 2-port calibration. Also applies to the following condition: Environmental temperature 23° ±3 °C, with < 1 °C deviation from calibration temperature.


| Description | Specification (dB) | | | |
|-----------------------|----------------------|----------------------|----------------------|----------------------|
| | 10 to 500 MHz | 500 MHz to 2 GHz | 2 to 8 GHz | 8 to 20 GHz |
| Directivity | 46 | 56 | 54 | 48 |
| Source match | 41 | 47 | 45 | 44 |
| Load match | 40 | 41 | 39 | 36 |
| Reflection tracking | ±0.050 (+0.01/°C) | ±0.020 (+0.01/°C) | ±0.030 (+0.02/°C) | ±0.040 (+0.03/°C) |
| Transmission tracking | ±0.084 (+0.01/°C) | ±0.087 (+0.01/°C) | ±0.098 (+0.02/°C) | ±0.127 (+0.03/°C) |

Transmission uncertainty (specifications)

Magnitude

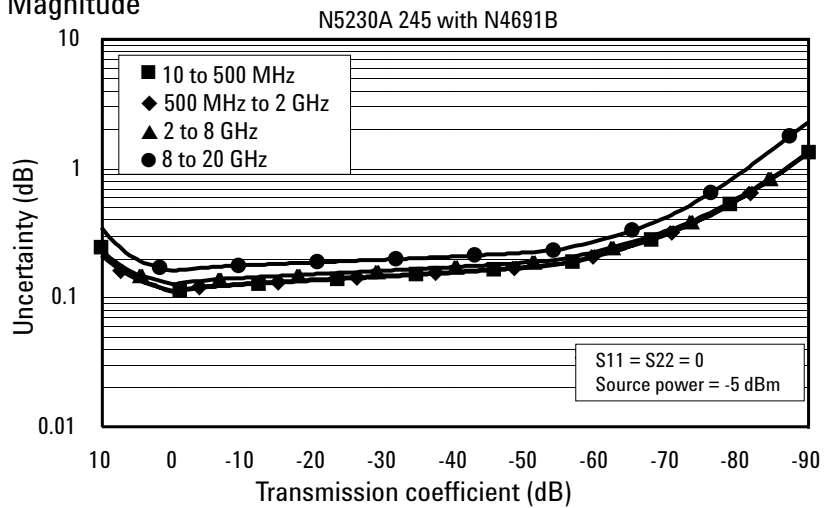

Phase

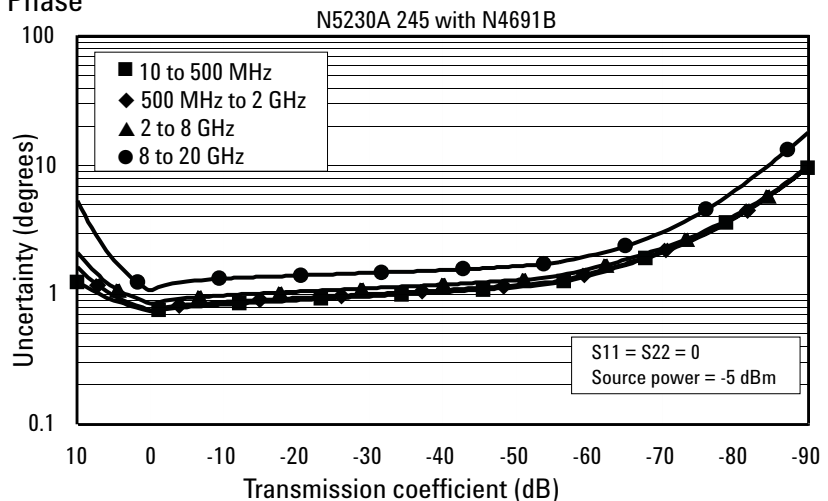

1. From 300 kHz to 10 MHz, performance is characterized as “typical”. To generate these typical values, please download our free Uncertainty Calculator from www.agilent.com/find/na_calculator.

N4691B Electronic calibration module (continued)
N5230A – configurable test set and extended power range (Option 245)

Reflection uncertainty (specifications)

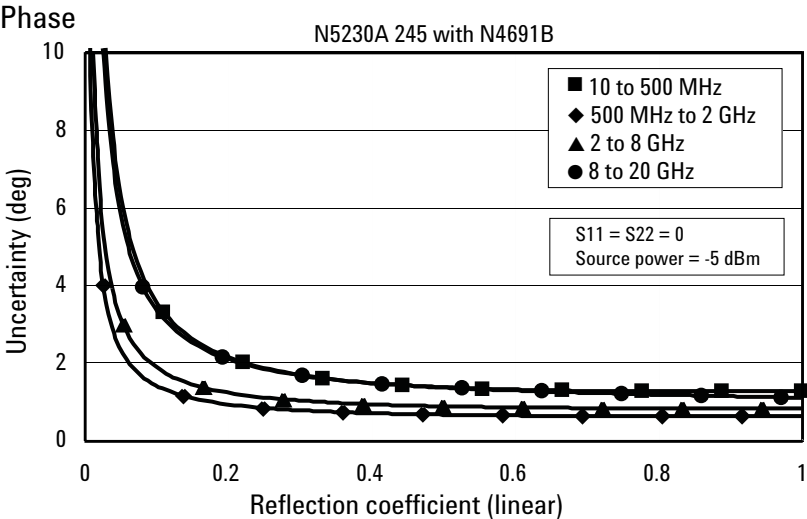
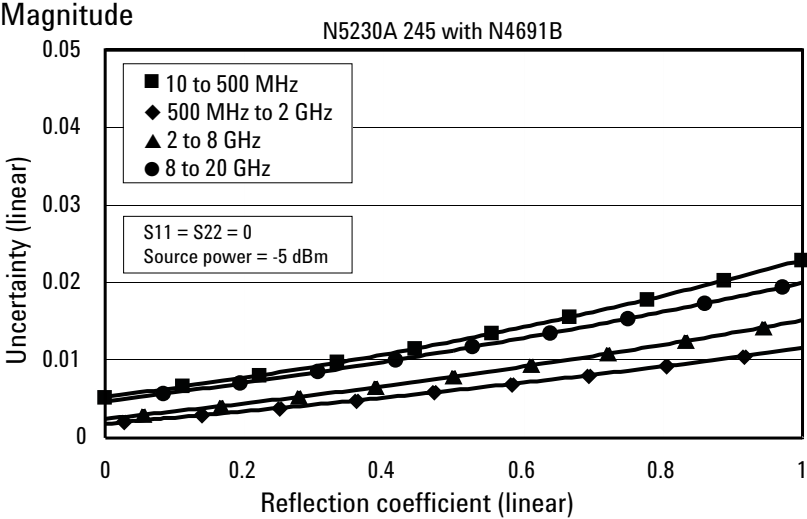


Table 5. Uncorrected system performance¹

| Directivity | Specifications | Typicals |
|------------------------------|---|--|
| | Options 140, 145, 146, 240, 245, 246 | Options 140, 145, 146, 240, 245,246 |
| 300 kHz to 10 MHz | | -23 dB |
| 10 MHz to 1 GHz | -28 dB | |
| 1 to 3 GHz | -25 dB | |
| 3 to 5 GHz | -20 dB | |
| 5 to 11.5 GHz | -17 dB | |
| 11.5 to 13.5 GHz | -15 dB | |
| 13.5 to 20 GHz | -15 dB | |
| Source match | | |
| 300 kHz to 10 MHz | | -8 dB |
| 10 MHz to 1 GHz | -12 dB | |
| 1 to 3 GHz | -12 dB | |
| 3 to 5 GHz | -12 dB | |
| 5 to 10.5 GHz | -12 dB | |
| 10.5 to 11.5 GHz | -10 dB | |
| 11.5 to 13.5 GHz | -8 dB | |
| 13.5 to 20 GHz | -8 dB | |
| Load match | | |
| 300 kHz to 10 MHz | | -9 dB |
| 10 MHz to 1 GHz | -20 dB | |
| 1 to 3 GHz | -20 dB | |
| 3 to 5 GHz | -18 dB | |
| 5 to 11.5 GHz | -12 dB | |
| 11.5 to 13.5 GHz | -7 dB | |
| 13.5 to 16 GHz | -7 dB | |
| 16 to 20 GHz | -7.5 dB | |
| Crosstalk² | | |
| 300 kHz to 5 MHz | | -70 dB |
| 5 to 10 MHz | | -100 dB |
| 10 to 45 MHz | | -110 dB |
| 45 MHz to 4 GHz | | -122 dB |
| 4 to 6 GHz | | -123 dB |
| 6 to 10.5 GHz | | -120 dB |
| 10.5 to 13.5 GHz | | -115 dB |
| 13.5 to 15 GHz | | -115 dB |
| 15 to 20 GHz | | -110 dB |

1. Specifications apply over environmental temperature of 25 °C ±5 °C with less than 1 °C variation from calibration temperature.
2. Measurement conditions: normalized to a thru, measured with two shorts, 10 Hz IF bandwidth, averaging factor of 8, alternate mode source power set to the lesser of the maximum power out or the maximum receiver power.

Table 6. Test port output¹

| Description | Specifications | | Typicals | |
|-----------------------------|---------------------|-------------------------------|---|---|
| | Options 140, 240 | Options 145, 146, 245, 246 | Options 140, 240 | Options 145, 146, 245, 246 |
| Frequency range | | | | |
| Options 140, 145, 146 | | 300 kHz to 13.5 GHz | | |
| Options 240, 245, 246 | | 300 kHz to 20 GHz | | |
| Nominal power | | | | |
| -5 dBm | | -8 dBm | | Preset power; attenuator switch point 10 dB below nominal power |
| Frequency resolution | | | | |
| 1 Hz | | | | |
| CW accuracy | | | | |
| ±1 ppm | | | | |
| Frequency stability | | | | |
| | | | ±0.05 ppm. -10° to 70° C ±0.1 ppm/yr maximum | |

| Description | Specifications | | Typicals | |
|---|---------------------|-------------------------------|---------------------|-------------------------------|
| | Options 140, 240 | Options 145, 146, 245, 246 | Options 140, 240 | Options 145, 146, 245, 246 |
| Power level accuracy | | | | |
| Variation from nominal power in range 0 | | | | |
| 300 kHz to 10 MHz | | | ±1.0 dB | ±1.0 dB |
| 10 MHz to 2 GHz | | ±1.0 dB | ±1.0 dB | |
| 2 to 10.5 GHz | | ±1.5 dB | ±1.5 dB | |
| 10.5 to 13.5 GHz | | ±2.5 dB | ±2.5 dB | |
| 13.5 to 20 GHz | | ±2.5 dB | ±2.5 dB | |
| Max leveled power | | | | |
| 300 kHz to 10 MHz | | | +8 dBm | +8 dBm |
| 10 MHz to 4 GHz | | +8 dBm | +8 dBm | +12 dBm |
| 4 to 6 GHz | | +6 dBm | +6 dBm | +10 dBm |
| 6 to 10.5 GHz | | +3 dBm | +1 dBm | +8 dBm |
| 10.5 to 13.5 GHz | | 0 dBm | -2 dBm | +5 dBm |
| 13.5 to 15 GHz | | 0 dBm | -2 dBm | +5 dBm |
| 15 to 20 GHz | | -3 dBm | -8 dBm | +2 dBm |
| Power level linearity | | | | |
| Specified on Port 1 only. Ports 2, 3, 4 performance is Typical. Test is at the nominal power level. | | | | |
| 300 kHz to 10 MHz | | | ±2.0 dB | ±2.0 dB |
| 10 MHz to 1 GHz | | ±2.0 dB | ±2.0 dB | |
| 1 to 13.5 GHz | | ±1.5 dB | ±1.5 dB | |
| 13.5 to 20 GHz | | ±1.5 dB | ±1.5 dB | |
| Power sweep range (ALC) | | | | |
| ALC range starts at maximum-leveled power and decreases by the dB amount specified here. | | | | |
| 300 kHz to 10 MHz | | | 35 dB | 35 dB |
| 10 MHz to 4 GHz | | 33 dB | 33 dB | |
| 4 to 6 GHz | | 31 dB | 31 dB | |
| 6 to 10.5 GHz | | 28 dB | 26 dB | |
| 10.5 to 13.5 GHz | | 25 dB | 23 dB | |
| 13.5 to 15 GHz | | 25 dB | 23 dB | |
| 15 to 20 GHz | | 22 dB | 17 dB | |
| Power resolution | | | | |
| 0.01 dB | | 0.01 dB | | |

Table 6. Test port output¹ (Continued)

| Description | Specifications | | Typicals | |
|--|---------------------|-------------------------------|--------------------------------------|-------------------------------|
| | Options 140, 240 | Options 145, 146, 245, 246 | Options 140, 240 | Options 145, 146, 245, 246 |
| Power range | | | | |
| 300 kHz to 10 MHz | | | -27 to +8 dBm | -87 to +8 dBm |
| 10 to 45 MHz | | | -27 to +12 dBm | -87 to +11 dBm |
| 45 MHz to 4 GHz | | | -27 to +12 dBm | -87 to +11 dBm |
| 4 to 6 GHz | | | -27 to +10 dBm | -87 to +9 dBm |
| 6 to 10.5 GHz | | | -27 to +8 dBm | -87 to +6 dBm |
| 10.5 to 13.5 GHz | | | -27 to +5 dBm | -87 to +3 dBm |
| 13.5 to 15 GHz | | | -27 to +5 dBm | -87 to +3 dBm |
| 15 to 20 GHz | | | -27 to +2 dBm | -87 to -1 dBm |
| Power settings | | | | |
| Minimum power setting | | | -30 dBm | -90 dBm |
| Maximum power setting | | | +20 dBm | +20 dBm |
| Harmonics (2nd or 3rd) at maximum output power | | | | |
| In-band source harmonics | | | | |
| 300 kHz to 10 MHz | | | -17 dBc | |
| 10 MHz to 1 GHz | | | -17 dBc | |
| 1 to 13.5 GHz | | | -20 dBc | |
| 13.5 to 20 GHz | | | -20 dBc | |
| Non-harmonic spurious (at nominal output power) | | | | |
| 300 kHz to 20 GHz | | | -50 dBc for offset frequency > 1 kHz | |

Typical performance

| Phase noise (Nominal power at test port) | Typical performance | | |
|--|---------------------|----------------|--------------|
| | 10 kHz Offset | 100 kHz Offset | 1 MHz Offset |
| 300 kHz to 10 MHz | -86 dBc/Hz | -86 dBc/Hz | -95 dBc/Hz |
| 10 MHz to 1.5 GHz | -86 dBc/Hz | -91 dBc/Hz | -95 dBc/Hz |
| 1.5 to 3.125 GHz | -83 dBc/Hz | -91 dBc/Hz | -95 dBc/Hz |
| 3.125 to 6.25 GHz | -77 dBc/Hz | -85 dBc/Hz | -89 dBc/Hz |
| 6.25 to 12.5 GHz | -71 dBc/Hz | -79 dBc/Hz | -83 dBc/Hz |
| 12.5 to 13.5 GHz | -65 dBc/Hz | -73 dBc/Hz | -77 dBc/Hz |
| 13.5 to 20 GHz | -65 dBc/Hz | -73 dBc/Hz | -77 dBc/Hz |

1. For Options 140/145/240/245, performance specified on Port 1 only; Ports 2, 3, and 4 performance is typical. For Options 146/246, performance is specified on Ports 1 and 3 only; Ports 2 and 4 performance is typical.

Table 7: Test port input

| Description | Specification | | Typicals | |
|--|--------------------------------------|-------------|--------------------------------------|-------------|
| | Options 140, 145, 146, 240, 245, 246 | | Options 140, 145, 146, 240, 245, 246 | |
| Test port noise floor | | | | |
| Total average (rms) noise power calculated as the mean value of a linear magnitude trace expressed in dBm. | | | | |
| 10 Hz IF bandwidth | | | | |
| 300 kHz to 10 MHz | | | | < -103 dBm |
| 10 to 500 MHz | < -112 dBm | | | < -116 dBm |
| 500 MHz to 4 GHz | < -112 dBm | | | < -120 dBm |
| 4 to 10.5 GHz | < -112 dBm | | | < -119 dBm |
| 10.5 to 13.5 GHz | < -107 dBm | | | < -114 dBm |
| 13.5 to 15 GHz | < -107 dBm | | | < -114 dBm |
| 15 to 20 GHz | < -106 dBm | | | < -114 dBm |
| 1 KHz IF bandwidth | | | | |
| 300 kHz to 10 MHz | | | | < -83 dBm |
| 10 to 500 MHz | < -92 dBm | | | < -96 dBm |
| 500 MHz to 4 GHz | < -92 dBm | | | < -100 dBm |
| 4 to 10.5 GHz | < -92 dBm | | | < -99 dBm |
| 10.5 to 13.5 GHz | < -87 dBm | | | < -94 dBm |
| 13.5 to 15 GHz | < -87 dBm | | | < -94 dBm |
| 15 to 20 GHz | < -86 dBm | | | < -94 dBm |
| Direct receiver access input noise floor (Options 145, 146, 245, 246) | | | | |
| Total average (rms) noise power calculated as the mean value of a linear magnitude trace expressed in dBm. | | | | |
| 10 Hz IF bandwidth | | | | |
| 300 kHz to 10 MHz | | | | < -119 dBm |
| 10 to 500 MHz | < -128 dBm | | | < -132 dBm |
| 500 MHz to 4 GHz | < -128 dBm | | | < -136 dBm |
| 4 to 10.5 GHz | < -128 dBm | | | < -135 dBm |
| 10.5 to 13.5 GHz | < -123 dBm | | | < -130 dBm |
| 13.5 to 15 GHz | < -123 dBm | | | < -130 dBm |
| 15 to 20 GHz | < -122 dBm | | | < -130 dBm |
| 1 KHz IF bandwidth | | | | |
| 300 kHz to 10 MHz | | | | < -99 dBm |
| 10 to 500 MHz | < -108 dBm | | | < -112 dBm |
| 500 MHz to 4 GHz | < -108 dBm | | | < -116 dBm |
| 4 to 10.5 GHz | < -108 dBm | | | < -115 dBm |
| 10.5 to 13.5 GHz | < -103 dBm | | | < -110 dBm |
| 13.5 to 15 GHz | < -103 dBm | | | < -110 dBm |
| 15 to 20 GHz | < -102 dBm | | | < -110 dBm |
| Compression level (at +8 dBm except as noted) | | | | |
| | Specification | | Typicals | |
| | Options 140, 145, 146, 240, 245, 246 | | Options 140, 145, 146, 240, 245, 246 | |
| | Power | Compression | Power | Compression |
| 300 kHz to 10 MHz | | | +5 dBm | 0.10 dB |
| 10 to 50 MHz | +8 dBm | 0.35 dB | | |
| 50 MHz to 1 GHz | +8 dBm | 0.35 dB | | |
| 1 to 8 GHz | +8 dBm | 0.25 dB | | |
| 8 to 12.5 GHz | +8 dBm | 0.30 dB | | |
| 12.5 to 13.5 GHz | +8 dBm | 0.55 dB | | |
| 13.5 to 20 GHz | +8 dBm | 0.55 dB | | |
| Test port compression at 0.1 dB | | | | |
| 300 kHz to 10 MHz | | | +5 dBm | |
| 10 MHz to 1 GHz | | | +9 dBm | |
| 1 to 12.5 GHz | | | +10 dBm | |
| 12.5 to 13.5 GHz | | | +9 dBm | |
| 13.5 to 20 GHz | | | +9 dBm | |

Table 7. Test port input (Continued)

| Description | Specifications | | | Typicals | | |
|--|------------------|------------------|------------------|------------------|------------------|------------------|
| | Options 140, 240 | Options 145, 245 | Options 146, 246 | Options 140, 240 | Options 145, 245 | Options 146, 246 |
| Trace noise magnitude | | | | | | |
| Ratioed measurement, nominal power at test port. | | | | | | |
| 100 kHz IF bandwidth | | | | | | |
| 300 kHz to 10 MHz | | | | 0.015 dB rms | 0.030 dB rms | 0.050 dB rms |
| 10 MHz to 10.5 GHz | 0.006 dB rms | 0.008 dB rms | 0.016 dB rms | 0.004 dB rms | 0.005 dB rms | 0.013 dB rms |
| 10.5 to 13.5 GHz | 0.010 dB rms | 0.014 dB rms | 0.038 dB rms | 0.007 dB rms | 0.009 dB rms | 0.026 dB rms |
| 13.5 to 20 GHz | 0.010 dB rms | 0.014 dB rms | 0.038 dB rms | 0.007 dB rms | 0.009 dB rms | 0.026 dB rms |
| 600 kHz IF bandwidth | | | | | | |
| 300 kHz to 10 MHz | | | | 0.015 dB rms | 0.030 dB rms | 0.050 dB rms |
| 10 MHz to 10.5 GHz | | | | 0.013 dB rms | 0.015 dB rms | 0.032 dB rms |
| 10.5 to 13.5 GHz | | | | 0.017 dB rms | 0.023 dB rms | 0.063 dB rms |
| 13.5 to 20 GHz | | | | 0.017 dB rms | 0.023 dB rms | 0.063 dB rms |
| 100 kHz IF bandwidth | | | | | | |
| Measured at maximum specified power | | | | | | |
| 300 kHz to 10 MHz | | | | 0.005 dB rms | 0.010 dB rms | 0.012 dB rms |
| 10 MHz to 2 GHz | | | | 0.001 dB rms | 0.003 dB rms | 0.004 dB rms |
| 2 to 10.5 GHz | | | | 0.002 dB rms | 0.003 dB rms | 0.004 dB rms |
| 10.5 to 13.5 GHz | | | | 0.006 dB rms | 0.009 dB rms | 0.023 dB rms |
| 13.5 to 20 GHz | | | | 0.006 dB rms | 0.009 dB rms | 0.023 dB rms |
| Trace noise phase | | | | | | |
| Ratioed measurement, nominal power at test port. | | | | | | |
| 100 kHz IF bandwidth | | | | | | |
| 300 kHz to 10 MHz | | | | 0.110° rms | 0.180° rms | 0.280° rms |
| 10 MHz to 10.5 GHz | 0.05° rms | 0.07° rms | 0.130° rms | 0.025° rms | 0.035° rms | 0.090° rms |
| 10.5 to 13.5 GHz | 0.08° rms | 0.10° rms | 0.250° rms | 0.050° rms | 0.060° rms | 0.170° rms |
| 13.5 to 20 GHz | 0.08° rms | 0.10° rms | 0.250° rms | 0.050° rms | 0.060° rms | 0.170° rms |
| 600 kHz IF bandwidth | | | | | | |
| 300 kHz to 10 MHz | | | | 0.110° rms | 0.180° rms | 0.300° rms |
| 10 MHz to 10.5 GHz | | | | 0.080° rms | 0.100° rms | 0.200° rms |
| 10.5 to 13.5 GHz | | | | 0.120° rms | 0.160° rms | 0.430° rms |
| 13.5 to 20 GHz | | | | 0.120° rms | 0.160° rms | 0.430° rms |
| 100 kHz IF bandwidth | | | | | | |
| Measured at maximum specified power | | | | | | |
| 300 kHz to 10 MHz | | | | 0.040° rms | 0.050° rms | 0.075° rms |
| 10 MHz to 2 GHz | | | | 0.007° rms | 0.012° rms | 0.013° rms |
| 2 to 10.5 GHz | | | | 0.012° rms | 0.015° rms | 0.030° rms |
| 10.5 to 13.5 GHz | | | | 0.040° rms | 0.060° rms | 0.150° rms |
| 13.5 to 20 GHz | | | | 0.040° rms | 0.060° rms | 0.150° rms |
| Stability magnitude | | | | | | |
| Stability as defined as a ratio measurement made at the test port. | | | | | | |
| 300 kHz to 10 MHz | | | | ±0.015 dB/°C | | ±0.015 dB/°C |
| 10 MHz to 2 GHz | | | | ±0.010 dB/°C | | ±0.010 dB/°C |
| 2 to 4 GHz | | | | ±0.015 dB/°C | | ±0.015 dB/°C |
| 4 to 13.5 GHz | | | | ±0.020 dB/°C | | ±0.020 dB/°C |
| 13.5 to 16 GHz | | | | ±0.020 dB/°C | | ±0.020 dB/°C |
| 16 to 19 GHz | | | | ±0.025 dB/°C | | ±0.025 dB/°C |
| 19 to 20 GHz | | | | ±0.030 dB/°C | | ±0.030 dB/°C |

Table 7. Test port input (Continued)

| Description | Specifications | | | Typicals | | |
|--|-------------------|-------------------|-------------------|--------------------------------------|------------------|--------------------------------------|
| | Options 140, 240 | Options 145, 245 | Options 146, 246 | Options 140, 240 | Options 145, 245 | Options 146, 246 |
| Stability phase | | | | | | |
| Stability as defined as a ratio measurement made at the test port. | | | | | | |
| 300 kHz to 10 MHz | | | | $\pm 0.360^{\circ}/^{\circ}\text{C}$ | | $\pm 0.360^{\circ}/^{\circ}\text{C}$ |
| 10 to 45 MHz | | | | $\pm 0.020^{\circ}/^{\circ}\text{C}$ | | $\pm 0.020^{\circ}/^{\circ}\text{C}$ |
| 45 to 500 MHz | | | | $\pm 0.030^{\circ}/^{\circ}\text{C}$ | | $\pm 0.030^{\circ}/^{\circ}\text{C}$ |
| 500 MHz to 2 GHz | | | | $\pm 0.050^{\circ}/^{\circ}\text{C}$ | | $\pm 0.070^{\circ}/^{\circ}\text{C}$ |
| 2 to 4 GHz | | | | $\pm 0.100^{\circ}/^{\circ}\text{C}$ | | $\pm 0.150^{\circ}/^{\circ}\text{C}$ |
| 4 to 8 GHz | | | | $\pm 0.150^{\circ}/^{\circ}\text{C}$ | | $\pm 0.250^{\circ}/^{\circ}\text{C}$ |
| 8 to 13.5 GHz | | | | $\pm 0.300^{\circ}/^{\circ}\text{C}$ | | $\pm 0.500^{\circ}/^{\circ}\text{C}$ |
| 13.5 to 16 GHz | | | | $\pm 0.300^{\circ}/^{\circ}\text{C}$ | | $\pm 0.500^{\circ}/^{\circ}\text{C}$ |
| 16 to 20 GHz | | | | $\pm 0.350^{\circ}/^{\circ}\text{C}$ | | $\pm 0.650^{\circ}/^{\circ}\text{C}$ |
| Reference level magnitude | | | | | | |
| Range | ± 200 dB | ± 200 dB | ± 200 dB | | | |
| Resolution | .001 dB | .001 dB | .001 dB | | | |
| Reference level phase | | | | | | |
| Range | $\pm 500^{\circ}$ | $\pm 500^{\circ}$ | $\pm 500^{\circ}$ | | | |
| Resolution | .01 $^{\circ}$ | .01 $^{\circ}$ | .01 $^{\circ}$ | | | |
| Damage input level | | | | | | |
| Test port 1, 2, 3, and 4 | | | | +27 dBm or ± 16 VDC | | +27 dBm or ± 16 VDC |
| Receivers R, A, B, C, D | | | | | | +15 dBm or ± 16 VDC |
| Source out (reference) | | | | | | +27 dBm or ± 16 VDC |
| Source out (test ports) | | | | | | +27 dBm or ± 16 VDC |
| Coupler thru | | | | | | +27 dBm or ± 16 VDC |
| Coupler arm | | | | | | +15 dBm or ± 10 VDC |


Table 8. Dynamic Accuracy (specification)

Accuracy of the test port input power reading relative to the reference input power level. Dynamic accuracy is verified with the following measurements:

- Compression over frequency
- IF linearity at a single frequency of 1.195 GHz using a reference level of -20 dBm for an input power range of 0 to -110 dBm

Dynamic Accuracy 0.045 GHz

Magnitude

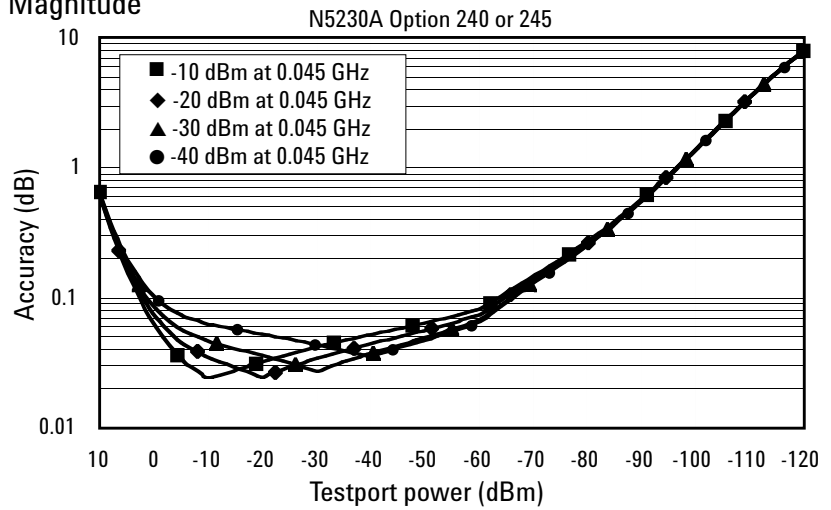

Phase


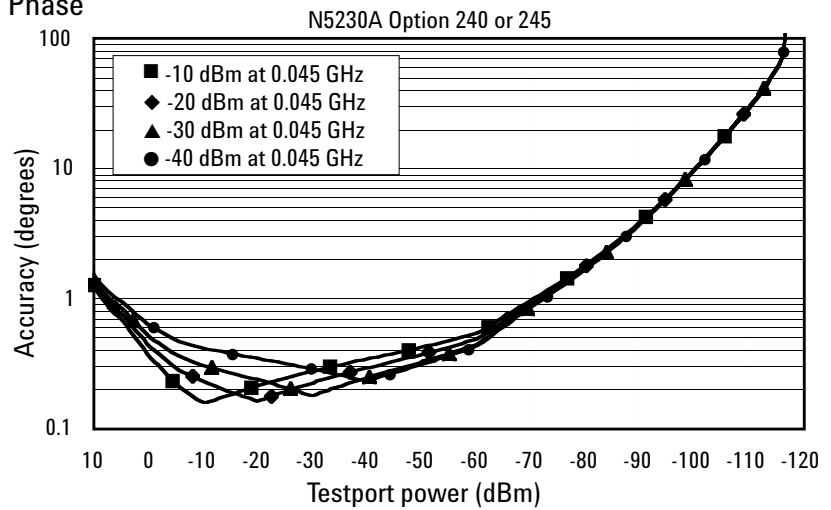


Table 8. Dynamic Accuracy (continued)

Dynamic Accuracy 0.500 GHz

Magnitude

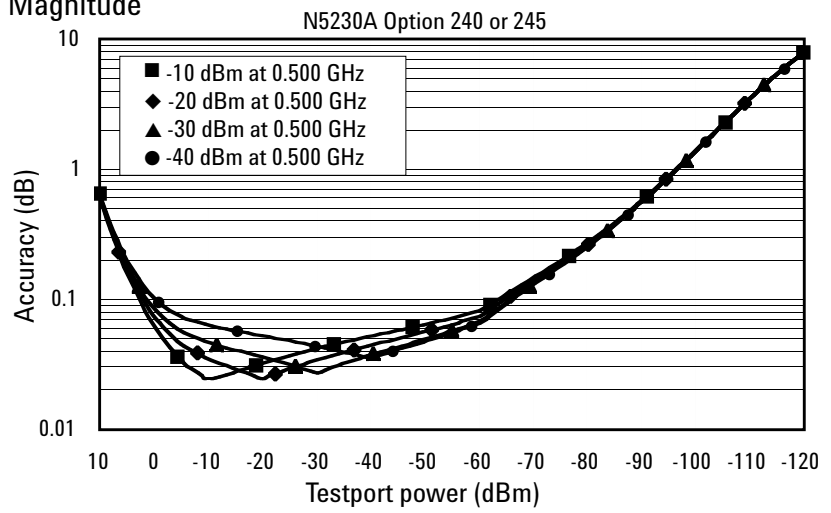

Phase


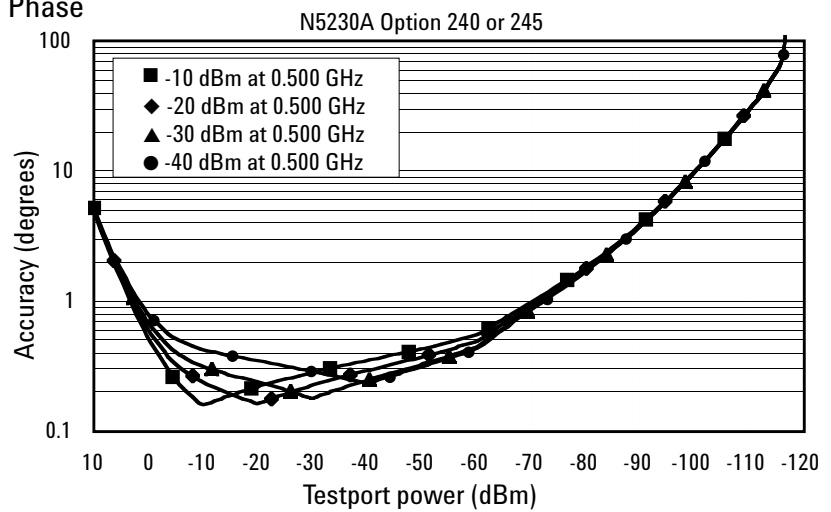


Table 8. Dynamic Accuracy (continued)

Dynamic Accuracy 1 to 2 GHz

Magnitude

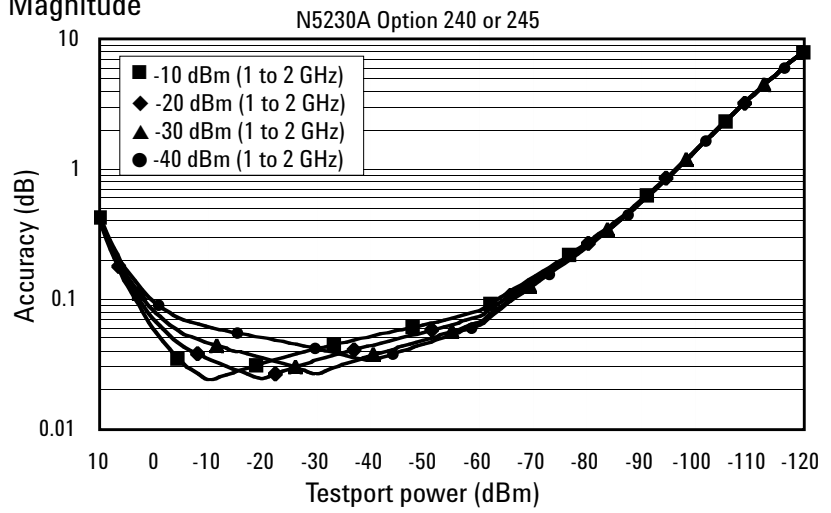

Phase


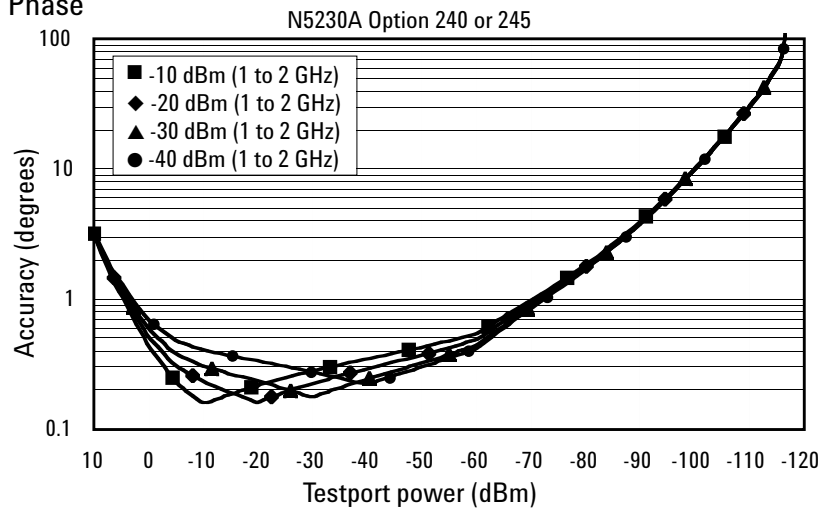


Table 8. Dynamic Accuracy (continued)

Dynamic Accuracy 2 to 12.5 GHz

Magnitude

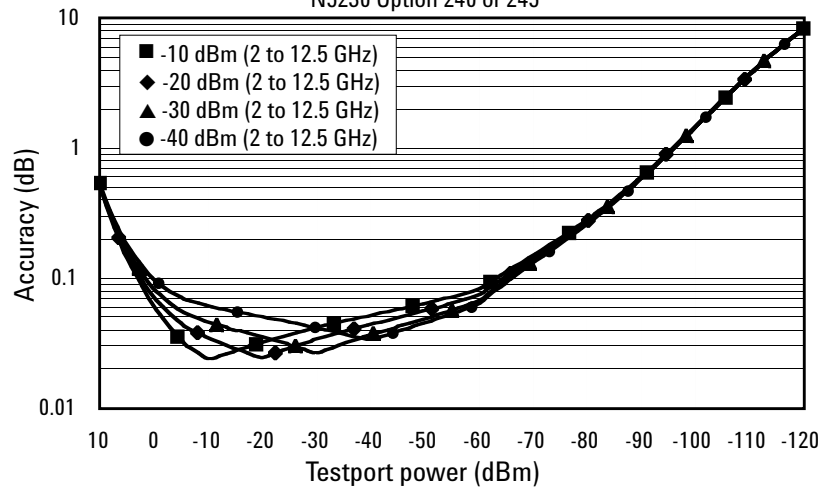

Phase


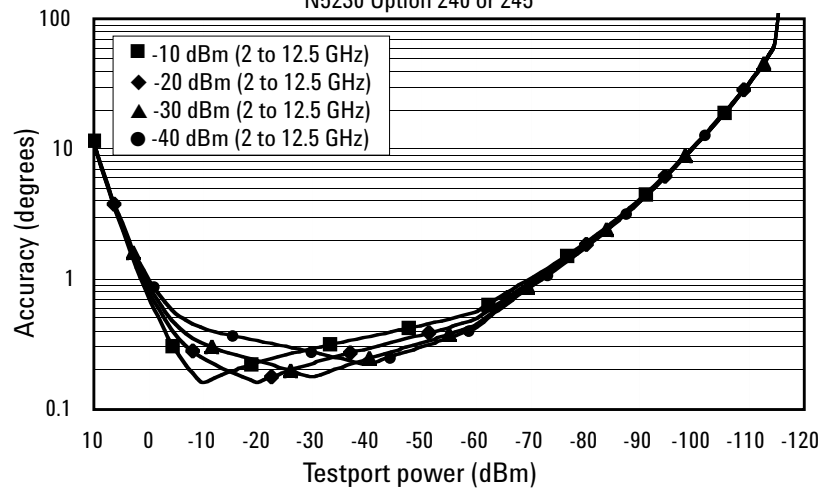


Table 8. Dynamic Accuracy (continued)

Dynamic Accuracy 12.5 to 20 GHz

Magnitude

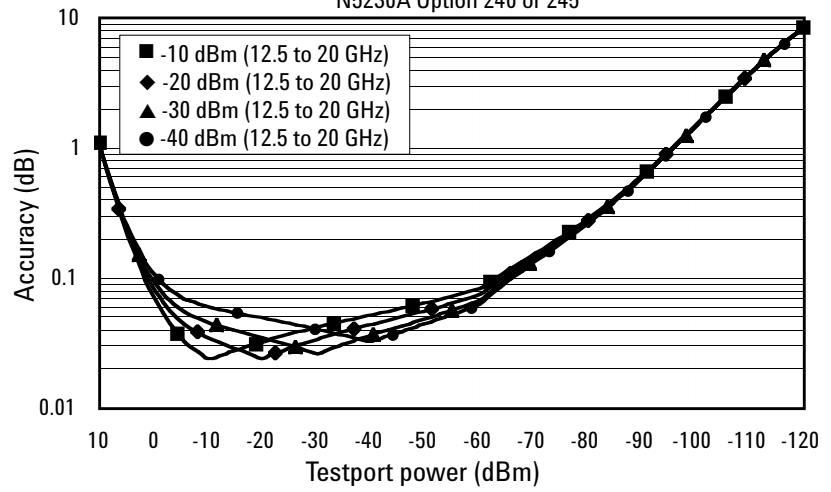

Phase


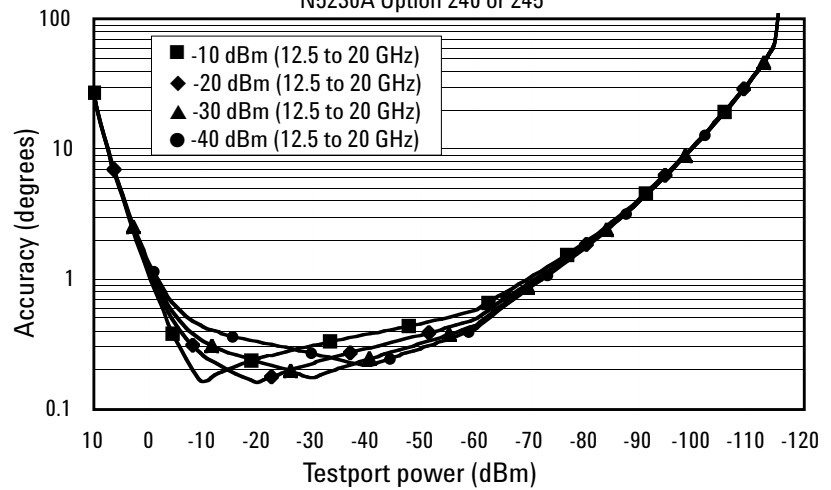


Table 9. Test port input (group delay)¹

| Description | Specification | Supplemental information (typ.) |
|-----------------------|---------------|--|
| Aperture (selectable) | | (frequency span)/(number of points -1) |
| Maximum aperture | | 20% of frequency span |
| Range | | 0.5 x (1/minimum aperture) |
| Maximum delay | | Limited to measuring no more than 180° of phase change within the minimum aperture |
| Accuracy | | See graph below. Char. |

The following graph shows characteristic group delay accuracy with full 2-port calibration and a 10 Hz IF bandwidth. Insertion loss is assumed to be < 2 dB and electrical length to be ten meters.

For any S_{ij} group delay measurement, $S_{ij} = 0$, $S_{ij} = 0$, $S_{kl} = 0$ for all $kl \neq ij$

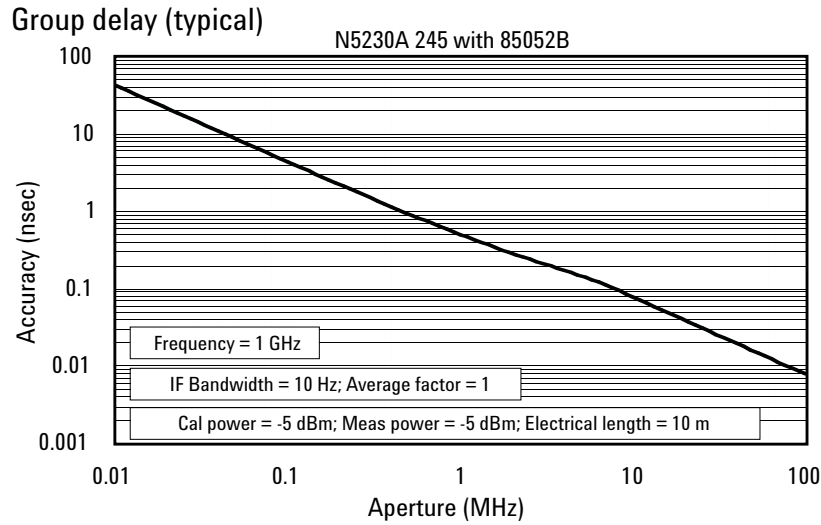

In general, the following formula can be used to determine the accuracy, in seconds, of specific group delay measurement:

$$\pm \text{Phase Accuracy (deg)} / [360^\circ \text{ Aperture (Hz)}]$$

Depending on the aperture and device length, the phase accuracy used is either incremental phase accuracy or worst case phase accuracy.

General Information

Table 10. Miscellaneous information

| Description | Supplemental information |
|---------------------------|--|
| System IF bandwidth range | 1 Hz to 600 kHz, nominal |
| CPU | Intel® 1.1 GHz Pentium® M with 1 GByte RAM |

Table 11. Front panel information

| Description | Supplemental information |
|---------------------------|--|
| RF connectors | |
| Type | Options 140, 145, 146, 240, 245, 246: 3.5 mm (male), 50 ohm (nominal) |
| Center pin recession | 0.002 in. (characteristic) |
| Display | |
| Size | 21.3 cm (8.4 in) diagonal color active matrix LCD; 640 (horizontal) X 480 (vertical) resolution |
| Refresh rate | Vertical 59.83 Hz; Horizontal 31.41 kHz |
| Display range | |
| Magnitude | ±500 dB (at 20 dB/div), max |
| Phase | ±500°, max |
| Polar | 10 pUnits, min 1000 Units, max |
| Display resolution | |
| Magnitude | 0.001 dB/div, min |
| Phase | 0.01°/div, min |
| Marker resolution | |
| Magnitude | 0.001 dB, min |
| Phase | 0.01°, min |
| Polar | 0.01 mUnit, min; 0.01°, min |

Table 13. Rear panel information

| Description | Supplemental information |
|--|--|
| 10 MHz Reference in | |
| Connector | BNC, female |
| Input frequency | 10 MHz \pm 10 ppm, typical |
| Input level | -15 to +20 dBm, typical |
| Input impedance | 200 Ω , nom. |
| 10 MHz Reference out | |
| Connector | BNC, female |
| Output frequency | 10 MHz \pm 1 ppm, typical |
| Signal type | Sine Wave, typical |
| Output level | +10 dBm \pm 4 dB into 50 Ω , typical |
| Output impedance | 50 Ω , nominal |
| Harmonics | < -40 dBc, typical |
| VGA Video output | |
| Connector | 15-pin mini D-Sub; Drives VGA compatible monitors |
| Devices supported | |
| | Resolutions: |
| Flat panel (TFT) | 1024 X 768, 800 X 600, 640 X 480 |
| Flat panel (DSTN) | 800 X 600, 640 X 480 |
| CRT monitor | 1280 X 1024, 1024 X 768, 800 X 600, 640 X 480 |
| | Simultaneous operation of the internal and external displays is allowed, but with 640 X 480 resolution only. If you change resolution, you can only view the external display (internal display will "white out"). |
| Test set IO | |
| | 25-pin D-Sub connector, female, available for external test set control |
| Aux IO | |
| | 25-pin D-Sub connector, male, analog and digital IO |
| Handler IO | |
| | 36-pin parallel I/O port; all input/output signals are default set to negative logic; can be reset to positive logic via GPIB command |
| GPIB | |
| | Two ports: dedicated controller and dedicated talker/listener 24-pin D-sub (Type D-24), female; compatible with IEEE-488. |
| Parallel port (LPT1) | |
| | 25-pin D-Sub miniature connector, female; provides connection to printers or any other parallel port peripherals |
| Serial Port (COM 1) | |
| | 9-pin D-Sub, male; compatible with RS-232 |
| USB Port | |
| | One port on front panel and five ports on rear panel. Universal Serial Bus jack, Type A configuration (4 contacts inline, contact 1 on left); female |
| Contact 1 | Vcc: 4.75 to 5.25 VDC, 500 mA, maximum |
| Contact 2 | -Data |
| Contact 3 | +Data |
| Contact 4 | Ground |
| LAN | |
| | 10/100BaseT Ethernet, 8-pin configuration; auto selects between the two data rates |
| Line power A third-wire ground is required. | |
| Frequency | 50/60/400 Hz |
| Voltage | 120/240 VAC (Power supply is auto switching.) |
| Max | 500 Watts |

Note: Option H08 and Option H11 are not available with the N5230A network analyzer.

Table 13. Analyzer environment and dimensions

| Description | Supplemental information |
|---|---|
| General environmental | |
| RFI/EMI susceptibility | Defined by CISPR Pub. 11, Group 1, Class A, and IEC 50082-1 |
| ESD | Minimize by using static-safe work procedures and an antistatic bench mat |
| Dust | Minimize for optimum reliability |
| Operating environment | |
| Temperature | 0 to +40 °C |
| | Instrument powers up and displays no error messages within this temperature range (except for "source unlevelled" error message that may occur at temperatures outside the specified performance temperature range of 25 ± 5 °C). |
| Error-corrected temperature range | 23 °C ± 3 °C with less than 1 °C deviation from calibration temp. |
| Humidity | 5 to 95% at +40 °C |
| Altitude | 0 to 4500 m (14,760 ft.) |
| Non-operating storage environment | |
| Temperature | -40 to +70 °C |
| Humidity | 0 to 90% at +65 °C (non-condensing) |
| Altitude | 0 to 4500 m (14,760 ft.) |
| Cabinet dimensions | |
| | Height Width Depth |
| Excluding front and rear panel hardware and feet | 267 mm 426 mm 427 mm |
| | 10.5 in 16.75 in 16.8 in |
| As shipped - includes front panel connectors, rear panel bumpers, and feet. | 280 mm 435 mm 470 mm |
| | 11 in 17.10 in 18.5 in |
| As shipped plus handles | 280 mm 458 mm 501 mm |
| | 11 in 18 in 19.7 in |
| As shipped plus rack-mount flanges | 280 mm 483 mm 470 mm |
| | 11 in 19 in 18.5 in |
| As shipped plus handles and rack-mount flanges | 280 mm 483 mm 501 mm |
| | 11 in 19 in 19.7 in |
| Weight | |
| Net | |
| N5230A | 24.9 kg (55 lb), nominal |
| Shipping | |
| N5230A | 36.3 kg (80 lb), nominal |

Measurement Throughput Summary

Table 14. Typical cycle time¹ (ms) for measurement completion

| | Number of Points | | | | |
|---|------------------|---------|---------|---------|----------|
| | 201 | 401 | 801 | 1601 | 16,001 |
| Start 8 GHz, stop 18 GHz, 600 kHz IF bandwidth | | | | | |
| Uncorrected | 21.148 | 21.743 | 23.01 | 25.198 | 54.836 |
| 4-Port cal | 74.597 | 82.296 | 296.5 | 307.75 | 538.646 |
| Start 300 kHz, stop 10 GHz, 600 kHz IF bandwidth | | | | | |
| Uncorrected | 19.814 | 22.801 | 24.973 | 29.01 | 67.733 |
| 4-Port cal | 69.752 | 85.111 | 100.125 | 129.347 | 480.711 |
| Start 300 kHz, stop 20 GHz, 600 kHz IF bandwidth | | | | | |
| Uncorrected | 32.575 | 34.7 | 39.237 | 43.155 | 69.625 |
| 4-Port cal | 121.254 | 133.626 | 157.506 | 179.223 | 487.779 |
| Start 8 GHz, stop 18 GHz, 100 kHz IF bandwidth | | | | | |
| Uncorrected | 38.083 | 51.816 | 55.488 | 56.36 | 184.154 |
| 4-Port cal | 143.271 | 201.814 | 215.056 | 230.133 | 934.161 |
| Start 300 kHz, stop 10 GHz, 100 kHz IF bandwidth | | | | | |
| Uncorrected | 37.03 | 42.532 | 45.122 | 46.729 | 198.683 |
| 4-Port cal | 137.431 | 162.37 | 194.13 | 192.182 | 906.768 |
| Start 300 kHz, stop 20 GHz, 100 kHz IF bandwidth | | | | | |
| Uncorrected | 44.98 | 69.408 | 87.161 | 92.475 | 198.792 |
| 4-Port cal | 169.041 | 268.877 | 343.898 | 369.526 | 914.963 |
| Start 8 GHz, stop 18 GHz, 50 kHz IF bandwidth | | | | | |
| Uncorrected | 42.171 | 70.09 | 88.702 | 90.981 | 371.611 |
| 4-Port cal | 157.107 | 271.791 | 351.517 | 368.02 | 1532.609 |
| Start 300 kHz, stop 10 GHz, 50 kHz IF bandwidth | | | | | |
| Uncorrected | 43.713 | 61.41 | 66.878 | 69.373 | 385.04 |
| 4-Port cal | 163.58 | 238.267 | 259.687 | 279.816 | 1580.761 |
| Start 300 kHz, stop 20 GHz, 50 kHz IF bandwidth | | | | | |
| Uncorrected | 48.673 | 80.798 | 124.605 | 147.303 | 388.46 |
| 4-Port cal | 184.429 | 313.392 | 493.142 | 587.548 | 1587.839 |

1. Includes sweep time, retrace time and band-crossing time. Analyzer display turned off with DISPLAY:ENABLE OFF. Add 21 ms for display on. Data for one trace (S₁₁) measurement.

Table 15. Cycle Time vs IF Bandwidth

Applies to the preset condition (201 points, correction off) except for the following changes:

- CF = 10 GHz
- Span = 100 MHz
- Display off (add 21 ms for display on)

| Description | Typical performance | |
|--------------------------|------------------------------------|-----------------------------|
| IF Bandwidth (Hz) | Cycle time (ms)¹ | Trace noise (dB rms) |
| 600,000 | 3.13 | 0.00544 |
| 360,000 | 3.21 | 0.00602 |
| 280,000 | 3.17 | 0.00321 |
| 200,000 | 3.17 | 0.00259 |
| 150,000 | 3.19 | 0.00207 |
| 100,000 | 4.05 | 0.00155 |
| 70,000 | 4.99 | 0.00144 |
| 50,000 | 6.41 | 0.00121 |
| 30,000 | 8.78 | 0.00094 |
| 20,000 | 12.07 | 0.00080 |
| 15,000 | 14.91 | 0.00069 |
| 10,000 | 26.02 | 0.00052 |
| 7000 | 34.54 | 0.00047 |
| 5000 | 45.87 | 0.00044 |
| 3000 | 69.91 | 0.00032 |
| 2000 | 99.69 | 0.00029 |
| 1500 | 128.18 | 0.00010 |
| 1000 | 215.62 | 0.00009 |
| 700 | 291.58 | 0.00006 |
| 500 | 397.36 | 0.00007 |
| 300 | 633.86 | 0.00000 |
| 200 | 930.15 | 0.00000 |
| 100 | 1824.19 | 0.00000 |
| 30 | 6001.70 | 0.00000 |
| 10 | 17899.79 | 0.00000 |
| 1 | 178391.58 | 0.00000 |

1. Cycle time includes sweep and retrace time.

Table 16. Cycle time vs number of points

Applies to the preset condition (correction off) except for the following changes:

- CF = 10 GHz
- Span = 100 MHz
- Display off (add 21 ms for display on)

| IF Bandwidth (Hz) | Number of points | Cycle time (ms)¹ |
|--------------------------|-------------------------|------------------------------------|
| 30,000 | 3 | 2.88 |
| | 11 | 3.50 |
| | 51 | 3.91 |
| | 101 | 5.29 |
| | 201 | 8.75 |
| | 401 | 15.66 |
| | 801 | 29.46 |
| | 1,601 | 57.73 |
| | 6,401 | 221.04 |
| | 16,001 | 549.71 |
| 100,000 | 3 | 2.87 |
| | 11 | 2.82 |
| | 51 | 2.86 |
| | 101 | 2.96 |
| | 201 | 4.02 |
| | 401 | 6.23 |
| | 801 | 10.65 |
| | 1,601 | 19.49 |
| | 6,401 | 70.96 |
| | 16,001 | 173.78 |
| 600,000 | 3 | 2.84 |
| | 11 | 2.84 |
| | 51 | 2.87 |
| | 101 | 3.03 |
| | 201 | 3.14 |
| | 401 | 3.51 |
| | 801 | 4.22 |
| | 1,601 | 6.22 |
| | 6,401 | 19.35 |
| | 16,001 | 45.12 |

1. Cycle time includes sweep and retrace time.

Table 17. Data transfer time (ms)

| | Number of points | | | |
|---|-------------------------|-----|------|--------|
| | 201 | 401 | 1601 | 16,001 |
| SCPI over GPIB (program executed on external PC) | | | | |
| 32-bit floating point | 7 | 12 | 43 | 435 |
| 64-bit floating point | 12 | 22 | 84 | 856 |
| ASCII | 64 | 124 | 489 | 5054 |
| SCPI (program executed in the analyzer) | | | | |
| 32-bit floating point | 1 | 2 | 3 | 30 |
| 64-bit floating point | 2 | 2 | 4 | 40 |
| ASCII | 29 | 56 | 222 | 2220 |
| COM (program executed in the analyzer) | | | | |
| 32-bit floating point | < 0.4 | 0.4 | 0.5 | 1.9 |
| Variant type | 0.7 | 1 | 3 | 32 |
| DCOM over LAN (program executed on external PC) | | | | |
| 32-bit floating point | < 0.8 | 1 | 1.5 | 7.1 |
| Variant type | 1.8 | 2.7 | 8.5 | 80 |

Note: Specifications for recall and sweep speed are not provided for the N5230A analyzers.

Specifications: Front-Panel Jumpers

**Table 18: Measurement receiver inputs (rcvr A In, rcvr B In, rcvr C In, rcvr D In)
0.1 dB Typical compression**

| Description | Specification | Typical Options 145, 146, 245, 246 |
|----------------------------|---------------|---------------------------------------|
| Maximum input level | | |
| 300 kHz to 10 MHz | | -11 dBm |
| 10 MHz to 1 GHz | | -7 dBm |
| 1 to 12.5 GHz | | -6 dBm |
| 12.5 to 13.5 GHz | | -7 dBm |
| 13.5 to 20 GHz | | -7 dBm |
| Damage level | | |
| N5230A | | +15 dBm |
| Maximum DC level | | |
| N5230A | | ±16 V |

Table 19: Reference receiver input (rcvr in) at maximum specified output power

| Description | Specification | Typical Options 145, 146, 245, 246 |
|----------------------------|---------------|---------------------------------------|
| Maximum input level | | |
| 300 kHz to 10 MHz | | -15 dBm |
| 10 to 45 MHz | | -15 dBm |
| 45 to 500 MHz | | -15 dBm |
| 500 MHz to 4 GHz | | -15 dBm |
| 4 to 6 GHz | | -16 dBm |
| 6 to 10.5 GHz | | -20 dBm |
| 10.5 to 13.5 GHz | | -21 dBm |
| 13.5 to 15 GHz | | -21 dBm |
| 15 to 20 GHz | | -27 dBm |
| Damage level | | |
| N5230A | | +15 dBm |
| Maximum DC level | | |
| N5230A | | ±16 V |

Table 20: Reference output (source out) at maximum specified output power

| Description | Specification | Typical Options 145, 146, 245, 246 |
|-----------------------------|---------------|---------------------------------------|
| Maximum output level | | |
| 300 kHz to 10 MHz | | -15 dBm |
| 10 to 45 MHz | | -15 dBm |
| 45 to 500 MHz | | -15 dBm |
| 500 MHz to 4 GHz | | -15 dBm |
| 4 to 6 GHz | | -15 dBm |
| 6 to 10.5 GHz | | -20 dBm |
| 10.5 to 13.5 GHz | | -21 dBm |
| 13.5 to 15 GHz | | -21 dBm |
| 15 to 20 GHz | | -27 dBm |
| Damage level | | |
| N5230A | | +27 dBm |
| Maximum DC level | | |
| N5230A | | ±16 V |

Table 21: Source outputs (port 1 source out, port 2 source out, port 3 source out, port 4 source out) at maximum specified output power

| Description | Specification | Typical |
|-----------------------------|---------------|----------------------------|
| | | Options 145, 146, 245, 246 |
| Maximum output level | | |
| 300 kHz to 10 MHz | | +10 dBm |
| 10 to 45 MHz | | +10 dBm |
| 45 to 500 MHz | | +10 dBm |
| 500 MHz to 4 GHz | | +10 dBm |
| 4 to 6 GHz | | +9 dBm |
| 6 to 10.5 GHz | | +4 dBm |
| 10.5 to 13.5 GHz | | +1 dBm |
| 13.5 to 15 GHz | | +1 dBm |
| 15 to 20 GHz | | -4 dBm |
| Damage level | | |
| N5230A | | +27 dBm |
| Maximum DC level | | |
| N5230A | | ±16 V |

Table 22: Coupler inputs (port 1 cplr thru, port 2 cplr thru, port 3 cplr thru, port 4 cplr thru) Insertion loss of coupler thru


| Description | Specification | Typical |
|------------------------------------|---------------|----------------------------|
| | | Options 145, 146, 245, 246 |
| Insertion loss to test port | | |
| 300 kHz to 10 MHz | | 1.5 dB |
| 10 to 45 MHz | | 1.5 dB |
| 45 to 500 MHz | | 1.5 dB |
| 500 MHz to 4 GHz | | 2.0 dB |
| 4 to 6 GHz | | 2.5 dB |
| 6 to 10.5 GHz | | 2.5 dB |
| 10.5 to 13.5 GHz | | 3.0 dB |
| 13.5 to 15 GHz | | 3.0 dB |
| 15 to 20 GHz | | 3.0 dB |
| Damage level | | |
| N5230A | | +27 dBm |
| Maximum DC level | | |
| N5230A | | ±16 V |

Table 23: Coupler outputs (port 1 cplr arm, port 2 cplr arm, port 3 cplr arm, port 4 cplr arm)


| Description | Specification | Typical |
|-------------------------|---------------|----------------------------|
| | | Options 145, 146, 245, 246 |
| Damage level | | |
| N5230A | | +15 dBm |
| Maximum DC level | | |
| N5230A | | 0 V |

Test Set Block Diagrams


**N5230A Option 140 or 240
standard test set and
standard power range**

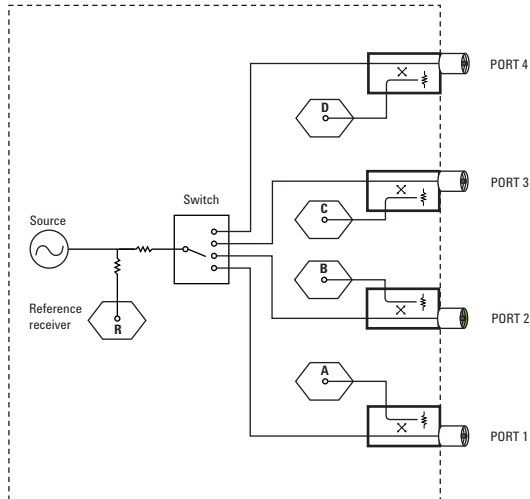

**N5230A Option 145 or 245
configurable test set,
extended power range**

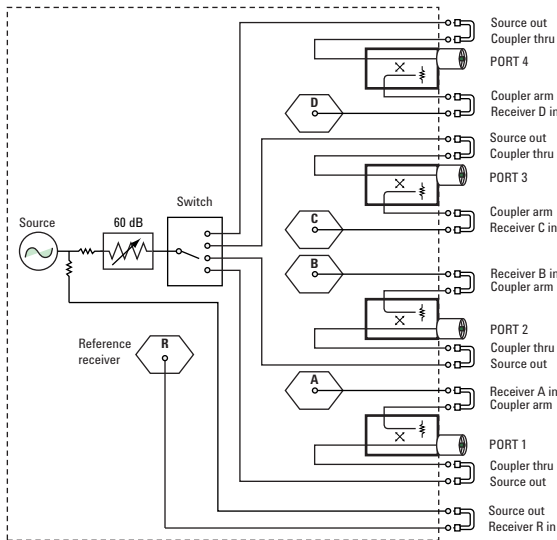

**N5230A Option 146 or 246
configurable test set,
extended power range,
and internal second source**

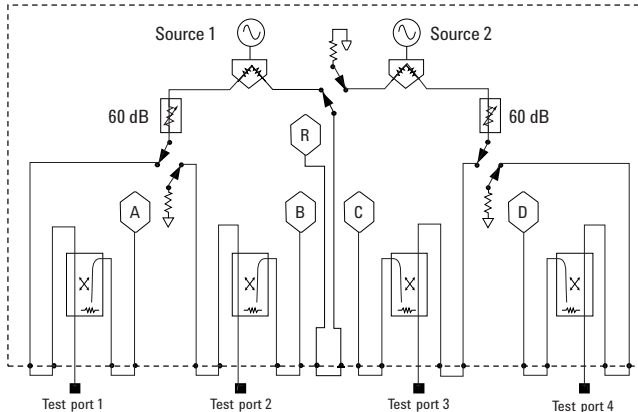



Agilent Email Updates

www.agilent.com/find/emailupdates

Get the latest information on the products and applications you select.



Agilent Direct

www.agilent.com/find/agilentdirect

Quickly choose and use your test equipment solutions with confidence.



www.agilent.com/find/open

Agilent Open simplifies the process of connecting and programming test systems to help engineers design, validate and manufacture electronic products. Agilent offers open connectivity for a broad range of system-ready instruments, open industry software, PC-standard I/O and global support, which are combined to more easily integrate test system development.



is the US registered trademark of the LXI Consortium.

Intel® and Pentium® are US registered trademarks of Intel Corporation.

Remove all doubt

Our repair and calibration services will get your equipment back to you, performing like new, when promised. You will get full value out of your Agilent equipment throughout its lifetime. Your equipment will be serviced by Agilent-trained technicians using the latest factory calibration procedures, automated repair diagnostics and genuine parts. You will always have the utmost confidence in your measurements.

Agilent offers a wide range of additional expert test and measurement services for your equipment, including initial start-up assistance onsite education and training, as well as design, system integration, and project management.

For more information on repair and calibration services, go to

www.agilent.com/find/removealldoubt

www.agilent.com

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

www.agilent.com/find/contactus

Phone or Fax

United States:

(tel) 800 829 4444
(fax) 800 829 4433

Canada:

(tel) 877 894 4414
(fax) 800 746 4866

China:

(tel) 800 810 0189
(fax) 800 820 2816

Europe:

(tel) 31 20 547 2111

Japan:

(tel) (81) 426 56 7832
(fax) (81) 426 56 7840

Korea:

(tel) (080) 769 0800
(fax) (080) 769 0900

Latin America:

(tel) (305) 269 7500

Taiwan:

(tel) 0800 047 866
(fax) 0800 286 331

Other Asia Pacific Countries:

(tel) (65) 6375 8100
(fax) (65) 6755 0042
Email: tm_ap@agilent.com

Revised: 09/14/06

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2003 - 2006
Printed in USA, October 23, 2006
5989-1695EN



Agilent Technologies