

# Agilent 83059

## Precision 3.5 mm Coaxial Adapters DC - 26.5 GHz

Technical Overview



- Low SWR
- Excellent repeatability
- Low loss
- Precision “instrument grade” 3.5 mm coax connectors
- Ideal connector savers

### Outstanding Performance

You don't have to sacrifice measurement integrity when using general purpose adapters and connector savers. The Agilent Technologies 83059 instrument grade 3.5 mm coaxial adapters offer outstanding performance to 26.5 GHz. With SWR typically better than 1.05, these adapters are ideal for most connector saver and interconnect needs.

### Applications

Out-of-spec SMA and poor quality 3.5 mm connectors can cause considerable damage to expensive test port connectors. To help protect your test port connectors from damage, use 83059 adapters. These adapters offer test port safety without compromising accuracy.

You can use the 83059 adapters to perform adapter swap calibrations when testing non-insertable devices on network analyzers.

For general purpose test and measurement applications, the 83059 adapters offer far better performance than most instrument grade adapters available today.

### Convenient Kits

Damaged adapters can damage your test ports. The 83059 adapters are available in kits of three, packaged in protective foam to help reduce damage and are supplied in an attractive wooden box you can use to store them in so there's less chance of losing your adapters.



Agilent Technologies

## Specifications


Specifications describe the instrument's warranted performance over the temperature range 0 to 55° C (except where noted). *Supplemental Characteristics* are intended to provide information useful in applying the instrument by giving typical but nonwarranted performance parameters. These are denoted as "typical," "nominal," or "approximate."

### Performance characteristics<sup>1</sup>

Model number	Connector type <sup>2</sup>	Frequency (GHz)	Typical min. return loss	Typical max. insertion loss <sup>3,4</sup>
83059A	3.5 mm (m-m)	DC - 26.5	- 32 dB	0.074 dB
83059B	3.5 mm (f-f)	DC - 26.5	- 32 dB	0.074 dB
83059C	3.5 mm (m-f)	DC - 26.5	- 32 dB	0.074 dB
83059K (kit)	3.5 mm (m-m) (f-f), (m-f)	DC - 26.5	- 32 dB	0.074 dB

1. Typical values are defined as 2σ from the mean.
2. m = plug, f = jack
3. Typical measurements were taken from the f-f 83059B; they represent the worst case for the Agilent 83059 family.
4. Insertion loss values were derived using a short circuit technique; values displayed are half the measured "round trip" values.

"Instrument Grade" connectors are intended for use with precision test and measurement equipment where maintaining high performance through many connect/disconnect cycles is of paramount importance. They feature the traditional slotted female contacts, rather than the slotless design used by "Metrology Grade" connectors.

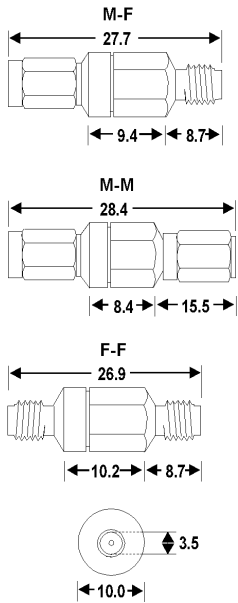

Dimensions in millimeters  
Net Weight: 14 Grams each

### Agilent Email Updates

[www.agilent.com/find/emailupdates](http://www.agilent.com/find/emailupdates)  
Get the latest information on the products and applications you select.

### Agilent Direct

[www.agilent.com/find/agilentdirect](http://www.agilent.com/find/agilentdirect)  
Quickly choose and use your test equipment solutions with confidence.

### Agilent Open

[www.agilent.com/find/open](http://www.agilent.com/find/open)  
Agilent Open simplifies the process of connecting and programming test systems to help engineers design, validate and manufacture electronic products. Agilent offers open connectivity for a broad range of system-ready instruments, open industry software, PC-standard I/O and global support, which are combined to more easily integrate test system development.

## www.agilent.com

### Agilent Technologies' Test and Measurement Support, Services, and Assistance

Agilent Technologies aims to maximize the value you receive, while minimizing your risk and problems. We strive to ensure that you get the test and measurement capabilities you paid for and obtain the support you need. Our extensive support resources and services can help you choose the right Agilent products for your applications and apply them successfully. Every instrument and system we sell has a global warranty. Two concepts underlie Agilent's overall support policy: "Our Promise" and "Your Advantage."

#### Our Promise

Our Promise means your Agilent test and measurement equipment will meet its advertised performance and functionality. When you are choosing new equipment, we will help you with product information, including realistic performance specifications and practical recommendations from experienced test engineers. When you receive your new Agilent equipment, we can help verify that it works properly and help with initial product operation.

#### Your Advantage

Your Advantage means that Agilent offers a wide range of additional expert test and measurement services, which you can purchase according to your unique technical and business needs. Solve problems efficiently and gain a competitive edge by contracting with us for calibration, extra-cost upgrades, out-of-warranty repairs, and onsite education and training, as well as design, system integration, project management, and other professional engineering services. Experienced Agilent engineers and technicians worldwide can help you maximize your productivity, optimize the return on investment of your Agilent instruments and systems, and obtain dependable measurement accuracy for the life of those products.

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office.

#### Phone or Fax

<b>United States:</b> (tel) 800 829 4444 (fax) 800 829 4433	<b>Korea:</b> (tel) (080) 769 0800 (fax) (080) 769 0900
<b>Canada:</b> (tel) 877 894 4414 (fax) 800 746 4866	<b>Latin America:</b> (tel) (305) 269 7500
<b>China:</b> (tel) 800 810 0189 (fax) 800 820 2816	<b>Taiwan:</b> (tel) 0800 047 866 (fax) 0800 286 331
<b>Europe:</b> (tel) 31 20 547 2111	<b>Other Asia Pacific Countries:</b> (tel) (65) 6375 8100 (fax) (65) 6755 0042
<b>Japan:</b> (tel) (81) 426 56 7832 (fax) (81) 426 56 7840	Email: <a href="mailto:tm_ap@agilent.com">tm_ap@agilent.com</a>

Contacts revised: 09/26/05

The complete list is available at:  
[www.agilent.com/find/contactus](http://www.agilent.com/find/contactus)

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2006, 2000  
Printed in USA, January 13, 2006  
5952-2836E