

This literature was published years prior to the establishment of Agilent Technologies as a company independent from Hewlett-Packard and describes products or services now available through Agilent. It may also refer to products/services no longer supported by Agilent. We regret any inconvenience caused by obsolete information. For the latest information on Agilent's test and measurement products go to:

www.agilent.com/find/products

Or in the U.S., call Agilent Technologies at 1-800-452-4844 (8am-8pm EST)



Agilent Technologies
Innovating the HP Way



MM-Wave Waveguide Isolators

33.0-60.0 GHz

HP Models
Q365A
U365A


TECHNICAL DATA • MAY 1985

NEW PERFORMANCE STANDARDS FOR MM-WAVE MEASUREMENTS

Waveguide Isolators find important applications in measurement setups where it is necessary to improve a mismatch or to isolate reflection effects of a source. It becomes particularly important in millimeter frequency ranges where good matches are harder to achieve or where diode signal sources show sensitivity to load mismatches.


HP Q and U365A Isolators are Faraday-rotation-type design consisting of a section of waveguide containing low-loss ferrite material and impedance matching elements. A permanent magnet supplies the external magnetic bias field to the ferrite core.

Excellent isolation ratios of at least 25 dB are achieved broadband, along with low SWR and insertion loss.

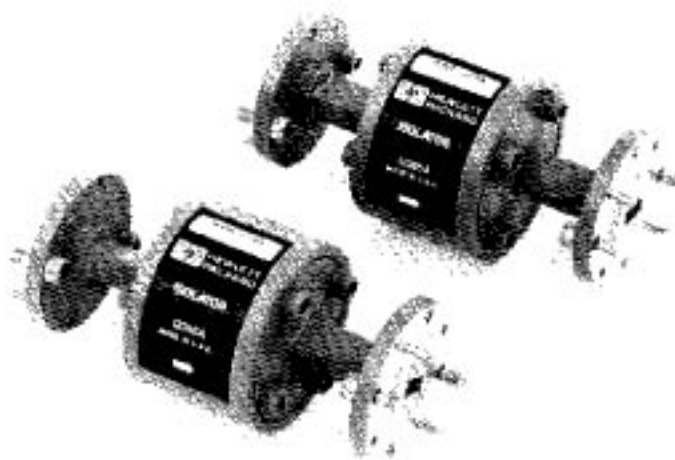

SPECIFICATIONS

HP Model #		Q365A	U365A
Frequency Range (GHz)		33.0 - 50.0	40.0 - 60.0
Insertion Loss (dB, max.)		1.5	1.8
Isolation (dB, min.)		25	25
SWR (max.)		1.4	1.4
Maximum Input Power (W, avg.)		1.5	1.5
Fits Waveguide Size:			
EIA		WR-22	WR-19
MIL-F-85/x-xx		3-010	3-014
Equivalent Flange:			
MIL-F-85/xx-xxx		67B-006	67B-007
UG-xxx/U		UG-383/U	UG-383/U (mod.)
Dimensions:			
Length:	cm.	6.8	6.7
	in.	1.32	1.32
Net Weight:	gm.	124	120
	lb.	.27	.26

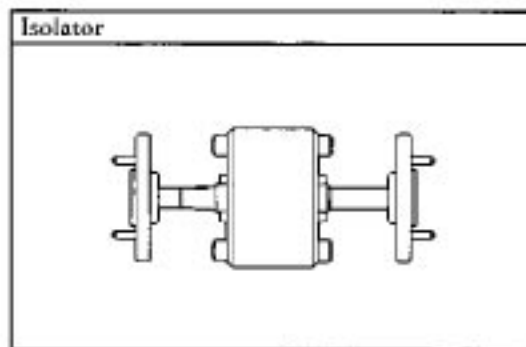

For more information, call your local HP sales office listed in the telephone directory white pages. Ask for the Electronic Instruments Department. Or write to Hewlett-Packard: U.S.A. 19301, Palo Alto, CA 94305-0890. Europe — P.O. Box 999, 1180 Amstelveen, the Netherlands. Canada — 6877 Goreway Drive, Mississauga, L4V 1M8, Ontario. Japan — Hewlett-Packard Ltd., 3-29-21, Takaido-Higashi, Sugitani-ku, Tokyo 168. Elsewhere in the world, write to Hewlett-Packard International, 3455 Deer Creek Road, Palo Alto, CA 94303-0890.

5953-6489

Data Subject to Change

Printed in U.S.A.