

Agilent 33391C Microwave Insulator (Bead) Assembly

Data Sheet

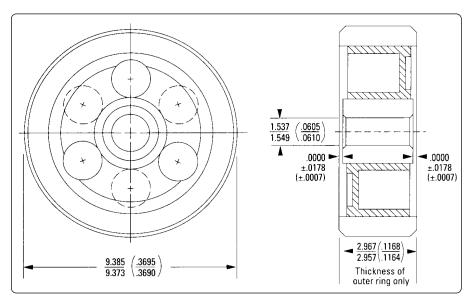


Figure 1. Part dimensions in millimeters and (inches).




Figure 2. Typical SWR.

Specifications

Frequency range: dc - 18 GHz

SWR (typical): 1.004 from dc-2 GHz, 1.004 + 0.0009 GHz,

above 2 GHz, from 2-18 GHz Inner/outer ring coplanarity:

±0.0178 mm (±0.0007 inches)

±0.0127 mm (±0.0005 inches) typical

Non-operating temperature (MII-STD 883, Method 1010):

40° to 85° C

Operating temperature: 0° to 55° C

Humidity: Cycling five days, 40° C at 95% RH

Features and description

- Temperature stable
- Broadband coverage from dc to 18 GHz
- · Low signal loss
- Excellent reflection coefficient
- Low-cost alternative for 7mm Type N and APC-7 connectors.

The 33391C Insulator Bead Assemblies are designed to provide excellent performance from dc to 18 GHz in both type N and APC-7 connectors.

Unlike traditional insulator materials such as Teflon, the unique material composition of the 33391C ensures mechanical stability and electrical specification adherence throughout a wide operating temperature range.

The excellent performance specifications as well as the rugged design make these insulator bead assemblies ideal for OEM and replacement part applications.

The 33391C's are packaged in quantities of 50 per container, allowing for convenient ordering sizes.



Agilent Technologies' Test and Measurement Support, Services, and Assistance

Agilent Technologies aims to maximize the value you receive, while minimizing your risk and problems. We strive to ensure that you get the test and measurement capabilities you paid for and obtain the support you need. Our extensive support resources and services can help you choose the right Agilent products for your applications and apply them successfully. Every instrument and system we sell has a global warranty. Support is available for at least five years beyond the production life of the product. Two concepts underlie Agilent's overall support policy: "Our Promise" and "Your Advantage."

Our Promise

Our Promise means your Agilent test and measurement equipment will meet its advertised performance and functionality. When you are choosing new equipment, we will help you with product information, including realistic performance specifications and practical recommendations from experienced test engineers. When you use Agilent equipment, we can verify that it works properly, help with product operation, and provide basic measurement assistance for the use of specified capabilities, at no extra cost upon request. Many self-help tools are available.

Your Advantage

Your Advantage means that Agilent offers a wide range of additional expert test and measurement services, which you can purchase according to your unique technical and business needs. Solve problems efficiently and gain a competitive edge by contacting us for calibration, extra-cost upgrades, out-of-warranty repairs, and on-site education and training, as well as design, system integration, project management, and other professional services. Experienced Agilent engineers and technicians worldwide can help you maximize your productivity, optimize the return on investment of your Agilent instruments and systems, and obtain dependable measurement accuracy for the life of those products.

By internet, phone, or fax, get assistance with all your test & measurement needs

Online assistance:

www.agilent.com/find/assist

Phone or Fax:

United States:

(tel) 1 800 452 4844

Canada:

(tel) 1 877 894 4414 (fax) (905) 282-6495

China:

(tel) 800 810 0189 (fax) 1 0800 650 0121

Europe:

(tel) (31 20) 547 2323 (fax) (31 20) 547 2390

Japan

(tel) (81) 426 56 7832 (fax) (81) 426 56 7840

Korea:

(tel) (82 2) 2004-5004 (fax) (82 2) 2004-5115

Latin America:

(tel) (305) 269 7500 (fax) (305) 269 7599

Taiwan:

(tel) 080 004 7866 (fax) (886 2) 2545 6723

Other Asia Pacific Countries:

(tel) (65) 375 8100 (fax) (65) 836 0252 Email: tm_asia@agilent.com

Product specifications and descriptions in this document subject to change without notice.

Copyright © 2001 Agilent Technologies, Inc. Printed in U.S.A. August 1, 2001 5953-2352

