

SCPI Command Reference

Agilent Technologies E4428C/38C ESG Signal Generators

This guide applies to the following signal generator models:

E4428C ESG Analog Signal Generator

E4438C ESG Vector Signal Generator

Due to our continuing efforts to improve our products through firmware and hardware revisions, signal generator design and operation may vary from descriptions in this guide. We recommend that you use the latest revision of this guide to ensure you have up-to-date product information. Compare the print date of this guide (see bottom of page) with the latest revision, which can be downloaded from the following website:

<http://www.agilent.com/find/esg>



Agilent Technologies

Manufacturing Part Number: E4400-90622 – For Online Use Only

Printed in USA

March 2005

© Copyright 2001–2005 Agilent Technologies, Inc.

Notice

The material contained in this document is provided “as is”, and is subject to being changed, without notice, in future editions.

Further, to the maximum extent permitted by applicable law, Agilent disclaims all warranties, either express or implied with regard to this manual and to any of the Agilent products to which it pertains, including but not limited to the implied warranties of merchantability and fitness for a particular purpose. Agilent shall not be liable for errors or for incidental or consequential damages in connection with the furnishing, use, or performance of this document or any of the Agilent products to which it pertains. Should Agilent have a written contract with the User and should any of the contract terms conflict with these terms, the contract terms shall control.

Questions or Comments about our Documentation?

We welcome any questions or comments you may have about our documentation. Please send us an E-mail at sources_manuals@am.exch.agilent.com.

SCPI Command Reference

1. SCPI Basics	1
Command Reference Information	2
SCPI Command Listings	2
Key and Data Field Cross Reference	2
Supported Field	2
SCPI Basics	3
Common Terms	3
Command Syntax	4
Command Types	5
Command Tree	6
Command Parameters and Responses	7
Program Messages	12
File Name Variables	13
MSUS (Mass Storage Unit Specifier) Variable	15
Quote Usage with SCPI Commands	16
Binary, Decimal, Hexadecimal, and Octal Formats	16
2. Basic Function Commands	17
Correction Subsystem ([:SOURce]:CORRection)	18
:FLATness:LOAD	18
:FLATness:PAIR	18
:FLATness:POINts	18
:FLATness:PRESet	19
:FLATness:STORe	19
[:STATe]	19
Digital Modulation Subsystem—E4438C ([:SOURce])	20
:BURSt:SOURce	20
:BURSt:STATe	20
:DM:EXTernal:ALC:BANDwidth BWIDth	21
:DM:EXTernal:HCRest[:STATe]	21
:DM:EXTernal:FILTer	22
:DM:EXTernal:FILTer:AUTO	22
:DM:EXTernal:POLarity	23
:DM:EXTernal:SOURce	23
:DM:IQADjustment:EXTernal:COFFset	24

Contents

:DM:IQADjustment:EXTernal:DIOFFset	24
:DM:IQADjustment:EXTernal:DQOFFset	25
:DM:IQADjustment:EXTernal:GAIN	25
:DM:IQADjustment:EXTernal:IOFFset	26
:DM:IQADjustment:EXTernal:IQATten	26
:DM:IQADjustment:EXTernal:QOFFset	27
:DM:IQADjustment:GAIN	27
:DM:IQADjustment:IOFFset	28
:DM:IQADjustment:QOFFset	28
:DM:IQADjustment:QSKew	29
:DM:IQADjustment:SKEW	29
:DM:IQADjustment:SKEW:Path	30
:DM:IQADjustment[:STATe]	31
:DM:MODulation:FILTer	31
:DM:MODulation:FILTer:AUTO	32
:DM:MODulation:ATTen	32
:DM:MODulation:ATTen:AUTO	33
:DM:POLarity[:ALL]	33
:DM:SKEW:PATH	34
:DM:SKEW[:STATe]	34
:DM:SOURce	35
:DM:SRATio	35
:DM:STATe	36
Frequency Subsystem ([:SOURce])	37
:FREQuency:CHANnels:BAND	37
:FREQuency:CHANnels:NUMBer	39
:FREQuency:CHANnels[:STATe]	40
:FREQuency:FIXed	40
:FREQuency:MODE	41
:FREQuency:MULTiplier	41
:FREQuency:OFFSet	42
:FREQuency:OFFSet:STATe	42
:FREQuency:REFerence	43
:FREQuency:REFerence:STATe	43
:FREQuency:START	44
:FREQuency:STOP	44
:FREQuency:SYNTHeSis	45
:FREQuency[:CW]	46

:PHASe:REFeRence	46
:PHASe[:ADJust]	47
:ROSCillator:SOURce	47
:ROSCillator:SOURce:AUTO	47
List/Sweep Subsystem ([:SOURce])	48
:LIST:DIRection	49
:LIST:DWELI	49
:LIST:DWELI:POINts	50
:LIST:DWELI:TYPE	50
:LIST:FREQuency	50
:LIST:FREQuency:POINts	51
:LIST:MANual	51
:LIST:MODE	52
:LIST:POWer	52
:LIST:POWer:POINts	52
:LIST:RETRace	53
:LIST:TRIGger:SOURce	53
:LIST:TYPE	54
:LIST:TYPE:LIST:INITialize:FSTep	54
:LIST:TYPE:LIST:INITialize:PRESet	55
:SWEep:DWELI	55
:SWEep:POINts	56
Power Subsystem ([:SOURce]:POWer)	57
:ALC:BA NDwidth BWIDth	57
:ALC:BA NDwidth	57
:ALC:LEVel	58
:ALC:SEARch	58
:ALC:SEARch:REFeRence	59
:ALC:SEARch:SPAN:START	59
:ALC:SEARch:SPAN:STOP	59
:ALC:SEARch:SPAN:TYPE	60
:ALC:SEARch:SPAN[:STATe]	60
:ALC[:STATe]	60
:ALTeRnate:AMPLitude	61
:ALTeRnate:MANual	61
:ALTeRnate:STATe	62
:ALTeRnate:TRIGger[:SOURce]	62
:ATTenuation:AUTO	63

Contents

:ATTenuation.	64
:MODE	65
:REFerence	65
:REFerence:STATe	66
:START	66
:STOP	67
[:LEVel][:IMMediate]:OFFSet	67
[:LEVel][:IMMediate][:AMPLitude]	68
Pulse Subsystem ([:SOURce]:PULSe).	69
:FREQuency:STEP	69

3. System Commands. 71

Calibration Subsystem (:CALibration).	72
:DCFM	72
:IQ	72
:IQ:DC	72
:IQ:DEFault	73
:IQ:FULL	73
:IQ:START	74
:IQ:STOP	74
Communication Subsystem (:SYSTem:COMMunicate)	75
:GPIB:ADDRess	75
:GTLocal	75
:LAN:GATEway	75
:LAN:HOSTname	76
:LAN:IP	76
:LAN:SUBNet	76
:PMEter:ADDRess	77
:PMEter:CHANnel	77
:PMEter:IDN	78
:PMEter:TIMEout	78
:SERial:BAUD	79
:SERial:ECHO	79
:SERial:RESet	79
:SERial:TOUT	80
Diagnostic Subsystem (:DIAGnostic[:CPU]:INFORMation)	81
:BOARDs	81
:CCOunt:ATTenuator	81

:CCOut:PON	81
:CCOut:PROTection	81
:DISPlay:OTIME	82
:LICense:AUXiliary	82
:LICense:WAVeform	83
:OPTions	83
:OPTions:DETail	83
:OTIME	84
:REVision	84
:SDATe	84
:WLIcence[:VALue]	84
Display Subsystem (:DISPlay)	85
:ANNotation:AMPLitude:UNIT	85
:ANNotation:CLOCK:DATE:FORMat	85
:ANNotation:CLOCK[:STATe]	85
:BRIGHtness	86
:CAPTure	86
:CONTrast	87
:INVerse	87
:REMote	88
[:WINDow][:STATe]	88
IEEE 488.2 Common Commands	89
*CLS	89
*ESE	89
*ESE?	89
*ESR?	90
*IDN?	90
*OPC	90
*OPC?	90
*PSC	91
*PSC?	91
*RCL	91
*RST	91
*SAV	92
*SRE	92
*SRE?	92
*STB?	93
*TRG	93

Contents

*TST?	93
*WAI	93
Memory Subsystem (:MEMory)	94
:CATalog:BINary	94
:CATalog:BIT	94
:CATalog:CDMa	95
:CATalog:DMOD	95
:CATalog:DWCDma	96
:CATalog:FCDMa	96
:CATalog:FIR	97
:CATalog:FSK	97
:CATalog:IQ	98
:CATalog:LIST	98
:CATalog:MCDMa	99
:CATalog:MDMod	99
:CATalog:MDWCdma	100
:CATalog:MFCdma	100
:CATalog:MTONe	101
:CATalog:RCDMa	101
:CATalog:SEQ	102
:CATalog:SHAPE	102
:CATalog:STATe	103
:CATalog:UFLT	103
:CATalog:UWCDma	104
:CATalog[:ALL]	104
:COPY[:NAME]	105
:DATA	105
:DATA:APPend	106
:DATA:BIT	107
:DATA:FIR	108
:DATA:FSK	109
:DATA:IQ	110
:DATA:PRAM:FILE:BLOCK	111
:DATA:PRAM:FILE:LIST	112
:DATA:PRAM	113
:DATA:PRAM:BLOCK	113
:DATA:PRAM:LIST	113
:DATA:SHAPE	113

:DATA:UNPRotected	114
:DELeTe:ALL	115
:DELeTe:BINary	116
:DELeTe:BIT	116
:DELeTe:CDMa	116
:DELeTe:DMOD	116
:DELeTe:DWCDma	116
:DELeTe:FCDMa	117
:DELeTe:FIR	117
:DELeTe:FSK	117
:DELeTe:IQ	117
:DELeTe:LIST	117
:DELeTe:MCDMa	118
:DELeTe:MMod	118
:DELeTe:MDWCdma	118
:DELeTe:MFCdma	118
:DELeTe:MTONE	118
:DELeTe:RCDMa	119
:DELeTe:SEQ	119
:DELeTe:SHApe	119
:DELeTe:STATe	119
:DELeTe:UFLT	119
:DELeTe:UWCDma	120
:DELeTe[:NAME]	120
:FREE[:ALL]	120
:LOAD:LIST	120
:MOVE	121
:STATe:COMMeNt	121
:STORe:LIST	121
Mass Memory Subsystem (:MMEMory)	122
:CATalog	122
:COpy	124
:DATA	124
:DATA:UNPRotected	125
:DELeTe:NVWFm	126
:DELeTe:WFM	126
:DELeTe:WFM1	127
:DELeTe[:NAME]	127

Contents

:HEADer:CLEar	127
:HEADer:DESCription	128
:LOAD:LIST	128
:MOVE	128
:STORe:LIST	128
Output Subsystem (:OUTPut)	129
:BLANKing:AUTO	129
:BLANKing:STATe	129
:MODulation[:STATe]	129
[:STATe]	130
Route Subsystem (:ROUte:HARDware:DGENerator)	131
:INPut:BPOLarity	131
:INPut:CPOLarity	131
:INPut:DPOLarity	132
:INPut:SPOLarity	132
:IPOLarity:BGATe	132
:IPOLarity:CLOCK	133
:IPOLarity:DATA	133
:IPOLarity:SSYNc	133
:OPOLarity:CLOCK	134
:OPOLarity:DATA	134
:OPOLarity:SSYNc	135
:OUTPut:CPOLarity	135
:OUTPut:DCS[:STATe]	136
:OUTPut:DPOLarity	136
:OUTPut:SPOLarity	136
Status Subsystem (:STATus)	137
:OPERation:BASeband:CONDition	137
:OPERation:BASeband:ENABle	137
:OPERation:BASeband:NTRansition	138
:OPERation:BASeband:PTRansition	138
:OPERation:BASeband[:EVENT]	139
:OPERation:CONDition	139
:OPERation:ENABle	140
:OPERation:NTRansition	140
:OPERation:PTRansition	141
:OPERation[:EVENT]	141
:PRESet	141

:QUESTionable:BERT:CONDition	142
:QUESTionable:BERT:ENABle	142
:QUESTionable:BERT:NTRansition	143
:QUESTionable:BERT:PTRansition	143
:QUESTionable:BERT[:EVENT]	144
:QUESTionable:CALibration:CONDition	144
:QUESTionable:CALibration:ENABle	144
:QUESTionable:CALibration:NTRansition	145
:QUESTionable:CALibration:PTRansition	145
:QUESTionable:CALibration[:EVENT]	146
:QUESTionable:CONDition	146
:QUESTionable:ENABle	147
:QUESTionable:FREQuency:CONDition	147
:QUESTionable:FREQuency:ENABle	147
:QUESTionable:FREQuency:NTRansition	148
:QUESTionable:FREQuency:PTRansition	148
:QUESTionable:FREQuency[:EVENT]	148
:QUESTionable:MODulation:CONDition	149
:QUESTionable:MODulation:ENABle	149
:QUESTionable:MODulation:NTRansition	150
:QUESTionable:MODulation:PTRansition	150
:QUESTionable:MODulation[:EVENT]	150
:QUESTionable:NTRansition	151
:QUESTionable:POWer:CONDition	151
:QUESTionable:POWer:ENABle	152
:QUESTionable:POWer:NTRansition	152
:QUESTionable:POWer:PTRansition	152
:QUESTionable:POWer[:EVENT]	153
:QUESTionable:PTRansition	153
:QUESTionable[:EVENT]	154
System Subsystem (:SYSTem)	155
:CAPability	155
:DATE	155
:ERRor[:NEXT]	156
:ERRor:SCPI[:SYNTax]	156
:FILEsystem:SAFEmode	156
:HELP:MODE	157
:IDN	157

Contents

:LANGUage	157
:PON:TYPE	158
:PRESet	159
:PRESet:ALL	159
:PRESet:LANGUage	159
:PRESet:PERSistent	160
:PRESet:PN9	160
:PRESet:TYPE	161
:PRESet[:USER]:SAVE	161
:SECurity:DISPlay	162
:SECurity:ERASeall	162
:SECurity:LEVel	163
:SECurity:LEVel:STATe	164
:SECurity:OVERwrite	164
:SECurity:SANitize	165
:SSAVer:DELay	165
:SSAVer:MODE	166
:SSAVer:STATe	166
:TIME	166
:VERSion	167
Trigger Subsystem	168
:ABORt	168
:INITiate:CONTinuous[:ALL]	168
:INITiate[:IMMediate][:ALL]	169
:TRIGger:OUTPut:POLarity	169
:TRIGger[:SEQuence]:SLOPe	170
:TRIGger[:SEQuence]:SOURce	170
:TRIGger[:SEQuence][:IMMediate]	171
Unit Subsystem (:UNIT)	172
:POWer	172
4. Analog Commands	173
Amplitude Modulation Subsystem ([:SOURce])	174
:AM[1]2...	174
:AM:INTernal:FREQuency:STEP[:INCReMENT]	174
:AM:WIDeband:STATe	175
:AM[1]2:EXTernal[1]2:COUPling	175
:AM[1]2:INTernal[1]:FREQuency	176

:AM[1]2:INTErnal[1]:FREQuency:ALTErnate.....	176
:AM[1]2:INTErnal[1]:FREQuency:ALTErnate:AMPLitude:PERCent.....	176
:AM[1]2:INTErnal[1]:FUNCTion:SHAPE.....	177
:AM[1]2:INTErnal[1]:SWEep:TIME.....	177
:AM[1]2:INTErnal[1]:SWEep:TRIGger.....	178
:AM[1]2:SOURce.....	178
:AM[1]2:STATe.....	179
:AM[1]2[:DEPT]h.....	179
:AM[1]2[:DEPT]h:TRACk.....	180
:AM[:DEPT]h:STEP[:INCR]ement.....	180
Frequency Modulation Subsystem ([:SOUR]ce).....	181
:FM[1]2.....	181
:FM:INTErnal:FREQuency:STEP[:INCR]ement.....	182
:FM[1]2:EXTErnal[1]2:COUPLing.....	182
:FM[1]2:INTErnal[1]:FREQuency.....	183
:FM[1]2:INTErnal[1]:FREQuency:ALTErnate.....	183
:FM[1]2:INTErnal[1]:FREQuency:ALTErnate:AMPLitude:PERCent.....	184
:FM[1]2:INTErnal[1]:FUNCTion:SHAPE.....	184
:FM[1]2:INTErnal[1]:SWEep:TIME.....	185
:FM[1]2:INTErnal[1]:SWEep:TRIGger.....	185
:FM[1]2:SOURce.....	186
:FM[1]2:STATe.....	186
:FM[1]2[:DEV]iation.....	187
:FM[1]2[:DEV]iation:TRACk.....	187
Low Frequency Output Subsystem ([:SOUR]ce[:LFO]utput).....	188
:AMPLitude.....	188
:FUNCTion[1]:FREQuency.....	188
:FUNCTion[1]:FREQuency:ALTErnate.....	189
:FUNCTion[1]:FREQuency:ALTErnate:AMPLitude:PERCent.....	189
:FUNCTion[1]:PERiod.....	190
:FUNCTion[1]:PWIDth.....	190
:FUNCTion[1]:SHAPE.....	191
:FUNCTion[1]:SWEep:TIME.....	191
:FUNCTion[1]:SWEep:TRIGger.....	191
:SOURce.....	192
:STATe.....	192
Phase Modulation Subsystem ([:SOUR]ce).....	193
:PM[1]2.....	193

Contents

:PM:INTErnal:FREQUency:STEP[:INCRement]	194
:PM[1]2:BAWIDth BWIDth	194
:PM[1]2:EXTErnal[1]:COUPLing	195
:PM[1]2:INTErnal[1]:FREQUency	195
:PM[1]2:INTErnal[1]:FREQUency:ALTErnate	196
:PM[1]2:INTErnal[1]:FREQUency:ALTErnate:AMPLitude:PERCent	196
:PM[1]2:INTErnal[1]:FUNCTion:SHAPE	197
:PM[1]2:INTErnal[1]:SWEep:TIME	197
:PM[1]2:INTErnal[1]:SWEep:TRIGger	197
:PM[1]2:SOURce	198
:PM[1]2:STATe	198
:PM[1]2[:DEVIation]	199
:PM[1]2[:DEVIation]:TRACk	199
:PM[:DEVIation]:STEP[:INCRement]	200
Pulse Modulation Subsystem ([:SOURce]:PULM)	201
:INTErnal[1]:FREQUency	201
:INTErnal[1]:FREQUency:STEP	201
:INTErnal[1]:FUNCTion:SHAPE	202
:INTErnal[1]:PERiod	202
:INTErnal[1]:PERiod:STEP[:INCRement]	202
:INTErnal[1]:PWIDth	203
:INTErnal[1]:PWIDth:STEP	203
:SOURce	204
:STATe	204
5. Component Test Digital Commands	205
All Subsystem–Option 001/601 or 002/602 ([:SOURce])	206
:RADio:ALL:OFF	206
AWGN ARB Subsystem–Option 403 ([:SOURce]:RADio:AWGN:ARB)	207
:BWIDth	207
:IQ:EXTErnal:FILTEr	207
:IQ:EXTErnal:FILTEr:AUTO	208
:HEADer:CLEar	208
:HEADer:SAVE	208
:IQ:MODulation:ATTen	209
:IQ:MODulation:ATTen:AUTO	209
:IQ:MODulation:FILTEr	210
:IQ:MODulation:FILTEr:AUTO	210

:MDEStination:PULSe	211
:MDEStination:AAMPlitude	211
:MDEStination:ALCHold	211
:MPOLarity:MARKer1	212
:MPOLarity:MARKer2	212
:MPOLarity:MARKer3	212
:MPOLarity:MARKer4	212
:LENGth	213
:REFErence:EXTErnal:FREQUency	213
:REFErence[:SOURce]	214
:SCLock:RATE	214
:SEED	215
[:STATE]	215
CDMA ARB Subsystem–Option 401 ([:SOURce]:RADio:CDMA:ARB)	216
:CLIPping:I	216
:CLIPping:POSition	216
:CLIPping:Q	217
:CLIPping:TYPE	217
:CLIPping[:IJQ]	218
:CRATe	218
:IQ:EXTErnal:FILTer	219
:IQ:EXTErnal:FILTer:AUTO	219
:FILTer	220
:FILTer:ALPHa	221
:FILTer:BBT	221
:FILTer:CHANnel	222
:HEADer:CLEar	222
:HEADer:SAVE	222
:IQMap	223
:IQ:MODulation:ATTen	223
:IQ:MODulation:ATTen:AUTO	223
:IQ:MODulation:FILTer	224
:IQ:MODulation:FILTer:AUTO	224
:MDEStination:PULSe	225
:MDEStination:AAMPlitude	225
:MDEStination:ALCHold	225
:MPOLarity:MARKer1	226
:MPOLarity:MARKer2	226

Contents

:MPOLarity:MARKer3	226
:MPOLarity:MARKer4	226
:OSAMple	227
:REFerence:EXTernal:FREQuency	227
:REFerence[:SOURce]	228
:RETRigger	228
:SCLock:RATE	229
:SETup	229
:SETup:CHANnel	230
:SETup:MCARrier	231
:SETup:MCARrier:STORe	232
:SETup:MCARrier:TABLE	232
:SETup:STORe	233
:TRIGger:TYPE	234
:TRIGger:TYPE:CONTInuous[:TYPE]	235
:TRIGger:TYPE:GATE:ACTive	236
:TRIGger[:SOURce]	236
:TRIGger[:SOURce]:EXTernal:DELay	238
:TRIGger[:SOURce]:EXTernal:DELay:STATe	238
:TRIGger[:SOURce]:EXTernal:SLOPe	239
:TRIGger[:SOURce]:EXTernal[:SOURce]	239
:WLENgth	240
[:STATe]	241
CDMA2000 ARB Subsystem–Option 401 ([:SOURce]:RADio:CDMA2000:ARB)	242
:CLIPping:I	242
:CLIPping:POSition	242
:CLIPping:Q	243
:CLIPping:TYPE	243
:CLIPping[:IJQ]	244
:IQ:EXTernal:FILTer	244
:IQ:EXTernal:FILTer:AUTO	244
:FILTer	245
:FILTer:ALPHa	246
:FILTer:BBT	246
:FILTer:CHANnel	247
:HEADer:CLEar	247
:HEADer:SAVE	247
:IQ:MODulation:ATTen	248

:IQ:MODulation:ATTen:AUTO	248
:IQ:MODulation:FILTer	249
:IQ:MODulation:FILTer:AUTO	249
:IQMap	250
:LINK	250
:LINK:FORWard:SETup	250
	251
:LINK:FORWard:SETup:MCARrier:STORE	252
:LINK:FORWard:SETup:MCARrier:TABLE	252
:LINK:FORWard:SETup:MCARrier:TABLE:NCARriers	253
:LINK:FORWard:SETup:STORE	254
:LINK:FORWard:SETup:TABLE:APPLY	254
:LINK:FORWard:SETup:TABLE:CHANnel	255
:LINK:FORWard:SETup:TABLE:NCHannels	256
:LINK:FORWard:SETup:TABLE:PADJust	256
:LINK:REVerse:RCONfig	256
:LINK:REVerse:SETup	257
:LINK:REVerse:SETup:STORE	258
:LINK:REVerse:SETup:TABLE:APPLY	258
:LINK:REVerse:SETup:TABLE:CHANnel	259
:LINK:REVerse:SETup:TABLE:NCHannels	260
:LINK:REVerse:SETup:TABLE:PADJust	260
:MDEStination:PULSe	260
:MDEStination:AAMPLitude	261
:MDEStination:ALCHold	261
:MPOLarity:MARKer1	261
:MPOLarity:MARKer2	262
:MPOLarity:MARKer3	262
:MPOLarity:MARKer4	262
:REFerence:EXTernal:FREQuency	263
:REFerence[:SOURce]	263
:RETRigger	264
:REVision	264
:SCLock:RATE	264
:SPReading:RATE	265
:SPReading:TYPE	265
:SPReading:TYPE:MCARrier:SPACing	266
:TRIGger:TYPE	266

Contents

:TRIGger:TYPE:CONTInuous[:TYPE]	268
:TRIGger:TYPE:GATE:ACTive	268
:TRIGger[:SOURce]	269
:TRIGger[:SOURce]:EXTernal:DELay	270
:TRIGger[:SOURce]:EXTernal:DELay:STATE	271
:TRIGger[:SOURce]:EXTernal:SLOPe	271
:TRIGger[:SOURce]:EXTernal[:SOURce]	272
[:STATE]	273
Dmodulation Subsystem–Option 001/601 or 002/602 ([:SOURce]:RADio:DMODulation:ARB)	274
:IQ:EXTernal:FILTer	274
:IQ:EXTernal:FILTer:AUTO	274
:FILTer	275
:FILTer:ALPHa	276
:FILTer:BBT	276
:FILTer:CHANnel	277
:HEADer:CLEar	277
:HEADer:SAVE	277
	278
:IQ:MODulation:ATTen:AUTO	278
:IQ:MODulation:FILTer	279
:IQ:MODulation:FILTer:AUTO	279
:MDEStination:PULSe	280
:MDEStination:AAMPLitude	280
:MDEStination:ALCHold	280
:MODulation:FSK[:DEViation]	280
:MODulation[:TYPE]	281
:MPOLarity:MARKer1	281
:MPOLarity:MARKer2	282
:MPOLarity:MARKer3	282
:MPOLarity:MARKer4	282
:REFerence:EXTernal:FREQUency	282
:REFerence[:SOURce]	283
:RETRigger	283
:SCLock:RATE	284
:SETup	284
:SETup:MCARrier	285
:SETup:MCARrier:PHASe	286
:SETup:MCARrier:STORE	286

:SETup:MCARrier:TABLE	286
:SETup:MCARrier:TABLE:NCARriers	287
:SETup:STORE	288
:SRATE	288
:TRIGger:TYPE	289
:TRIGger:TYPE:CONTinuous[:TYPE]	291
:TRIGger:TYPE:GATE:ACTive	291
:TRIGger[:SOURce]	292
:TRIGger[:SOURce]:EXTernal:DELay	293
:TRIGger[:SOURce]:EXTernal:DELay:STATe	294
:TRIGger[:SOURce]:EXTernal:SLOPe	294
:TRIGger[:SOURce]:EXTernal[:SOURce]. [:STATe]	295 296
Dual ARB Subsystem–Option 001/601 or 002/602 (:SOURce):RADio:ARB)	297
:CLIPping	297
:GENerate:SINE	297
:HEADer:CLEar	298
:HEADer:RMS	298
:HEADer:SAVE	299
:HCRest[:STATe].	299
:IQ:EXTernal:FILTer	300
:IQ:EXTernal:FILTer:AUTO	300
:IQ:MODulation:ATTen	301
:IQ:MODulation:ATTen:AUTO	301
:IQ:MODulation:FILTer	302
:IQ:MODulation:FILTer:AUTO	302
:MARKer:CLEar	303
:MARKer:CLEar:ALL	303
:MARKer:ROtate	304
:MARKer:[SET]	304
:MDESTination:PULSe	305
:MDESTination:AAMPLitude	305
:MDESTination:ALCHold	306
:MPOLarity:MARKer1	306
:MPOLarity:MARKer2	306
:MPOLarity:MARKer3	307
:MPOLarity:MARKer4	307
:NOISe	307

Contents

:NOISe:BFACtor	308
:NOISe:CBWidth	308
:NOISe:CN	309
:REFerence:EXTernal:FREQuency	309
:REFerence[:SOURce]	310
:RETRigger	310
:RSCALing	311
:SCALing	311
:SCLock:RATE	311
:SEQuence	312
:TRIGger:TYPE	312
:TRIGger:TYPE:CONTinuous[:TYPE]	314
:TRIGger:TYPE:GATE:ACTive	314
:TRIGger:TYPE:SADVance[:TYPE]	315
:TRIGger[:SOURce]	315
:TRIGger[SOURce]:EXTernal:DELay	316
:TRIGger[:SOURce]:EXTernal:DELay:STATE	317
:TRIGger[:SOURce]:EXTernal:SLOPe	317
:TRIGger[:SOURce]:EXTernal[:SOURce]	318
:WAVEform	318
:Waveform:NHEAders	319
[:STATE]	320
Multitone Subsystem—Option 001/601 or 002/602 ([:SOURce]:RADio:MTONE:ARB)	321
Creating a Multitone Waveform	321
:HEADer:CLear	321
:HEADer:SAVE	321
:IQ:EXTernal:FILTer	322
:IQ:EXTernal:FILTer:AUTO	322
:IQ:MODulation:ATTen	323
:IQ:MODulation:ATTen:AUTO	323
:IQ:MODulation:FILTer	324
:IQ:MODulation:FILTer:AUTO	324
:MDESTination:PULSe	325
:MDESTination:AAMPplitude	325
:MDESTination:ALCHold	325
:MPOLarity:MARKer1	326
:MPOLarity:MARKer2	326
:MPOLarity:MARKer3	326

:MPOLarity:MARKer4	326
:REFeRence:EXTeRnal:FREQUency	327
:REFeRence[:SOURce]	327
:ROW	328
:SCLock:RATE	329
:SETup	329
:SETup:STORe	329
:SETup:TABLE	330
:SETup:TABLE:FSPacing	330
:SETup:TABLE:NTONes	331
:SETup:TABLE:PHASe:INITialize	331
:SETup:TABLE:PHASe:INITialize:SEED	332
[:STATe]	332
Wideband CDMA ARB Subsystem–Option 400 ([:SOURce]:RADio:WCDMa:TGPP:ARB)	333
:CLIPping:I	333
:CLIPping:POSition	333
:CLIPping:Q	334
:CLIPping:TYPE	334
:CLIPping[:IJQ]	335
:CRATe	335
:FILTer	336
:FILTer:ALPHa	336
:FILTer:BBT	337
:FILTer:CHANnel	337
:HEADer:CLEar	338
:HEADer:SAVE	338
:IQ:EXTeRnal:FILTer	338
:IQ:EXTeRnal:FILTer:AUTO	338
:IQMap	339
:IQ:MODulation:ATTen	339
:IQ:MODulation:ATTen:AUTO	340
:IQ:MODulation:FILTer	340
:IQ:MODulation:FILTer:AUTO	341
:LINK	341
:LINK:DOWN:OACP	342
:LINK:DOWN:SETup	342
:LINK:DOWN:SETup:MCARrier	343
:LINK:DOWN:SETup:MCARrier:CLIPping:I	345

Contents

:LINK:DOWN:SETup:MCARrier:CLIPping:Q	345
:LINK:DOWN:SETup:MCARrier:CLIPping:TYPE	346
:LINK:DOWN:SETup:MCARrier:CLIPping[:IJQ]	346
:LINK:DOWN:SETup:MCARrier:SCODE:AINCrement	346
:LINK:DOWN:SETup:MCARrier:STORE	347
:LINK:DOWN:SETup:MCARrier:TABLE	347
:LINK:DOWN:SETup:MCARrier:TABLE:NCARriers	349
:LINK:DOWN:SETup:MCARrier:TOFFset:AINCrement	349
:LINK:DOWN:SETup:STORE	350
:LINK:DOWN:SETup:TABLE:APPLY	350
:LINK:DOWN:SETup:TABLE:CHANnel	351
:LINK:DOWN:SETup:TABLE:NCHannels?	355
:LINK:DOWN:SETup:TABLE:PADJust	356
:LINK:DOWN:TFCI	356
:LINK:UP:OACP	356
:LINK:UP:SCRAMBLE	357
:LINK:UP:SDPDch	357
:LINK:UP:SETup	357
:LINK:UP:SETup:STORE	358
:LINK:UP:SETup:TABLE:APPLY	359
:LINK:UP:SETup:TABLE:CHANnel	359
:LINK:UP:SETup:TABLE:GUNit	360
:LINK:UP:SETup:TABLE:NCHannel	361
:LINK:UP:TFCI	361
:MDEStination:PULSe	361
:MDEStination:AAMPLitude	362
:MDEStination:ALCHold	362
:MPOLarity:MARKer1	362
:MPOLarity:MARKer2	363
:MPOLarity:MARKer3	363
:MPOLarity:MARKer4	363
:REFerence:EXTernal:FREQuency	364
:REFerence[:SOURce]	364
:RETRigger	365
:REVision	365
:SCLock:RATE	366
:TRIGger:TYPE	366
:TRIGger:TYPE:CONTInuous[:TYPE]	368

:TRIGger:TYPE:GATE:ACTive	369
:TRIGger[:SOURce]	369
:TRIGger[:SOURce]:EXTernal:DELay	370
:TRIGger[:SOURce]:EXTernal:DELay:STATe	371
:TRIGger[:SOURce]:EXTernal:SLOPe	372
:TRIGger[:SOURce]:EXTernal[:SOURce]	372
[:STATe]	373
6. Digital Signal Interface Module Commands	375
Digital Subsystem—Option 003 and 004 ([:SOURce])	376
:DIGital:CLOCK:CPS 1 2 4	376
:DIGital:CLOCK:PHASe	376
:DIGital:CLOCK:POLarity	377
:DIGital:CLOCK:RATE	378
:DIGital:CLOCK:REFerence:FREQuency	378
:DIGital:CLOCK:SKEW	379
:DIGital:CLOCK:SOURCe	379
:DIGital:DATA:ALIGNment	380
:DIGital:DATA:BORDER	380
:DIGital:DATA:DIRection	381
:DIGital:DATA:IGain	381
:DIGital:DATA:INEGate	382
:DIGital:DATA:IOFFset	382
:DIGital:DATA:IQSWap	383
:DIGital:DATA:NFORmat	383
:DIGital:DATA:POLarity:FRAMe	383
:DIGital:DATA:POLarity:IQ	384
:DIGital:DATA:QGain	384
:DIGital:DATA:QNEGate	385
:DIGital:DATA:QOFFset	386
:DIGital:DATA:ROTation	386
:DIGital:DATA:SCALing	387
:DIGital:DATA:SIZE	387
:DIGital:DATA:STYPe	388
:DIGital:DATA:TYPE	388
:DIGital:DIAGnostic:LOOPback	389
:DIGital:LOGic[:TYPE]	389
:DIGital:PCONfig	390

Contents

:DIGital:PRESet:PTHROUGH	391
:DIGital[:STATe]	391

7. Bit Error Rate Test (BERT) Commands 393

Calculate Subsystem–Option UN7 and 300 (:CALCulate:BERT)	394
:BTS:LOOPback:EDGE:ETCH:F43:COMParator:CRITeria:ERATe	394
:BTS:LOOPback:EDGE:ETCH:F43:COMParator:CRITeria[:SElect]	394
:BTS:LOOPback:EDGE:MCS5:COMParator:CRITeria:ERATe	395
:BTS:LOOPback:EDGE:MCS5:COMParator:CRITeria[:SElect]	395
:BTS:LOOPback:EDGE:MCS9:COMParator:CRITeria:ERATe	395
:BTS:LOOPback:EDGE:MCS9:COMParator:CRITeria[:SElect]	396
:BTS:LOOPback:EDGE:UNCoded:COMParator:CRITeria:ERATe	396
:BTS:LOOPback:EDGE:UNCoded:COMParator:CRITeria[:SElect]	397
:BTS:LOOPback:GSM:CS1:COMParator:CRITeria:ERATe	397
:BTS:LOOPback:GSM:CS1:COMParator:CRITeria[:SElect]	398
:BTS:LOOPback:GSM:CS4:COMParator:CRITeria:ERATe	398
:BTS:LOOPback:GSM:CS4:COMParator:CRITeria[:SElect]	398
:BTS:LOOPback:GSM:MCS1:COMParator:CRITeria:ERATe	399
:BTS:LOOPback:GSM:MCS1:COMParator:CRITeria[:SElect]	399
:BTS:LOOPback:GSM:COMParator:CRITeria:CIB	400
:BTS:LOOPback:GSM:COMParator:CRITeria:CII	400
:BTS:LOOPback:GSM:COMParator:CRITeria:FERasure	400
:BTS:LOOPback:GSM:COMParator:CRITeria[:SElect]	401
[:BAsEband]:COMParator:MODE	401
[:BAsEband]:COMParator:THReshold	402
[:BAsEband]:COMParator[:STATe]	402
[:BAsEband]:DISPlay:MODE:	403
[:BAsEband]:DISPlay:UPDate:	403
Data Subsystem–Option UN7 and 300 (:DATA)	404
:BERT:BTS:LOOPback:EDGE:ETCH:F43[:DATA]	404
:BERT:BTS:LOOPback:EDGE:MCS5[:DATA]	405
:BERT:BTS:LOOPback:EDGE:MCS9[:DATA]	406
:BERT:BTS:LOOPback:EDGE:UNCoded[:DATA]	406
:BERT:BTS:LOOPback:GSM[:DATA]	406
:BERT:BTS:LOOPback:GSM:CS1[:DATA]	408
:BERT:BTS:LOOPback:GSM:CS4[:DATA]	409
:BERT:BTS:LOOPback:GSM:MCS1[:DATA]	409
:BERT:AUXout	409

[DATA].....	411
Input Subsystem–Option UN7 (:INPut:BERT[: BASeband])	412
:CGATe:DELay:CLOCK	412
:CGATe:DELay:MODE	412
:CGATe:DELay:TIME	413
:CGATe:DELay[:STATe].....	413
:CGATe:POLarity	414
:CGATe[:STATe].....	414
:CLOCK:DELay:RESolution	414
:CLOCK:DELay:TIME.....	415
:CLOCK:DELay[:STATe].....	415
:CLOCK:POLarity.....	416
:DATA:POLarity	416
:IMPedance	416
:THReshold	417
Measure Subsystem–Option 300 (:MEASure[:SCALar]:BERT:BTS:LOOPback)	418
:EDGE:MCS5[:SENSitivity]	418
:EDGE:MCS9[:SENSitivity]	418
:EDGE:UNCoded[:SENSitivity].....	419
:GSM[:SENSitivity]	420
Sense Subsystem–Options UN7 and 300 ([:SOURce]:SENSe:BERT)	421
:BTS:LOOPback:EDGE:ETCH:F43:BLOCK:COUNT	421
:BTS:LOOPback:EDGE:ETCH:F43:CONTain	421
:BTS:LOOPback:EDGE:ETCH:F43:STOP:CRITeria:EBLock	422
:BTS:LOOPback:EDGE:ETCH:F43:STOP:CRITeria[:SElect]	422
:BTS:LOOPback:EDGE:FTRigger:EXTernal:DELay	423
:BTS:LOOPback:EDGE:FTRigger:EXTernal:POLarity	423
:BTS:LOOPback:EDGE:FTRigger[SElect]	424
:BTS:LOOPback:EDGE:MCS5:BLOCK:COUNT.....	424
:BTS:LOOPback:EDGE:MCS5:CONTain	425
:BTS:LOOPback:EDGE:MCS5:ESensitivity	425
:BTS:LOOPback:EDGE:MCS5:HAMPLitude	425
:BTS:LOOPback:EDGE:MCS5:LAMPLitude.....	426
:BTS:LOOPback:EDGE:MCS5:PAMPLitude	426
:BTS:LOOPback:EDGE:MCS5:SBLock:COUNT	426
:BTS:LOOPback:EDGE:MCS5:SBLock:INITial.....	427
:BTS:LOOPback:EDGE:MCS5:STOP:CRITeria:EBLock.....	427
:BTS:LOOPback:EDGE:MCS5:STOP:CRITeria[:SElect]	427

Contents

:BTS:LOOPback:EDGE:MCS9:BLOCK:COUNT	428
:BTS:LOOPback:EDGE:MCS9:CONTain	428
:BTS:LOOPback:EDGE:MCS9:ESENSitivity	428
:BTS:LOOPback:EDGE:MCS9:HAMPLitude	429
:BTS:LOOPback:EDGE:MCS9:LAMPLitude	429
:BTS:LOOPback:EDGE:MCS9:PAMPLitude	430
:BTS:LOOPback:EDGE:MCS9:SBLock:COUNT	430
:BTS:LOOPback:EDGE:MCS9:SBLock:INITial	430
:BTS:LOOPback:EDGE:MCS9:STOP:CRITeria:EBLock	431
:BTS:LOOPback:EDGE:MCS9:STOP:CRITeria[:SElect]	431
:BTS:LOOPback:EDGE:MEASurement:STOP	432
:BTS:LOOPback:EDGE:MEASurement:TSLot	432
:BTS:LOOPback:EDGE:MEASurement[:MODE]	432
:BTS:LOOPback:EDGE:SINVert	433
:BTS:LOOPback:EDGE:SYNC:AGain	433
:BTS:LOOPback:EDGE:SYNC:RF	433
:BTS:LOOPback:EDGE:SYNC[:SOURce]	434
:BTS:LOOPback:EDGE:TRIGger[:SOURce]	434
:BTS:LOOPback:EDGE:ULINK:OFFSet	435
:BTS:LOOPback:EDGE:UNCoded:BIT:COUNT	435
:BTS:LOOPback:EDGE:UNCoded:ESENSitivity	435
:BTS:LOOPback:EDGE:UNCoded:HAMPLitude	436
:BTS:LOOPback:EDGE:UNCoded:LAMPLitude	436
:BTS:LOOPback:EDGE:UNCoded:PAMPLitude	437
:BTS:LOOPback:EDGE:UNCoded:SBIT:COUNT	437
:BTS:LOOPback:EDGE:UNCoded:SBIT:INITial	437
:BTS:LOOPback:EDGE:UNCoded:STOP:CRITeria:EBIT	438
:BTS:LOOPback:EDGE:UNCoded:STOP:CRITeria[:SElect]	438
:BTS:LOOPback:EDGE[:STATe]	438
:BTS:LOOPback:GSM:CS1:BLOCK:COUNT	439
:BTS:LOOPback:GSM:CS1:CONTain	439
:BTS:LOOPback:GSM:CS1:STOP:CRITeria:EBLock	440
:BTS:LOOPback:GSM:CS1:STOP:CRITeria[:SElect]	440
:BTS:LOOPback:GSM:CS4:BLOCK:COUNT	440
:BTS:LOOPback:GSM:CS4:CONTain	441
:BTS:LOOPback:GSM:CS4:STOP:CRITeria:EBLock	441
:BTS:LOOPback:GSM:CS4:STOP:CRITeria[:SElect]	442
:BTS:LOOPback:GSM:ESENSitivity	442

:BTS:LOOPback:GSM:FRAMe:CIB	442
:BTS:LOOPback:GSM:FRAMe:CII	442
:BTS:LOOPback:GSM:FRAMe:COUNT	443
:BTS:LOOPback:GSM:HAMPLitude	443
:BTS:LOOPback:GSM:LAMPLitude	443
:BTS:LOOPback:GSM:MCS1:BLOCK:COUNT	444
:BTS:LOOPback:GSM:MCS1:CONTain	444
:BTS:LOOPback:GSM:MCS1:STOP:CRITeria:EBLOCK	444
:BTS:LOOPback:GSM:MCS1:STOP:CRITeria[:SElect]	445
:BTS:LOOPback:GSM:MEASurement:STOP	445
:BTS:LOOPback:GSM:MEASurement:TSLot	446
:BTS:LOOPback:GSM:MEASurement[:MODE]	446
:BTS:LOOPback:GSM:PAMPLitude	447
:BTS:LOOPback:GSM:SFRame:COUNT	447
:BTS:LOOPback:GSM:SFRame:INITial	447
:BTS:LOOPback:GSM:SINVert	448
:BTS:LOOPback:GSM:STOP:CRITeria:CIB	448
:BTS:LOOPback:GSM:STOP:CRITeria:CII	449
:BTS:LOOPback:GSM:STOP:CRITeria:FERasure	449
:BTS:LOOPback:GSM:STOP:CRITeria[:SElect]	449
:BTS:LOOPback:GSM:SYNC:RF	450
:BTS:LOOPback:GSM:SYNC[:SOURce]	451
:BTS:LOOPback:GSM:TRIGger[:SOURce]	451
:BTS:LOOPback:GSM:ULINK:OFFSet	452
:BTS:LOOPback:GSM[:STATe]	452
[:BAsband]:PRBS:FUNCTion:SPIGnore:DATA	452
[:BAsband]:PRBS:FUNCTion:SPIGnore[:STATe]	453
[:BAsband]:PRBS[:DATA]	453
[:BAsband]:RSYNc:THReshold	454
[:BAsband]:RSYNc[:STATe]	454
[:BAsband]:STATe	454
[:BAsband]:STOP:CRITeria:EBIT	455
[:BAsband]:STOP:CRITeria[:SElect]	455
[:BAsband]:TBITs	456
[:BAsband]:TRIGger:BDELay	456
[:BAsband]:TRIGger:BDELay:STATe	456
[:BAsband]:TRIGger:COUNT	457
[:BAsband]:TRIGger:POLarity	457

Contents

[:BASeband]:TRIGger[:SOURce]	457
8. Receiver Test Digital Commands	459
All Subsystem–Option 001/601 or 002/602 ([:SOURce])	460
:RADio:ALL:OFF	460
AWGN Real-Time Subsystem–Option 403 ([:SOURce]:RADio:AWGN:RT)	461
:BWIDth	461
[:STATe]	461
Bluetooth Subsystem–Option 406 ([:SOURce]:RADio:BLUEtooth:ARB)	462
:AMADdr	462
:BDADdr	462
:BURSt[:STATe]	462
:CGDelay	463
:DATA	463
:IQ:EXTernal:FILTer	464
:IQ:EXTernal:FILTer:AUTO	464
:HEADer:CLEar	465
:HEADer:SAVE	465
:IMPairments	465
:IMPairments:AWGN	466
:IMPairments:AWGN:CNR	466
:IMPairments:AWGN:NSEed	467
:IMPairments:DDEViation	467
:IMPairments:FDFType	468
:IMPairments:FOFFset	469
:IMPairments:MINdex	469
:IMPairments:STERror	470
:IQ:MODulation:ATTen	470
:IQ:MODulation:ATTen:AUTO	471
:IQ:MODulation:FILTer	471
:IQ:MODulation:FILTer:AUTO	472
:MDESTination:PULSe	472
:MDESTination:AAMPplitude	472
:MDESTination:ALCHold	473
:MPOLarity:MARKer1	473
:MPOLarity:MARKer2	473
:MPOLarity:MARKer3	474
:MPOLarity:MARKer4	474

:PACKet	474
:REFeRnce:EXTeRnal:FREQUency	475
:REFeRence[:SOURce]	475
:RSYMBOLs	476
:SCLock:RATE	476
[:STATE]	476
CDMA2000 BBG Subsystem–Option 401 ([:SOURce]:RADio:CDMA2000[:BBG])	477
:LMODe	477
[:FORWard]:BBCLock	478
[:FORWard]:CHIPRate	478
[:FORWard]:ESDeLay	479
[:FORWard]:FILTer	479
[:FORWard]:FILTer:ALPHa	480
[:FORWard]:FILTer:BBT	481
[:FORWard]:FILTer:CHANnel	481
[:FORWard]:LCState	482
[:FORWard]:FFCH:DATA	482
[:FORWard]:FFCH:DATA:FIX4	482
[:FORWard]:FFCH:EBNO	483
[:FORWard]:FFCH:FOFFset	484
[:FORWard]:FFCH:LCMask	484
[:FORWard]:FFCH:LCMask:ESN	484
[:FORWard]:FFCH:LCMask:HEADer	485
[:FORWard]:FFCH:POWer	485
[:FORWard]:FFCH:PRAMp	485
[:FORWard]:FFCH:PRTime	486
[:FORWard]:FFCH:QOF	486
[:FORWard]:FFCH:RATE	487
[:FORWard]:FFCH:RCONfig	487
[:FORWard]:FFCH:WALSh	487
[:FORWard]:FFCH[:STATE]	488
[:FORWard]:FPCH:DATA	488
[:FORWard]:FPCH:EBNO	488
[:FORWard]:FPCH:LCMask	489
[:FORWard]:FPCH:LCMask:F1	489
[:FORWard]:FPCH:LCMask:F2	489
[:FORWard]:FPCH:LCMask:F3	490
[:FORWard]:FPCH:MESSAge	490

Contents

[:FORWard]:FPCH:POWer	490
[:FORWard]:FPCH:RATE	491
[:FORWard]:FPCH:WALSh	491
[:FORWard]:FPCH[:STATe].	491
[:FORWard]:FPICH:ECNO	492
[:FORWard]:FPICH:POWer	492
[:FORWard]:FPICH[:STATe].	493
[:FORWard]:FSCH[1]2:DATA	493
[:FORWard]:FSCH[1]2:DATA:FIX4	493
[:FORWard]:FSCH[1]2:EBNO	494
[:FORWard]:FSCH[1]2:FOFFset	494
[:FORWard]:FSCH[1]2:LCMask	495
[:FORWard]:FSCH[1]2:LCMask:ESN	495
[:FORWard]:FSCH[1]2:LCMask:HEADer	495
[:FORWard]:FSCH[1]2:POWer	496
[:FORWard]:FSCH[1]2:QOF	496
[:FORWard]:FSCH[1]2:RATE	496
[:FORWard]:FSCH[1]2:RCONfig	497
[:FORWard]:FSCH[1]2:TCODE	497
[:FORWard]:FSCH[1]2:WALSh	497
[:FORWard]:FSCH[1]2[:STATe]	498
[:FORWard]:FSYNc:CFRequency	498
[:FORWard]:FSYNc:DAYLt	498
[:FORWard]:FSYNc:EBNO	499
[:FORWard]:FSYNc:ECFRequency	499
[:FORWard]:FSYNc:LPSec	500
[:FORWard]:FSYNc:LTMoff	500
[:FORWard]:FSYNc:MPREv	500
[:FORWard]:FSYNc:MSGType	501
[:FORWard]:FSYNc:NID	501
[:FORWard]:FSYNc:POWer	501
[:FORWard]:FSYNc:PRATe	502
[:FORWard]:FSYNc:PREV	502
[:FORWard]:FSYNc:RESERved	502
[:FORWard]:FSYNc:SID	503
[:FORWard]:FSYNc:STYPe	503
[:FORWard]:FSYNc:SYSTime	503
[:FORWard]:FSYNc:WALSh	504

[:FORWard]:FSYNc[:STATe]	504
[:FORWard]:NOISe:CN	504
[:FORWard]:NOISe[:STATe]	505
[:FORWard]:OCNS:EBNO	505
[:FORWard]:OCNS:POWer	506
[:FORWard]:OCNS:WALSh	507
[:FORWard]:OCNS[:STATe]	507
[:FORWard]:PADJust	507
[:FORWard]:POLarity	508
[:FORWard]:QPCH:CCI	508
[:FORWard]:QPCH:EBNO	508
[:FORWard]:QPCH:PI	509
[:FORWard]:QPCH:POWer	509
[:FORWard]:QPCH:RATE	510
[:FORWard]:QPCH:WALSh	510
[:FORWard]:QPCH[:STATe]	510
[:FORWard]:SRATe	510
:PNOFFset	511
:REVerse:BBCLock	511
:REVerse:CHIPrate	512
:REVerse:ESDelay	512
:REVerse:FILTer	513
:REVerse:FILTer:ALPHa	514
:REVerse:FILTer:BBT	514
:REVerse:FILTer:CHANnel	515
:REVerse:LCMask	515
:REVerse:LCState	515
:REVerse:PADJust	516
:REVerse:POLarity[:ALL]	516
:REVerse:NOISe:CN	516
:REVerse:NOISe[:STATe]	517
:REVerse:RC12:ACCess:RACH:DATA	517
:REVerse:RC12:ACCess:RACH:DATA:FIX4	518
:REVerse:RC12:ACCess:RACH:EBNO	518
:REVerse:RC12:ACCess:RACH:FLENgth	519
:REVerse:RC12:ACCess:RACH:FOFFset	519
:REVerse:RC12:ACCess:RACH:POWer	519
:REVerse:RC12:ACCess:RACH:RCONfig	520

Contents

:REVerse:RC12:ACCess:RACH:RATE	520
:REVerse:RC12:ACCess:RACH[:STATe]	520
:REVerse:RC12:TRAFfic:RSCH:DATA	521
:REVerse:RC12:TRAFfic:RSCH:DATA:FIX4	521
:REVerse:RC12:TRAFfic:RSCH:FLENgth	521
:REVerse:RC12:TRAFfic:RSCH:FOFFset	522
:REVerse:RC12:TRAFfic:RSCH:POWer	522
:REVerse:RC12:TRAFfic:RSCH:RATE	522
:REVerse:RC12:TRAFfic:RSCH:RCONfig	523
:REVerse:RC12:TRAFfic:RSCH[:STATe]	523
:REVerse:RC34:CCONtrol:RCCCh:DATA	523
:REVerse:RC34:CCONtrol:RCCCh:DATA:FIX4	524
:REVerse:RC34:CCONtrol:RCCCh:EBNO	524
:REVerse:RC34:CCONtrol:RCCCh:FLENgth	525
:REVerse:RC34:CCONtrol:RCCCh:FOFFset	525
:REVerse:RC34:CCONtrol:RCCCh:POWer	525
:REVerse:RC34:CCONtrol:RCCCh:RCONfig	526
:REVerse:RC34:CCONtrol:RCCCh:RATE	526
:REVerse:RC34:CCONtrol:RCCCh:WALSh	526
:REVerse:RC34:CCONtrol:RCCCh[:STATe]	527
:REVerse:RC34:CCONtrol:RPICH:ECNO	527
:REVerse:RC34:CCONtrol:RPICH:GRATe	528
:REVerse:RC34:CCONtrol:RPICH:POWer	528
:REVerse:RC34:CCONtrol:RPICH:WALSh	528
:REVerse:RC34:CCONtrol:RPICH[:STATe]	529
:REVerse:RC34:EACCess:REACH:DATA	529
:REVerse:RC34:EACCess:REACH:DATA:FIX4	529
:REVerse:RC34:EACCess:REACH:EBNO	530
:REVerse:RC34:EACCess:REACH:FOFFset	530
:REVerse:RC34:EACCess:REACH:POWer	531
:REVerse:RC34:EACCess:REACH:RCONfig	531
:REVerse:RC34:EACCess:REACH:RATE	531
:REVerse:RC34:EACCess:REACH:WALSh	532
:REVerse:RC34:EACCess:REACH[:STATe]	532
:REVerse:RC34:EACCess:RPICH:ECNO	532
:REVerse:RC34:EACCess:RPICH:GRATe	533
:REVerse:RC34:EACCess:RPICH:POWer	533
:REVerse:RC34:EACCess:RPICH:WALSh	533

:REVerse:RC34:EACcEss:RPICh[:STATe]	534
:REVerse:RC34:TRAFfic:RDCCh:DATA	534
:REVerse:RC34:TRAFfic:RDCCh:DATA:FIX4	534
:REVerse:RC34:TRAFfic:RDCCh:EBNO	534
:REVerse:RC34:TRAFfic:RDCCh:FLENgth	535
:REVerse:RC34:TRAFfic:RDCCh:FOFFset	536
:REVerse:RC34:TRAFfic:RDCCh:POWer	536
:REVerse:RC34:TRAFfic:RDCCh:RATE	536
:REVerse:RC34:TRAFfic:RDDCh:RCONfig	537
:REVerse:RC34:TRAFfic:RDCCh:WALSh	537
:REVerse:RC34:TRAFfic:RDCCh[:STATe]	537
:REVerse:RC34:TRAFfic:RFCH:DATA	538
:REVerse:RC34:TRAFfic:RFCH:DATA:FIX4	538
:REVerse:RC34:TRAFfic:RFCH:EBNO	538
:REVerse:RC34:TRAFfic:RFCH:FLENgth	539
:REVerse:RC34:TRAFfic:RFCH:FOFFset	539
:REVerse:RC34:TRAFfic:RFCH:POWer	540
:REVerse:RC34:TRAFfic:RFCH:RCONfig	540
:REVerse:RC34:TRAFfic:RFCH:RATE	540
:REVerse:RC34:TRAFfic:RFCH:WALSh	541
:REVerse:RC34:TRAFfic:RFCH[:STATe]	541
:REVerse:RC34:TRAFfic:RSCH[1]2:DATA	541
:REVerse:RC34:TRAFfic:RSCH[1]2:DATA:FIX4	542
:REVerse:RC34:TRAFfic:RSCH[1]2:DATA:EBNO	542
:REVerse:RC34:TRAFfic:RSCH[1]2:FLENgth	543
:REVerse:RC34:TRAFfic:RSCH[1]2:FOFFset	543
:REVerse:RC34:TRAFfic:RSCH[1]2:POWer	543
:REVerse:RC34:TRAFfic:RSCH[1]2:RCONfig	544
:REVerse:RC34:TRAFfic:RSCH[1]2:RATE	544
:REVerse:RC34:TRAFfic:RSCH[1]2:TCODE	544
:REVerse:RC34:TRAFfic:RSCH[1]2:WALSh	545
:REVerse:RC34:TRAFfic:RSCH[1]2[:STATe]	545
:REVerse:REFeRence:EXTeRnal:FREQuency	545
:REVerse:REFeRence[:SOURce]	546
:REVerse:TADVance	546
:REVerse:TEDGE	546
:REVerse:SRATE	547
[:STATe]	547

Contents

Custom Subsystem–Option 001/601or 002/602 ([:SOURce]:RADio:CUSTom)	548
:ALPha	548
:BBCLock	548
:BBT	549
:BRATe	549
:BURSt:SHAPe:FALL:DELay	551
:BURSt:SHAPe:FALL:TIME	551
:BURSt:SHAPe:FDELay	552
:BURSt:SHAPe:FTIME	552
:BURSt:SHAPe:RDELay	553
:BURSt:SHAPe:RISE:DELay	554
:BURSt:SHAPe:RISE:TIME	554
:BURSt:SHAPe:RTIME	555
:BURSt:SHAPe[:TYPE]	555
:CHANnel	556
:DATA	556
:DATA:FIX4	557
:DATA:PRAM	557
:DENCode	558
:EDATa:DELay	558
:EDCLock	558
:EREference	559
:EREference:VALue	559
:FILTer	560
:IQ:SCALE	561
:MODulation:FSK[:DEViation]	561
:MODulation:MSK[:PHASe]	562
:MODulation:UFSK	562
:MODulation:UIQ	562
:MODulation[:TYPE]	563
:POLarity[:ALL]	563
:SRATe	564
:STANdard:SELect	565
:TRIGger:TYPE	566
:TRIGger:TYPE:CONTinuous[:TYPE]	566
:TRIGger:TYPE:GATE:ACTive	567
:TRIGger[:SOURce]	567
:TRIGger[:SOURce]:EXTernal:DELay	568

:TRIGger[:SOURce]:EXTernal:DELay:STATe	569
:TRIGger[:SOURce]:EXTernal:SLOPe	569
:TRIGger[:SOURce]:EXTernal[:SOURce]	570
[:STATe]	570
DECT Subsystem–Option 402 ([:SOURce]:RADio:DECT)	571
:ALPha	571
:BBCLock	571
:BBT	572
:BRATe	572
:BURSt:PN9	574
:BURSt:SHAPe:FALL:DELay	574
:BURSt:SHAPe:FALL:TIME	575
:BURSt:SHAPe:FDELay	575
:BURSt:SHAPe:FTIME	576
:BURSt:SHAPe:RDELay	576
:BURSt:SHAPe:RISE:DELay	577
:BURSt:SHAPe:RISE:TIME	578
:BURSt:SHAPe:RTIME	578
:BURSt:SHAPe[:TYPE]	579
:BURSt[:STATe]	579
:CHANnel	580
:DATA	580
:DATA:FIX4	581
:DATA:PRAM	581
:DEFault	582
:EDATa:DELay	582
:EDCLock	582
:EREFerence	583
:EREFerence:VALue	583
:FILTer	584
:IQ:SCALE	585
:MODulation:FSK[:DEViation]	585
:MODulation:MSK[:PHASe]	586
:MODulation:UFSK	586
:MODulation:UIQ	586
:MODulation[:TYPE]	587
:POLarity[:ALL]	587
:PPart:SLOT0 [1] 2 3 4 5 6 7 8 9 10 11[:TYPE]	588

Contents

:PPart:SLOT0 [1] 2 3 4 5 6 7 8 9 10 11:CUSTom	588
:PPart:SLOT0 [1] 2 3 4 5 6 7 8 9 10 11:CUSTom:FIX4	589
:PPart:SLOT0 [1] 2 3 4 5 6 7 8 9 10 11:LCAPacity:A	589
:PPart:SLOT0 [1] 2 3 4 5 6 7 8 9 10 11:LCAPacity:P	590
:PPart:SLOT0 [1] 2 3 4 5 6 7 8 9 10 11:LCAPacity:S	590
:PPart:SLOT0 [1] 2 3 4 5 6 7 8 9 10 11:LCAPacity[:B]	591
:PPart:SLOT0 [1] 2 3 4 5 6 7 8 9 10 11:LCAPacity[:B]:FIX4	591
:PPart:SLOT0 [1] 2 3 4 5 6 7 8 9 10 11:LCAPacity:POWer	592
:PPart:SLOT0 [1] 2 3 4 5 6 7 8 9 10 11:STATe	592
:PPart:SLOT0 [1] 2 3 4 5 6 7 8 9 10 11:TRAFfic:A	592
:PPart:SLOT0 [1] 2 3 4 5 6 7 8 9 10 11:TRAFfic:P	593
:PPart:SLOT0 [1] 2 3 4 5 6 7 8 9 10 11:TRAFfic:S	593
:PPart:SLOT0 [1] 2 3 4 5 6 7 8 9 10 11:TRAFfic[:B]	594
:PPart:SLOT0 [1] 2 3 4 5 6 7 8 9 10 11:TRAFfic[:B]:FIX4	594
:PPart:SLOT0 [1] 2 3 4 5 6 7 8 9 10 11:ZLCapacity:A	595
:PPart:SLOT0 [1] 2 3 4 5 6 7 8 9 10 11:ZLCapacity:P	595
:PPart:SLOT0 [1] 2 3 4 5 6 7 8 9 10 11:ZLCapacity:A	596
:PPart:SLOT0 [1] 2 3 4 5 6 7 8 9 10 11:ZLCapacity[:B]	596
:PPart:SLOT0 [1] 2 3 4 5 6 7 8 9 10 11:ZLCapacity[:B]:FIX4	597
:PPart:SLOT0 [1] 2 3 4 5 6 7 8 9 10 11:ZTRaffic:A	597
:PPart:SLOT0 [1] 2 3 4 5 6 7 8 9 10 11:ZTRaffic:P	598
:PPart:SLOT0 [1] 2 3 4 5 6 7 8 9 10 11:ZTRaffic:S	598
:PPart:SLOT0 [1] 2 3 4 5 6 7 8 9 10 11:ZTRaffic[:B]	599
:PPart:SLOT0 [1] 2 3 4 5 6 7 8 9 10 11:ZTRaffic[:B]:FIX4	599
:RFPart:SLOT0 [1] 2 3 4 5 6 7 8 9 10 11[:TYPE]	600
:RFPart:SLOT0 [1] 2 3 4 5 6 7 8 9 10 11:CUSTom	600
:RFPart:SLOT0 [1] 2 3 4 5 6 7 8 9 10 11:CUSTom:FIX4	601
:RFPart:SLOT0 [1] 2 3 4 5 6 7 8 9 10 11:DUMM2:A	601
:RFPart:SLOT0 [1] 2 3 4 5 6 7 8 9 10 11:DUMM2:P	602
:RFPart:SLOT0 [1] 2 3 4 5 6 7 8 9 10 11:DUMM2:S	602
:RFPart:SLOT0 [1] 2 3 4 5 6 7 8 9 10 11:DUMM[1]:A	602
:RFPart:SLOT0 [1] 2 3 4 5 6 7 8 9 10 11:DUMM[1]:P	603
:RFPart:SLOT0 [1] 2 3 4 5 6 7 8 9 10 11:DUMM[1]:S	603
:RFPart:SLOT0 [1] 2 3 4 5 6 7 8 9 10 11:LCAPacity:A	603
:RFPart:SLOT0 [1] 2 3 4 5 6 7 8 9 10 11:LCAPacity:P	604
:RFPart:SLOT0 [1] 2 3 4 5 6 7 8 9 10 11:LCAPacity:S	604
:RFPart:SLOT0 [1] 2 3 4 5 6 7 8 9 10 11:LCAPacity[:B]	604
:RFPart:SLOT0 [1] 2 3 4 5 6 7 8 9 10 11:LCAPacity[:B]:FIX4	605

:RFPart:SLOT0[1] 2 3 4 5 6 7 8 9 10 11:LCAPacity:POWer	605
:RFPart:SLOT0[1] 2 3 4 5 6 7 8 9 10 11:STATe	606
:RFPart:SLOT0[1] 2 3 4 5 6 7 8 9 10 11:TRAFfic:A	606
:RFPart:SLOT0[1] 2 3 4 5 6 7 8 9 10 11:TRAFfic:P	606
:RFPart:SLOT0[1] 2 3 4 5 6 7 8 9 10 11:TRAFfic:S	607
:RFPart:SLOT0[1] 2 3 4 5 6 7 8 9 10 11:TRAFfic[:B]	607
:RFPart:SLOT0[1] 2 3 4 5 6 7 8 9 10 11:TRAFfic[:B]:FIX4	608
:RFPart:SLOT0[1] 2 3 4 5 6 7 8 9 10 11:ZLCapacity:A	608
:RFPart:SLOT0[1] 2 3 4 5 6 7 8 9 10 11:ZLCapacity:P	609
:RFPart:SLOT0[1] 2 3 4 5 6 7 8 9 10 11:ZLCapacity:S	609
:RFPart:SLOT0[1] 2 3 4 5 6 7 8 9 10 11:ZLCapacity[:B]	610
:RFPart:SLOT0[1] 2 3 4 5 6 7 8 9 10 11:ZLCapacity[:B]:FIX4	610
:RFPart:SLOT0[1] 2 3 4 5 6 7 8 9 10 11:ZTRAffic:A	611
:RFPart:SLOT0[1] 2 3 4 5 6 7 8 9 10 11:ZTRAffic:P	611
:RFPart:SLOT0[1] 2 3 4 5 6 7 8 9 10 11:ZTRAffic:S	611
:RFPart:SLOT0[1] 2 3 4 5 6 7 8 9 10 11:ZTRAffic[:B]	612
:RFPart:SLOT0[1] 2 3 4 5 6 7 8 9 10 11:ZTRAffic[:B]:FIX4	612
:SECondary:RECall	613
:SECondary:SAVE	613
:SECondary:TRIGger[:SOURce]	613
:SECondary[:STATe]	614
:SOUT	614
:SOUT:OFFSet	615
:SOUT:SLOT	615
:SRATe	616
:TRIGger:TYPE	617
:TRIGger:TYPE:CONTInuous[:TYPE]	618
:TRIGger:TYPE:GATE:ACTive	618
:TRIGger[:SOURce]	619
:TRIGger[:SOURce]:EXTErnal:DELay	620
:TRIGger[:SOURce]:EXTErnal:SLOPe	620
:TRIGger[:SOURce]:EXTErnal[:SOURce]	621
:TRIGger[:SOURce]:EXTErnal:DELay:STATe	622
[:STATe]	622
EDGE Subsystem–Option 402 ([:SOURce]:RADio:EDGE)	623
:ALPHa	623
:BBCLock	623
:BBT	624

Contents

:BURSt:SHAPE:FALL:DElay	624
:BURSt:SHAPE:FDElay	625
:BURSt:SHAPE:FALL:TIME	626
:BURSt:SHAPE:FTIME	626
:BURSt:SHAPE:RDElay	627
:BURSt:SHAPE:RISE:DElay	628
:BURSt:SHAPE:RISE:TIME	628
:BURSt:SHAPE:RTIME	629
:BURSt:SHAPE[:TYPE]	630
:BURSt[:STATe]	630
:CHANnel	631
:DATA	631
:DATA:PRAM	632
:DATA:FIX4	632
:DEFault	633
:EDATa:DElay	633
:EDCLock	633
:EREference	634
:EREference:VALue	634
:FILTer	635
:IQ:SCALE	636
:MODulation:FSK[:DEViation]	636
:MODulation:MSK[:PHASe]	637
:MODulation:UFSK	637
:MODulation:UIQ	637
:MODulation[:TYPE]	638
:POLarity[:ALL]	638
:SECondary:RECall	638
:SECondary:SAVE	639
:SECondary:TRIGger[:SOURce]	639
:SECondary[:STATe]	640
:SLOT0[1]2 3 4 5 6 7:CUSTom	640
:SLOT0[1]2 3 4 5 6 7:CUSTom:FIX4	641
:SLOT0[1]2 3 4 5 6 7:CUSTom:GUARd	641
:SLOT0[1]2 3 4 5 6 7:GMSK:ENCryption	642
:SLOT0[1]2 3 4 5 6 7:GMSK:ENCryption:CS1:DATA	643
:SLOT0[1]2 3 4 5 6 7:GMSK:ENCryption:CS4:DATA	644
:SLOT0[1]2 3 4 5 6 7:GMSK:ENCryption:DLINk:MCS1:DATA	644

:SLOT0[1]2 3 4 5 6 7:GMSK:ENCrypTion:FIX4	644
:SLOT0[1]2 3 4 5 6 7:GMSK:ENCrypTion:TCH:FS:DATA	645
:SLOT0[1]2 3 4 5 6 7:GMSK:ENCrypTion:ULINK:MCS1:DATA	645
:SLOT0[1]2 3 4 5 6 7:GMSK:STeal	646
:SLOT0[1]2 3 4 5 6 7:GMSK:TSEQuence	646
:SLOT0[1]2 3 4 5 6 7:MULTIslot	647
:SLOT0[1]2 3 4 5 6 7:NORMAl:ENCrypTion	648
:SLOT0:NORMAl:ENCrypTion:BCH:BCC	650
:SLOT0:NORMAl:ENCrypTion:BCH:CELLId	650
:SLOT0:NORMAl:ENCrypTion:BCH:LAC	651
:SLOT0:NORMAl:ENCrypTion:BCH:MCC	651
:SLOT0:NORMAl:ENCrypTion:BCH:MNC	651
:SLOT0:NORMAl:ENCrypTion:BCH:PLMN	652
:SLOT0[1]2 3 4 5 6 7:NORMAl:ENCrypTion:DLINK:MCS5:DATA	652
:SLOT0[1]2 3 4 5 6 7:NORMAl:ENCrypTion:DLINK:MCS9:DATA	653
:SLOT0[1]2 3 4 5 6 7:NORMAl:ENCrypTion:ETCH:F43:DATA	653
:SLOT0[1]2 3 4 5 6 7:NORMAl:ENCrypTion:FIX4	654
:SLOT0[1]2 3 4 5 6 7:NORMAl:ENCrypTion:ULINK:MCS5:DATA	654
:SLOT0[1]2 3 4 5 6 7:NORMAl:ENCrypTion:ULINK:MCS9:DATA	655
:SLOT0[1]2 3 4 5 6 7:NORMAl:ENCrypTion:UNCoded	655
:SLOT0[1]2 3 4 5 6 7:NORMAl:GUARd	656
:SLOT0[1]2 3 4 5 6 7:NORMAl:T1	656
:SLOT0[1]2 3 4 5 6 7:NORMAl:T2	657
:SLOT0[1]2 3 4 5 6 7:NORMAl:TSEQuence	657
:SLOT0[1]2 3 4 5 6 7:LCAPacity:POWer	657
:SLOT0[1]2 3 4 5 6 7:STATe	658
:SLOT0[1]2 3 4 5 6 7[:TYPE]	658
:SOUT:	658
:SOUT:OFFSet	659
:SOUT:SLOT	660
:SRATe	660
:TRIGger:TYPE	662
:TRIGger:TYPE:CONTInuous[:TYPE]	662
:TRIGger:TYPE:GATE:ACTIve	663
:TRIGger[:SOURce]	663
:TRIGger[:SOURce]:EXTeRnal:DELay	664
:TRIGger[:SOURce]:EXTeRnal:DELay:FINe	665
:TRIGger[:SOURce]:EXTeRnal:DELay:STATe	666

Contents

:TRIGger[:SOURce]:EXTernal:SLOPe	666
:TRIGger[:SOURce]:EXTernal[:SOURce]	666
[:STATe]	667

9. Receiver Test Digital Commands (continued) 669

GPS Subsystem–Option 409	
([:SOURce]:RADio[1] 2 3 4:GPS)	670
:DATA	670
:DMODE	670
:DSHift	671
:FILTer	671
:FILTer:ALPHa	672
:FILTer:BBT	673
:FILTer:CHANnel	673
:IQPHase	674
:PCODE	674
:RCODE	674
:REFClk	675
:REFFreq	675
:SATid	676
[:STATe]	676
GSM Subsystem–Option 402 ([:SOURce]:RADio:GSM)	677
:ALPha	677
:BBCLock	677
:BBT	678
:BRATe	678
:BURSt:PN9	680
:BURSt:SHAPe:FALL:DELay	680
:BURSt:SHAPe:FALL:TIME	681
:BURSt:SHAPe:FDELay	681
:BURSt:SHAPe:FTIME	682
:BURSt:SHAPe:RDELay	683
:BURSt:SHAPe:RISE:DELay	683
:BURSt:SHAPe:RISE:TIME	684
:BURSt:SHAPe:RTIME	685
:BURSt:SHAPe[:TYPE]	685
:BURSt[:STATe]	686
:CHANnel	686

:DATA	687
:DATA:PRAM	687
:DATA:FIX4	688
:DEFAult	688
:DENCode	688
:EDATa:DELay	689
:EDCLock	689
:EREference	690
:EREference:VALue	690
:FILTer	691
:IQ:SCALE	692
:MODulation:FSK[:DEViation]	692
:MODulation:MSK[:PHASe]	693
:MODulation:UFSK	693
:MODulation:UIQ	693
:MODulation[:TYPE]	694
:POLarity[:ALL]	694
:SECondary:RECall	695
:SECondary:SAVE	695
:SECondary:TRIGger[:SOURce]	695
:SECondary[:STATe]	696
:SLOT0[1]2 3 4 5 6 7:ACCess:ENCRyption	696
:SLOT0[1]2 3 4 5 6 7:ACCess:ENCRyption:FIX4	696
:SLOT0[1]2 3 4 5 6 7:ACCess:ETAil	697
:SLOT0[1]2 3 4 5 6 7:ACCess:SSEquence	697
:SLOT0[1]2 3 4 5 6 7:ACCess:CUSTom	697
:SLOT0[1]2 3 4 5 6 7:CUSTom:FIX4	698
:SLOT0[1]2 3 4 5 6 7:DUMMy:TSEquence	698
:SLOT0[1]2 3 4 5 6 7:MULTIslot	699
:SLOT0[1]2 3 4 5 6 7:NORMal:ENCRyption	699
:SLOT0:NORMal:ENCRyption:BCH:BCC	701
:SLOT0:NORMal:ENCRyption:BCH:CELLid	701
:SLOT0:NORMal:ENCRyption:BCH:LAC	701
:SLOT0:NORMal:ENCRyption:BCH:MCC	702
:SLOT0:NORMal:ENCRyption:BCH:MNC	702
:SLOT0:NORMal:ENCRyption:BCH:PLMN	702
:SLOT0[1]2 3 4 5 6 7:NORMal:ENCRyption:CS1:DATA	703
:SLOT0[1]2 3 4 5 6 7:NORMal:ENCRyption:CS4:DATA	703

Contents

:SLOT0[1]2 3 4 5 6 7:NORMAl:ENCRyption:DLINK:MCS1:DATA	703
:SLOT0[1]2 3 4 5 6 7:NORMAl:ENCRyption:FIX4	704
:SLOT0[1]2 3 4 5 6 7:NORMAl:ENCRyption:TCH:FS:DATA	704
:SLOT0[1]2 3 4 5 6 7:NORMAl:ENCRyption:ULINK:MCS1:DATA	704
:SLOT0[1]2 3 4 5 6 7:NORMAl:STeal	705
:SLOT0[1]2 3 4 5 6 7:NORMAl:TSEquence.	705
:SLOT0[1]2 3 4 5 6 7:POWer	706
:SLOT0[1]2 3 4 5 6 7:STAtE	706
:SLOT0[1]2 3 4 5 6 7:SYNC:ENCRyption	706
:SLOT0[1]2 3 4 5 6 7:SYNC:ENCRyption:FIX4	707
:SLOT0[1]2 3 4 5 6 7:SYNC:TSEquence.	707
:SLOT0[1]2 3 4 5 6 7[:TYPE]	707
:SOUT	708
:SOUT:OFFSet	708
:SOUT:SLOT	709
:SRATe	709
:TRIGger:EXTernal:DELay	710
:TRIGger:TYPE	711
:TRIGger:TYPE:CONTInuous[:TYPE]	711
:TRIGger:TYPE:GATE:ACTive.	712
:TRIGger[:SOURce]	712
:TRIGger[:SOURce]:EXTernal:DELay	713
:TRIGger[:SOURce]:EXTernal:DELay:FINe	714
:TRIGger[:SOURce]:EXTernal:DELay:STAtE	714
:TRIGger[:SOURce]:EXTernal:SLOPe	714
:TRIGger[:SOURce]:EXTernal[:SOURce]	715
[:STAtE]	716
HSDPA over W-CDMA Subsystem–Option 418 ([:SOURce]:RADio:WCDMa:HSDPa[:BBG])	717
File Overview	717
Managing ESG Setting Conflicts and Error Messages.	719
:DLINK:APPLy	719
Nk:AWGN:CN	720
:DLINK:AWGN[:STAtE]	720
:DLINK:BBCLock[:SOURce]	720
:DLINK:CPICH:CCODE	721
:DLINK:CPICH:POWer.	721
:DLINK:CPICH[:STAtE]	721
:DLINK:DPCH:CCODE	721

:DLINK:DPCH:DATA	722
:DLINK:DPCH:DATA:FIX4	722
:DLINK:DPCH:DCH[1] 2 3 4 5 6:BSIZe	723
:DLINK:DPCH:DCH[1] 2 3 4 5 6:CTYPe	723
:DLINK:DPCH:DCH[1] 2 3 4 5 6:CRC	724
:DLINK:DPCH:DCH[1] 2 3 4 5 6:DATA	724
:DLINK:DPCH:DCH[1] 2 3 4 5 6:DATA:FIX4	724
:DLINK:DPCH:DCH[1] 2 3 4 5 6:NBLocks	725
:DLINK:DPCH:DCH[1] 2 3 4 5 6:RMATtribute	725
:DLINK:DPCH:DCH[1] 2 3 4 5 6:TTI	726
:DLINK:DPCH:DCH2 3 4 5 6[:STATe]	726
:DLINK:DPCH:POWer	726
:DLINK:DPCH:SFORmat	727
:DLINK:DPCH:SSCOffset	727
:DLINK:DPCH:TFCI	728
:DLINK:DPCH:TOFFset	728
:DLINK:DPCH:TPC:NSTeps	729
:DLINK:DPCH:TPC:PATtern	729
:DLINK:DPCH:TRPosition	730
:DLINK:DPCH[:STATe]	730
:DLINK:FILTer	730
:DLINK:FILTer:ALPHa	731
:DLINK:FILTer:BBT	731
:DLINK:FILTer:CHANnel	732
:DLINK:HSBurst	732
:DLINK:HSDPa:AMC:CQIMapping:UECategory	733
:DLINK:HSDPa:AMC:CPATtern	733
:DLINK:HSDPa:FCONtrol	734
:DLINK:HSDPa:HARQ:APATtern	734
:DLINK:HSDPa:HARQ:MNHTrans	735
:DLINK:HSDPa:HARQ:RVSequence[1] 2 3 4 5 6 7 8	736
:DLINK:HSDPa[1] 2 3 4:BSINfo	737
:DLINK:HSDPa[1] 2 3 4:HSPDSch:COFFset	737
:DLINK:HSDPa[1] 2 3 4:HSPDSch:DATA	737
:DLINK:HSDPa[1] 2 3 4:HSPDSch:DATA:FIX4	738
:DLINK:HSDPa:HSPDSch:DSCH:DATA	738
:DLINK:HSDPa:HSPDSch:DSCH:DATA:FIX4	739
:DLINK:HSDPa:HSPDSch:DSCH:IRBSize	739

Contents

:DLINK:HSDPa:HSPDsch:NCODe	740
:DLINK:HSDPa[1] 2 3 4:HSPDsch:POWer	740
:DLINK:HSDPa[1] 2 3 4:HSPDsch:SFORmat	741
:DLINK:HSDPa[1] 2 3 4:HSPDsch[:STATe]	741
:DLINK:HSDPa[1] 2 3 4:HSSCch:CCODe	742
:DLINK:HSDPa[1] 2 3 4:HSSCch:DATA	742
:DLINK:HSDPa[1] 2 3 4:HSSCch:DATA:FIX4	743
:DLINK:HSDPa[1] 2 3 4:HSSCch:POWer	743
:DLINK:HSDPa[1] 2 3 4:ITTI	744
:DLINK:HSDPa[1] 2 3 4:ITTI:PATtern	744
:DLINK:HSDPa:NHPRocess	745
:DLINK:HSDPa[1] 2 3 4:RVParameter	745
:DLINK:HSDPa[1] 2 3 4:UEID	746
:DLINK:HSDPa[1] 2 3 4[:STATe]	746
:DLINK:OCNS[1] 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16:CCODe	747
:DLINK:OCNS[1] 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16:DATA	747
:DLINK:OCNS[1] 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16:POWer	748
:DLINK:OCNS[1] 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16:SSCOffset	748
:DLINK:OCNS[1] 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16:TOFFset	749
:DLINK:OCNS[1] 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16[:STATe]	749
:DLINK:PCCPch:BCH:DATA	749
:DLINK:PCCPch:BCH:DATA:FIX4	750
:DLINK:PCCPch:CCODe	750
:DLINK:PCCPch:POWer	751
:DLINK:PCCPch[:STATe]	751
:DLINK:PICH:CCODe	751
:DLINK:PICH:DATA	752
:DLINK:PICH:DATA:FIX4	752
:DLINK:PICH:POWer	753
:DLINK:PICH[:STATe]	753
:DLINK:POLarity	753
:DLINK:PSCH:POWer	754
:DLINK:PSCH[:STATe]	754
:DLINK:SCRamblecode	754
:DLINK:SSCH:POWer	755
:DLINK:SSCH[:STATe]	755
:DLINK:TXDiversity	755
:LINK	756

:ULINK:APPLy	756
:ULINK:AWGN:CN	757
:ULINK:AWGN[:STATe]	757
:ULINK:BBReference:EXTeRnal:MRATe	757
:ULINK:BBReference[:SOURce]	758
:ULINK:DPCCh:CCODE	758
:ULINK:DPCCh:DATA	758
:ULINK:DPCCh:DATA:FIX4	759
:ULINK:DPCCh:FBI:PATTeRn	759
:ULINK:DPCCh:FBI:PATTeRn:FIX	760
:ULINK:DPCCh:POWeR	760
:ULINK:DPCCh:SFORmat	761
:ULINK:DPCCh[:STATe]	761
:ULINK:DPCCh:TFCI	761
:ULINK:DPCCh:TPC:NSTePs	762
:ULINK:DPCCh:TPC:PATTeRn	762
:ULINK:DPDCh:CCODE	763
:ULINK:DPDCh:DATA	763
:ULINK:DPDCh:DATA:FIX4	763
:ULINK:DPDCh:DCH[1] 2 3 4 5 6:BSIZE	764
:ULINK:DPDCh:DCH[1] 2 3 4 5 6:CRC	764
:ULINK:DPDCh:DCH[1] 2 3 4 5 6:CTYPe	764
:ULINK:DPDCh:DCH[1] 2 3 4 5 6:DATA	765
:ULINK:DPDCh:DCH[1] 2 3 4 5 6:DATA:FIX4	765
:ULINK:DPDCh:DCH[1] 2 3 4 5 6:NBLocks	766
:ULINK:DPDCh:DCH[1] 2 3 4 5 6:RMATtribute	766
:ULINK:DPDCh:DCH[1] 2 3 4 5 6:TTL	767
:ULINK:DPDCh:DCH2 3 4 5 6[:STATe]	767
:ULINK:DPDCh:POWeR	768
:ULINK:DPDCh:SFORmat	768
:ULINK:DPDCh[:STATe]	768
:ULINK:FCLock:INTeRval	769
:ULINK:FCLock:POLarity	769
:ULINK:FILTeR	770
ULINK:FILTeR:ALPHa	770
:ULINK:FILTeR:BBT	771
:ULINK:FILTeR:CHANnel	771
:ULINK:FOFFset	772

Contents

:ULINK:HSDPcch:APATtern	772
:ULINK:HSDPcch:APOWer	773
:ULINK:HSDPcch:CCODE	773
:ULINK:HSDPcch:CPATtern	774
:ULINK:HSDPcch:CPOWer	774
:ULINK:HSDPcch:NPOWer	775
:ULINK:HSDPcch:SFDelay	775
:ULINK:HSDPcch[:STATe]	775
:ULINK:POLarity	776
:ULINK:SCRamblecode	776
:ULINK:SDElay	776
:ULINK:SFNRst:POLarity	777
:ULINK:SYNC:MODE	777
:ULINK:SYNC[:SOURce]	777
:ULINK:TOFFset	778
[:STATe]	778
NADC Subsystem–Option 402 ([:SOURce]:RADio[:NADC])	779
:ALPha	779
:BBCLock	779
:BBT	780
:BRATe	780
:BURSt:PN9	781
:BURSt:SHAPE[:TYPE]	782
:BURSt:SHAPE:FALL:DElay	782
:BURSt:SHAPE:FALL:TIME	783
:BURSt:SHAPE:FDElay	784
:BURSt:SHAPE:FTIME	784
:BURSt:SHAPE:RDElay	785
:BURSt:SHAPE:RISE:DElay	786
:BURSt:SHAPE:RISE:TIME	786
:BURSt:SHAPE:RTIME	787
:BURSt[:STATe]	788
:BURSt:SHAPE[:TYPE]	788
:CHANnel	789
:DATA	789
:DATA:PRAM	790
:DATA:FIX4	790
:DEFault	790

:EDATa:DELay	.791
:EDCLock	.791
:EREFerence	.792
:EREFerence:VALue	.792
:FILTer	.793
:FRATe	.794
:IQ:SCALE	.794
:MODulation:FSK[:DEViation]	.794
:MODulation:MSK[:PHASe]	.795
:MODulation:UFSK	.795
:MODulation:UIQ	.796
:MODulation[:TYPE]	.796
:REPeat	.796
:POLarity[:ALL]	.797
:SECOndary:RECall	.797
:SECOndary:SAVE	.797
:SECOndary:TRIGger[:SOURce]	.798
:SECOndary[:STATe]	.798
:SLOT[1] 2 3 4 5 6:DCUStom	.798
:SLOT[1] 2 3 4 5 6:DCUStom:FIX4	.799
:SLOT[1] 2 3 4 5 6:DTCHannel:CDLocator	.799
:SLOT[1] 2 3 4 5 6:DTCHannel:CDVCcode	.800
:SLOT[1] 2 3 4 5 6:DTCHannel:SACChannel	.800
:SLOT[1] 2 3 4 5 6:DTCHannel:SWORd	.800
:SLOT[1] 2 3 4 5 6:DTCHannel[:DATA]	.801
:SLOT[1] 2 3 4 5 6:DTCHannel[:DATA]FIX4	.801
:SLOT[1] 2 3 4 5 6:POWer	.802
:SLOT[1] 2 3 4 5 6:STATe	.802
:SLOT[1] 2 3 4 5 6:UCUStom	.802
:SLOT[1] 2 3 4 5 6:UCUStom:FIX4	.803
:SLOT[1] 2 3 4 5 6:UTCHannel:CDVCcode	.803
:SLOT[1] 2 3 4 5 6:UTCHannel:SACChannel	.804
:SLOT[1] 2 3 4 5 6:UTCHannel:SWORd	.804
:SLOT[1] 2 3 4 5 6:UTCHannel[:DATA]	.804
:SLOT[1] 2 3 4 5 6:UTCHannel[:DATA]:FIX4	.805
:SLOT[1] 2 3 4 5 6[:TYPE]	.805
:SOUT	.806
:SOUT:OFFSet	.806

Contents

:SOUT:SLOT	807
:SRATe	807
:TRIGger:TYPE	808
:TRIGger:TYPE:CONTInuous[:TYPE]	809
:TRIGger:TYPE:GATE:ACTive	810
:TRIGger[:SOURce]	810
:TRIGger[:SOURce]:EXTernal:DELay	811
:TRIGger[:SOURce]:EXTernal:DELay:STATe	812
:TRIGger[:SOURce]:EXTernal:SLOPe	812
:TRIGger[:SOURce]:EXTernal[:SOURce]	812
.....	813
PDC Subsystem–Option 402 ([:SOURce]:RADio:PDC)	814
:ALPha	814
:BBCLock	814
:BBT	815
:BRATe	815
:BURSt:PN9	817
:BURSt:SHAPE:FALL:DELay	817
:BURSt:SHAPE:FALL:TIME	818
:BURSt:SHAPE:FDELay	818
:BURSt:SHAPE:FTIME	819
:BURSt:SHAPE:RDELay	820
:BURSt:SHAPE:RISE:DELay	820
:BURSt:SHAPE:RISE:TIME	821
:BURSt:SHAPE:RTIME	822
:BURSt:SHAPE[:TYPE]	822
:BURSt[:STATe]	823
:CHANnel	823
:DATA	824
:DATA:PRAM	824
:DATA:FIX4	825
:DEFault	825
:EDATa:DELay	825
:EDCLock	826
:EREference	826
:EREference:VALue	827
:FILTer	827
:FRATe	828

:IQ:SCALe	828
:MODulation:FSK[:DEViation]	829
:MODulation:MSK[:PHASe]	829
:MODulation:UFSK	830
:MODulation:UIQ	830
:MODulation[:TYPE]	830
:POLarity[:ALL]	831
:SECondary:RECall	831
:SECondary:SAVE	832
:SECondary:TRIGger[:SOURce]	832
:SECondary[:STATe]	833
:SLOT0[1]2 3 4 5:DCUSTom	833
:SLOT0[1]2 3 4 5:DCUSTom:FIX4	834
:SLOT0[1]2 3 4 5:DTCHannel:CCODE	834
:SLOT0[1]2 3 4 5:DTCHannel:SACChannel	834
:SLOT0[1]2 3 4 5:DTCHannel:SWORd	835
:SLOT0[1]2 3 4 5:DTCHannel[:TCHannel]	835
:SLOT0[1]2 3 4 5:DTCHannel[:TCHannel]:FIX4	836
:SLOT0[1]2 3 4:POWer	836
:SLOT0[1]2 3 4 5:STATe	836
:SLOT0[1]2 3 4 5:UCUSTom	837
:SLOT0[1]2 3 4 5:UCUSTom:FIX4	837
:SLOT0[1]2 3 4 5:UTCHannel:CCODE	838
:SLOT0[1]2 3 4 5:UTCHannel:SACChannel	838
:SLOT0[1]2 3 4 5:UTCHannel:SWORd	838
:SLOT0[1]2 3 4 5:UTCHannel[:TCHannel]	839
:SLOT0[1]2 3 4 5:UTCHannel[:TCHannel]:FIX4	839
:SLOT0[1]2 3 4 5:UVOX:CCODE	840
:SLOT0[1]2 3 4 5:UVOX:SACChannel	840
:SLOT0[1]2 3 4 5:UVOX:SWORd	840
:SLOT0[1]2 3 4 5[:TYPE]	841
:SOUT	841
:SOUT:OFFSet	842
:SOUT:SLOT	842
:SRATe	843
:TRIGger:TYPE	844
:TRIGger:TYPE:CONTinuous[:TYPE]	845
:TRIGger:TYPE:GATE:ACTive	846

Contents

:TRIGger[:SOURce]	846
:TRIGger[:SOURce]:EXTernal:DELay	847
:TRIGger[:SOURce]:EXTernal:DELay:STATe	848
:TRIGger[:SOURce]:EXTernal:SLOPe	848
:TRIGger[:SOURce]:EXTernal[:SOURce] [:STATe]	849
PHS Subsystem–Option 402 ([:SOURce]:RADio:PHS)	850
:ALPha	850
:BBCLock	850
:BBT	851
:BRATe	851
:BURSt:PN9	852
:BURSt:SCRamble:SEED	853
:BURSt:SCRamble[:STATe]	853
:BURSt:SHAPe:FALL:DELay	854
:BURSt:SHAPe:FALL:TIME	854
:BURSt:SHAPe:FDELay	855
:BURSt:SHAPe:FTIME	856
:BURSt:SHAPe:RDELay	856
:BURSt:SHAPe:RISE:DELay	857
:BURSt:SHAPe:RISE:TIME	858
:BURSt:SHAPe:RTIME	858
:BURSt:SHAPe[:TYPE]	859
:BURSt[:STATe]	859
:CHANnel	860
:DATA	860
:DATA:PRAM	861
:DATA:FIX4	861
:DEFault	862
:DLINK:SLOT[1] 2 3 4:CUSTom	862
:DLINK:SLOT[1] 2 3 4:CUSTom:FIX4	862
:DLINK:SLOT[1] 2 3 4:POWer	863
:DLINK:SLOT[1] 2 3 4:SCHannel:CSID	863
:DLINK:SLOT[1] 2 3 4:SCHannel:IDLE	863
:DLINK:SLOT[1] 2 3 4:SCHannel:PSID	864
:DLINK:SLOT[1] 2 3 4:SCHannel:UWORD	864
:DLINK:SLOT[1] 2 3 4:STATe	864
:DLINK:SLOT[1] 2 3 4:TCHannel:SACChannel	865

:DLINK:SLOT[1] 2 3 4:TCHannel:UWORD	865
:DLINK:SLOT[1] 2 3 4:TCHannel[:TCHannel]	866
:DLINK:SLOT[1] 2 3 4:TCHannel[:TCHannel]:FIX4	866
:DLINK:SLOT[1] 2 3 4[:TYPE]	867
:EDATa:DELay	867
:EDCLock	867
:EREFerence	868
:EREFerence:VALue	868
:FILTer	869
:IQ:SCALE	870
:MODulation:FSK[:DEViation]	870
:MODulation:MSK[:PHASe]	872
:MODulation:UFSK	872
:MODulation:UIQ	872
:MODulation[:TYPE]	873
:POLarity[:ALL]	873
:SECondary:RECall	874
:SECondary:SAVE	874
:SECondary:TRIGger[:SOURce]	874
:SECondary[:STATE]	875
:SOUT	875
:SOUT:OFFSet	876
:SOUT:SLOT	876
:SRATe	877
:TRIGger:TYPE	878
:TRIGger:TYPE:CONTInuous[:TYPE]	879
:TRIGger:TYPE:GATE:ACTive	880
:TRIGger[:SOURce]:EXTernal:DELay	880
:TRIGger[:SOURce]:EXTernal:DELay:STATe	881
:TRIGger[:SOURce]:EXTernal:SLOPe	881
:TRIGger[:SOURce]:EXTernal[:SOURce]	882
:TRIGger[:SOURce]	882
:ULINK:SLOT[1] 2 3 4:CUSTom	883
:ULINK:SLOT[1] 2 3 4:CUSTom:FIX4	884
:ULINK:SLOT[1] 2 3 4:POWer	884
:ULINK:SLOT[1] 2 3 4:SCHannel:CSID	884
:ULINK:SLOT[1] 2 3 4:SCHannel:IDLE	885
:ULINK:SLOT[1] 2 3 4:SCHannel:PSID	885

Contents

:ULINK:SLOT[1] 2 3 4:SCHannel:UWORD.	885
:ULINK:SLOT[1] 2 3 4:STATe	886
:ULINK:SLOT[1] 2 3 4:TCHannel:SACChannel	886
:ULINK:SLOT[1] 2 3 4:TCHannel:UWORD.	886
:ULINK:SLOT[1] 2 3 4:TCHannel[:TCHannel]	887
:ULINK:SLOT[1] 2 3 4:TCHannel[:TCHannel:FIX4	887
:ULINK:SLOT[1] 2 3 4[:TYPE]	888
[:STATe]	888
TETRA Subsystem–Option 402 ([:SOURce]:RADio:TETRa)	889
:ALPha	889
:BBCLock	889
:BBT	890
:BRATe	890
:BURSt:PN9	892
:BURSt:SCRamble:SEED	892
:BURSt:SCRamble[:STATe]	893
:BURSt:SHAPE:FALL:DELAy	893
:BURSt:SHAPE:FALL:TIME	894
:BURSt:SHAPE:FDELAy	894
:BURSt:SHAPE:FTIME	895
:BURSt:SHAPE:RDELAy	896
:BURSt:SHAPE:RISE:DELAy	896
:BURSt:SHAPE:RISE:TIME	897
:BURSt:SHAPE:RTIME	898
:BURSt:SHAPE[:TYPE]	898
:BURSt[:STATe]	899
:CHANnel	899
:DATA	900
:DATA:PRAM	900
:DATA:FIX4	901
:DEFault	901
:EDATa:DELAy	901
:EDCLock	902
:EREFerence	902
:EREFerence:VALue	903
:FILTer	903
:IQ:SCALE	904
:MODulation:FSK[:DEViation]	904

:MODulation:MSK[:PHASe]	.905
:MODulation:UFSK	.905
:MODulation:UIQ	.906
:MODulation[:TYPE]	.906
:POLarity[:ALL]	.907
:SECondary:RECall	.907
:SECondary:SAVE	.907
:SECondary:TRIGger[:SOURce]	.908
:SECondary[:STATe]	.908
:SLOT[1] 2 3 4:DCCustom	.908
:SLOT[1] 2 3 4:DCCustom:FIX4	.909
:DCNormal:B1	.909
:DCNormal:B2	.910
:SLOT[1] 2 3 4:DCNormal:TSEQUence	.910
:SLOT[1] 2 3 4:DCNormal[:DATA]	.910
:SLOT[1] 2 3 4:DCNormal[:DATA]:FIX4	.911
:SLOT[1] 2 3 4:DCSync:B	.911
:SLOT[1] 2 3 4:DCSync:FCOR	.912
:SLOT[1] 2 3 4:DCSync:SSB	.912
:SLOT[1] 2 3 4:DCSync:STS	.912
:SLOT[1] 2 3 4:DCSync[:DATA]	.913
:SLOT[1] 2 3 4:DCSync[:DATA]:FIX4	.913
:SLOT[1] 2 3 4:DDCustom	.914
:SLOT[1] 2 3 4:DDCustom:FIX4	.914
:SLOT[1] 2 3 4:DDNormal:B1	.914
:SLOT[1] 2 3 4:DDNormal:B2	.915
:SLOT[1] 2 3 4:DDNormal:TSEQUence	.915
:SLOT[1] 2 3 4:DDNormal[:DATA]	.916
:SLOT[1] 2 3 4:DDNormal[:DATA]:FIX4	.916
:SLOT[1] 2 3 4:DDSync:B	.917
:SLOT[1] 2 3 4:DDSync:FCOR	.917
:SLOT[1] 2 3 4:DDSync:SSB	.917
:SLOT[1] 2 3 4:DDSync:STS	.918
:SLOT[1] 2 3 4:DDSync[:DATA]	.918
:SLOT[1] 2 3 4:DDSync[:DATA]:FIX4	.918
:SLOT[1] 2 3 4:POWer	.919
:SLOT[1] 2 3 4:STATe	.919
:SLOT[1] 2 3 4:UC1:TSEQUence	.919

Contents

:SLOT[1] 2 3 4:UC1[:DATA]	920
:SLOT[1] 2 3 4:UC1[:DATA]:FIX4	920
:SLOT[1] 2 3 4:UC2:TSEquence	920
:SLOT[1] 2 3 4:UC2[:DATA]	921
:SLOT[1] 2 3 4:UC2[:DATA]:FIX4	921
:SLOT[1] 2 3 4:UCUStom	922
:SLOT[1] 2 3 4:UCUStom:FIX4	922
:SLOT[1] 2 3 4:UNORmal:TSEquence	922
:SLOT[1] 2 3 4:UNORmal[:DATA]	923
:SLOT[1] 2 3 4:UNORmal[:DATA]:FIX4	923
:SLOT[1] 2 3 4[:TYPE]	924
:SOUT	924
:SOUT:OFFSet	925
:SOUT:SLOT	926
:SRATe	926
:TRIGger:TYPE	928
:TRIGger:TYPE:CONTInuous[:TYPE]	928
:TRIGger:TYPE:GATE:ACTive	929
:TRIGger[:SOURce]	930
:TRIGger[:SOURce]:EXTernal:DELay	931
:TRIGger[:SOURce]:EXTernal:DELay:STATe	931
:TRIGger[:SOURce]:EXTernal:SLOPe	932
:TRIGger[:SOURce]:EXTernal[:SOURce]	933
[:STATe]	933
Wideband CDMA Base Band Generator Subsystem–Option 400 ([:SOURce]:RADio:WCDMa:TGPP[:BBG])	934
:BBCLock	934
:BBCLock:EXT:RATE	934
:DLINK:APPLy	935
:DLINK:AWGN:CN	935
:DLINK:AWGN:CPOWer	935
:DLINK:AWGN:ECNO	936
:DLINK:AWGN:ECRPower	936
:DLINK:AWGN:ECRef	936
:DLINK:AWGN:FNBW	937
:DLINK:AWGN:NPOWer	937
:DLINK:AWGN:TICPower	937
:DLINK:AWGN[:STATe]	938
:DLINK:BBCLock	938

:DLINK:CARB:CMODE:CCODE	938
:DLINK:CARB:CMODE:DATA	938
:DLINK:CARB:CMODE:FOFFset	939
:DLINK:CARB:CMODE:FSTRuct	939
:DLINK:CARB:CMODE:POWer	940
:DLINK:CARB:CMODE:PRATio	940
:DLINK:CARB:CMODE:SCTYpe	940
:DLINK:CARB:CMODE:SFORmat	941
:DLINK:CARB:CMODE:SSCodeos	941
:DLINK:CARB:CMODE:TFIRst	942
:DLINK:CARB:CMODE:TGL	942
:DLINK:CARB:CMODE[:STATe]	942
:DLINK:CPICH:CCODE	942
:DLINK:CPICH:POWer	943
:DLINK:CPICH[:STATe]	943
:DLINK:CRATe	943
:DLINK:DPCH[1]:BALance	944
:DLINK:DPCH[1]:BINitalize	944
:DLINK:DPCH[1]2:ALL[:STATe]	944
:DLINK:DPCH[1]2:CCODE	945
:DLINK:DPCH[1]2:DATA	945
:DLINK:DPCH[1]2:DATA:FIX4	946
:DLINK:DPCH[1]2:POWer	946
:DLINK:DPCH[1]2:RCSetup	947
:DLINK:DPCH[1]2:SLOTformat	948
:DLINK:DPCH[1]2:SRATe	948
:DLINK:DPCH[1]2:SSCodeos	948
:DLINK:DPCH[1]2:TFCI:PATtern	949
:DLINK:DPCH[1]2:TOFFset	949
:DLINK:DPCH[1]2:TPC:NUMSteps	950
:DLINK:DPCH[1]2:TPC:PATtern	950
:DLINK:DPCH[1]2[:STATe]	951
:DLINK:FILTer	951
:DLINK:FILTer:ALPHa	952
:DLINK:FILTer:BBT	952
:DLINK:FILTer:CHANnel	953
:DLINK:MSYNc	953
:DLINK:OCNS[1]2 3 4 5 6 7 8 9 10 11 12 13 14 15 16:ALL[:STATe]	953

Contents

:DLINK:OCNS[1] 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16:CCODE	954
:DLINK:OCNS[1] 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16:DATA	954
:DLINK:OCNS[1] 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16:POWer	954
:DLINK:OCNS[1] 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16:SRATe	955
:DLINK:OCNS[1] 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16:SSCodeos	955
:DLINK:OCNS[1] 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16:TOFFset	956
:DLINK:OCNS[1] 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16[:STATe]	956
:DLINK:OOSTest[:STATe]	956
:DLINK:OOSTest:DTXGate:POLarity	957
:DLINK:PADJust	957
:DLINK:PCCPch:BCHData	957
:DLINK:PCCPch:BCHData:FIX4	958
:DLINK:PCCPch:CCODE	958
:DLINK:PCCPch:POWer	958
:DLINK:PCCPch[:STATe]	959
:DLINK:PICH:CCODE	959
:DLINK:PICH:DATA	959
:DLINK:PICH:DATA:FIX4	960
:DLINK:PICH:PIBits	960
:DLINK:PICH:PINDicator	960
:DLINK:PICH:POWer	961
:DLINK:PICH[:STATe]	961
:DLINK:POLarity	961
:DLINK:PSCH:POWer	962
:DLINK:PSCH[:STATe]	962
:DLINK:RPANel:INPut:ALTPower	962
:DLINK:RPANel:INPut:BBGRef	963
:DLINK:RPANel:INPut:BGATe	963
:DLINK:RPANel:INPut:PTRigger1	963
:DLINK:RPANel:INPut:PTRigger2	964
:DLINK:RPANel:OUTPut:DCLock	964
:DLINK:RPANel:OUTPut:DOUT	966
:DLINK:RPANel:OUTPut:EVENT1	967
:DLINK:RPANel:OUTPut:EVENT2	967
:DLINK:RPANel:OUTPut:EVENT3	968
:DLINK:RPANel:OUTPut:EVENT4	968
:DLINK:RPANel:OUTPut:SSYNc	969
:DLINK:SCH[:STATe]	969

:DLINK:SCRamblecode	969
:DLINK:SDElay	970
:DLINK:SSCH:POWer	970
:DLINK:SSCH:SSGRoup	970
:DLINK:SSCH[:STATe]	971
:DLINK:TGAP:FSTRuct	971
:DLINK:TGAP:POFFset	971
:DLINK:TGAP:PSI[1]:CFN	972
:DLINK:TGAP:PSI[1]:CMMethod	972
:DLINK:TGAP:PSI[1]:D	973
:DLINK:TGAP:PSI[1]:L1	973
:DLINK:TGAP:PSI[1]:L2	973
:DLINK:TGAP:PSI[1]:PL1	974
:DLINK:TGAP:PSI[1]:PL2	974
:DLINK:TGAP:PSI[1]:PRC	975
:DLINK:TGAP:PSI[1]:PS	975
:DLINK:TGAP:PSI[1]:SN	975
:DLINK:TGAP:RPARameter	976
:DLINK:TGAP:SCFN	976
:DLINK:TGAP:STARt:TRIGger	977
:DLINK:TGAP:STARt:TRIGger:POLarity	977
:DLINK:TGAP:STOP:TRIGger	977
:DLINK:TGAP:STOP:TRIGger:POLarity	978
:DLINK:TGAP[:STATe]	978
:DLINK:TSETup	979
:DLINK:TXDV	980
:DLINK[:TGRoup [A] B]:DCH[1] 2 3 4 5 6:BLKSize	980
:DLINK[:TGRoup [A] B]:DCH[1] 2 3 4 5 6:BPFRame	981
:DLINK[:TGRoup [A] B]:DCH[1] 2 3 4 5 6:BRATe	981
:DLINK[:TGRoup [A] B]:DCH[1] 2 3 4 5 6:BSSize	981
:DLINK[:TGRoup [A] B]:DCH[1] 2 3 4 5 6:CODE	982
:DLINK[:TGRoup [A] B]:DCH[1] 2 3 4 5 6:CRC	982
:DLINK[:TGRoup [A] B]:DCH[1] 2 3 4 5 6:DATA	983
:DLINK[:TGRoup [A] B]:DCH[1] 2 3 4 5 6:DATA:EINSert	983
:DLINK[:TGRoup [A] B]:DCH[1] 2 3 4 5 6:DATA:FIX4	984
:DLINK[:TGRoup [A] B]:DCH[1] 2 3 4 5 6:NBLocks	984
:DLINK[:TGRoup [A] B]:DCH[1] 2 3 4 5 6:POSITION	985
:DLINK[:TGRoup [A] B]:DCH[1] 2 3 4 5 6:PPERcentage	985

Contents

:DLINK[:TGRoup [A]B]:DCH[1]2 3 4 5 6:RMATch	985
:DLINK[:TGRoup [A]B]:DCH[1]2 3 4 5 6:TTI	986
:DLINK[:TGRoup [A]B]:DCH[1]2 3 4 5 6[:STATe]	986
:LINK	987
:POLarity[:ALL]	987
:ULINK:APPLy	987
:ULINK:AWGN:CN	988
:ULINK:AWGN:CPOWer	988
:ULINK:AWGN:DRATe	988
:ULINK:AWGN:EBNO	989
:ULINK:AWGN:EBRef	990
:ULINK:AWGN:FNBW	990
:ULINK:AWGN:NPOWer	991
:ULINK:AWGN:TICPower	991
:ULINK:AWGN[:STATe]	991
:ULINK:CRATe	992
:ULINK:DPCCh:BETA	992
:ULINK:DPCCh:CCODE	993
:ULINK:DPCCh:DATA	993
:ULINK:DPCCh:DATA:FIX4	994
:ULINK:DPCCh:FBI:PATTem	994
:ULINK:DPCCh:FBI:PATTem:FIX	995
:ULINK:DPCCh:FBI[:STATe]	995
:ULINK:DPCCh:POWer	996
:ULINK:DPCCh:RATE	996
:ULINK:DPCCh:SLOTformat	996
:ULINK:DPCCh:TFCI:PATTem	997
:ULINK:DPCCh:TFCI:PATTem:FIX	997
:ULINK:DPCCh:TFCI[:STATe]	998
:ULINK:DPCCh:TPC:NSTeps	998
:ULINK:DPCCh:TPC:PATTem	999
:ULINK:DPCCh:TPC:PATTem:FIX4	1000
:ULINK:DPCCh:TPC:PATTem:TRIGger:POLarity	1000
:ULINK:DPCCh:TPC:PATTem:TRIGger[:STATe]	1001
:ULINK:DPCCh:TPOWer	1001
:ULINK:DPCCh[:STATe]	1002
:ULINK:DPDCh:BETA	1002
:ULINK:DPDCh:CCODE	1003

:ULINK:DPDCh:DATA	1004
:ULINK:DPDCh:DATA:FIX4	1004
:ULINK:DPDCh:POWer	1005
:ULINK:DPDCh:RATE	1005
:ULINK:DPDCh:RBER	1006
:ULINK:DPDCh:SLOTformat	1007
:ULINK:DPDCh:TBER[:CLENgth]	1008
:ULINK:DPDCh:TBER:ELENgth	1008
:ULINK:DPDCh:TPOWer	1009
:ULINK:DPDCh[:STATe]	1009
:ULINK:FClock:INTerval	1009
:ULINK:FClock:POLarity	1010
:ULINK:FILTer	1010
:ULINK:FILTer:ALPHa	1011
:ULINK:FILTer:BBT	1012
:ULINK:FILTer:CHANnel	1012
:ULINK:FOFFset	1012
:ULINK:PADJust	1013
:ULINK:PHYSical[1]:TYPE	1013
:ULINK:PMODE:TPControl:HOLD	1014
:ULINK:PMODE:TPControl:POWer:INITial	1014
:ULINK:PMODE:TPControl:POWer:MAXimum	1015
:ULINK:PMODE:TPControl:POWer:MINimum	1015
:ULINK:PMODE:TPControl:POWer:RESet	1016
:ULINK:PMODE:TPControl:POWer:STEP	1016
:ULINK:PMODE:TPControl:TRIGger:POLarity	1017
:ULINK:PMODE[:SElect]	1017
:ULINK:PRACH:AICH:NUMBer	1018
:ULINK:PRACH:AICH:POLarity	1018
:ULINK:PRACH:AWGN:CN	1019
:ULINK:PRACH:AWGN:CPOWer	1019
:ULINK:PRACH:AWGN:DRATE	1019
:ULINK:PRACH:AWGN:EBNO	1020
:ULINK:PRACH:AWGN:ECNO	1020
:ULINK:PRACH:AWGN:EREF	1021
:ULINK:PRACH:AWGN:NPOWer	1021
:ULINK:PRACH:AWGN:TICPower	1022
:ULINK:PRACH:AWGN[:STATe]	1022

Contents

:ULINK:PRACH:MESSAge:CPARt:BETA	1023
:ULINK:PRACH:MESSAge:CPARt:DATA	1023
:ULINK:PRACH:MESSAge:CPARt:DATA:FIX4	1024
:ULINK:PRACH:MESSAge:CPARt:POWer	1024
:ULINK:PRACH:MESSAge:CPARt:RATE	1025
:ULINK:PRACH:MESSAge:CPARt:SLOTformat	1025
:ULINK:PRACH:MESSAge:CPARt:TFCI:PATtern	1026
:ULINK:PRACH:MESSAge:CPARt:TFCI:PATtern:FIX	1026
:ULINK:PRACH:MESSAge:CPARt:TFCI[:STATe]	1027
:ULINK:PRACH:MESSAge:DPARt:BETA	1027
:ULINK:PRACH:MESSAge:DPARt:DATA	1028
:ULINK:PRACH:MESSAge:DPARt:DATA:FIX4	1028
:ULINK:PRACH:MESSAge:DPARt:POWer	1029
:ULINK:PRACH:MESSAge:DPARt:RATE	1030
:ULINK:PRACH:MESSAge:DPARt:SLOTformat	1031
:ULINK:PRACH:MODE[:SELEct]	1032
:ULINK:PRACH:MULTi:MESSAge:TPOWer	1032
:ULINK:PRACH:MULTi:MESSAge[:STATe]	1033
:ULINK:PRACH:MULTi:NUMBer	1033
:ULINK:PRACH:MULTi:PREAmble:NUMBer	1034
:ULINK:PRACH:MULTi:PREAmble:POWer:INITIAL	1034
:ULINK:PRACH:MULTi:PREAmble:POWer:MAX	1034
:ULINK:PRACH:MULTi:PREAmble:POWer:RSTep	1035
:ULINK:PRACH:MULTi:PREAmble:PPM	1035
:ULINK:PRACH:MULTi:UE[1] 2 3 4 5 6 7 8:MESSAge:CPARt:CCODE	1035
:ULINK:PRACH:MULTi:UE[1] 2 3 4 5 6 7 8:MESSAge:DPARt:CCODE	1036
:ULINK:PRACH:MULTi:UE[1] 2 3 4 5 6 7 8:PREAmble:SIGNature	1036
:ULINK:PRACH:MULTi:UE[1] 2 3 4 5 6 7 8:SPOsition[1] 2 3 4 5 6 7 8[:ASLot]	1037
:ULINK:PRACH:MULTi:UE[1] 2 3 4 5 6 7 8[:STATe]	1038
:ULINK:PRACH:PREAmble:POWer:AVERAge	1038
:ULINK:PRACH:PREAmble:POWer:MODE	1039
:ULINK:PRACH:RPARAmeter	1040
:ULINK:PRACH:SCRAmblecode	1040
:ULINK:PRACH:SDELay	1041
:ULINK:PRACH:SUBChannel	1041
:ULINK:PRACH:TOFFset	1042
:ULINK:PRACH:TPA	1042
:ULINK:PRACH:TPM	1043

:ULINK:PRACH:TPOWer	1043
:ULINK:PRACH:TPP	1044
:ULINK:PRACH:TRIGger	1044
:ULINK:PRACH:TRIGger:POLarity	1045
:ULINK:PRACH:TRIGger:SOURce	1045
:ULINK:PRACH:TTI	1046
:ULINK:PRACH[:SINGle]:MESSAge[:STATe]	1046
:ULINK:PRACH[:SINGle]:NUMBer	1047
:ULINK:PRACH[:SINGle]:MESSAge:CPARt:CCODE	1047
:ULINK:PRACH[:SINGle]:MESSAge:DPARt:CCODE	1048
:ULINK:PRACH[:SINGle]:MESSAge:TPOWer	1049
:ULINK:PRACH[:SINGle]:NUMBer	1049
:ULINK:PRACH[:SINGle]:PREamble:NUMBer	1050
:ULINK:PRACH[:SINGle]:PREamble:POWER:INITial	1050
:ULINK:PRACH[:SINGle]:PREamble:POWER:MAX	1050
:ULINK:PRACH[:SINGle]:PREamble:POWER:RSTep	1051
:ULINK:PRACH[:SINGle]:PREamble:PPM	1052
:ULINK:PRACH[:SINGle]:PREamble:SIGNature	1052
:ULINK:RMCHannel	1053
:ULINK:RPANel:DPCH:INPut:ALTPower	1054
:ULINK:RPANel:DPCH:INPut:BBGRef	1054
:ULINK:RPANel:DPCH:INPut:BGATe	1054
:ULINK:RPANel:DPCH:INPut:PTRigger1	1055
:ULINK:RPANel:DPCH:INPut:PTRigger2	1055
:ULINK:RPANel:DPCH:OUTPut:DCLock	1055
:ULINK:RPANel:DPCH:OUTPut:DOUT	1057
:ULINK:RPANel:DPCH:OUTPut:EVENT1	1057
:ULINK:RPANel:DPCH:OUTPut:EVENT2	1058
:ULINK:RPANel:DPCH:OUTPut:EVENT3	1058
:ULINK:RPANel:DPCH:OUTPut:EVENT4	1059
:ULINK:RPANel:DPCH:OUTPut:SSYNc	1059
:ULINK:RPANel:PRACH:INPut:ALTPower	1060
:ULINK:RPANel:PRACH:INPut:BBGRef	1060
:ULINK:RPANel:PRACH:INPut:BGATe	1060
:ULINK:RPANel:PRACH:INPut:PTRigger1	1061
:ULINK:RPANel:PRACH:INPut:PTRigger2	1061
:ULINK:RPANel:PRACH:OUTPut:DCLock	1062
:ULINK:RPANel:PRACH:OUTPut:DOUT	1064

Contents

:ULINK:RPANel:PRACH:OUTPut:EVENT1	1064
:ULINK:RPANel:PRACH:OUTPut:EVENT2	1065
:ULINK:RPANel:PRACH:OUTPut:EVENT3	1066
:ULINK:RPANel:PRACH:OUTPut:EVENT4	1067
:ULINK:RPANel:PRACH:OUTPut:SSYNc	1068
:ULINK:SCRamblecode	1068
:ULINK:SDElay	1069
:ULINK:SFNRst:POLarity	1069
:ULINK:SYNC:MODE	1070
:ULINK:SYNC[:SOURce]	1070
:ULINK:TGAP:POFFset	1071
:ULINK:TGAP:PSI[1] 2 3 4 5 6:CFN	1071
:ULINK:TGAP:PSI[1]:CMMethod	1072
:ULINK:TGAP:PSI[1] 2 3 4 5 6:D	1072
:ULINK:TGAP:PSI[1] 2 3 4 5 6:L1	1073
:ULINK:TGAP:PSI[1] 2 3 4 5 6:L2	1073
:ULINK:TGAP:PSI[1] 2 3 4 5 6:PL1	1073
:ULINK:TGAP:PSI[1] 2 3 4 5 6:PL2	1074
:ULINK:TGAP:PSI[1] 2 3 4 5 6:POWer	1074
:ULINK:TGAP:PSI[1] 2 3 4 5 6:PRC	1075
:ULINK:TGAP:PSI[1] 2 3 4 5 6:PS	1075
:ULINK:TGAP:PSI[1] 2 3 4 5 6:SN	1076
:ULINK:TGAP:RPARameter	1076
:ULINK:TGAP:SCFN	1076
:ULINK:TGAP[:STATe]	1077
:ULINK:TGAP:STARt:TRIGger	1077
:ULINK:TGAP:STARt:TRIGger:POLarity	1078
:ULINK:TGAP:STOP:TRIGger	1078
:ULINK:TGAP:STOP:TRIGger:POLarity	1078
:ULINK:TOFFset	1079
:ULINK:TSTatus:COMPRessed	1079
:ULINK:TSTatus:RACH	1079
:ULINK:TSTatus:RECeive	1080
:ULINK:TSTatus:SYNC	1080
:ULINK:[TGRoup[1]]:DCH[1] 2 3 3 5 6:BLKSize	1080
:ULINK[:TGRoup[1]]:DCH[1] 2 3 4 5 6:BPFRame	1081
:ULINK[:TGRoup[1]]:DCH[1] 2 3 4 5 6:BRATe	1081
:ULINK:[TGRoup[1]]:DCH[1] 2 3 3 5 6:CODE	1081

:ULINK[:TGRoup[1]]:DCH[1] 2 3 3 5 6:CRC	1082
:ULINK[:TGRoup[1]]:DCH[1] 2 3 3 5 6:DATA	1082
:ULINK[:TGRoup[1]]:DCH[1] 2 3 4 5 6:DATA:BER:ACTual	1083
:ULINK[:TGRoup[1]]:DCH[1] 2 3 4 5 6:DATA:BER:ERRor:BIT	1083
:ULINK[:TGRoup[1]]:DCH[1] 2 3 4 5 6:DATA:BER:TOTal:BIT	1083
:ULINK[:TGRoup[1]]:DCH[1] 2 3 4 5 6:DATA:BER[:VALue]	1084
:ULINK[:TGRoup[1]]:DCH[1] 2 3 4 5 6:DATA:BLER:ACTual	1084
:ULINK[:TGRoup[1] 2]:DCH[1] 2 3 4 5 6:DATA:BLER:ERRor:BLOCK	1084
:ULINK[:TGRoup[1] 2]:DCH[1] 2 3 4 5 6:DATA:BLER:TOTal:BLOCK	1085
:ULINK[:TGRoup[1]]:DCH[1] 2 3 4 5 6:DATA:BLER[:VALue]	1085
:ULINK[:TGRoup[1]]:DCH[1] 2 3 4 5 6:DATA:EINsert	1086
:ULINK[:TGRoup[1]]:DCH[1] 2 3 4 5 6:DATA:FIX4	1086
:ULINK[:TGRoup[1]]:DCH[1] 2 3 4 5 6:NBLock	1087
:ULINK[:TGRoup [1]]:DCH[1] 2 3 4 5 6:PPERcentage	1087
:ULINK[:TGRoup[1]]:DCH[1] 2 3 4 5 6:RMATch	1087
:ULINK[:TGRoup[1]]:DCH[1] 2 3 4 5 6:TTI	1088
:ULINK[:TGRoup[1]]:DCH[1] 2 3 4 5 6:STATe]	1088
:ULINK[:TGRoup[1]]:RACH[1]:BLKSize	1089
:ULINK[:TGRoup [1]]:RACH[1]:BPFRame	1089
:ULINK[:TGRoup [1]]:RACH[1]:BRATe	1089
:ULINK[:TGRoup[1]]:RACH[1]:CODE	1090
:ULINK[:TGRoup[1]]:RACH[1]:CRC	1090
:ULINK[:TGRoup[1]]:RACH[1]:DATA	1090
:ULINK[:TGRoup[1]]:RACH[1]:DATA:BER:ACTual	1091
:ULINK[:TGRoup[1]]:RACH[1]:DATA:BER:ERRor:BIT	1091
:ULINK[:TGRoup[1]]:RACH[1]:DATA:BER:TOTal:BIT	1091
:ULINK[:TGRoup[1]]:RACH[1]:DATA:BER[:VALue]	1092
:ULINK[:TGRoup[1]]:RACH[1]:DATA:BLER:ACTual	1092
:ULINK[:TGRoup[1]]:RACH[1]:DATA:BLER:ERRor:BLOCK	1092
:ULINK[:TGRoup[1]]:RACH[1]:DATA:BLER:TOTal:BLOCK	1093
:ULINK[:TGRoup[1]]:RACH[1]:DATA:BLER[:VALue]	1093
:ULINK[:TGRoup[1]]:RACH[1]:DATA:EINsert	1094
:ULINK[:TGRoup[1]]:RACH[1]:DATA:FIX4	1094
:ULINK[:TGRoup[1]]:RACH[1]:NBLock	1095
:ULINK[:TGRoup [1]]:RACH[1]:PPERcentage	1095
:ULINK[:TGRoup[1]]:RACH[1]:RMATch	1095
:ULINK[:TGRoup[1]]:RACH[1]:TTI	1096
:ULINK[:TGRoup[1]]:RACH[1]:STATe]	1096
[:STATe]	1096

Contents

1 SCPI Basics

This chapter describes how SCPI information is organized and presented in this guide. An overview of the SCPI language is also provided. This Chapter contains the following major sections:

- [“Command Reference Information” on page 2](#)
- [“SCPI Basics” on page 3](#)

Command Reference Information

SCPI Command Listings

The Table of Contents lists the Standard Commands for Programmable Instruments (SCPI) without the parameters. The SCPI subsystem name will generally have the first part of the command in parenthesis that is repeated in all commands within the subsystem. The title(s) beneath the subsystem name is the remaining command syntax. The following example demonstrates this listing:

```
Communication Subsystem (:SYSTem:COMMunicate)
:PMETer:CHANnel
:SERial:ECHO
```

The following examples show the complete commands from the above Table of Contents listing:

```
:SYSTem:COMMunicate:PMETer:CHANnel
:SYSTem:COMMunicate:SERial:ECHO
```

Key and Data Field Cross Reference

The index is set up so applicable key and data field names can be cross-referenced to the appropriate SCPI command. There are two headings in the index where the key and data field names can be found:

- individual softkey, hardkey, or data field name
- subsystem name

Supported Field

Within each command section, the Supported heading describes which signal generator configurations are supported by the SCPI command. When “All” is shown next to this heading, all signal generator configurations are supported by the SCPI command. When “All with Option xxx” is shown next to this heading, only the stated option(s) is supported.

SCPI Basics

This section describes the general use of the SCPI language for the ESG. It is not intended to teach you everything about the SCPI language; the SCPI Consortium or IEEE can provide that level of detailed information. For a list of the specific commands available for the signal generator, refer to the table of contents.

For additional information, refer to the following publications:

- IEEE Standard 488.1-1987, IEEE Standard Digital Interface for Programmable Instrumentation. New York, NY, 1998.
- IEEE Standard 488.2-1992, IEEE Standard Codes, Formats, Protocols and Command Commands for Use with ANSI/IEEE Standard 488.1-1987. New York, NY, 1998.

Common Terms

The following terms are used throughout the remainder of this section:

Command	A command is an instruction in SCPI consisting of mnemonics (keywords), parameters (arguments), and punctuation. You combine commands to form messages that control instruments.
Controller	A controller is any device used to control the signal generator, for example a computer or another instrument.
Event Command	Some commands are events and cannot be queried. An event has no corresponding setting; it initiates an action at a particular time.
Program Message	A program message is a combination of one or more properly formatted commands. Program messages are sent by the controller to the signal generator.
Query	A query is a special type of command used to instruct the signal generator to make response data available to the controller. A query ends with a question mark. Generally you can query any command value that you set.
Response Message	A response message is a collection of data in specific SCPI formats sent from the signal generator to the controller. Response messages tell the controller about the internal state of the signal generator.

Command Syntax

A typical command is made up of keywords prefixed with colons (:). The keywords are followed by parameters. The following is an example syntax statement:

```
[ :SOURCE ] :POWER [ :LEVEL ] MAXimum|MINimum
```

In the example above, the [:LEVEL] portion of the command immediately follows the :POWER portion with no separating space. The portion following the [:LEVEL], MINimum|MAXimum, are the parameters (argument for the command statement). There is a separating space (white space) between the command and its parameter.

Additional conventions in syntax statements are shown in [Table 1-1](#) and [Table 1-2](#).

Table 1-1 Special Characters in Command Syntax

Characters	Meaning	Example
	A vertical stroke between keywords or parameters indicates alternative choices. For parameters, the effect of the command varies depending on the choice.	[:SOURCE] :AM: MOD DEEP NORMAl DEEP or NORMAl are the choices.
[]	Square brackets indicate that the enclosed keywords or parameters are optional when composing the command. These implied keywords or parameters will be executed even if they are omitted.	[:SOURCE] :FREQUENCY [:CW] ? SOURCE and CW are optional items.
< >	Angle brackets around a word (or words) indicate they are not to be used literally in the command. They represent the needed item.	[:SOURCE] :FREQUENCY: START <val><unit> In this command, the words <val> and <unit> should be replaced by the actual frequency and unit. :FREQUENCY:START 2.5GHZ
{ }	Braces indicate that parameters can optionally be used in the command once, several times, or not at all.	[:SOURCE] :LIST: POWER <val>{ , <val> } a single power listing: LIST:POWER 5 a series of power listings: LIST:POWER 5,10,15,20

Table 1-2 Command Syntax

Characters, Keywords, and Syntax	Example
Upper-case lettering indicates the minimum set of characters required to execute the command.	[:SOURCE] :FREQuency [:CW] ?, FREQ is the minimum requirement.
Lower-case lettering indicates the portion of the command that is optional; it can either be included with the upper-case portion of the command or omitted. This is the flexible format principle called forgiving listening. Refer to “Command Parameters and Responses” on page 7 for more information.	:FREQuency Either :FREQ, :FREQuency, or :FREQUENCY is correct.
When a colon is placed between two command mnemonics, it moves the current path down one level in the command tree. Refer to “Command Tree” on page 6 more information on command paths.	:TRIGger:OUTPut:POLarity? TRIGger is the root level keyword for this command.
If a command requires more than one parameter, you must separate adjacent parameters using a comma. Parameters are not part of the command path, so commas do not affect the path level.	[:SOURCE] :LIST: DWELl <val>{,<val>}
A semicolon separates two commands in the same program message without changing the current path.	:FREQ 2.5GHZ;:POW 10DBM
White space characters, such as <tab> and <space>, are generally ignored as long as they do not occur within or between keywords. However, you must use white space to separate the command from the parameter, but this does not affect the current path.	:FREQ uency or :POWER :LEVel are not allowed. A <space> between :LEVel and 6.2 is mandatory. :POWER:LEVel 6.2


Command Types

Commands can be separated into two groups: common commands and subsystem commands. [Figure 1-1](#), shows the separation of the two command groups.

Common commands are used to manage macros, status registers, synchronization, and data storage and are defined by IEEE 488.2. They are easy to recognize because they all begin with an asterisk. For example *IDN?, *OPC, and *RST are common commands. Common commands are not part of any subsystem and the signal generator interprets them in the same way, regardless of the current path setting.

Subsystem commands are distinguished by the colon (:). The colon is used at the beginning of a command statement and between keywords, as in :FREQUency [:CW?]. Each command subsystem is a set of commands that roughly correspond to a functional block inside the signal generator. For example, the power subsystem (:POWeR) contains commands for power generation, while the status subsystem (:STATus) contains commands for controlling status registers.

Figure 1-1

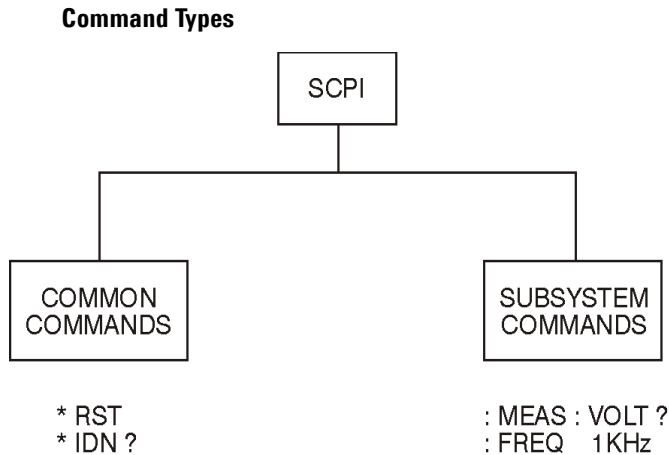


ck709a

Command Tree

Most programming tasks involve subsystem commands. SCPI uses a structure for subsystem commands similar to the file systems on most computers. In SCPI, this command structure is called a command tree and is shown in Figure 1-2.

Figure 1-2

Simplified Command Tree

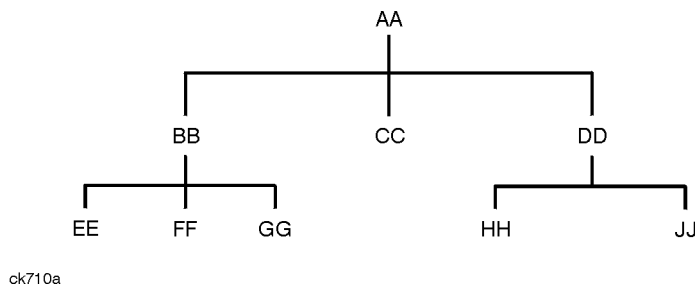

ck710a

The command closest to the top is the root command, or simply “the root.” Notice that you must follow a particular path to reach lower level commands. In the following example, :POWeR represents AA, :ALC

represents BB, :SOURce represents GG. The complete command path is :POWER:ALC:SOURce? (:AA:BB:GG).

Paths Through the Command Tree

To access commands from different paths in the command tree, you must understand how the signal generator interprets commands. The parser, a part of the signal generator firmware, decodes each message sent to the signal generator. The parser breaks up the message into component commands using a set of rules to determine the command tree path used. The parser keeps track of the current path (the level in the command tree) and where it expects to find the next command statement. This is important because the same keyword may appear in different paths. The particular path is determined by the keyword(s) in the command statement.

A message terminator, such as a <new line> character, sets the current path to the root. Many programming languages have output statements that automatically send message terminators.

NOTE The current path is set to the root after the line-power is cycled or when *RST is sent.

Command Parameters and Responses

SCPI defines different data formats for use in program and response messages. It does this to accommodate the principle of forgiving listening and precise talking. For more information on program data types refer to IEEE 488.2.

Forgiving listening means the command and parameter formats are flexible.

For example, with the :FREQuency:REFerence:STATe ON|OFF|1|0 command, the signal generator accepts :FREQuency:REFerence:STATe ON, :FREQuency:REFerence:STATe 1, :FREQ:REF:STAT ON, :FREQ:REF:STAT 1 to turn on the frequency reference mode.

Each parameter type has one or more corresponding response data types. A setting that you program using a numeric parameter returns either real or integer response data when queried. Response data (data returned to the controller) is more concise and restricted, and is called precise talking.

Precise talking means that the response format for a particular query is always the same.

For example, if you query the power state (:POWER:ALC:STATe?) when it is on, the response is always 1, regardless of whether you previously sent :POWER:ALC:STATe 1 or :POWER:ALC:STATe ON. [Table 1-3](#) shows the response for a given parameter type.

Table 1-3 Parameter and Response Types

Parameter Types	Response Data Types
Numeric	Real, Integer
Extended Numeric	Real, Integer
Discrete	Discrete
Boolean	Numeric Boolean
String	String

Numeric Parameters

Numeric parameters are used in both common and subsystem commands. They accept all commonly used decimal representations of numbers including optional signs, decimal points, and scientific notation.

If a signal generator setting is programmed with a numeric parameter which can only assume a finite value, it automatically rounds any entered parameter which is greater or less than the finite value. For example, if a signal generator has a programmable output impedance of 50 or 75 ohms, and you specified 76.1 for the output impedance, the value is rounded to 75. The following are examples of numeric parameters:

- 100 no decimal point required
- 100. fractional digits optional
- 1.23 leading signs allowed
- 4.56E<space>3 space allowed after the E in exponential
- 7.89E-001 use either E or e in exponential
- +256 leading + allowed
- .5 digits left of decimal point optional

Extended Numeric Parameters

Most subsystems use extended numeric parameters to specify physical quantities. Extended numeric parameters accept all numeric parameter values and other special values as well.

The following are examples of extended numeric parameters:

100	any simple numeric value
1.2GHZ	GHZ can be used for exponential (E009)
200MHZ	MHZ can be used for exponential (E006)
-100mV	negative 100 millivolts
10DEG	10 degrees

Extended numeric parameters also include the following special parameters:

DEfault	resets the parameter to its default value
UP	increments the parameter
DOWN	decrements the parameter
MINimum	sets the parameter to the smallest possible value
MAXimum	sets the parameter to the largest possible value

Discrete Parameters

Discrete parameters use mnemonics to represent each valid setting. They have a long and a short form, just like command mnemonics. You can mix upper and lower case letters for discrete parameters.

The following examples of discrete parameters are used with the command
:TRIGger[:SEQUence]:SOURce BUS|IMMediate|EXTernal.

BUS	GPIB, LAN, or RS-232 triggering
IMMediate	immediate trigger (free run)
EXTernal	external triggering

Although discrete parameters look like command keywords, do not confuse the two. In particular, be sure to use colons and spaces properly. Use a colon to separate command mnemonics from each other and a space to separate parameters from command mnemonics.

The following are examples of discrete parameters in commands:

```
TRIGger:SOURce BUS
TRIGger:SOURce IMMediate
TRIGger:SOURce EXTernal
```

Boolean Parameters

Boolean parameters represent a single binary condition that is either true or false. The two-state boolean parameter has four arguments. The following list shows the arguments for the two-state boolean parameter:

ON	boolean true, upper/lower case allowed
OFF	boolean false, upper/lower case allowed
1	boolean true
0	boolean false

String Parameters

String parameters allow ASCII strings to be sent as parameters. Single or double quotes are used as delimiters.

The following are examples of string parameters:

```
'This is valid'  
"This is also valid"  
'SO IS THIS'
```

Real Response Data

Real response data represent decimal numbers in either fixed decimal or scientific notation. Most high-level programming languages that support signal generator input/output (I/O) handle either decimal or scientific notation transparently.

The following are examples of real response data:

```
+4.000000E+010, -9.990000E+002  
-9.990000E+002  
+4.000000000000000E+010  
+1  
0
```

Integer Response Data

Integer response data are decimal representations of integer values including optional signs. Most status register related queries return integer response data.

The following are examples of integer response data:

0	signs are optional
+100	leading + allowed
-100	leading – allowed
256	never any decimal point

Discrete Response Data

Discrete response data are similar to discrete parameters. The main difference is that discrete response data only returns the short form of a particular mnemonic, in all upper case letters.

The following are examples of discrete response data:

```

IMM
EXT
INT
NEG

```

Numeric Boolean Response Data

Boolean response data returns a binary numeric value of one or zero.

String Response Data

String response data are similar to string parameters. The main difference is that string response data returns double quotes, rather than single quotes. Embedded double quotes may be present in string response data. Embedded quotes appear as two adjacent double quotes with no characters between them.

The following are examples of string response data:

```

"This is a string"
"one double quote inside brackets: [""]"
>Hello!"

```

Program Messages

The following commands will be used to demonstrate the creation of program messages:

```
[ :SOURce ] :FREQuency:START      [ :SOURce ] :FREQuency:STOP  
[ :SOURce ] :FREQuency[:CW]      [ :SOURce ] :POWer [ :LEVeL ] :OFFSet
```

Example 1

```
:FREQuency:START 500MHZ;STOP 1000MHZ
```

This program message is correct and will not cause errors; `START` and `STOP` are at the same path level. It is equivalent to sending the following message:

```
FREQuency:START 500MHZ;FREQuency:STOP 1000MHZ
```

Example 2

```
:POWer 10DBM;:OFFSet 5DB
```

This program message will result in an error. The message makes use of the default `POWER[:LEVeL]` node (root command). When using a default node, there is no change to the current path position. Since there is no command `OFFSet` at the root level, an error results.

The following example shows the correct syntax for this program message:

```
:POWer 10DBM;:POWer:OFFSet 5DB
```

Example 3

```
:POWer:OFFSet 5DB;POWer 10DBM
```

This program message results in a command error. The path is dropped one level at each colon. The first half of the message drops the command path to the lower level command `OFFSet`; `POWer` does not exist at this level.

The `POWER 10DBM` command is missing the leading colon and when sent, it causes confusion because the signal generator cannot find `POWER` at the `POWER:OFFSet` level. By adding the leading colon, the current path is reset to the root. The following shows the correct program message:

```
:POWer:OFFSet 5DB;:POWer 10DBM
```

Example 4

```
FREQ 500MHZ;POW 4DBM
```

In this example, the keyword short form is used. The program message is correct because it utilizes the default nodes of `:FREQ[:CW]` and `:POW[:LEVeL]`. Since default nodes do not affect the current path, it is not necessary to use a leading colon before `FREQ` or `POW`.

File Name Variables

File name variables, such as "<file name>", represent three formats, "<file name>", "<file name@file type>", and "</user/file type/file name>". The following shows the file name syntax for the three formats, but uses "FLATCAL" as the file name in place of the variable "<file name>":

```
Format 1      "FLATCAL"
Format 2      "FLATCAL@USERFLAT"
Format 3      "/USER/USERFLAT/FLATCAL"
```

Format 2 uses the file type extension (@USERFLAT) as part of the file name syntax. Format 3 uses the directory path which includes the file name and file type. Use Formats 2 and 3 when the command does not specify the file type. This generally occurs in the Memory (:MEMORY) or Mass Memory (:MMEMORY) subsystems.

The following examples demonstrate a command where Format 1 applies:

Command Syntax with the file name variable

```
:MEMORY:STORE:LIST "<file name>"
```

Command Syntax with the file name

```
:MEMORY:STORE:LIST "SWEEP_1"
```

This command has :LIST in the command syntax. This denotes that "SWEEP_1" will be saved in the :List file type location as a list type file.

The following examples demonstrate a command where Format 2 applies:

Command Syntax with the file name variable

```
:MMEMORY:COPY "<file name>","<file name>"
```

Command Syntax with the file name

```
:MMEMORY:COPY "FLATCAL@USERFLAT", "FLAT_2CAL@USERFLAT"
```

This command cannot distinguish which file type "FLATCAL" belongs to without the file type extension (@USERFLAT). If this command were executed without the extension, the command would assume the file type was Binary.

The following examples demonstrate a command where format 3 applies:

Command Syntax with the file name variable

```
:MMEMory:DATA "/USER/BBG1/WAVEFORM/<file name>",#ABC
```

alternate command syntax:

```
:MMEMory:DATA "WFM1:<file name>",#ABC
```

Command Syntax with the file name

```
:MMEMory:DATA "/USER/BBG1/WAVEFORM/FLATCAL",#ABC
```

alternate command syntax:

```
:MMEMory:DATA "WFM1:FLATCAL",#ABC
```

This command gives the directory path name where the file "FLATCAL" is stored.

- # indicates the start of the data block header
- A the number of decimal digits to follow in B.
- B a decimal number specifying the number of data bytes in C.
- C the binary waveform data.

Refer to [Table 3-1 on page 122](#) for a listing of the file systems and types. The entries under file type are used in the directory path.

MSUS (Mass Storage Unit Specifier) Variable

The variable "<msus>" enables a command to be file type specific when working with user files. Some commands use it as the only command parameter, while others can use it in conjunction with a file name when a command is not file type specific. When used with a file name, it is similar to Format 2 in the "File Name Variables" section on [page 13](#). The difference is the file type specifier (msus) occupies its own variable and is not part of the file name syntax.

The following examples illustrate the usage of the variable "<msus>" when it is the only command parameter:

Command Syntax with the msus variable

```
:MMEMory:CATAlOG? "<msus>"
```

Command Syntax with the file system

```
:MMEMory:CATAlOG? "LIST:"
```

The variable "<msus>" is replaced with "LIST:". When the command is executed, the output displays only the files from the List file system.

The following examples illustrate the usage of the variable "<file name>" with the variable "<msus>":

Command Syntax with the file name and msus variables

```
:MMEMory:DELEte[:NAME] "<file name>",["<msus>"]
```

Command Syntax with the file name and file system

```
:MMEMory:DELEte:NAME "LIST_1", "LIST:"
```

The command from the above example cannot discern which file system LIST_1 belongs to without a file system specifier and will not work without it. When the command is properly executed, LIST_1 is deleted from the List file system.

The following example shows the same command, but using Format 2 from the "File Name Variables" section on [page 13](#):

```
:MMEMory:DELEte:NAME "LIST_1@LIST"
```

When a file name is a parameter for a command that is not file system specific, either format ("<file name>","<msus>" or "<file name@file systems>") will work.

Refer to [Table 1-1 on page 4](#) for a listing of the file systems and types.

Quote Usage with SCPI Commands

As a general rule, programming languages require that SCPI commands be enclosed in double quotes as shown in the following example:

```
" :FM:EXTernal:IMPedance 600 "
```

However when a string is the parameter for a SCPI command, additional quotes or other delimiters may be required to identify the string. Your programming language may use two sets of double quotes, one set of single quotes, or back slashes with quotes to signify the string parameter. The following examples illustrate these different formats:

```
"MEMory:LOAD:LIST ""myfile"" used in BASIC programming languages
```

```
"MEMory:LOAD:LIST \"myfile\" used in C, C++, Java, and PERL
```

```
"MEMory:LOAD:LIST 'myfile' accepted by most programming languages
```

Consult your programming language reference manual to determine the correct format.

Binary, Decimal, Hexadecimal, and Octal Formats

Command values may be entered using a binary, decimal, hexadecimal, or octal format. When the binary, hexadecimal, or octal format is used, their values must be preceded with the proper identifier. The decimal format (default format) requires no identifier and the signal generator assumes this format when a numeric value is entered without one. The following list shows the identifiers for the formats that require them:

- #B identifies the number as a binary numeric value (base-2).
- #H identifies the number as a hexadecimal alphanumeric value (base-16).
- #Q identifies the number as a octal alphanumeric value (base-8).

The following are examples of SCPI command values and identifiers for the decimal value 45:

```
#B101101      binary equivalent
```

```
#H2D          hexadecimal equivalent
```

```
#Q55          octal equivalent
```

The following example sets the RF output power to 10 dBm (or the equivalent value for the currently selected power unit, such as DBUV or DBUEMF) using the hexadecimal value 000A:

```
:POW #H000A
```

A unit of measure, such as DBM or mV, will not work with the values when using a format other than decimal.

The following example sets the bluetooth board address to FFBF7 (hexadecimal):

```
:RADio:BLUEtooth:ARB:BDADdr #HFFBF7
```

2 Basic Function Commands

This chapter provides SCPI descriptions for subsystems dedicated to signal generator operations common to most ESG Signal Generators. This chapter contains the following major sections:

- “Correction Subsystem ([:SOURce]:CORRection)” on page 18
- “Digital Modulation Subsystem—E4438C ([:SOURce])” on page 20
- “Frequency Subsystem ([:SOURce])” on page 37
- “List/Sweep Subsystem ([:SOURce])” on page 48
- “Power Subsystem ([:SOURce]:POWer)” on page 57
- “Pulse Subsystem ([:SOURce]:PULSe)” on page 69

Correction Subsystem ([:SOURce]:CORRection)

:FLATness:LOAD

Supported All Models

```
[:SOURce]:CORRection:FLATness:LOAD "<file name>"
```

This command loads a user-flatness correction file.

Key Entry Load From Selected File

:FLATness:PAIR

Supported All Models

```
[:SOURce]:CORRection:FLATness:PAIR <freq.>[<freq suffix>],  
<corr.>[<corr suffix>]
```

This command sets a frequency and amplitude correction pair.

<corr.> This variable is the power correction.

Range	Frequency	Standard	Option UNB
	Option 501: 100kHz–1GHZ	–136 to 20DB	–136 to 25DB
	Option 502: 100kHz–2GHZ	–136 to 20DB	–136 to 25DB
	Option 503: 100kHz–3GHZ	–136 to 20DB	–136 to 25DB
	Option 504: 100kHz–4GHZ	–136 to 20DB	–136 to 25DB
	Option 506: 100kHz–6GHZ	–136 to 25DB	N/A

Key Entry Configure Cal Array

Remarks The maximum number of points that can be entered is 1601. Options 501, 502, and 504 are specific to the E4438C.

:FLATness:POINts

Supported All Models

```
[:SOURce]:CORRection:FLATness:POINts?
```

This query returns the number of points in the user-flatness correction file.

:FLATness:PRESet

Supported All Models

CAUTION The current correction data will be overwritten once this command is executed. Save the current data if needed. Refer to [“:FLATness:STORE” on page 19](#) for storing user-flatness files.

[:SOURCE]:CORREction:FLATness:PRESet

This command presets the user-flatness correction to a factory-defined setting that consists of one point.

Key Entry Preset List

:FLATness:STORE

Supported All Models

[:SOURCE]:CORREction:FLATness:STORE "<file name>"

This command stores the current user-flatness correction data to a file.

Key Entry Store To File

Remarks For information on file name syntax, refer to [“File Name Variables” on page 13](#).

[:STATe]

Supported All Models

[:SOURCE]:CORREction[:STATe] ON|OFF|1|0

[:SOURCE]:CORREction[:STATe]?

This command enables or disables the user-flatness corrections.

***RST** 0

Key Entry Flatness Off On

Digital Modulation Subsystem—E4438C (:SOURce)

:BURSt:SOURce

Supported E4438C

[:SOURce] :BURSt :SOURce EXT [1] | INT [1]

[:SOURce] :BURSt :SOURce?

This command selects either an internally generated or an externally supplied burst source.

***RST** EXT

Key Entry **Burst Envelope Int Ext Off**

Remarks The external burst source is applied to the EXT 1 INPUT connector.
The INT[1] choice will not work unless an internal burst source is active.

:BURSt:STATe

Supported E4438C

[:SOURce] :BURSt :STATe ON | OFF | 1 | 0

[:SOURce] :BURSt :STATe?

This command enables or disables the burst envelope function.

***RST** 0

Key Entry **Burst Envelope Int Ext Off**

:DM:EXTernal:ALC:BWIDth | BWIDth

Supported E4438C

```
[ :SOURce ] :DM:EXTernal:ALC:BWIDth | BWIDth NORMal | NARRow  
[ :SOURce ] :DM:EXTernal:ALC:BWIDth | BWIDth ?
```

This command sets the bandwidth of the automatic leveling control (ALC) loop.

NORMal This choice enables the signal generator to automatically select the ALC bandwidth for the current test conditions.

NARRow This choice sets the narrowest possible ALC bandwidth and is useful when an external I/Q source is connected.

***RST** NORM

Key Entry **ALC BW Normal Narrow**

:DM:EXTernal:HCRest[:STATe]

Supported E4438C

```
[ :SOURce ] :DM:EXTernal:HCRest [ :STATe ] ON | OFF | 1 | 0  
[ :SOURce ] :DM:EXTernal:HCRest [ :STATe ] ?
```

This command changes the operating condition to accommodate I/Q inputs with a high crest factor.

ON(1) This choice turns high crest mode on for externally applied signals with high crest factors. High crest mode allows the signal generator to process these signals with less distortion. For crest factors higher than 4 dB, I/Q drive levels should be reduced by 1 dB for each dB above that level. In high crest mode, the maximum output level is reduced and power level accuracy is degraded.

OFF(0) This choice disables the high crest mode.

***RST** 0

Key Entry **High Crest Mode Off On**

:DM:EXTernal:FILTer**Supported** E4438C

```
[ :SOURce ] :DM:EXTernal :FILTer 40e6 | THRough
[ :SOURce ] :DM:EXTernal :FILTer?
```

This command selects the filter or through path for I/Q signals routed to the rear panel I and Q outputs. Selecting a filter using this command will automatically set “:DM:EXTernal:FILTer:AUTO” on [page 22](#) to OFF(0) mode.

40e6 This choice applies a 40 MHz baseband filter.

THRough This choice bypasses filtering.

***RST** THR

Key Entry 40.000 MHz Through

:DM:EXTernal:FILTer:AUTO**Supported** E4438C

```
[ :SOURce ] :DM:EXTernal :FILTer :AUTO ON | OFF | 1 | 0
[ :SOURce ] :DM:EXTernal :FILTer :AUTO?
```

This command enables or disables the automatic selection of the filters for I/Q signals routed to the rear panel outputs.

ON(1) This choice will automatically select a digital modulation filter optimized for the current signal generator settings.

OFF(0) This choice disables the auto feature which lets you select a digital modulation filter or through path. Refer to “:DM:EXTernal:FILTer” on [page 22](#) for selecting a filter or through path.

***RST** 1

Key Entry I/Q Output Filter Manual Auto

:DM:EXTernal:POLarity

Supported E4438C

`[:SOURce] :DM:EXTernal:POLarity NORMal | INVert`

`[:SOURce] :DM:EXTernal:POLarity?`

This command sets the phase polarity for the I/Q signal.

***RST** NORM

Key Entry **Int Phase Polarity Normal Invert**

Remarks This command is for backward compatibility with the appropriate ESG E44xxB.

:DM:EXTernal:SOURce

Supported E4438C

`[:SOURce] :DM:EXTernal:SOURce EXTernal | INTernal | BBG1 | EXT600 | OFF | SUM`

`[:SOURce] :DM:EXTernal:SOURce?`

This command selects the I/Q signal source that is routed to the rear panel I and Q output connectors.

EXTernal This choice routes a portion of the externally applied signals at the 50 ohm I and Q input connectors to the rear panel I and Q output connectors.

INTernal This choice is for backward compatibility with the appropriate ESG E44xxB and performs the same function as the BBG1 selection.

BBG1 This choice routes a portion of the baseband generator I/Q signals to the rear panel I and Q connectors and requires Option 001/601 or 002/602.

EXT600 This choice routes a portion of the externally applied signals at the 600 ohm I and Q input connectors to the rear panel I and Q output connectors.

OFF This choice disables the output to the rear panel I and Q output connectors.

SUM This choice routes a portion of the summed I/Q signals from source one and two, to the rear panel I and Q output connectors. See “[:DM:SRATio](#)” on page 35 for setting the summing ratio of the I/Q signals between source one and two.

***RST** EXT

Key Entry **Ext 50 Ohm BBG1 Ext 600 Ohm Off Sum**

Remarks The output is the analog component of the I and Q signals. For selecting the I/Q source, refer to “[:DM:SOURce](#)” on page 35

:DM:IQADjustment:EXTernal:COFFset**Supported** E4438C

[:SOURce]:DM:IQADjustment:EXTernal:COFFset <val>

[:SOURce]:DM:IQADjustment:EXTernal:COFFset?

This command sets the common mode offset voltage for both the in-phase (I) and quadrature-phase (Q) signals going to the rear panel I and Q output connectors.

The variable <val> is expressed in units of volts (mV–V).

***RST** +0.00000000E+000**Range** –3 to 3**Key Entry** **Common Mode I/Q Offset**

Remarks This command is effective only if the state of the I/Q adjustment function is set to ON. Refer to “:DM:IQADjustment[:STATe]” on page 31.

:DM:IQADjustment:EXTernal:DIOffset**Supported** E4438C

[:SOURce]:DM:IQADjustment:EXTernal:DIOffset <val>

[:SOURce]:DM:IQADjustment:EXTernal:DIOffset?

This command sets the differential offset voltage for an in-phase (I) signal routed to the I output connectors.

The variable <val> is expressed in units of volts (mV–V).

***RST** +0.00000000E+000**Range** –3 to 3**Key Entry** **Diff. Mode I Offset**

Remarks This command is effective only if the state of the I/Q adjustment function is set to ON. Refer to “:DM:IQADjustment[:STATe]” on page 31.

:DM:IQADjustment:EXTernal:DQOffset

Supported E4438C

[:SOURce] :DM:IQADjustment:EXTernal:DQOffset <val>

[:SOURce] :DM:IQADjustment:EXTernal:DQOffset?

This command sets the differential offset voltage for a quadrature-phase (Q) signal routed to the Q output connectors.

***RST** +0.00000000E+000

Range -4 to 4

Key Entry **Diff. Mode Q Offset**

Remarks This command is effective only if the state of the I/Q adjustment function is set to ON. Refer to “:DM:IQADjustment[:STATe]” on page 31.

:DM:IQADjustment:EXTernal:GAIN

Supported E4438C

[:SOURce] :DM:IQADjustment:EXTernal:GAIN <val>

[:SOURce] :DM:IQADjustment:EXTernal:GAIN?

This command sets the I/Q gain ratio for signals routed to the rear panel I and Q output connectors.

The variable <val> is expressed in units of decibels (dB).

***RST** +0.00000000E+000

Range -4 to 4

Key Entry **I/Q Out Gain Balance**

Remarks This command is effective only if the state of the I/Q adjustment function is set to ON. Refer to “:DM:IQADjustment[:STATe]” on page 31.

:DM:IQADjustment:EXTernal:IOFFset**Supported** E4438C

[:SOURce]:DM:IQADjustment:EXTernal:IOFFset <val>

[:SOURce]:DM:IQADjustment:EXTernal:IOFFset?

This command sets the offset voltage for a signal applied to the 600 ohm I input connector.

The variable <val> is expressed in units of volts (mV–V).

***RST** +0.00000000E+000**Key Entry** Ext In 600 Ohm I Offset**Range** –5 to 5

Remarks This command is effective only if the state of the I/Q adjustment function is set to ON. Refer to “:DM:IQADjustment[:STATe]” on page 31.

:DM:IQADjustment:EXTernal:IQATten**Supported** E4438C

[:SOURce]:DM:IQADjustment:EXTernal:IQATten <val>

[:SOURce]:DM:IQADjustment:EXTernal:IQATten?

This command sets the I/Q output attenuation level.

The variable <val> is expressed in units of decibels (dB).

***RST** +6.00000000E+000**Range** 0–40**Key Entry** I/Q Output Atten

Remarks The value set by this command is active even if the I/Q adjustment function is off.

:DM:IQADjustment:EXTernal:QOFFset

Supported E4438C

[:SOURce] :DM:IQADjustment:EXTernal:QOFFset <val>

[:SOURce] :DM:IQADjustment:EXTernal:QOFFset?

This command sets the offset voltage for a signal applied to the 600 ohm Q input connector.

The variable <val> is expressed in units of volts (mV–V).

***RST** +0.00000000E+000

Range –5 to 5

Key Entry **Ext In 600 Ohm Q Offset**

Remarks This command is effective only if the state of the I/Q adjustment function is set to ON. Refer to “:DM:IQADjustment[:STATe]” on page 31.

:DM:IQADjustment:GAIN

Supported E4438C

[:SOURce] :DM:IQADjustment:GAIN <val>

[:SOURce] :DM:IQADjustment:GAIN?

This command sets the gain for the I signal relative to the Q signal.

The variable <val> is expressed in units of decibels (dB).

***RST** +0.00000000E+000

Range –4 to 4

Key Entry **I/Q Gain Balance Source 1**

Remarks This command is effective only if the state of the I/Q adjustment function is set to ON. Refer to “:DM:IQADjustment[:STATe]” on page 31.

:DM:IQADjustment:IOFFset**Supported** E4438C

[:SOURce]:DM:IQADjustment:IOFFset <val>

[:SOURce]:DM:IQADjustment:IOFFset?

This command adjusts the I channel offset value.

The variable <val> is expressed in units of percent with a minimum resolution of 0.025.

***RST** +0.00000000E+000**Range** -50.000 to 50.000**Key Entry** **I Offset**

Remarks When using this command to minimize the LO feedthrough signal, optimum performance is achieved when the command is sent after all other I/Q path commands are executed, such as those that change the internal phase polarity or adjust the modulator attenuator. If other adjustments are made after minimizing is performed, the LO feedthrough signal may increase.

This command is effective only if the state of the I/Q adjustment function is set to ON. Refer to “:DM:IQADjustment[:STATe]” on page 31.

:DM:IQADjustment:QOFFset**Supported** E4438C

[:SOURce]:DM:IQADjustment:QOFFset

[:SOURce]:DM:IQADjustment:QOFFset?

This command adjusts the Q channel offset value.

The variable <val> is expressed in units of percent with a minimum resolution of 0.025.

***RST** +0.00000000E+000**Range** -50.000 to 50.000**Key Entry** **Q Offset**

Remarks When using this command to minimize the LO feedthrough signal, optimum performance is achieved when the command is sent after all other I/Q path commands are executed, such as those that change the internal phase polarity or adjust the modulator attenuator. If other adjustments are made after minimizing is performed, the LO feedthrough signal may increase.

This command is effective only if the state of the I/Q adjustment function is set to ON. Refer to “:DM:IQADjustment[:STATe]” on page 31.

:DM:IQADjustment:QSKew

Supported E4438C

[[:SOURce]:DM:IQADjustment:QSKew <val>

[[:SOURce]:DM:IQADjustment:QSKew?

This command adjusts the phase angle (quadrature skew) between the I and Q vectors by increasing or decreasing the Q phase angle.

The <val> variable is expressed in degrees with a minimum resolution of 0.1.

If the signal generator is operating at frequencies greater than 3.3 GHz, quadrature skew settings greater than ± 5 degrees will not be within specifications.

Positive skew increases the angle from 90 degrees while negative skew decreases the angle from 90 degrees. When the quadrature skew is zero, the phase angle between the I and Q vectors is 90 degrees.

This command is effective only if the state of the I/Q adjustment function is set to ON. Refer to “:DM:IQADjustment[:STATe]” on page 31.

Example

```
:DM:IQAD:QSK 4.5
```

The preceding example increases the phase angle by 4.5 degrees.

***RST** +0.00000000E+000

Range -1E1 to +1E1

Key Entry **Quadrature Angle Adjustment**

:DM:IQADjustment:SKEW

Supported E4438C

[[:SOURce]:DM:IQADjustment:SKEW[:DELay] <val>

[[:SOURce]:DM:IQADjustment:SKEW?

This command changes the input skew which is a time delay difference between the I and Q signals. Equal and opposite skew is applied to both I and Q and affects the RF Output and I/Q output paths simultaneously. A positive value delays the I signal relative to the Q signal, and a negative value delays the Q signal relative to the I signal.

If the internal I/Q correction path is set to RF or BB the I/Q signals are already optimized and adjusting I/Q skew would add an impairment to the signals. If the internal I/Q correction path is set to Off, then adjusting the I/Q skew could improve the I/Q signals. The I/Q skew adjustment cannot be performed on the MSK, FSK, and C4FM constant envelope modulations.

I/Q skew adjustments are preserved when the instrument state is saved. I/Q skew adjustments are also preserved when instrument settings are changed. If the signal generator is calibrated, the skew adjustments are added to the calibration value used for the given signal generator state. If the signal generator is uncalibrated, the skew adjustments are re-applied directly.

Using I/Q skew while playing a user FIR file greater than 32 symbols will generate an error.

The variable <val> is expressed in seconds. Range limits are determined by the modulation configuration but is limited to a maximum of ± 2 seconds.

Example

```
:DM:IQAD:SKEW .5
```

The preceding example sets the time delay difference between the I and Q signals to 500 milliseconds.

```
*RST          +0.00000000E+000
```

Key Entry **I/Q Timing Skew**

:DM:IQADjustment:SKEW:Path

Supported E4438C

```
[ :SOURce ] :DM:IQADjustment:SKEW:PATH RF BB
```

```
[ :SOURce ] :DM:IQADjustment:SKEW?
```

This command selects either the RF or BB (baseband) path as the path to which skew timing corrections will be applied. If there are no factory I/Q timing skew corrections data, then adjusting the I/Q timing skew for the selected path may improve the error vector magnitude (EVM) of the signal. Refer to the “:DM:IQADjustment:SKEW” on page 29 for more information.

If internal I/Q corrections are available for the RF or external I/Q output (BB) path then the I/Q signals are already optimized and adjusting I/Q skew for either path would add an impairment to the signal.

Example

```
:DM:IQAD:SKEW:PATH RF
```

The preceding example selects the RF path as the path to which skew timing adjustments will be made.

```
*RST          +0.00000000E+000
```

Key Entry **I/Q Timing Skew Path**

:DM:IQADjustment[:STATe]

Supported E4438C

```
[ :SOURce ] :DM:IQADjustment [ :STATe ] ON | OFF | 1 | 0  
[ :SOURce ] :DM:IQADjustment [ :STATe ] ?
```

This command enables or disables the I/Q adjustments.

Example

```
:DM:IQAD 1
```

The preceding example enables I/Q adjustments.

***RST** 0

Key Entry I/Q Adjustments Off On

:DM:MODulation:FILTer

Supported E4438C

```
[ :SOURce ] :DM:MODulation:FILTer 2.1e6 | 40e6 | THRough  
[ :SOURce ] :DM:MODulation:FILTer ?
```

This command enables you to select a filter or through path for I/Q signals modulated onto the RF carrier. Selecting a filter with this command automatically sets “:DM:MODulation:FILTer:AUTO” to OFF(0).

2.1E6 This choice applies a 2.1 MHz baseband filter to the I/Q signals.

40E6 This choice applies a 40 MHz baseband filter to the I/Q signals.

THRough This choice bypasses filtering.

***RST** THR

Key Entry 2.100 MHz 40.000 MHz Through

:DM:MODulation:FILTer:AUTO**Supported** E4438C

[:SOURce]:DM:MODulation:FILTer:AUTO ON|OFF|1|0

[:SOURce]:DM:MODulation:FILTer:AUTO?

This command enables or disables the automatic selection of the filters for I/Q signals modulated onto the RF carrier.

ON(1) This choice will automatically select a digital modulation filter.

OFF(0) This choice disables the auto feature which lets you select a digital modulation filter or through path. Refer to “[:DM:MODulation:FILTer](#)” on page 31 for selecting a filter or through path.

RST** 1**Key Entry** I/Q Mod Filter Manual Auto**:DM:MODulation:ATTen*Supported** E4438C

[:SOURce]:DM:MODulation:ATTen <val>

[:SOURce]:DM:MODulation:ATTen?

This command attenuates the I/Q signals being modulated through the signal generator RF path.

The variable <val> is expressed in units of decibels (dB).

***RST** +2.00000000E+000**Range** 0–40**Key Entry** Modulator Atten Manual Auto

:DM:MODulation:ATTen:AUTO

Supported E4438C

```
[ :SOURCE ] :DM:MODulation:ATTen:AUTO ON | OFF | 1 | 0  
[ :SOURCE ] :DM:MODulation:ATTen:AUTO?
```

This command enables or disables the I/Q attenuation auto mode.

ON (1) This choice enables the attenuation auto mode which optimizes the modulator attenuation for the current conditions.

OFF (0) This choice holds the attenuator at its current setting or at a selected value. Refer to “[:DM:MODulation:ATTen](#)” on page 32 for setting the attenuation value.

***RST** 1

Key Entry **Modulator Atten Manual Auto**

:DM:POLarity[:ALL]

Supported E4438C

```
[ :SOURCE ] :DM:POLarity[:ALL] NORMal | INVert  
[ :SOURCE ] :DM:POLarity?
```

This command sets the digital modulation phase polarity.

NORMal This choice selects normal phase polarity for the I and Q signals.

INVert This choice flips the I and Q signals by routing the I signal to the Q input of the I/Q modulator and the Q signal to the I input.

***RST** NORM

Key Entry **Int Phase Polarity Normal Invert**

:DM:SKEW:PATH**Supported** E4438C

[:SOURce] :DM:SKEW:PATH RF|BB

[:SOURce] :DM:SKEW:PATH?

This command selects the skew path.

RF When RF is selected, the skew is optimized for the I/Q signal applied to the RF Output. The BB output will be functional, but the I/Q timing skew applied will be optimized for the RF path. When using this choice, seven symbols of latency are added to the Arb based waveform. While in real-time mode, the maximum number of user symbols for the FIR is limited to 32.

BB When BB is selected, the skew is optimized for the I/Q signal outputs on the rear panel. The RF Output will be functional, but the I/Q timing skew applied will be optimized for the BB path. When using this choice, seven symbols of latency are added to the Arb based waveform. While in real-time mode, the maximum number of user symbols for the FIR is limited to 32.

RST** INT**Key Entry** **Int I/Q Skew Corrections RF BB Off*:DM:SKEW[:STATe]****Supported** E4438C

[:SOURce] :DM:SKEW[:STATe] ON|OFF|1|0

[:SOURce] :DM:SKEW[:STATe] ?

This command enables or disables the I/Q timing skew correction function.

***RST** 1**Key Entry** **Int I/Q Skew Corrections RF BB Off**

:DM:SOURce

Supported E4438C

```
[ :SOURce ] :DM:SOURce [1] | 2 EXTernal | INTernal | BBG1 | EXT600 | OFF
[ :SOURce ] :DM:SOURce?
```

This command selects the I/Q modulator source.

EXTernal	This choice selects a 50 ohm impedance for the I and Q input connectors and routes the applied signals to the I/Q modulator.
INTernal	This choice is for backward compatibility with the appropriate ESG E44xxB and performs the same function as the BBG1 selection.
BBG1	This choice selects the baseband generator as the source for the I/Q modulator and requires Option 001/601or 002/602.
EXT600	This choice selects a 600 ohm impedance for the I and Q input connectors and routes the applied signals to the I/Q modulator.
OFF	This choice disables the digital modulation source.
*RST	EXT
Key Entry	Ext 50 Ohm BBG1 Ext 600 Ohm Off

:DM:SRATio

Supported E4438C

```
[ :SOURce ] :DM:SRATio <val><unit>
[ :SOURce ] :DM:SRATio?
```

This command sets the power level difference (ratio) between the source one and source two signals when the two signals are summed together. A positive ratio value reduces the amplitude for source two, while a negative ratio value reduces the amplitude for source one.

The range for the summing ratio is dependent on the modulator attenuator (mod atten) setting for the signal generator that is summing the signals together. The minimum range is achieved when the modulator attenuator setting is zero and the maximum range is reached when the maximum attenuator value is used. The range can be calculated using the following formula:

$$\pm \text{Range} = 50 \text{ dB} + \text{Mod Atten}$$

*RST	+0.00000000E+000
Range	<i>Min:</i> ± 50 dB <i>Max:</i> ± 90 dB
Key Entry	Summing Ratio (SRC1/SRC2) x.xx dB

Digital Modulation Subsystem—E4438C (:SOURce)

Remarks For real-time modulation format modulator attenuator settings, see “:DM:MODulation:ATTen” on page 32 and “:DM:MODulation:ATTen:AUTO” on page 33. For an Arb modulation format modulator attenuator setting, refer to the SCPI command subsystem for the Arb format being used and find the commands that contain the command mnemonics IQ:MODulation:ATTen.

:DM:STATe

Supported E4438C

[:SOURce] :DM:STATe ON|OFF|1|0

[:SOURce] :DM:STATe?

This command enables or disables the I/Q modulator.

ON (1) This choice enables the internal I/Q modulator.

OFF (0) This choice disables the internal I/Q modulator. You can turn off the I/Q modulation with this choice even though a digital modulation format is enabled. With this configuration, the RF output signal will not be modulated, but the I/Q signals may be present at the rear panel I and Q outputs depending on the rear panel output selection.

***RST** 0

Key Entry I/Q Off On

Remarks The I/Q modulator is enabled whenever a digital format is turned on.
The I/Q annunciator will be shown on the signal generator display whenever the I/Q modulator is on.

Frequency Subsystem ([:SOURce])

:FREQuency:CHANnels:BAND

Supported All Models

```
[:SOURce]:FREQuency:CHANnels:BAND NBASe|NMOBile|BPGSm|MPGSm|BEGSm|MEGSm|
BRGSm|MRGSm|BDCS|MDCS|BPCS|MPCS|B450|GM450|B480|M480|B850|M850|B8|M8|B15
|M15|B390|B420|B460|B915|M380|M410|M450|M870|PHS|DECT
[:SOURce]:FREQuency:CHANnels:BAND?
```

This command sets the frequency of the signal generator by specifying a frequency channel band.

- | | |
|---------|---|
| NBASe | This choice selects Standard Base as the frequency band for NADC. |
| NMOBile | This choice selects Standard Mobile as the frequency band for NADC. |
| BPGSm | This choice selects P-Gsm 900 Base as the frequency band for GSM. |
| MPGSm | This choice selects P-Gsm 900 Mobile as the frequency band for GSM. |
| BEGSm | This choice selects E-Gsm 900 Base as the frequency band for GSM. |
| MEGSm | This choice selects E-Gsm 900 Mobile as the frequency band for GSM. |
| BRGSm | This choice selects R-Gsm 900 Base as the frequency band for GSM. |
| MRGSm | This choice selects R-Gsm 900 Mobile as the frequency band for GSM. |
| BDCS | This choice selects DCS 1800 Base as the frequency band for GSM. |
| MDCS | This choice selects DCS 1800 Mobile as the frequency band for GSM. |
| BPCS | This choice selects PCS 1900 Base as the frequency band for GSM. |
| MPCS | This choice selects PCS 1900 Mobile as the frequency band for GSM. |
| B450 | This choice selects Gsm 450 Base as the frequency band for GSM. |
| GM450 | This choice selects Gsm 450 Mobile as the frequency band for GSM. |
| B480 | This choice selects Gsm 480 Base as the frequency band for GSM. |
| M480 | This choice selects Gsm 480 Mobile as the frequency band for GSM. |
| B850 | This choice selects Gsm 850 Base as the frequency band for GSM. |
| M850 | This choice selects Gsm 850 Mobile as the frequency band for GSM. |
| B8 | This choice selects 800MHz Base as the frequency band for PDC. |

Basic Function Commands

Frequency Subsystem ([:SOURce])

M8	This choice selects 800MHz Mobile as the frequency band for PDC.
B15	This choice selects 1500MHz Base as the frequency band for PDC.
M15	This choice selects 1500MHz Mobile as the frequency band for PDC.
B390	This choice selects Base 390-400 as the frequency band for TETRA.
B420	This choice selects Base 420-430 as the frequency band for TETRA.
B460	This choice selects Base 460-470 as the frequency band for TETRA.
B915	This choice selects Base 915-921 as the frequency band for TETRA.
M380	This choice selects Mobile 380-390 as the frequency band for TETRA.
M410	This choice selects Mobile 410-420 as the frequency band for TETRA.
M450	This choice selects Mobile 450-460 as the frequency band for TETRA.
M870	This choice selects Mobile 870-876 as the frequency band for TETRA.
PHS	This choice selects Standard PHS as the frequency band.
DECT	This choice selects Standard DECT as the frequency band.

***RST**

BPGS

Key Entry

P-GSM Base	E-GSM Base	R-GSM Base	DCS Base
PCS Base	GSM 450 Base	GSM 480 Base	GSM 850 Base
NADC Base	800MHZ Base	1500MHZ Base	
Tetra Base 390/400	Tetra Base 420/430	Tetra Base 460/470	
Tetra Base 915/921	PHS Standard	DECT Standard	
P-GSM Mobile	E-GSM Mobile	R-GSM Mobile	DCS Mobile
PCS Mobile	GSM 450 Mobile	GSM 480 Mobile	GSM 850 Mobile
NADC Mobile	800MHZ Mobile	1500MHZ Mobile	
Tetra Mobile 380/390	Tetra Mobile 410/420	Tetra Mobile 450/460	
Tetra Mobile 870/876			

Remarks

The frequency channel state must be enabled for this command to work. Refer to “:FREQuency:CHANnels[:STATe]” on page 40.

:FREQuency:CHANnels:NUMBer

Supported All Models

[:SOURCE] :FREQuency:CHANnels:NUMBer <number>

[:SOURCE] :FREQuency:CHANnels:NUMBer?

This command sets the frequency of the signal generator by specifying a channel number of a given frequency band.

***RST** +1

Range	P-GSM Base/Mobile:	1–24
	E-GSM and R-GSM Base/Mobile:	1–1023
	DCS Base/Mobile:	512–885
	PCS Base/Mobile:	512–900
	GSM-450 Base/Mobile:	259–293
	GSM-480 Base/Mobile:	306–340
	GSM-850 Base/Mobile:	128–251
	NADC Base/Mobile:	1–1023
	800MHZ Base/Mobile:	0–640
	1500MHZ Base/Mobile:	0–960
	TETRA 380/390 Mobile:	3600–4000
	TETRA 390/4000 Base:	3600–4000
	TETRA 410/420 Mobile:	800–1200
	TETRA 420/430 Base:	800–1200
	TETRA 460/470: 2400 through 2800	2400–2800
	TETRA 870/876 Mobile:	600–640
	TETRA 915/921 Base:	600–940
	PHS Standard:	1–255
	DECT Standard:	0–9

Key Entry **Channel Number**

Remarks The frequency channel state must be enabled for this command to work. Refer to “:FREQuency:CHANnels[:STATe]” on page 40.

:FREQuency:CHANnels[:STATe]

Supported All Models

[:SOURce] :FREQuency:CHANnels [:STATe] ON | OFF | 1 | 0

[:SOURce] :FREQuency:CHANnels [:STATe] ?

This command enables or disables the frequency channel and band selection to set the output frequency.

***RST** 0

Key Entry **Freq Channels Off On**

Remarks To set frequency channels band refer to “[:FREQuency:CHANnels:BAND]” on page 37.

:FREQuency:FIXed

Supported All Models

[:SOURce] :FREQuency:FIXed <val><unit>

[:SOURce] :FREQuency:FIXed?

This command sets the signal generator output frequency.

***RST** Option 501: +10000000000000E+09
 Option 502: +20000000000000E+09
 Option 503: +30000000000000E+09
 Option 504: +40000000000000E+09
 Option 506: +60000000000000E+09

Range Option 501: 100kHz–1GHZ
 Option 502: 100kHz–2GHZ
 Option 503: 100kHz–3GHZ
 Option 504: 100kHz–4GHZ
 Option 506: 100kHz–6GHZ

Remarks A frequency change may affect the current output power. Refer to “[:LEVel][:IMMEDIATE][:AMPLitude]” on page 68 for the correct specified frequency and amplitude settings. To set the frequency mode refer to “[:FREQuency:MODE]” on page 41. Options 501, 502, and 504 are specific to the E4438C.

:FREQuency:MODE

Supported All Models

```
[ :SOURce ] :FREQuency:MODE CW | FIXed | LIST
[ :SOURce ] :FREQuency:MODE?
```

This command sets the frequency mode of the signal generator to CW or swept.

CW and FIXed These choices are synonymous with one another and stops a frequency sweep, allowing the ESG to operate at a set frequency. Refer to “[:FREQuency\[:CW\]](#)” on [page 46](#) for setting the frequency in the CW mode and to “[:FREQuency:FIXed](#)” on [page 40](#) for setting the frequency in the FIXed mode.

LIST This choice selects the swept frequency mode. If sweep triggering is set to immediate along with continuous sweep mode, executing the command starts the LIST or STEP frequency sweep.

NOTE To perform a frequency and amplitude sweep, you must also select LIST as the power mode. See “[:MODE](#)” on [page 65](#) for selecting the list mode for an amplitude sweep.

***RST** CW

Key Entry **Frequency Freq Off**

:FREQuency:MULTiplier

Supported All Models

```
[ :SOURce ] :FREQuency:MULTiplier <val>
[ :SOURce ] :FREQuency:MULTiplier?
```

This command sets the multiplier for the signal generator carrier frequency.

***RST** +1.00000000E+000

Range Negative Values: -100 to -.001 Positive Values: .001-1000

Key Entry **Freq Multiplier**

Remarks For any multiplier other than one, the MULT indicator is shown in the frequency area of the display.

:FREQuency:OFFSet**Supported** All Models

[:SOURce]:FREQuency:OFFSet <val><unit>

[:SOURce]:FREQuency:OFFSet?

This command sets the frequency offset.

The query of this command returns a value equal to the original output frequency times the multiplier value, plus the frequency offset value.

***RST** +0.00000000000000E+00**Range** -200GHZ to 200GHZ**Key Entry** **Freq Offset**

Remarks When an offset has been entered, the OFFS indicator is turned on in the frequency area of the display.

The frequency offset state is turned on when any non-zero value is entered; entering zero will turn it off. Refer to “:FREQuency:OFFSet:STATe” for setting the offset state independent of entering offset values.

:FREQuency:OFFSet:STATe**Supported** All Models

[:SOURce]:FREQuency:OFFSet:STATe ON|OFF|1|0

[:SOURce]:FREQuency:OFFSet:STATe?

This command enables or disables the offset frequency.

***RST** 0**Key Entry** **Freq Offset**

Remarks Entering OFF (0) will set the frequency offset to 0 Hz.

:FREQuency:REFeRence

Supported All Models

[:SOURce] :FREQuency:REFeRence <val><unit>

[:SOURce] :FREQuency:REFeRence?

This command sets the output reference frequency.

***RST** +0.00000000000000E+00

Range Option 501: 0HZ–1GHZ
Option 502: 0HZ–2GHZ
Option 503: 0HZ–3GHZ
Option 504: 0HZ–4GHZ
Option 506: 0HZ–6GHZ

Key Entry **Freq Ref Set**

Remarks Options 501, 502, and 504 are specific to the E4438C.

:FREQuency:REFeRence:STATe

Supported All Models

[:SOURce] :FREQuency:REFeRence:STATe ON|OFF|1|0

[:SOURce] :FREQuency:REFeRence:STATe?

This command enables or disables the frequency reference mode.

***RST** 0

Key Entry **Freq Ref Off On**

Remarks When the frequency reference mode is on, subsequent frequency parameters are set relative to the reference value.

:FREQuency:START**Supported** All Models

[:SOURce]:FREQuency:START <val><unit>

[:SOURce]:FREQuency:START?

This command sets the first frequency point in a step sweep.

***RST** Option 501: +10000000000000E+09
 Option 502: +20000000000000E+09
 Option 503: +30000000000000E+09
 Option 504: +40000000000000E+09
 Option 506: +60000000000000E+09

Range Option 501: 100kHz–1GHZ
 Option 502: 100kHz–2GHZ
 Option 503: 100kHz–3GHZ
 Option 504: 100kHz–4GHZ
 Option 506: 100kHz–6GHZ

Key Entry **Freq Start****Remarks** Options 501, 502, and 504 are specific to the E4438C.**:FREQuency:STOP****Supported** All Models

[:SOURce]:FREQuency:STOP <val><unit>

[:SOURce]:FREQuency:STOP?

This command sets the last frequency point in a step sweep.

***RST** Option 501: +10000000000000E+09
 Option 502: +20000000000000E+09
 Option 503: +30000000000000E+09
 Option 504: +40000000000000E+09
 Option 506: +60000000000000E+09

Range Option 501: 100kHz–1GHZ
 Option 502: 100kHz–2GHZ
 Option 503: 100kHz–3GHZ

	Option 504: 100kHz–4GHz
	Option 506: 100kHz–6GHz
Key Entry	Freq Stop
Remarks	Options 501, 502, and 504 are specific to the E4438C.

:FREQuency:SYNThesis

Supported E4438C except with Option UNJ

```
[ :SOURCE ] :FREQuency:SYNThesis 1 | 2  
[ :SOURCE ] :FREQuency:SYNThesis?
```

This command sets the phase-lock loop (PLL) bandwidth to optimize phase noise for offsets above and below 10 kHz.

- | | |
|---|---|
| 1 | This choice will select mode 1 which optimize phase noise at offsets below 10 kHz. |
| 2 | This choice will select mode 2 which optimizes phase noise at offsets above 10 kHz. |

***RST** +1

Key Entry **Mode 1 Optimize <10kHz Offset** **Mode 2 Optimize >10kHz Offset**

:FREQuency[:CW]

Supported All Models

[:SOURce] :FREQuency [:CW] <val><unit>

[:SOURce] :FREQuency [:CW] ?

This command sets the signal generator output frequency for the CW frequency mode.

***RST** Option 501: +10000000000000E+09
Option 502: +20000000000000E+09
Option 503: +30000000000000E+09
Option 504: +40000000000000E+09
Option 506: +60000000000000E+09

Range Option 501: 100kHz–1GHZ
Option 502: 100kHz–2GHZ
Option 503: 100kHz–3GHZ
Option 504: 100kHz–4GHZ
Option 506: 100kHz–6GHZ

Key Entry **Frequency**

Remarks To set the frequency mode to CW, refer to “:FREQuency:MODE” on page 41.
Options 501, 502, and 504 are specific to the E4438C.

:PHASe:REFerence

Supported All Models

[:SOURce] :PHASe:REFerence

This command sets the current output phase as a zero reference.

Key Entry **Phase Ref Set**

Remarks Subsequent phase adjustments are set relative to the new reference.

:PHASe[:ADJust]

Supported All Models

```
[ :SOURce ] :PHASe [ :ADJust ] <val><unit>  
[ :SOURce ] :PHASe [ :ADJust ] ?
```

This command adjusts the phase of the modulating signal.

The query will only return values in radians.

***RST** +0.00000000E+000

Range Radians: -3.14 to 3.14RAD Degrees: -180 to 179DEG

Key Entry **Adjust Phase**

:ROSCillator:SOURce

Supported All Models

```
[ :SOURce ] :ROSCillator :SOURce ?
```

This command queries the source of the reference oscillator. It returns either INT (internal) or EXT (external).

:ROSCillator:SOURce:AUTO

Supported All Models except signal generators with Option UNJ

```
[ :SOURce ] :ROSCillator :SOURce :AUTO ON | OFF | 1 | 0  
[ :SOURce ] :ROSCillator :SOURce :AUTO ?
```

This command enables or disables the ability of the signal generator to automatically select between the internal and an external reference oscillator.

ON (1) This choice enables the signal generator to detect when a valid reference signal is present at the 10 MHz IN connector and automatically switches from internal to external frequency reference.

OFF (0) This choice selects the internal reference oscillator and disables the switching capability between the internal and an external frequency reference.

***RST** 1

Key Entry **Ref Oscillator Source Auto Off On**

List/Sweep Subsystem ([:SOURce])

To complete a sweep setup, requires commands from other subsystems. [Table 2-1](#) shows the function and location of these other commands.

Table 2-1 Location of Commands from the other Subsystems

Sweep Type	Function	Command Location	Key Entry under Sweep/List key
List and Step	Start/stop frequency sweep	“:FREQuency:MODE” on page 41	Freq Off
	Start/stop amplitude sweep	“:MODE” on page 65	Ampl Off
	Start/stop frequency and amplitude sweep ¹	“:MODE” on page 65 “:FREQuency:MODE” on page 41	Freq & Ampl Off
	Set up and control sweep triggering ²	“Trigger Subsystem” on page 168	See the “Trigger Subsystem”
Step	Start frequency sweep	“:FREQuency:START” on page 44	Freq Start
	Stop frequency sweep	“:FREQuency:STOP” on page 44	Freq Stop
	Start amplitude sweep	“:START” on page 66	Ampl Start
	Stop amplitude sweep	“:STOP” on page 67	Ampl Stop

1. Execute both commands to start or stop a frequency and amplitude sweep.
2. For point to point triggering, see “:LIST:TRIGger:SOURce” on page 53.

:LIST:DIRection

Supported All Models

[:SOURce] :LIST:DIRection UP|DOWN

[:SOURce] :LIST:DIRection?

This command sets the direction of a list or step sweep.

UP This choice enables a sweep in an ascending order:

- first to last point for a list sweep
- start to stop for a step sweep

DOWN This choice reverses the direction of the sweep.

***RST** UP

Key Entry Sweep Direction Down Up

:LIST:DWELl

Supported All Models

[:SOURce] :LIST:DWELl <val>{ , <val> }

[:SOURce] :LIST:DWELl?

This command sets the dwell time for the current list sweep points.

The variable <val> is expressed in units of seconds with a 0.001 resolution.

NOTE The dwell time (<val>) does not begin until the signal generator has settled for the current frequency and/or amplitude change.

Range 0.001–60

Remarks Dwell time is used when IMMEDIATE is the trigger source. Refer to [“:LIST:TRIGger:SOURce” on page 53](#) for the trigger setting.

The dwell time is the amount of time the sweep is guaranteed to pause after setting the frequency and/or power for the current point.

The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

:LIST:DWELl:POINts

Supported All Models

[:SOURce] :LIST:DWELl :POINts?

This command queries the signal generator for the number of dwell points in the current list sweep file.

:LIST:DWELl:TYPE

Supported All Models

[:SOURce] :LIST:DWELl :TYPE LIST | STEP

[:SOURce] :LIST:DWELl :TYPE?

This command toggles the dwell time for the list sweep points between the values defined in the list sweep and the value for the step sweep.

LIST This choice selects the dwell times from the list sweep. Refer to “:LIST:DWELl” on page 49 for setting the list dwell points.

STEP This choice selects the dwell time from the step sweep. Refer to “:SWEep:DWELl” on page 55 for setting the step dwell.

***RST** LIST

Key Entry Dwell Type List Step

:LIST:FREQuency

Supported All Models

[:SOURce] :LIST:FREQuency <val>{ , <val> }

[:SOURce] :LIST:FREQuency?

This command sets the frequency values for the current list sweep points.

The variable <val> is expressed in units of Hertz.

Range Option 501: 100E3–1E9
Option 502: 100E3–2E9
Option 503: 100E3–3E9
Option 504: 100E3–4E9
Option 506: 100E3–6E9

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST. Options 501, 502, and 504 are specific to the E4438C. The maximum number of list sweep points is 1,601.

:LIST:FREQuency:POINts

Supported All Models

[:SOURce] :LIST:FREQuency:POINts?

This command queries the current list sweep file for the number of frequency points.

:LIST:MANual

Supported All Models

[:SOURce] :LIST:MANual <val>

[:SOURce] :LIST:MANual?

This command sets a list or step sweep point as the current sweep point controlling the frequency and power output.

Range List Sweep: 1–1601 Step Sweep: 2-65535

Key Entry **Manual Point**

Remarks If list or step mode is controlling frequency or power, or both, then the indexed point in the respective list(s) will be used.

Entering a value with this command will have no effect, unless MANual is the selected mode. Refer to “[:LIST:MODE](#)” on page 52 for setting the proper mode.

If the point selected is beyond the length of the longest enabled list, then the point will be set to the maximum possible point, and an error will be generated.

:LIST:MODE**Supported** All Models

[:SOURce] :LIST:MODE AUTO|MANual

[:SOURce] :LIST:MODE?

This command sets the operating mode for the current list or step sweep.

AUTO This choice enables the selected sweep type to perform a sweep of all points.

MANual This choice enables you to select a single sweep point. The selected point controls the frequency and/or amplitude according to the sweep type. Refer to “:LIST:MANual” on page 51 for selecting a sweep point.

RST** AUTO**Key Entry** **Manual Mode Off On*:LIST:POWer****Supported** All Models

[:SOURce] :LIST:POWer <val>{ , <val> }

[:SOURce] :LIST:POWer?

This command sets the amplitude for the current list sweep points.

Range Refer to “[:LEVel][:IMMediate][:AMPLitude]” on page 68 for output power ranges.

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

During an amplitude sweep operation, signal generators with Option UNB or Option 506 protect the step attenuator by automatically switching to attenuator hold (OFF) mode. The attenuator is locked at its current setting and the amplitude sweep range is limited to 40 dB.

The maximum number of list sweep points is 1,601.

:LIST:POWer:POINts**Supported** All Models

[:SOURce] :LIST:POWer:POINts?

This command queries the number of power points in the current list sweep file.

:LIST:RETRace

Supported All Models

```
[ :SOURCE ] :LIST:RETRace ON|OFF|1|0
[ :SOURCE ] :LIST:RETRace?
```

This command resets the single sweep to the first sweep point, or leaves it at the last sweep point upon completion of the sweep operation.

On (1) The sweep resets to the first sweep point.

Off (0) The sweep stays at the last sweep point.

***RST** 1

Key Entry **Sweep Retrace Off On**

:LIST:TRIGger:SOURce

Supported All Models

```
[ :SOURCE ] :LIST:TRIGger:SOURce BUS|IMMEDIATE|EXTERNAL|KEY
[ :SOURCE ] :LIST:TRIGger:SOURce?
```

This command sets the trigger source for a list or step sweep event.

To set the sweep trigger, see [“:TRIGger\[:SEQUENCE\]:SOURce” on page 170](#).

BUS This choice enables GPIB triggering using the *TRG or GET command, or LAN and RS-232 triggering using the *TRG command.

IMMEDIATE This choice enables immediate triggering of the sweep event.

EXTERNAL This choice enables the triggering of a sweep event by an externally applied signal at the TRIGGER IN connector.

KEY This choice enables triggering by pressing the front-panel **Trigger** hardkey.

Example

```
:LIST:TRIG:SOUR BUS
```

The preceding example sets the trigger source to the instrument BUS.

***RST** IMM

Key Entry **Bus Free Run Ext Trigger Key**

:LIST:TYPE

Supported All Models

[:SOURce] :LIST:TYPE LIST|STEP

[:SOURce] :LIST:TYPE?

This command toggles between the two types of sweep.

LIST This type of sweep has arbitrary frequencies and amplitudes.

STEP This type of sweep has equally spaced frequencies and amplitudes.

***RST** STEP

Key Entry Sweep Type List Step

:LIST:TYPE:LIST:INITialize:FSTep

Supported All Models

CAUTION The current list sweep data will be overwritten once this command is executed. If needed, save the current data. Refer to “:STORe:LIST” on page 121 for storing list sweep files.

[:SOURce] :LIST:TYPE:LIST:INITialize:FSTep

This command replaces the loaded list sweep data with the settings from the current step sweep data points.

Key Entry Load List From Step Sweep

Remarks You can have only one sweep list at a time.

The maximum number of list sweep points is 1,601. When copying the step sweep settings over to a list sweep, ensure that the number of points in the step sweep do not exceed the maximum list sweep points.

:LIST:TYPE:LIST:INITialize:PRESet

Supported All Models

CAUTION The current list sweep data will be overwritten once this command is executed. If needed, save the current data. Refer to “:STORE:LIST” on page 121 for storing list sweep files.

[:SOURCE] :LIST:TYPE:LIST:INITialize:PRESet

This command replaces the current list sweep data with a factory-defined file consisting of one point at a frequency, amplitude, and dwell time.

Key Entry Preset List

:SWEep:DWELl

Supported All Models

[:SOURCE] :SWEep:DWELl <val>

[:SOURCE] :SWEep:DWELl?

This command enables you to set the dwell time for a step sweep.

The variable <val> is expressed in units of seconds with a 0.001 resolution.

NOTE The dwell time (<val>) does not begin until the signal generator has settled for the current frequency and/or amplitude change.

***RST** +2.00000000E-003

Range 0.001-60

Key Entry Step Dwell

Remarks Dwell time is used when the trigger source is set to IMMEDIATE. Refer to “:LIST:TRIGger:SOURce” on page 53 for the trigger setting.

The dwell time is the amount of time the sweep is guaranteed to pause after setting the frequency and/or power for the current point.

:SWEep:POINts

Supported All Models

[:SOURce] :SWEep:POINts <val>

[:SOURce] :SWEep:POINts?

This command defines the number of step sweep points.

***RST** 2

Range 2–65535

Key Entry # Points

Power Subsystem (:SOURce):POWer)

:ALC:BANDwidth | BWIDth

Supported All Models

```
[ :SOURce ] :POWer:ALC:BANDwidth|BWIDth <bandwidth>
[ :SOURce ] :POWer:ALC:BANDwidth|BWIDth?
```

This command sets the bandwidth of the automatic leveling control (ALC) loop. You can select bandwidths of 100 Hz, 1 kHz, or 10 kHz. If you do not specify one of these exact bandwidths, your entry rounds to the nearest acceptable value. The bandwidth choices for this command are not effective if an internal I/Q source is being used. Refer to the *ESG User's Guide* for information on ALC and bandwidth considerations.

Example

```
:POW:ALC:BWID 1KHZ
```

The preceding example sets the ALC bandwidth to 1 kHz.

```
*RST                    100.0
```

Key Entry **ALC BW**

:ALC:BANDwidth

Supported All Models

```
[ :SOURce ] :POWer:ALC:BANDwidth|BWIDth NORMal|NARRow
[ :SOURce ] :POWer:ALC:BANDwidth|BWIDth?
```

This command sets the bandwidth of the automatic leveling control (ALC) loop.

NORMal This choice enables the signal generator to automatically select the ALC bandwidth for the current test conditions.

NARRow This choice sets the narrowest possible ALC bandwidth and is useful when an external I/Q source is connected.

```
*RST                    NORM
```

Key Entry **ALC BW Normal Narrow**

Remarks The bandwidth choices for this command are not effective if an internal I/Q source is being used.

:ALC:LEVel**Supported** All Models

[:SOURce]:POWer:ALC:LEVel <value>

[:SOURce]:POWer:ALC:LEVel?

This command sets the automatic leveling control (ALC) level when the attenuator hold is active (On).

Use this command when the automatic attenuation mode is set to On. Refer to “:ATTenuation:AUTO” on page 63 for choosing the attenuator mode.

Example

:POW:ALC:LEV 10DB

The preceding example sets the ALC to 10 dB.

RST** +1.00000000E+000**Range** -20 to 25**Key Entry** **Set ALC Level*:ALC:SEARCh****Supported** All Models

[:SOURce]:POWer:ALC:SEARCh ON|OFF|1|0|ONCE

[:SOURce]:POWer:ALC:SEARCh?

This command enables or disables the internal power search calibration. A power search is recommended for pulse-modulated signals with pulse widths less than one microsecond.

ON (1) This choice executes the power search automatically with each change in RF frequency or power.

OFF (0) This choice disables the automatic power search routine.

ONCE This choice executes a single power search of the current RF output signal.

***RST** 0**Key Entry** **Power Search Manual Auto** **Do Power Search**

Remarks Use this command when the ALC state is set to OFF (0). Refer to “:ALC[:STATE]” on page 60 for setting the ALC state.

If ON was previously selected, executing ONCE will cause OFF to be the current selection after the power search is completed.

:ALC:SEARCh:REFerence

Supported All Models

```
[ :SOURce ] :POWER:ALC:SEARCh:REFerence FIXed|MODulated  
[ :SOURce ] :POWER:ALC:SEARCh:REFerence?
```

This command sets either fixed or modulated modes of power search.

FIXed This choice uses a 0.5 volt reference.

MODulated This choice uses the RMS value of the current I/Q modulation.

***RST** MOD

Key Entry **Power Search Reference Fixed Mod**

:ALC:SEARCh:SPAN:START

Supported All Models

```
[ :SOURce ] :POWER:ALC:SEARCh:SPAN:START  
[ :SOURce ] :POWER:ALC:SEARCh:SPAN:START?
```

This command sets the start frequency for a span power search over a user specified range.

Key Entry **Start Frequency**

Remarks The start frequency has no default value. The start frequency value will be the last value set before powering off the instrument.

:ALC:SEARCh:SPAN:STOP

Supported All Models

```
[ :SOURce ] :POWER:ALC:SEARCh:SPAN:STOP  
[ :SOURce ] :POWER:ALC:SEARCh:SPAN:STOP?
```

This command sets the stop frequency for a span power search over a user specified range.

Key Entry **Stop Frequency**

Remarks The stop frequency has no default value. The stop frequency value will be the last value set before powering off the instrument.

:ALC:SEARCh:SPAN:TYPE

Supported All Models

```
[ :SOURce ] : POWer : ALC : SEARCh : SPAN : TYPE FULL | USER  
[ :SOURce ] : POWer : ALC : SEARCh : SPAN : TYPE ?
```

This command enables you to select the frequency range for a span power search. You can specify the range (USER) or you can select the full range (FULL) of the signal generator.

Key Entry **Span Type User Full**

:ALC:SEARCh:SPAN[:STATe]

Supported All Models

```
[ :SOURce ] : POWer : ALC : SEARCh : SPAN [ : STATe ] ON | OFF | 1 | 0  
[ :SOURce ] : POWer : ALC : SEARCh : SPAN [ : STATe ] ?
```

This command enables (1) or disables (0) the span mode, allowing you to perform power searches over a selected range of frequencies. The power search corrections are then stored and used whenever the signal generator is tuned within the selected range.

:ALC[:STATe]

Supported All Models

```
[ :SOURce ] : POWer : ALC [ : STATe ] ON | OFF | 1 | 0  
[ :SOURce ] : POWer : ALC [ : STATe ] ?
```

This command enables or disables the automatic leveling control (ALC) circuit.

***RST** 1

Key Entry **ALC Off On**

Remarks The purpose of the ALC circuit is to hold output power at the desired level in spite of drift due to temperature and time.

:ALternate:AMPLitude

Supported All Models except signal generators with Option UNB or 506.

```
[ :SOURCE ] :POWER:ALternate:AMPLitude <val>  
[ :SOURCE ] :POWER:ALternate:AMPLitude?
```

This command sets the delta value for the alternate amplitude.

The variable <val> is expressed in units of decibels (dB).

***RST** +0.00000000E+000

Range -156 to 156

Key Entry **Alt Amp Delta**

Remarks The actual RF output amplitude is equal to the Alternate Amplitude Delta value plus the RF output amplitude; this sum cannot exceed the minimum and maximum amplitude limits of the signal generator. For example, if the Alternate Amplitude Delta is set to -156 dB and the RF output amplitude is set to 20 dB, the sum is equal to -136 dB.

:ALternate:MANual

Supported All Models

```
[ :SOURCE ] :POWER:ALternate:MANual MAIN|DELTA  
[ :SOURCE ] :POWER:ALternate:MANual?
```

This command toggles the alternate amplitude manual trigger source between main and alternate (delta).

MAIN The main power is present at the RF output.

DELTA The alternate power is present at the RF output.

***RST** MAIN

Key Entry **Manual Trigger Main Delta**

Remarks This command is effective only if MANual is the selection for the trigger source. Refer to “:ALternate:TRIGger[:SOURCE]” on page 62 for more information.

:ALternate:STATe

Supported All Models

```
[:SOURCE]:POWER:ALternate:STATe ON|OFF|1|0
[:SOURCE]:POWER:ALternate:STATe?
```

This command enables or disables the alternate amplitude.

***RST** 0

Key Entry **Alt Ampl Off On**

:ALternate:TRIGger[:SOURCE]

Supported All Models except with Option UNB or 506

```
[:SOURCE]:POWER:ALternate:TRIGger[:SOURCE] INTernal|EXTernal|MANual
[:SOURCE]:POWER:ALternate:TRIGger[:SOURCE]?
```

This command sets the trigger source for the alternate amplitude signal.

INTernal This choice is available only for an E4438C with Option 001/601 or 002/602. The baseband generator triggers each timeslot to output a power level set with either the user-selected main or alternate amplitude parameter.

Each timeslot is allowed to output power with a user-selected main or alternate amplitude. This choice requires the Option 001/601 or 002/602 baseband generator option.

This choice requires a baseband generator option. Each timeslot is allowed to output power with a user-selected main or alternate amplitude.

EXTernal This choice requires an external trigger to the TRIG IN rear panel connector to toggle the RF output power between main and alternate amplitudes.

MANual This choice enables the RF output power to be toggled between main and alternate amplitudes using the front-panel **Trigger** hardkey.

***RST** MAN

Key Entry **Int Ext Manual**

:ATTenuation:AUTO

Supported All Models

```
[ :SOURce ] :POWer:ATTenuation:AUTO ON|OFF|1|0
```

```
[ :SOURce ] :POWer:ATTenuation:AUTO?
```

This command sets the state of the attenuator hold function.

ON (1) The attenuation auto on selection enables the attenuator to operate normally which allows the ALC to automatically adjust the attenuator level as needed to maintain RF power levels.

OFF (0) This choice holds the attenuator at its current setting or at a selected value that will not change during power adjustments. This choice eliminates the power discontinuity normally associated with the attenuator switching during power adjustments by holding the attenuator at the current level.

***RST** 1

Key Entry **Atten Hold Off On**

Remarks During an amplitude sweep operation, signal generators with Option UNB or 506 protect the step attenuator by automatically switching to attenuator hold (On) mode. The attenuator is locked at its current setting and the amplitude sweep range is limited to 40 dB. Refer to the “:ALC:LEVel” on page 58, “:ATTenuation” for more information.

:ATTenuation

Supported All Models

```
[:SOURce]:POWer:ATTenuation <val><unit>  
[:SOURce]:POWer:ATTenuation?
```

This command sets the signal generator's attenuation level and is valid only when the automatic level control (ALC) is disabled. The ALC is disabled when the attenuator hold mode is set to On. In normal operation the ALC will automatically adjust the attenuator to maintain the RF power level. The signal generator output power is the ALC level minus the attenuator setting. The attenuation can be set in increments of 5 dB.

This command is valid only if the ALC mode is disabled (attenuator hold function set to ON). Refer to [“:ATTenuation:AUTO” on page 63](#) for selecting the attenuator mode.

Example

```
:POW:ATT 10DB
```

The preceding example sets the attenuator to 10 dB.

***RST** +115

Range 0 to 115 dB

Key Entry **Set Atten**

:MODE

Supported All Models

```
[ :SOURCE ] :POWER:MODE FIXed | LIST
[ :SOURCE ] :POWER:MODE?
```

This command sets the signal generator power mode to fixed or swept.

FIXed This choice stops a power sweep, allowing the signal generator to operate at a fixed power level. Refer to “[:LEVel][:IMMediate][:AMPLitude]” on page 68 for setting the output power level.

LIST This choice selects the swept power mode. If sweep triggering is set to immediate along with continuous sweep mode, executing the command starts the LIST or STEP power sweep.

NOTE To perform a frequency and amplitude sweep, you must also select LIST as the frequency mode. See “:FREQuency:MODE” on page 41 for selecting the list mode for a frequency sweep.

***RST** FIX

Key Entry **Amplitude Ampl Off**

:REFeRence

Supported All Models

```
[ :SOURCE ] :POWER:REFeRence <val><unit>
[ :SOURCE ] :POWER:REFeRence?
```

This command sets the power level for the signal generator RF output reference.

***RST** +0.00000000E+000

Range -400 to 300DBM

Key Entry **Ampl Ref Set**

Remarks The RF output power is referenced to the value entered in this command.

:REFerence:STATe

Supported All Models

```
[ :SOURce ] :POWer:REFerence:STATe ON|OFF|1|0
```

```
[ :SOURce ] :POWer:REFerence:STATe?
```

This command enables or disables the RF output reference.

ON(1) This choice will set the power reference state to ON. The unit displayed for commands, “[:ANNOtation:AMPLitude:UNIT]” on page 85 and “[:POWer]” on page 172 will be expressed in DB.

OFF(0) This choice will set the power reference state to OFF.

***RST** 0

Key Entry **Ampl Ref Off On**

Remarks Once the reference state is ON, all subsequent output power settings are set relative to the reference value.

Amplitude offsets can be used with the amplitude reference mode.

:START

Supported All Models

```
[ :SOURce ] :POWer:START <val><unit>
```

```
[ :SOURce ] :POWer:START?
```

This command sets the first amplitude point in a step sweep.

***RST** -1.35000000E+002

Range Refer to “[:LEVel][:IMMediate][:AMPLitude]” on page 68 for the output power ranges.

Key Entry **Ampl Start**

Remarks During an amplitude sweep operation, signal generators with Option UNB or 506 protect the step attenuator by automatically switching to attenuator hold (ON) mode. The attenuator is locked at its current setting and the amplitude sweep range is limited to 40 dB.

:STOP

Supported All Models

```
[ :SOURce ] :POWer:STOP <val><unit>
```

```
[ :SOURce ] :POWer:STOP?
```

This command sets the last amplitude point in a step sweep.

***RST** -1.35000000E+002

Range Refer to “[:LEVel][:IMMediate][:AMPLitude]” on page 68 for the output power ranges.

Key Entry **Ampl Stop**

Remarks During an amplitude sweep operation, signal generators with Option UNB or 506 protect the step attenuator by automatically switching to attenuator hold (ON) mode. The attenuator is locked at its current setting and the amplitude sweep range is limited to 40 dB.

[:LEVel][:IMMediate]:OFFSet

Supported All Models

```
[ :SOURce ] :POWer[:LEVel] [:IMMediate]:OFFSet <val><unit>
```

```
[ :SOURce ] :POWer[:LEVel] [:IMMediate]:OFFSet?
```

This command sets the power offset value.

***RST** +0.00000000E+000

Range -200DB to 200DB

Key Entry **Ampl Offset**

Remarks This simulates a power level at a test point beyond the RF OUTPUT connector without changing the actual RF output power. The offset value only affects the displayed amplitude setting.

You can enter an amplitude offset any time in either normal operation or amplitude reference mode.

Power Subsystem ([:SOURce]:POWer)

[:LEVel][:IMMediate][:AMPLitude]

Supported All Models

```
[:SOURce]:POWer[:LEVel] [:IMMediate] [:AMPLitude] <val><unit>
[:SOURce]:POWer[:LEVel] [:IMMediate] [:AMPLitude]?
```

This command sets the RF output power.

***RST** -1.35000000E+002

Range	<i>Frequency</i>	<i>Standard</i>	<i>Option UNB</i>	<i>Option 506</i>
	250kHz–1GHZ	-136 to 13DBM	-136 to 17DBM	-136 to 14DBM
	> 1–3GHZ	-136 to 10DBM	-136 to 16DBM	-136 to 13DBM
	> 3–4GHZ	-136 to 7DBM	-136 to 13DBM	-136 to 10DBM
	> 4–6GHZ	N/A	N/A	-136 to 10DBM

Key Entry **Amplitude**

Remarks The ranges for this command are specified values from the data sheet.

Pulse Subsystem ([:SOURce]:PULSe)

:FREQuency:STEP

Supported All Models

[:SOURce] :PULSe :FREQuency :STEP [:INCRement] freq

[:SOURce] :PULSe :FREQuency :STEP [:INCRement] ?

This command sets the step increment for the pulse frequency.

***RST** +1.00000000E+005

Range 0–100

3 System Commands

This chapter provides SCPI descriptions for subsystems dedicated to peripheral signal generator operations common to all ESG models. This chapter contains the following major sections:

- “Calibration Subsystem (:CALibration)” on page 72
- “Communication Subsystem (:SYSTem:COMMunicate)” on page 75
- “Diagnostic Subsystem (:DIAGnostic[:CPU]:INFORMation)” on page 81
- “Display Subsystem (:DISPlay)” on page 85
- “IEEE 488.2 Common Commands” on page 89
- “Memory Subsystem (:MEMory)” on page 94
- “Mass Memory Subsystem (:MMEMory)” on page 122
- “Output Subsystem (:OUTPut)” on page 129
- “Route Subsystem (:ROUte:HARDware:DGENerator)” on page 131
- “Status Subsystem (:STATus)” on page 137
- “System Subsystem (:SYSTem)” on page 155
- “Trigger Subsystem” on page 168
- “Unit Subsystem (:UNIT)” on page 172

Calibration Subsystem (:CALibration)

:DCFM

Supported All

:CALibration:DCFM

This command initiates a DCFM or DC Φ M calibration depending on the currently active modulation. This calibration eliminates any dc or modulation offset of the carrier signal.

NOTE If the calibration is performed with a dc signal applied, any deviation provided by the dc signal will be removed and the new zero reference point will be at the applied dc level. The calibration will have to be performed again when the dc signal is disconnected to reset the carrier signal to the correct zero reference.

Key Entry DCFM/DCFM Cal

Remarks Use this calibration for externally applied signals. While the calibration can also be performed for internally generated signals, dc offset is not a normal characteristic for them.

:IQ

Supported E4438C

:CALibration:IQ

This command initiates an I/Q calibration.

Key Entry Execute Cal

:IQ:DC

Supported E4438C

:CALibration:IQ:DC

This command performs a one to two second adjustment that is not traceable to a standard. However, it will minimize errors associated with offset voltages. This adjustment minimizes errors for the current signal generator setting and at a single frequency. The DC adjustment is volatile and must be repeated with each signal generator setting change. This command can be sent while the RF On/Off is set to Off and the adjustment will still be valid when the RF is enabled.

The I/Q DC adjustment is dependent upon a number of instrument settings. If any of the instrument settings change, the adjustment will become invalid. The dependent instrument settings are:

- RF frequency
- I/Q attenuation level
- Baseband generator settings
- I/Q polarity settings
- Baseband filter settings
- Path settings (Internal I/Q Mux Path 1 or Path 2)
- I/Q calibration (the I/Q DC calibration will be invalidated if any other I/Q calibration is executed or if the **Revert to Factory Default** key is pressed)
- Temperature (± 5 degrees)

The following instrument states will not invalidate the I/Q DC calibration:

- Power level changes
- I/Q Impairments

Key Entry **Execute Cal** (with **Calibration Type User Full** set to DC)

:IQ:DEfault

Supported E4438C

:CALibration:IQ:DEfault

This command will restore the original factory calibration data for the internal I/Q modulator.

Key Entry **Revert to Default Cal Settings**

:IQ:FULL

Supported E4438C

:CALibration:IQ:FULL

This command performs an adjustment to the I/Q offset, gain and quadrature for the full-frequency range (regardless of the start and stop frequency settings) and stores the results in the signal generator's firmware.

Key Entry **Execute Cal** (with **Calibration Type User Full** set to Full)

Remarks Start and stop frequencies will default to the full frequency range of the signal generator.

:IQ:START

Supported E4438C

:CALibration:IQ:START <val><unit>

:CALibration:IQ:START?

This command sets the start frequency and automatically sets the calibration type to User for an I/Q calibration.

Range Option 501: 100kHz–1GHz
Option 502: 100kHz–2GHz
Option 503: 100kHz–3GHz
Option 504: 100kHz–4GHz
Option 506: 100kHz–6GHz

Key Entry **Start Frequency**

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

:IQ:STOP

Supported E4438C

:CALibration:IQ:STOP <val><unit>

:CALibration:IQ:STOP?

This command sets the stop frequency and automatically sets the calibration type to User for an I/Q calibration.

Range Option 501: 100kHz–1GHz
Option 502: 100kHz–2GHz
Option 503: 100kHz–3GHz
Option 504: 100kHz–4GHz
Option 506: 100kHz–6GHz

Key Entry **Stop Frequency**

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

Communication Subsystem (:SYSTem:COMMunicate)

:GPIB:ADDRes

Supported All

```
:SYSTem:COMMunicate:GPIB:ADDRes <number>  
:SYSTem:COMMunicate:GPIB:ADDRes?
```

This command sets the signal generator's GPIB address.

Range 0–30

Key Entry GPIB Address

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

:GTLocal

Supported All

```
:SYSTem:COMMunicate:GTLocal
```

This command sets the signal generator to local mode from remote mode, enabling front panel operation.

Key Entry Local

:LAN:GATEway

Supported All

```
:SYSTem:COMMunicate:LAN:GATEway "<ipstring>"  
:SYSTem:COMMunicate:LAN:GATEway?
```

This command sets the gateway for local area network (LAN) access to the signal generator from outside the current sub-network.

Key Entry Default Gateway

Remarks Using an empty string restricts access to the signal generator to local hosts on the LAN.

:LAN:HOSTName

Supported All

:SYSTEM:COMMunicate:LAN:HOSTName "<string>"

:SYSTEM:COMMunicate:LAN:HOSTName?

This command sets the signal generator's local area network (LAN) connection hostname.

Key Entry **Hostname**

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

:LAN:IP

Supported All

:SYSTEM:COMMunicate:LAN:IP "<ipstring>"

:SYSTEM:COMMunicate:LAN:IP?

This command sets the signal generator's local area network (LAN) internet protocol (IP) address for your IP network connection.

Key Entry **IP Address**

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

:LAN:SUBNet

Supported All

:SYSTEM:COMMunicate:LAN:SUBNet "<ipstring>"

:SYSTEM:COMMunicate:LAN:SUBNet?

This command sets the signal generator's local area network (LAN) subnet mask address for your internet protocol (IP) network connection.

Key Entry **Subnet Mask**

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

:PMETER:ADDRESS

Supported All

:SYSTEM:COMMunicate:PMETER:ADDRESS <val>

:SYSTEM:COMMunicate:PMETER:ADDRESS?

This command sets the address for a power meter that is controlled by the signal generator.

Range 0–30

Key Entry **Meter Address**

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

The power meter is controlled only through a GPIB cable.

Ensure that the power meter address is different from the signal generator address.

:PMETER:CHANNEL

Supported All

:SYSTEM:COMMunicate:PMETER:CHANNEL A|B

:SYSTEM:COMMunicate:PMETER:CHANNEL?

This command sets the measurement channel on the power meter that is controlled by the signal generator.

Key Entry **Meter Channel A B**

Remarks A single-channel power meter uses channel A and selecting channel B will have no effect.

The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

The power meter is controlled only through a GPIB cable.

:PMETer:IDN

Supported All

:SYSTEM:COMMunicate:PMETer:IDN E4418B|E4419B|E4416A|E4417A

:SYSTEM:COMMunicate:PMETer:IDN?

This command sets the model number of the power meter that is controlled by the signal generator.

Key Entry **Power Meter**

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

The power meter is controlled only through a GPIB cable.

:PMETer:TIMEout

Supported All

:SYSTEM:COMMunicate:PMETer:TIMEout <num>[<time suffix>]

:SYSTEM:COMMunicate:PMETer:TIMEout?

This command sets the period of time which the signal generator will wait for a valid reading from the power meter.

The variable <num> has a resolution of 0.001.

Range 1mS–100S

Key Entry **Meter Timeout**

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

The power meter is controlled only through a GPIB cable.

If a time-out occurs, the signal generator reports an error message.

:SERial:BAUD

Supported All

```
:SYSTem:COMMunicate:SERial:BAUD <number>
```

```
:SYSTem:COMMunicate:SERial:BAUD?
```

This command sets the baud rate for the rear panel RS-232 interface labeled RS-232.

Key Entry **RS-232 Baud Rate**

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

:SERial:ECHO

Supported All

```
:SYSTem:COMMunicate:SERial:ECHO ON|OFF
```

```
:SYSTem:COMMunicate:SERial:ECHO?
```

This command enables or disables the RS-232 echo.

Key Entry **RS-232 ECHO Off On**

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

:SERial:RESet

Supported All

```
:SYSTem:COMMunicate:SERial:RESet
```

This event command resets the RS-232 buffer and will discard any unprocessed SCPI input received by the RS-232 port.

Key Entry **Reset RS-232**

:SERial:TOUT

Supported All

:SYSTEM:COMMunicate:SERial:TOUT <val>

:SYSTEM:COMMunicate:SERial:TOUT?

This command sets the RS-232 serial port time-out value.

If further input is not received within the time-out period specified, while a SCPI command is being processed, the command is aborted and the input buffer is cleared.

The variable <val> is entered in units of seconds.

Range 1–25

Key Entry **RS-232 Timeout**

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

Diagnostic Subsystem (:DIAGnostic[:CPU]:INFORMATION)

:BOARDs

Supported All

:DIAGnostic[:CPU]:INFORMATION:BOARDs?

This query returns a list of the installed boards in the signal generator. The information will be returned in the following format:

"<board name,part number,serial number,version number,status>"

This information format will repeat with as many iterations as the number of detected boards in the signal generator.

Key Entry **Installed Board Info**

:CCOunt:ATTenuator

Supported All

:DIAGnostic[:CPU]:INFORMATION:CCOunt:ATTenuator?

This query returns the cumulative number of times that the attenuator has been switched.

Key Entry **Diagnostic Info**

:CCOunt:PON

Supported All

:DIAGnostic[:CPU]:INFORMATION:CCOunt:PON?

This query returns the cumulative number of times the signal generator has been powered-on.

Key Entry **Diagnostic Info**

:CCOunt:PROTection

Supported All

:DIAGnostic[:CPU]:INFORMATION:CCOunt:PROTection?

This query returns the cumulative number of times the reverse power protection has been cycled.

Key Entry **Diagnostic Info**

:DISPlay:OTIME

Supported All Models

:DIAGnostic[:CPU]:INFORMATION:DISPlay:OTIME?

This query returns the cumulative number of hours the display has been on.

Key Entry **Diagnostic Info**

:LICense:AUXiliary

Supported All Models

:DIAGnostic[:CPU]:INFORMATION:LICense:AUXiliary?

This query returns a list of licenses for software applications associated with the signal generator that have the software license file installed on the PC, as opposed to a license key installed on the signal generator. However this query does not return demo licenses for Arb-based applications.

Key Entry **Auxiliary Software Options**

Remarks If you use the signal generator with a PC that has a copy of a software application for which a license shows with this query, the software automatically accesses and installs the license on the PC.

To access Arb-based demo software licenses, see “[:LICense:WAVEform](#)” . To view option numbers for software applications that use license keys, see “[:OPTions](#)” on page 83.

:LICense:WAVeform**Supported** All Models`:DIAGnostic[:CPU]:INFORMATION:LICense:WAVeform?`

This query returns a list of Arb-based licenses (including demo) for software applications associated with the signal generator that have the software license file installed on the PC, as opposed to a license key installed on the signal generator.

The response format is a series of comma-separated entries enclosed in quotation marks. The first field is the waveform type number and the second is a text description of the license.

Key Entry **Waveform Licenses**

Remarks If a license appears in this list, this means that you can transfer waveform files between signal generators that have the same license. The list duplicates the Arb-based software applications displayed with “:LICense:AUXiliary” query.

To view option numbers for software applications that use license keys, see “:OPTions”.

:OPTions**Supported** All Models`:DIAGnostic[:CPU]:INFORMATION:OPTions?`

This query returns a list of internally installed signal generator options.

Key Entry **Options Info****:OPTions:DETail****Supported** All Models`:DIAGnostic[:CPU]:INFORMATION:OPTions:DETail?`

This query returns the options that are installed along with the option revision and DSP version if applicable.

Key Entry **Options Info**

Diagnostic Subsystem (:DIAGnostic[:CPU]:INFORMATION)

:OTIME

Supported All Models

:DIAGnostic[:CPU]:INFORMATION:OTIME?

This query returns the cumulative number of hours that the signal generator has been on.

Key Entry **Diagnostic Info**

:REVISION

Supported All ModelsAll Models

:DIAGnostic[:CPU]:INFORMATION:REVISION?

This query returns the CPU bootstrap read only memory (boot ROM) revision date. In addition, the query returns the revision, creation date, and creation time of the main firmware.

Key Entry **Diagnostic Info**

:SDATE

Supported All Models

:DIAGnostic[:CPU]:INFORMATION:SDATE?

This query returns the date and time of the main firmware.

Key Entry **Diagnostic Info**

:WLIENCE[:VALUE]

Supported All Models

:DIAGnostic[:CPU]:INFORMATION:WLIENCE[:VALUE]? <type_num>

This query returns the number of seconds remaining on the waveform license for the type of waveform designated by the <type_num> variable number. The type variable number is obtained using the “[LICense:WAVEform](#)” command shown on [page 83](#). Zero is returned for non-existent and expired licenses. The value $2^{32} - 1$ (4,294,967,295) is returned for licenses that do not expire.

Display Subsystem (:DISPlay)

:ANNotation:AMPLitude:UNIT

Supported All Models

```
:DISPlay:ANNotation:AMPLitude:UNIT DBM|DBUV|DBUVEFMF|V|VEMF|DB  
:DISPlay:ANNotation:AMPLitude:UNIT?
```

This command sets the displayed front panel amplitude units.

If the amplitude reference state is set to on, the query returns units expressed in DB. Setting any other unit will cause a setting conflict error stating that the amplitude reference state must be set to off. Refer to, “:REFerence:STATE” on page 66 for more information.

***RST** DBM

:ANNotation:CLOCK:DATE:FORMat

Supported All Models

```
:DISPlay:ANNotation:CLOCK:DATE:FORMat MDY|DMY  
:DISPlay:ANNotation:CLOCK:DATE:FORMat?
```

This command enables the selection of the date format. The choices are month-day-year (MDY) or day-month-year (DMY) format.

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

:ANNotation:CLOCK[:STATe]

Supported All Models

```
:DISPlay:ANNotation:CLOCK[:STATe] ON|OFF|1|0  
:DISPlay:ANNotation:CLOCK[:STATe]?
```

This command enables or disables the digital clock view in the lower right side of the front panel display.

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

:BRIGhtness

Supported All Models

:DISPlay:BRIGhtness <val>

:DISPlay:BRIGhtness?

This command sets the display brightness (intensity). The brightness can be set to the minimum level (0.02), maximum level (1), or in between by using fractional numeric values (0.03–0.99).

Range 0.02–1

Key Entry **Brightness**

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

:CAPTURE

Supported All Models

:DISPlay:CAPTURE

This event command enables the user to capture the current display and store it in the signal generator's memory.

Remarks The display capture is stored as DISPLAY.BMP in the Binary file system. This file is overwritten with each subsequent display capture. The file can be down-loaded in the following manner:

1. Log on to the signal generator using ftp.
2. Change (cd) to the BIN directory.
3. Retrieve the file by using the get command.

:CONTRast

Supported All Models

:DISPlay:CONTRast <val>

:DISPlay:CONTRast?

This command sets the contrast of the LCD display. The contrast can be set to the maximum level (1), minimum level (0), or in between by using fractional numeric values (0.001–0.999).

Range 0–1

Key Entry Display contrast hardkeys are located below the display.

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

:INVerse

Supported All Models

:DISPlay:INVerse ON|OFF|1|0

:DISPlay:INVerse?

This command sets the display of the source to inverse video mode.

Key Entry **Inverse Video Off On**

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

:REMOte

Supported All Models

:DISPlay:REMOte ON|OFF|1|0

:DISPlay:REMOte?

This command enables or disables the display updating when the signal generator is remotely controlled.

ON (1) This choice updates the signal generator display so you can see the settings as the commands are executed, however, this will degrade the signal generator speed.

OFF (0) This choice turns off the display updating while further optimizing the signal generator for speed.

Key Entry Update in Remote Off On

Remarks The setting enabled by this command is not affected by signal generator preset or *RST. However, cycling the signal generator power will reset it to zero.

[:WINDow][:STATe]

Supported All Models

:DISPlay[:WINDow][:STATe] ON|OFF|1|0

:DISPlay[:WINDow][:STATe]?

This command is used to either blank out (OFF or 0) the display screen or turn it on (ON or 1).

Remarks The setting enabled by this command is not affected by *RST. However, presetting the signal generator or cycling the power will turn the display on.

IEEE 488.2 Common Commands

*CLS

Supported All Models

*CLS

The Clear Status (CLS) command clears the Status Byte Register, the Data Questionable Event Register, the Standard Event Status Register, the Standard Operation Status Register and any other registers that are summarized in the status byte.

*ESE

Supported All Models

*ESE <data>

The Standard Event Status Enable (ESE) command sets the Standard Event Status Enable Register.

The variable <data> represents the sum of the bits that will be enabled.

Range 0–255

Remarks The setting enabled by this command is not affected by signal generator preset or *RST. However, cycling the signal generator power will reset this register to zero.

Refer to Chapter 3 of the *E4428C/38C ESG Signal Generators Programming Guide* for more information.

*ESE?

Supported All Models

*ESE?

The Standard Event Status Enable (ESE) query returns the value of the Standard Event Status Enable Register.

Remarks Refer to Chapter 3 of the *ESG Signal Generators Programming Guide* for more information.

***ESR?**

Supported All Models

CAUTION This is a destructive read. The data in the register is latched until it is queried. Once queried, the data is cleared.

*ESR?

The Standard Event Status Register (ESR) query returns the value of the Standard Event Status Register.

Remarks Refer to Chapter 3 of the *E4428C/38C ESG Signal Generators Programming Guide* for more information.

***IDN?**

Supported All Models

*IDN?

The Identification (IDN) query outputs an identifying string. The response will show the following information:

<company name>, <model number>, <serial number>, <firmware revision>

Key Entry **Diagnostic Info**

Remarks The identification information can be modified. Refer to [“:IDN” on page 157](#) for more information.

***OPC**

Supported All Models

*OPC

The Operation Complete (OPC) command sets bit 0 in the Standard Event Status Register when all pending operations have finished.

***OPC?**

Supported All Models

*OPC?

The Operation Complete (OPC) query returns the ASCII character 1 in the Standard Event Status Register when all pending operations have finished.

*PSC

Supported

*PSC ON|OFF|1|0

The Power-On Status Clear (PSC) command controls the automatic power-on clearing of the Service Request Enable Register, the Standard Event Status Enable Register, and device-specific event enable registers.

ON (1) This choice enables the power-on clearing of the listed registers.

OFF (0) This choice disables the clearing of the listed registers and they retain their status when a power-on condition occurs.

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

*PSC?

Supported All Models

*PSC?

The Power-On Status Clear (PSC) query returns the flag setting as enabled by the *PSC command.

*RCL

Supported All Models

*RCL <reg>, <seq>

The Recall (RCL) command recalls the state from the specified memory register <reg> of the specified sequence <seq>.

Range Registers: 0–99 Sequences: 0–9

Key Entry **RECALL Reg** **Select Seq:**

*RST

Supported All Models

*RST

The Reset (RST) command resets most signal generator functions to factory-defined conditions.

Remarks Each command shows the *RST value if the setting is affected.

SAV*Supported** All Models

*SAV <reg>, <seq>

The Save (SAV) command saves the state of the signal generator to the specified memory register <reg> of the specified sequence <seq>.

Range Registers: 0–99 Sequences: 0–9

Key Entry **Save Reg** **Save Seq[n] Reg[nn]*****SRE****Supported** All Models

*SRE <data>

The Service Request Enable (SRE) command sets the value of the Service Request Enable Register.

The variable <data> is the decimal sum of the bits that will be enabled. Bit 6 (value 64) is ignored and cannot be set by this command.

Range 0–255**Remarks** Refer to Chapter 3 of the *E4428C/38C ESG Signal Generators Programming Guide* for more information.

Entering values from 64 to 127 is equivalent to entering values from 0 to 63.

The setting enabled by this command is not affected by signal generator preset or *RST. However, cycling the signal generator power will reset it to zero.

SRE?*Supported** All Models

*SRE?

The Service Request Enable (SRE) query returns the value of the Service Request Enable Register.

Range 0–63 or 128–191**Remarks** Refer to Chapter 3 of the *E4428C/38C ESG Signal Generators Programming Guide* for more information.

*STB?

Supported All Models

*STB?

The Read Status Byte (STB) query returns the value of the status byte including the master summary status (MSS) bit.

Range 0–255

Remarks Refer to Chapter 3 of the *E4428C/38C ESG Signal Generators Programming Guide* for more information.

*TRG

Supported All Models

*TRG

The Trigger (TRG) command triggers the device if BUS is the selected trigger source, otherwise, *TRG is ignored.

*TST?

Supported All Models

*TST?

The Self-Test (TST) query initiates the internal self-test and returns one of the following results:

0 This shows that all tests passed.

1 This shows that one or more tests failed.

Key Entry **Run Complete Self Test**

*WAI

Supported All Models

*WAI

The Wait-to-Continue (WAI) command causes the signal generator to wait until all pending commands are completed, before executing any other commands.

Memory Subsystem (:MEMory)

:CATalog:BINary

Supported E4438C with Option 001/601 or 002/602

:MEMory:CATalog:BINary?

This command outputs a list of the binary files. The return data will be in the following form:

```
<mem used>,<mem free>{,"<file listing>"}
```

The signal generator will return the two memory usage parameters and as many file listings as there are files in the directory list. Each file listing parameter will be in the following form:

```
"<file name,file type,file size>"
```

Key Entry Binary

Remarks Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:CATalog:BIT

Supported E4438C with Option 001/601 or 002/602

:MEMory:CATalog:BIT?

This command outputs a list of the bit files. The return data will be in the following form:

```
<mem used>,<mem free>{,"<file listing>"}
```

The signal generator will return the two memory usage parameters and as many file listings as there are files in the directory list. Each file listing parameter will be in the following form:

```
"<file name,file type,file size>"
```

Key Entry Bit

Remarks Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:CATalog:CDMa

Supported E4438C with Option 401

:MEMory:CATalog:CDMa?

This command outputs a list of the arbitrary waveform CDMA files. The return data will be in the following form:

```
<mem used>,<mem free>{,"<file listing>"}
```

The signal generator will return the two memory usage parameters and as many file listings as there are files in the directory list. Each file listing parameter will be in the following form:

```
"<file name,file type,file size>"
```

Key Entry CDMA

Remarks Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:CATalog:DMOD

Supported E4438C with Option 001/601 or 002/602

:MEMory:CATalog:DMOD?

This command outputs a list of the arbitrary waveform digital modulation files. The return data will be in the following form:

```
<mem used>,<mem free>{,"<file listing>"}
```

The signal generator will return the two memory usage parameters and as many file listings as there are files in the directory list. Each file listing parameter will be in the following form:

```
"<file name,file type,file size>"
```

Key Entry DMOD

Remarks Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:CATalog:DWCDma

Supported E4438C with Option 400

:MEMory:CATalog:DWCDma?

This command outputs a list of the arbitrary waveform downlink W-CDMA files. The return data will be in the following form:

```
<mem used>,<mem free>{,"<file listing>"}
```

The signal generator will return the two memory usage parameters and as many file listings as there are files in the directory list. Each file listing parameter will be in the following form:

```
"<file name,file type,file size>"
```

Key Entry DWCDMA

Remarks Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:CATalog:FCDMa

Supported E4438C with Option 401

:MEMory:CATalog:FCDMa?

This command outputs a list of the arbitrary waveform forward link cdma2000 files. The return data will be in the following form:

```
<mem used>,<mem free>{,"<file listing>"}
```

The signal generator will return the two memory usage parameters and as many file listings as there are files in the directory list. Each file listing parameter will be in the following form:

```
"<file name,file type,file size>"
```

Key Entry FCDMA

Remarks Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:CATalog:FIR

Supported E4438C with Option 001/601 or 002/602

:MEMory:CATalog:FIR?

This command outputs a list of the finite impulse response filter files. The return data will be in the following form:

```
<mem used>,<mem free>{,"<file listing>"}
```

The signal generator will return the two memory usage parameters and as many file listings as there are files in the directory list. Each file listing parameter will be in the following form:

```
"<file name,file type,file size>"
```

Key Entry FIR

Remarks Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:CATalog:FSK

Supported E4438C with Option 001/601 or 002/602

:MEMory:CATalog:FSK?

This command outputs a list of the FSK files. The return data will be in the following form:

```
<mem used>,<mem free>{,"<file listing>"}
```

The signal generator will return the two memory usage parameters and as many file listings as there are files in the directory list. Each file listing parameter will be in the following form:

```
"<file name,file type,file size>"
```

Key Entry FIR

Remarks Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:CATalog:IQ

Supported E4438C with Option 001/601 or 002/602

:MEMory:CATalog:IQ?

This command outputs a list of the IQ files. The return data will be in the following form:

<mem used>,<mem free>{,"<file listing>"}

The signal generator will return the two memory usage parameters and as many file listings as there are files in the directory list. Each file listing parameter will be in the following form:

"<file name,file type,file size>"

Key Entry I/Q

Remarks Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:CATalog:LIST

Supported All Models

:MEMory:CATalog:LIST?

This command outputs a list of the list sweep files. The return data will be in the following form:

<mem used>,<mem free>{,"<file listing>"}

The signal generator will return the two memory usage parameters and as many file listings as there are files in the directory list. Each file listing parameter will be in the following form:

"<file name,file type,file size>"

Key Entry List

Remarks Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:CATalog:MCDMa

Supported E4438C with Option 401

:MEMory:CATalog:MCDMa?

This command outputs a list of the arbitrary waveform multicarrier IS-95 CDMA files. The return data will be in the following form:

```
<mem used>,<mem free>{,"<file listing>"}
```

The signal generator will return the two memory usage parameters and as many file listings as there are files in the directory list. Each file listing parameter will be in the following form:

```
"<file name,file type,file size>"
```

Key Entry MCDMA

Remarks Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:CATalog:MDMod

Supported E4438C with Option 001/601 or 002/602

:MEMory:CATalog:MDMod?

This command outputs a list of the arbitrary waveform multicarrier digital modulation files. The return data will be in the following form:

```
<mem used>,<mem free>{,"<file listing>"}
```

The signal generator will return the two memory usage parameters and as many file listings as there are files in the directory list. Each file listing parameter will be in the following form:

```
"<file name,file type,file size>"
```

Key Entry MDMOD

Remarks Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:CATalog:MDWCdma

Supported E4438C with Option 400

:MEMory:CATalog:MDWCdma?

This command outputs a list of the arbitrary waveform multicarrier downlink W-CDMA files. The return data will be in the following form:

```
<mem used>,<mem free>{,"<file listing>"}
```

The signal generator will return the two memory usage parameters and as many file listings as there are files in the directory list. Each file listing parameter will be in the following form:

```
"<file name,file type,file size>"
```

Key Entry MDWCdma

Remarks Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:CATalog:MFCdma

Supported E4438C with Option 401

:MEMory:CATalog:MFCdma?

This command outputs a list of the arbitrary waveform multicarrier forward link cdma2000 files. The return data will be in the following form:

```
<mem used>,<mem free>{,"<file listing>"}
```

The signal generator will return the two memory usage parameters and as many file listings as there are files in the directory list. Each file listing parameter will be in the following form:

```
"<file name,file type,file size>"
```

Key Entry MFCdma

Remarks Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:CATalog:MTONe

Supported E4438C with Option 001/601 or 002/602

:MEMory:CATalog:MTONe?

This command outputs a list of the arbitrary waveform multitone files. The return data will be in the following form:

```
<mem used>,<mem free>{,"<file listing>"}
```

The signal generator will return the two memory usage parameters and as many file listings as there are files in the directory list. Each file listing parameter will be in the following form:

```
"<file name,file type,file size>"
```

Key Entry MTONE

Remarks Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:CATalog:RCDMa

Supported E4438C with Option 401

:MEMory:CATalog:RCDMa?

This command outputs a list of the arbitrary waveform files for reverse link cdma2000. The return data will be in the following form:

```
<mem used>,<mem free>{,"<file listing>"}
```

The signal generator will return the two memory usage parameters and as many file listings as there are files in the directory list. Each file listing parameter will be in the following form:

```
"<file name,file type,file size>"
```

Key Entry RCDMA

Remarks Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:CATalog:SEQ

Supported E4438C with Option 001/601 or 002/602

:MEMory:CATalog:SEQ?

This command outputs a list of the arbitrary waveform sequence files. The return data will be in the following form:

```
<mem used>,<mem free>{,"<file listing>"}
```

The signal generator will return the two memory usage parameters and as many file listings as there are files in the directory list. Each file listing parameter will be in the following form:

```
"<file name,file type,file size>"
```

Key Entry SEQ

Remarks Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:CATalog:SHAPE

Supported E4438C with Option 001/601 or 002/602

:MEMory:CATalog:SHAPE?

This command outputs a list of the burst shape files. The return data will be in the following form:

```
<mem used>,<mem free>{,"<file listing>"}
```

The signal generator will return the two memory usage parameters and as many file listings as there are files in the directory list. Each file listing parameter will be in the following form:

```
"<file name,file type,file size>"
```

Key Entry SHAPE

Remarks Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:CATalog:STATe

Supported All Models

:MEMory:CATalog:STATe?

This command outputs a list of the state files. The return data will be in the following form:

```
<mem used>,<mem free>{,"<file listing>"}
```

The signal generator will return the two memory usage parameters and as many file listings as there are files in the directory list. Each file listing parameter will be in the following form:

```
"<file name,file type,file size>"
```

Key Entry State

Remarks Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:CATalog:UFLT

Supported All Models

:MEMory:CATalog:UFLT?

This command outputs a list of the user-flatness correction files. The return data will be in the following form:

```
<mem used>,<mem free>{,"<file listing>"}
```

The signal generator will return the two memory usage parameters and as many file listings as there are files in the directory list. Each file listing parameter will be in the following form:

```
"<file name,file type,file size>"
```

Key Entry User Flatness

Remarks Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:CATalog:UWCDma

Supported E4438C with Option 400

:MEMory:CATalog:UWCDma?

This command outputs a list of the arbitrary waveform uplink W-CDMA files. The return data will be in the following form:

```
<mem used>,<mem free>{,"<file listing>"}
```

The signal generator will return the two memory usage parameters and as many file listings as there are files in the directory list. Each file listing parameter will be in the following form:

```
"<file name,file type,file size>"
```

Key Entry UWCDMA

Remarks Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:CATalog[:ALL]

Supported All Models

:MEMory:CATalog[:ALL]?

This command outputs a list of all the files in the memory subsystem. However it does not include files stored on the Option 001/601 or 002/602 baseband generator. The return data will be in the following form:

```
<mem used>,<mem free>{,"<file listing>"}
```

The signal generator will return the two memory usage parameters and as many file listings as there are files in the memory subsystem. Each file listing parameter will be in the following form:

```
"<file name,file type,file size>"
```

Key Entry All

Remarks Refer to [Table 3-1 on page 122](#) for a listing of the file types and [“File Name Variables” on page 13](#) for information on the "<file name>" syntax.

:COPY[:NAME]

Supported All Models

```
:MEMory:COPY[:NAME] "<file name>","<file name>"
```

This command makes a duplicate of the requested file.

Key Entry **Copy File**

Remarks Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

When copying a waveform file from volatile to non-volatile memory, the marker and header files associated with the waveform file will automatically be copied at the same time.

:DATA

Supported E4438C with Option 001/601 or 002/602

```
:MEMory:DATA "<file name>",<datablock>
```

```
:MEMory:DATA? "<file name>"
```

This command creates a user data file and stores it in the signal generator non-volatile binary memory catalog.

<file name> This variable represents the file name for the user file being stored in the signal generator non-volatile memory.

<datablock> This variable represents the block-formatted data.

Example:

```
:MEMory:DATA "userfile",#1912S407897
```

userfile This is the user file as it appears in the signal generator.

1 This variable defines the number of decimal digits to follow.

9 This variable defines how many bytes of data are to follow.

12S407897 This example is an ASCII representation of the data that is downloaded to the signal generator. Refer to the *E4428C/38C ESG Signal Generators Programming Guide* for more information.

Remarks Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:DATA:APPend

Supported E4438C with Option 001/601 or 002/602

:MEMory:DATA:APPend "<file name>", <datablock>

This command appends new data to an existing binary user file stored in non-volatile signal generator memory.

<file name> This variable represents the name of the existing user file.

<datablock> This variable represents the block-formatted data.

Example:

:MEMory:DATA:APPend "userfile", #141249

userfile This name represents the user file name as it appears in the signal generator.

1 This variable defines the number of decimal digits to follow.

4 This variable defines how many bytes of data are to follow.

1249 This example is an ASCII representation of the data that is downloaded to the signal generator. Refer to the *E4428C/38C ESG Signal Generators Programming Guide* for more information.

Remarks Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:DATA:BIT

Supported E4438C with Option 001/601 or 002/602

```
:MEMory:DATA:BIT "<file name>", <bit_count>, <datablock>
```

```
:MEMory:DATA:BIT? "<file name>"
```

This command creates a bit file and stores it in the signal generator non-volatile memory.

"<file name>" This variable represents the user file name as it will appear in the signal generator memory.

<bit_count> This variable represents the number of significant bits in the data block.

<datablock> This variable represents the block-formatted data.

Example:

```
:MEMory:DATA:BIT "userfile1", 16, #12Qz
```

"userfile1" This is the name of the user file as it appears in the signal generator.

16 This variable defines the actual number of data bits contained in the datablock.

1 This variable defines the number of decimal digits to follow.

2 This variable defines how many bytes of data are to follow.

Qz This variable defines the ASCII representation of the 16 bits of data that are downloaded to the signal generator. Refer to the *E4428C/38C ESG Signal Generators Programming Guide* for more information.

Remarks Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:DATA:FIR

Supported E4438C with Option 001/601 or 002/602

:MEMory:DATA:FIR "<file name>",osr,coefficient{,coefficient}

:MEMory:DATA:FIR? "<file name>"

This command creates a user-defined finite impulse response (FIR) file and stores it in the signal generator non-volatile memory.

osr The oversample ratio (osr) is the number of filter taps per symbol.

coefficient This variable is the FIR coefficient. The maximum total number of coefficients is 1024.

{,coefficient} This optional variable is used when you enter additional coefficients.

Range osr: 1–32
coefficient: –1000 to 1000

Key Entry Oversample Ratio

Remarks Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:DATA:FSK

Supported E4438C with Option 001/601 or 002/602

```
:MEMory:DATA:FSK "<file name>", <num_states>, <f0>, <f1>, ... <f(n)>
[ , <diff_state>, <num_diff_states>, <diff1>, ... <diff(n)> ]
:MEMory:DATA:FSK? "<file name>"
```

This command creates a custom FSK file and stores it in the signal generator non-volatile memory.

The query returns data in the following form:

```
<num_states>, <f0>, <f1>, ... <f(n)>, <diff_state>, <num_diff_states>, <diff1>,
... <diff(n)>
```

"<file name>"	This variable string identifies the name of the FSK file.
<num_states>	This variable identifies the number of frequency states.
<f0>	This variable identifies the value of the first frequency state.
<f1>, ... <f(n)>	This variable identifies the value of the second and subsequent frequency states with a frequency resolution of 0.1Hz.
<diff_state>	This variable enables or disables differential encoding.
<num_diff_states>	This variable identifies the number of differential states.
<diff0>	This variable identifies the value of the first differential state.
<diff1>, ... <diff(n)>	This variable identifies the value of the second and subsequent differential states.

The following example creates and stores a four-level FSK file named 4FSK that has four states (frequencies): -2kHz, -1kHz, 2kHz, 1kHz; differential encoding is toggled ON, and there are two differential states 1 and 0.

```
:MEM:DATA:FSK "4FSK", 4, -2kHz, -1kHz, 2kHz, 1kHz, ON, 2, 1, 0
```

Range	num_diff_states: 0–256
	num_states: 2–16
	f0–f(n): -20MHZ to 20MHZ
	diff0–diff(n): -128 to 127

:DATA:IQ

Supported E4438C with Option 001/601 or 002/602

```
:MEMory:DATA:IQ "<file name>",<offsetQ>,<num_states>,<i0>,<q0>,<i1>,<q1>,...<i(n)>,<q(n)>
[,<diff_state>,<num_diff_states>,<diff0>,<diff1>,...<diff(n)>]
:MEMory:DATA:IQ? "<file name>"
```

This command creates a custom I/Q file and stores it in the signal generator non-volatile memory.

The query returns data in the following form:

```
<offsetQ>,<num_states>,<i0>,<q0>,<i1>,<q1>,...<i(n)>,<q(n)>,<diff_state>
,<num_diff_states>,<diff0>,<diff1>,...<diff(n)>
```

- "<file name>" This variable string identifies the name of the I/Q file.
- <offsetQ> This variable enables or disables the Q output delay by 1/2 symbol from the I output.
- <num_states> This variable identifies the number of symbols.
- <i0>...<i(n)> This variable identifies the I value of the first and subsequent I symbols.
- <q0>...<q(n)> This variable identifies the Q value of the first and subsequent Q symbols.
- <diff_state> This variable enables and disables differential encoding.
- <num_diff_states> This variable identifies the number of differential states.
- <diff0> This variable identifies the value of the first differential state.
- <diff1,...diff(n)> This variable identifies the value of the second and subsequent differential states.

The following example creates and stores a two-symbol I/Q file named testBPSK that has the Q offset.

```
:MEM:DATA:IQ "testBPSK",1,2,1,0,0,0
```

Range

- num_states: 2–256
- i0–i(n): –1 to 1
- q0–q(n): –1 to 1
- num_diff_states: 0–256
- diff0–diff(n): –128 to 127

:DATA:PRAM:FILE:BLOCK

Supported E8267D with Option 601 or 602

```
:MEMory:DATA:PRAM:FILE:BLOCK "<file_name>", <data_block>
```

This command loads block-formatted data directly into pattern RAM volatile memory (WFM1). Pattern RAM memory describes how memory (WFM1) is used and is not a distinct piece of memory. A PRAM file is specified as an array of bytes. No directory path name is needed.

"<file_name>" This variable names the destination file. Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

<data_block> This parameter represents the data and file length parameters. The data in the file is represented by the <data_block> variable. The file length parameters are used by the signal generator for allocating memory.

Pattern Ram files are binary files downloaded directly into waveform memory as an array of bytes. Each byte specifies a data bit (LSB 0), a burst bit (BIT 2), and an Event 1 output bit (BIT 6). Refer to the *E4428C/38C ESG Signal Generators Programming Guide* for more information on pattern RAM downloading.

Example

```
:MEM:DATA:PRAM:FILE:BLOCK "PRAM_Data", #14Yq8L
```

The preceding example downloads PRAM data to a file named PRAM_Data into the signal generator's volatile memory (WFM1).

- "PRAM_Data" PRAM_Data is the data filename. PRAM files are saved to the signal generator's non-volatile memory (WFM1).
- #14Yq8L Data block
 - # This character indicates the beginning of the data block
 - 1 Number of digits in the byte count
 - 4 Byte count
 - Yq8L 4 bytes of data

NOTE The data, Yq8L, in the above command is not valid and is used for example purposes only. Typically, ascii characters representing data are unprintable.

:DATA:PRAM:FILE:LIST

Supported E8267D with Option 601 or 602

MEMory:DATA:PRAM:FILE:LIST "<file_name>", <uint8> [, <uint8>, <...>]

This command loads list-formatted data directly into pattern RAM volatile memory (WFM1). Pattern RAM memory describes how memory (WFM1) is used and is not a distinct piece of memory. A PRAM file is specified as an array of bytes.

NOTE This command should be preceded by a *WAI (Wait-to-Continue) command to ensure that all pending operations are completed, before loading the list.

"<file_name>" This variable names the destination file. Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

<uint8> This variable is any of the valid 8-bit, unsigned integer values between 0 and 255.

[, <uint8>, <...>] This variable identifies the value of the second and subsequent 8-bit unsigned integer variables.

Pattern Ram files are binary files downloaded directly into waveform memory as an array of bytes. Each byte specifies a data bit (LSB 0), a burst bit (BIT 2), and an Event 1 output bit (BIT 6). Refer to the *E4428C/38C ESG Signal Generators Programming Guide* for more information on pattern RAM downloading.

Example

```
:MEM:DATA:PRAM:LIST "Pram_Data", 85,21,21,20,20,100
```

The preceding example downloads PRAM data, in list format, to a file named `Pram_Data` in the signal generator’s volatile memory (WFM1).

- "Pram_Data" Pram_Data is the data filename. PRAM files are saved to the signal generator’s non-volatile memory (WFM1).
- 85 The first 8-bit integer value
- 21,21,20,20,100 Subsequent 8-bit integer values.

Range 0–255

:DATA:PRAM

NOTE This query is no longer supported; however, it is still valid for backward compatibility. Refer to *ESG E4428C/38C Programming Compatibility Guide* for information on this command.

:DATA:PRAM:BLOCK

NOTE This command was replaced by “:DATA:PRAM:FILE:BLOCK” on page 111. Refer to *ESG E4428C/38C Programming Compatibility Guide* for more information.

:DATA:PRAM:LIST

NOTE This command has been replaced by “:DATA:PRAM:FILE:LIST” on page 112. Refer to *ESG E4428C/38C Programming Compatibility Guide* for information.

:DATA:SHAPE

Supported E4438C with Option 001/601 or 002/602

```
:MEMory:DATA:SHAPE "<filename>",<num_rise_points>,<rp0>,<rp1>,  
...<num_fall_points>,<fp0>,<fp1>,...<fp(n)>  
:MEMory:DATA:SHAPE? "<filename>"
```

This command creates a new burst shape file and stores it in the signal generator non-volatile memory.

"<filename>" This variable string identifies the name of the burst shape file.

num_rise_points This variable specifies how many rise points used in the command.

rp0,...rp(n) This variable defines each successive rise point, where 0 is no power and 1 is full power.

num_fall_points This variable specifies how many fall points used in the command.

fp0,...fp(n) This variable defines each successive fall point, where 0 is no power and 1 is full power.

Range num_rise_points: 2–256 num_fall_points: 2–256
rp0–rp(n): 0.0–1.0 fp0–fp(n): 0.0–1.0

:DATA:UNPRotected

Supported E4438C with Option 001/601 or 002/602

:MEMory:DATA:UNPRotected "<file_name>", <data_block>

This command allows you to download data and store it in a file on the signal generator with the ability to retrieve it. This command is intended for downloading waveform data; however, you can use it to download all types of data.

NOTE If you do not use the UNPRotected command when downloading a waveform file, you will not be able to retrieve or upload the file. Attempting to do so will cause the signal generator to display the message: `ERROR:221, Access denied`.

"<file_name>" This variable names the destination file and directory path. The file type determines how you must format the "<filename>" variable. The table shown below describes the different "<filename>" variable types.

Binary file	The "<filename>" variable requires only a file name. A file name without a file path is stored in the Binary memory catalog. Refer to "File Name Variables" on page 13 for information on the file name syntax.
Encrypted file	The "<filename>" variable requires a path that includes the SECUREWAVE directory. The securewave directory path is SNVWFM: for non-volatile waveform memory and SWFM1: for volatile waveform memory. Refer to the <i>E4428C/38C ESG Programming Guide</i> for more
All other file types	The "<filename>" variable requires a path that includes the destination directory for the file type. Refer to Table 3-1 on page 122 , "File Name Variables" on page 13 , and to the <i>E4428C/38C ESG Programming Guide</i> for more information.

<data_block> This parameter represents the data and file length parameters. The data in the file is represented by the <data_block> variable.

Refer to the *E4428C/38C ESG Signal Generators Programming Guide* for more information on downloading and using files.

Example

```
:MEM:DATA:UNPR "NVWFM:Data_File",#18Qz37pY9o
```

The preceding example downloads waveform data to a file named `Data_File` in the signal generator's non-volatile memory. The table shown below describes the command parameters.

- | | |
|---------------------|--|
| • "NVWFM:Data_File" | Data_File is the data filename. The directory path is implied along with the filename. |
| • #18Qz37pY9o | Data block |
| # | This character indicates the beginning of the data block |
| 1 | Number of digits in the byte count |
| 8 | Byte count |
| Qz37pY9o | 8 bytes of data |

NOTE The data, `Qz37pY9o`, in the above command is not valid and is used for example purposes only. Typically, ascii characters representing data are unprintable.

:DELeTe:ALL

Supported All Models

CAUTION Using this command deletes all user files including binary, list, state, and flatness correction files, and any saved setups which use the front panel table editor. However, this does not include files stored on the Option 001/601 or 002/602 baseband generator. You cannot recover the files after executing this command.

```
:MEMory:DELeTe:ALL
```

This command clears the file system of all user files.

Key Entry Delete All Files

:DElete:BINary

Supported E4438C with Option 001/601 or 002/602

:MEMory:DELeTe:BINary

This command deletes all binary files.

Key Entry Delete All Binary Files

:DElete:BIT

Supported E4438C with Option 001/601 or 002/602

:MEMory:DELeTe:BIT

This command deletes all bit files.

Key Entry Delete All Bit Files

:DElete:CDMa

Supported E4438C with Option 401

:MEMory:DELeTe:CDMa

This command deletes all arbitrary waveform IS-95 CDMA files.

Key Entry Delete All ARB CDMA Files

:DElete:DMOD

Supported E4438C with Option 001/601 or 002/602

:MEMory:DELeTe:DMOD

This command deletes all arbitrary waveform digital modulation files.

Key Entry Delete All ARB DMOD Files

:DElete:DWCDma

Supported E4438C with Option 400

:MEMory:DELeTe:DWCDma

This command deletes all arbitrary waveform downlink W-CDMA files.

Key Entry Delete All ARB DWCDMA Files

:DElete:FCDMa

Supported E4438C with Option 401

:MEMory:DELeTe:FCDMa

This command deletes all arbitrary waveform forward link W-CDMA files.

Key Entry Delete All ARB FCDMA Files

:DElete:FIR

Supported E4438C with Option 001/601 or 002/602

:MEMory:DELeTe:FIR

This command deletes all finite impulse response filter files.

Key Entry Delete All FIR Files

:DElete:FSK

Supported E4438C with Option 001/601 or 002/602

:MEMory:DELeTe:FSK

This command deletes all FSK files.

Key Entry Delete All FSK Files

:DElete:IQ

Supported E4438C with Option 001/601 or 002/602

:MEMory:DELeTe:IQ

This command deletes all I/Q files.

Key Entry Delete All I/Q Files

:DElete:LIST

Supported All Models

:MEMory:DELeTe:LIST

This command deletes all List files.

Key Entry Delete All List Files

:DElete:MCDMa

Supported E4438C with Option 401

:MEMory:DElete:MCDMa

This command deletes all arbitrary waveform multicarrier IS-95 CDMA files.

Key Entry Delete All ARB MCDMA Files

:DElete:MDMod

Supported E4438C with Option 001/601 or 002/602

:MEMory:DElete:MDMod

This command deletes all arbitrary waveform multicarrier digital modulation files.

Key Entry Delete All ARB MDMOD Files

:DElete:MDWCdma

Supported E4438C with Option 400

:MEMory:DElete:MDWCdma

This command deletes all arbitrary waveform multicarrier downlink W-CDMA files.

Key Entry Delete All ARB MDWCdma Files

:DElete:MFCdma

Supported E4438C with Option 401

:MEMory:DElete:MFCdma

This command deletes all arbitrary waveform multicarrier forward link cdma2000 files.

Key Entry Delete All ARB MFCdma Files

:DElete:MTONE

Supported E4438C with Option 001/601 or 002/602

:MEMory:DElete:MTONE

This command deletes all arbitrary waveform multitone files.

Key Entry Delete All ARB MTONE Files

:DElete:RCDMa

Supported E4438C with Option 401

:MEMory:DELeTe:RCDMa

This command deletes all arbitrary waveform reverse link cdma2000 files.

Key Entry Delete All ARB RCDMA Files

:DElete:SEQ

Supported E4438C with Option 001/601 or 002/602

:MEMory:DELeTe:SEQ

This command deletes all sequence files.

Key Entry Delete All Sequence Files

:DElete:SHAPE

Supported E4438C with Option 001/601 or 002/602

:MEMory:DELeTe:SHAPE

This command deletes all burst shape files.

Key Entry Delete All Shape Files

:DElete:STATE

Supported All Models

:MEMory:DELeTe:STATE

This command deletes all state files.

Key Entry Delete All Models State Files

:DElete:UFLT

Supported All Models

:MEMory:DELeTe:UFLT

This command deletes all user-flatness correction files.

Key Entry Delete All UFLT Files

:DElete:UWCDma

Supported E4438C with Option 400

:MEMory:DElete:UWCDma

This command deletes all arbitrary waveform uplink W-CDMA files.

Key Entry Delete All ARB UWCDMA Files

:DElete[:NAME]

Supported All Models

:MEMory:DElete[:NAME] "<file name>"

This command clears the user file system of "<file name>".

Key Entry Delete File

Remarks Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

When deleting a waveform (WFM1) file from memory, the marker and headers file associated with the waveform file will also be deleted.

:FREE[:ALL]

Supported All Models

:MEMory:FREE[:ALL] ?

This command returns the number of bytes left in the user file system.

Key Entry All

:LOAD:LIST

Supported All Models

:MEMory:LOAD:LIST "<file name>"

This command loads a list sweep file.

Key Entry Load From Selected File

:MOVE

Supported All Models

```
:MEMory:MOVE "<src_file>","<dest_file>"
```

This command renames the requested file in the memory catalog.

Key Entry **Rename File**

Remarks Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:STATe:COMMeNt

Supported All Models

```
:MEMory:STATe:COMMeNt <reg_num>,<seq_num>,"<comment>"
```

```
:MEMory:STATe:COMMeNt? <reg_num>,<seq_num>
```

This command lets you to add a descriptive comment to the saved state <reg_num>,<seq_num>. Comments can be up to 55 characters long.

Key Entry **Add Comment To Seq[n] Reg[nn]**

:STORe:LIST

Supported All Models

```
:MEMory:STORe:LIST "<file name>"
```

This command stores the current list sweep data to a file.

Key Entry **Store To File**

Mass Memory Subsystem (:MMEMory)

:CATalog

Supported All Models

```
:MMEMory:CATalog? "<msus>"
```

This command outputs a list of the files from the specified file system.

The variable "<msus>" (mass storage unit specifier) represents "<file system>:<file name>". The file systems and types are shown in [Table 3-1](#).

Table 3-1

File System	File Type
BINARY ^a	BIN
BIT ^a	BIT
CDMA ^a	CDMA
DMOD - ARB digital modulation file ^a	DMOD
DWCDMA - ARB downlink W-CDMA file ^a	DWCD
FCDMA - ARB forward link cdma2000 file ^a	FCDM
FIR - finite impulse response filter file	FIR
FSK - frequency shift keying modulation file ^a	FSK
I/Q - modulation file ^a	IQ
LIST - sweep list file	LIST
MCDMA - ARB multicarrier CDMA file ^a	MCDM
MDMOD - ARB multicarrier digital modulation file ^a	MDM
MDWCDMA - ARB multicarrier downlink W-CDMA file ^a	MDWC

Table 3-1

File System	File Type
MFCDMA - ARB multicarrier forward link cdma2000 file ^a	MFCD
MTONE - ARB multitone file ^a	MTON
NVMKR - non-volatile arbitrary waveform marker file ^a	NVMKR
NVWFM - non-volatile arbitrary waveform file ^a	NVWFM
RCDMA - ARB reverse link cdma2000 file ^a	RCDM
SEQ - ARB sequence file ^a	SEQ
SHAPE - burst shape file ^a	SHAP
STATE	STAT
USERFLAT - user-flatness file	UFLT
UWCDMA - ARB uplink W-CDMA file ^a	UWCD
WFM1 - waveform file ^a	WFM1

a. This feature does not apply to the E4428C.

The return data will be in the following form:

```
<mem used>,<mem free>{,"<file listing>"}
```

The signal generator will return the two memory usage parameters and as many file listings as there are files in the specified file system. Each file listing will be in the following format:

```
"<file name,file type,file size>"
```

Key Entry	Binary	List	State	User Flatness	FIR	Shape	Bit	FSK
	IQ	Seq	DMOD	MTONE	MDMOD	CDMA	MCDMA	FCDMA
	MFCDMA	RCDMA	WCDMA	FWCDMA	MFWCDMA	RWCDMA		
	DWCDMA	MDWCDMA	UWCDMA	WFM1	NVMKR	NVWFM		

Remarks Refer to “[MSUS \(Mass Storage Unit Specifier\) Variable](#)” on page 15 for information on the use of the "<msus>" variable.

:COPY

Supported All Models

:MMEMory:COPY "<file name>", "<file name>"

This command makes a duplicate of the requested file.

Key Entry Copy File

Remarks Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

When copying a waveform file from volatile to non-volatile memory, the marker and header files associated with the waveform file will automatically be copied at the same time.

:DATA

Supported E4438C with Option 001/601 or 002/602

:MMEMory:DATA "<file name>", <datablock>

:MMEMory:DATA? "<file name>"

This command loads <datablock> into the memory location "<file name>".

The query returns the <datablock> associated with the "<file name>".

Remarks Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:DATA:UNPRotected

Supported E4438C with Option 001/601 or 002/602

:MMEMory:DATA:UNPRotected "<file_name>", <data_block>

This command allows you to download data and store it in a file on the signal generator with the ability to retrieve it. This command is intended for downloading waveform data; however, you can use it to download all types of data.

NOTE If you do not use the UNPRotected command when downloading a waveform file, you will not be able to retrieve or upload the file. Attempting to do so will cause the signal generator to display the message: `ERROR:221, Access denied`.

"<file_name>" This variable names the destination file and directory path. The file type determines how you must format the "<filename>" variable. The table shown below describes the different "<filename>" variable types.

Binary file The "<filename>" variable requires only a file name. A file name without a file path is stored in the Binary memory catalog. Refer to ["File Name Variables" on page 13](#) for information on the file name syntax.

Encrypted file The "<filename>" variable requires a path that includes the SECUREWAVE directory. The securewave directory path is SNVWFM: for non-volatile waveform memory and SWFM1: for volatile waveform memory. Refer to the *E4428C/38C ESG Programming Guide* for more

All other file types The "<filename>" variable requires a path that includes the destination directory for the file type. Refer to [Table 3-1 on page 122](#), ["File Name Variables" on page 13](#), and to the *E4428C/38C ESG Programming Guide* for more information.

<data_block> This parameter represents the data and file length parameters. The data in the file is represented by the <data_block> variable.

Refer to the *E4428C/38C ESG Signal Generators Programming Guide* for more information on downloading and using files.

Mass Memory Subsystem (:MMEMory)

Example

```
:MMEM:DATA:UNPR "NVWFM:Data_File",#18Qz37pY9o
```

The preceding example downloads waveform data to a file named `Data_File` and saves it to the signal generator's non-volatile (NVWFM) memory. The table shown below describes the command parameters.

- "NVWFM:Data_File" `Data_File` is the data filename. The securewave directory path is designated along with the filename.
- #18Qz37pY9o Data block
 - # This character indicates the beginning of the data block
 - 1 Number of digits in the byte count
 - 8 Byte count
 - Qz37pY9o 8 bytes of data

NOTE The data, `Qz37pY9o`, in the above command is not valid and is used for example purposes only. Typically, ascii characters representing data are unprintable.

:DELeTe:NVWFm

Supported E4438C with Option 001/601 or 002/602

```
:MMEMory:DELeTe:NVWFm
```

This command clears the user file system of all non-volatile arbitrary waveform files.

Key Entry **Delete All NVWFM Files**

:DELeTe:WFM

Supported E4438C with Option 001/601 or 002/602

```
:MMEMory:DELeTe:WFM
```

This command clears the user file system of all arbitrary waveform files.

Key Entry **Delete All WFM1 Files**

Remarks This command performs the same function as `DELeTe:WFM1`.

:DELete:WFM1

Supported E4438C with Option 001/601 or 002/602

:MMEMory:DELete:WFM1

This command clears the user file system of all arbitrary waveform files.

Key Entry Delete All WFM1 Files

Remarks This command performs the same function as DELete:WFM.

:DELete[:NAME]

Supported All

:MMEMory:DELete[:NAME] "<file name>", ["<msus>"]

This command clears the user file system of "<file name>" with the option of specifying the file system separately.

The variable "<msus>" (mass storage unit specifier) represents "<file system>:". For a list of the file systems refer to [Table 3-1 on page 122](#).

Key Entry Delete File

Remarks If the optional variable "<msus>" is omitted, the file name needs to include the file system extension. Refer to [“File Name Variables” on page 13](#) and [“MSUS \(Mass Storage Unit Specifier\) Variable” on page 15](#) for information on the use of the file variables.

When deleting a waveform file from memory, the marker and headers file associated with the waveform file will also be deleted.

:HEADer:CLEar

Supported E4438C with Option 001/601 or 002/602

:MMEMory:HEADer:CLEar "<file name>"

This command deletes the header file for the waveform file named.

Key Entry Clear Header

Remarks This command does not require a personality modulation to be on.

:HEADer:DESCRiption

Supported E4438C with Option 001/601 or 002/602

`:MMEMory:HEADer:DESCRiption "<file name>","<description>"`

`:MMEMory:HEADer:DESCRiption? "<file name>"`

This command inserts a description for the header file named.

Key Entry **Edit Description**

Remarks The header description is limited to 32 characters.

:LOAD:LIST

Supported All

`:MMEMory:LOAD:LIST "<file name>"`

This command loads a List sweep file.

Key Entry **Load From Selected File**

:MOVE

Supported All

`:MMEMory:MOVE "<src_file>","<dest_file>"`

This command renames the requested file in the memory catalog.

Key Entry **Rename File**

Remarks Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:STORe:LIST

Supported All

`:MMEMory:STORe:LIST "<file name>"`

This command stores the current list sweep data to a file.

Key Entry **Store To File**

Output Subsystem (:OUTPut)

:BLANKing:AUTO

Supported All

:OUTPut:BLANKing:AUTO ON|OFF|1|0

:OUTPut:BLANKing:AUTO?

This command enables or disables the RF output blanking during frequency changes.

ON This choice causes the RF to always blank.

OFF This choice causes the RF to not blank.

***RST** 1

Key Entry **Output Blanking Off On Auto**

:BLANKing:STAtE

Supported All

:OUTPut:BLANKing:STAtE ON|OFF|1|0

:OUTPut:BLANKing:STAtE?

This command enables or disables the RF output blanking state.

***RST** 1

:MODulation[:STAtE]

Supported All

:OUTPut:MODulation[:STAtE] ON|OFF|1|0

:OUTPut:MODulation[:STAtE]?

This command enables or disables the modulation of the RF output with the currently active modulation type(s).

***RST** 1

Key Entry **Mod On/Off**

Remarks Some modulation types can be simultaneously enabled such as pulse and AM.

An annunciator on the signal generator is always displayed to indicate whether modulation is switched on or off.

[:STATe]

Supported All

:OUTPut [:STATe] ON | OFF | 1 | 0

:OUTPut [:STATe] ?

This command enables or disables the RF output.

***RST** 0

Key Entry **RF On/Off**

Remarks Although you can configure and engage various modulations, no signal is available at the RF OUTPUT connector until this command is executed.

An annunciator is always displayed on the signal generator to indicate whether the RF output is switched on or off.

Route Subsystem (:ROUTE:HARDware:DGENERator)

:INPut:BPOLarity

Supported E4438C with Option 001/601 or 002/602

```
:ROUTE:HARDware:DGENERator:INPut:BPOLarity POSitive|NEGative  
:ROUTE:HARDware:DGENERator:INPut:BPOLarity?
```

This command configures the polarity of the TTL input signal at the BURST GATE IN connector. POSitive refers to normal logic, while NEGative refers to inverted logic.

***RST** POS

Key Entry **Burst Gate In Polarity Neg Pos**

Remarks This command performs the same function as “:IPOLarity:BGATE” on page 132.

:INPut:CPOLarity

Supported E4438C with Option 001/601 or 002/602

```
:ROUTE:HARDware:DGENERator:INPut:CPOLarity POSitive|NEGative  
:ROUTE:HARDware:DGENERator:INPut:CPOLarity?
```

This command configures the polarity of the TTL input signal at the DATA CLOCK connector. POSitive refers to normal logic, while NEGative refers to inverted logic.

***RST** POS

Key Entry **Data Clock Polarity Neg Pos**

Remarks This command performs the same function as “:IPOLarity:CLOCK” on page 133.

:INPut:DPOLarity

Supported E4438C with Option 001/601 or 002/602

:ROUTE:HARDware:DGENERator:INPut:DPOLarity POSitive|NEGative

:ROUTE:HARDware:DGENERator:INPut:DPOLarity?

This command configures the polarity of the TTL input signal at the DATA connector. POSitive refers to normal logic, while NEGative refers to inverted logic.

***RST** POS

Key Entry **Data Polarity Neg Pos**

Remarks This command performs the same function as [“:IPOLarity:DATA” on page 133](#).

:INPut:SPOLarity

Supported E4438C with Option 001/601 or 002/602

:ROUTE:HARDware:DGENERator:INPut:SPOLarity POSitive|NEGative

:ROUTE:HARDware:DGENERator:INPut:SPOLarity?

This command configures the polarity of the TTL input signal at the SYMBOL SYNC connector. POSitive refers to normal logic, while NEGative refers to inverted logic.

***RST** POS

Key Entry **Symbol Sync Polarity Neg Pos**

Remarks This command performs the same function as [“:IPOLarity:SSYNc” on page 133](#).

:IPOLarity:BGATe

Supported E4438C with Option 001/601 or 002/602

:ROUTE:HARDware:DGENERator:IPOLarity:BGATe POSitive|NEGative

:ROUTE:HARDware:DGENERator:IPOLarity:BGATe?

This command configures the polarity of the input signal at the BURST GATE IN connector. POSitive refers to normal logic, while NEGative refers to inverted logic.

***RST** POS

Key Entry **Burst Gate In Polarity Neg Pos**

Remarks This command performs the same function as [“:INPut:BPOLarity” on page 131](#).

:IPOLarity:CLOCK

Supported E4438C with Option 001/601 or 002/602

```
:ROUTE:HARDware:DGENERator:IPOLarity:CLOCK POSitive|NEGative
```

```
:ROUTE:HARDware:DGENERator:IPOLarity:CLOCK?
```

This command configures the polarity of the TTL input signal at the DATA CLOCK connector. POSitive refers to normal logic, while NEGative refers to inverted logic.

***RST** POS

Key Entry **Data Clock Polarity Neg Pos**

Remarks This command performs the same function as [“:INPut:CPOLarity”](#) on page 131.

:IPOLarity:DATA

Supported E4438C with Option 001/601 or 002/602

```
:ROUTE:HARDware:DGENERator:IPOLarity:DATA POSitive|NEGative
```

```
:ROUTE:HARDware:DGENERator:IPOLarity:DATA?
```

This command configures the polarity of the TTL input signal at the DATA connector. POSitive refers to normal logic, while NEGative refers the inverted logic.

***RST** POS

Key Entry **Data Polarity Neg Pos**

Remarks This command performs the same function as [“:INPut:DPOLarity”](#) on page 132.

:IPOLarity:SSYNc

Supported E4438C with Option 001/601 or 002/602

```
:ROUTE:HARDware:DGENERator:IPOLarity:SSYNc POSitive|NEGative
```

```
:ROUTE:HARDware:DGENERator:IPOLarity:SSYNc?
```

This command configures the polarity of the TTL input signal at the SYMBOL SYNC connector. POSitive refers to normal logic, while NEGative refers to inverted logic.

***RST** POS

Key Entry **Symbol Sync Polarity Neg Pos**

Remarks This command performs the same function as [“:INPut:SPOLarity”](#) on page 132.

:OPOLarity:CLOCK

Supported E4438C with Option 001/601 or 002/602

:ROUTE:HARDware:DGENERator:OPOLarity:CLOCK POSitive|NEGative

:ROUTE:HARDware:DGENERator:OPOLarity:CLOCK?

This command configures the polarity of the TTL output Data Clock Out signal at the DATA CLK OUT pin on the rear panel AUX I/O connector. POSitive refers to normal logic, while the NEGative refers to inverted logic.

***RST** POS

Key Entry Data Clock Out Neg Pos

Remarks This command performs the same function as [“:OUTPut:CPOLarity” on page 135](#).

:OPOLarity:DATA

Supported E4438C with Option 001/601 or 002/602

:ROUTE:HARDware:DGENERator:OPOLarity:DATA POSitive|NEGative

:ROUTE:HARDware:DGENERator:OPOLarity:DATA?

This command configures the polarity of the TTL output DATA OUT signal at the DATA OUT pin on the rear panel AUX I/O connector. POSitive refers to normal logic, while NEGative refers to inverted logic.

***RST** POS

Key Entry Data Out Polarity Neg Pos

Remarks This command performs the same function as [“:OUTPut:DPOLarity” on page 136](#).

:OPOLarity:SSYNc

Supported E4438C with Option 001/601 or 002/602

```
:ROUTE:HARDware:DGENERator:OPOLarity:SSYNc POSitive|NEGative
```

```
:ROUTE:HARDware:DGENERator:OPOLarity:SSYNc?
```

This command configures the polarity of the TTL output SYMBOL SYNC signal at the SYM SYNC OUT pin on the rear panel AUX I/O connector. POSitive refers to normal logic, while NEGative refers to inverted logic.

***RST** POS

Key Entry **Symbol Sync Out Polarity Neg Pos**

Remarks This command performs the same function as “:OUTPut:SPOLarity” on [page 136](#).

:OUTPut:CPOLarity

Supported E4438C with Option 001/601 or 002/602

```
:ROUTE:HARDware:DGENERator:OUTPut:CPOLarity POSitive|NEGative
```

```
:ROUTE:HARDware:DGENERator:OUTPut:CPOLarity?
```

This command configures the polarity of the TTL output DATA CLOCK OUT signal at the DATA CLK OUT pin on the rear panel AUX I/O connector. POSitive refers to normal logic, while NEGative refers to inverted logic.

***RST** POS

Key Entry **Data Clock Polarity Neg Pos**

Remarks This command performs the same function as “:OPOLarity:CLOCK” on [page 134](#).

:OUTPut:DCS[:STATe]

Supported E4438C with Option 001/601 or 002/602

```
:ROUTE:HARDware:DGENERator:OUTPut:DCS[:STATe] ON|OFF|1|0
```

```
:ROUTE:HARDware:DGENERator:OUTPut:DCS[:STATe] ?
```

This command is used to enable or disable the output DATA OUT, DATA CLK OUT, and SYM SYNC OUT signals from the rear panel AUX I/O connector. Normally, these output signals should be enabled (On). However, disabling these outputs will decrease the spurs that are sometimes present when operating at high symbol rates.

***RST** 1

Key Entry DATA/CLK/SYNC Rear Outputs Off On

:OUTPut:DPOLarity

Supported E4438C with Option 001/601 or 002/602

```
:ROUTE:HARDware:DGENERator:OUTPut:DPOLarity POSitive|NEGative
```

```
:ROUTE:HARDware:DGENERator:OUTPut:DPOLarity?
```

This command configures the polarity of the TTL output signal at the DATA OUT connector. POSitive refers to normal logic, while NEGative refers to inverted logic.

***RST** POS

Key Entry Data Out Polarity Neg Pos

Remarks This command performs the same function as “:OPOLarity:DATA” on page 134.

:OUTPut:SPOLarity

Supported E4438C with Option 001/601 or 002/602

```
:ROUTE:HARDware:DGENERator:OUTPut:SPOLarity POSitive|NEGative
```

```
:ROUTE:HARDware:DGENERator:OUTPut:SPOLarity?
```

This command configures the polarity of the TTL input signal at the SYMBOL SYNC connector. POSitive refers to normal logic, while NEGative refers to inverted logic.

***RST** POS

Key Entry Symbol Sync Out Polarity Neg Pos

Status Subsystem (:STATUS)

:OPERation:BASEband:CONDition

Supported E4438C with Option 001/601 or 002/602

:STATus:OPERation:BASEband:CONDition?

This query returns the decimal sum of the bits in the Baseband Operation Condition Register. For example, if the baseband is busy (bit 0), the value 1 is returned.

Range 0–32767

Remarks The data in this register is continuously updated and reflects the current conditions.

Refer to Chapter 3 of the *E4428C/38C ESG Signal Generators Programming Guide* for more information.

:OPERation:BASEband:ENABLE

Supported E4438C with Option 001/601 or 002/602

:STATus:OPERation:BASEband:ENABLE <val>

:STATus:OPERation:BASEband:ENABLE?

This command determines which bits in the Baseband Operation Event Register will set the Baseband is Busy bit (bit 10) in the Standard Operation Condition Register.

The variable <num> is the sum of the decimal values of the bits you want to enable.

Range 0–32767

Remarks Refer to Chapter 3 of the *E4428C/38C ESG Signal Generators Programming Guide* for more information.

:OPERation:BASEband:NTRansition

Supported E4438C with Option 001/601 or 002/602

:STATus:OPERation:BASEband:NTRansition <val>

:STATus:OPERation:BASEband:NTRansition?

This command determines which bits in the Baseband Operation Condition Register will set the corresponding bit in the Baseband Operation Event Register when that bit has a negative transition (1 to 0).

The variable <val> is the sum of the decimal values of the bits that you want to enable.

Range 0–32767

Remarks Refer to Chapter 3 of the *E4428C/38C ESG Signal Generators Programming Guide* for more information.

:OPERation:BASEband:PTRansition

Supported E4438C with Option 001/601 or 002/602

:STATus:OPERation:BASEband:PTRansition <val>

:STATus:OPERation:BASEband:PTRansition?

This command determines which bits in the Baseband Operation Condition Register will set the corresponding bit in the Baseband Operation Event Register when that bit has a positive transition (0 to 1).

The variable <val> is the sum of the decimal values of the bits that you want to enable.

Range 0–32767

Remarks Refer to Chapter 3 of the *E4428C/38C ESG Signal Generators Programming Guide* for more information.

:OPERation:BASeband[:EVENT]

Supported E4438C with Option 001/601 or 002/602

:STATus:OPERation:BASeband[:EVENT]?

CAUTION This is a destructive read. The data in the register is latched until it is queried. Once queried, the data is cleared.

This query returns the decimal sum of the bits in the Standard Operation Baseband Event Register.

Range 0–32767

Remarks The equivalent PTR and NTR filters must be set before the condition register can set the corresponding bit in the event register.

Refer to Chapter 3 of the *E4428C/38C ESG Signal Generators Programming Guide* for more information.

:OPERation:CONDition

Supported All

:STATus:OPERation:CONDition?

This query returns the decimal sum of the bits for the registers that are set to one and are part of the Standard Operation Status Group. For example, if a sweep is in progress (bit 3), the value 8 is returned.

Range 0–32767

Remarks The data in this register is continuously updated and reflects current conditions.

Refer to Chapter 3 of the *E4428C/38C ESG Signal Generators Programming Guide* for more information.

:OPERation:ENABle

Supported All

:STATus:OPERation:ENABle <val>

:STATus:OPERation:ENABle?

This command determines which bits in the Standard Operation Event Register will set the Standard Operation Status Summary bit (bit 7) in the Status Byte Register.

The variable <val> is the sum of the decimal values of the bits that you want to enable.

Range 0–32767

Remarks Refer to Chapter 3 of the *E4428C/38C ESG Signal Generators Programming Guide* for more information.

:OPERation:NTRansition

Supported All

:STATus:OPERation:NTRansition <val>

:STATus:OPERation:NTRansition?

This command determines which bits in the Standard Operation Condition Register will set the corresponding bit in the Standard Operation Event Register when that bit has a negative transition (1 to 0).

The variable <val> is the sum of the decimal values of the bits that you want to enable.

Range 0–32767

Remarks Refer to Chapter 3 of the *E4428C/38C ESG Signal Generators Programming Guide* for more information.

:OPERation:PTRansition

Supported All

```
:STATUS:OPERation:PTRansition <val>
:STATUS:OPERation:PTRansition?
```

This command determines which bits in the Standard Operation Condition Register will set the corresponding bit in the Standard Operation Event Register when that bit has a positive transition (0 to 1).

The variable <val> is the sum of the decimal values of the bits that you want to enable.

Range 0–32767

Remarks Refer to Chapter 3 of the *E4428C/38C ESG Signal Generators Programming Guide* for more information.

:OPERation[:EVENT]

Supported All

CAUTION This is a destructive read. The data in the register is latched until it is queried. Once queried, the data is cleared.

```
:STATUS:OPERation[:EVENT]?
```

This query returns the decimal sum of the bits in the Standard Operation Event Register.

Range 0–32767

Remarks The equivalent PTR or NTR filters must be set before the condition register can set the corresponding bit in the event register.

Refer to Chapter 3 of the *E4428C/38C ESG Signal Generators Programming Guide* for more information.

:PRESet

Supported All

```
:STATUS:PRESet
```

This command presets all transition filters, enable registers, and error/event queue enable registers.

Remarks Refer to Chapter 3 of the *E4428C/38C ESG Signal Generators Programming Guide* for more information.

:QUESTionable:BERT:CONDition

Supported E4438C with Option UN7, 300 or both

:STATus:QUESTionable:BERT:CONDition?

This query returns the decimal sum of the bits in the Data Questionable BERT Condition Register. For example, if no clock signal has been input for more than three seconds during the bit error rate measurement (bit 0), then a value of 1 is returned.

Range 0–32767

Remarks The data in this register is continuously updated and reflects the current conditions.

Refer to Chapter 3 of the *E4428C/38C ESG Signal Generators Programming Guide* for more information.

:QUESTionable:BERT:ENABLE

Supported E4438C with Option UN7, 300 or both

:STATus:QUESTionable:BERT:ENABLE <val>

:STATus:QUESTionable:BERT:ENABLE?

This command determines which bits in the Data Questionable BERT Event Register will set the Data Questionable BERT Summary bit (bit 12) in the Data Questionable Condition Register.

The variable <val> is the sum of the decimal values of the bits you want to enable.

Range 0–32767

Remarks Refer to Chapter 3 of the *E4428C/38C ESG Signal Generators Programming Guide* for more information.

:QUESTionable:BERT:NTRansition

Supported E4438C with Option UN7, 300 or both

:STATUS:QUESTionable:BERT:NTRansition <val>

:STATUS:QUESTionable:BERT:NTRansition?

This command determines which bits in the Data Questionable BERT Condition Register will set the corresponding bit in the Data Questionable BERT Event Register when that bit has a negative transition (1 to 0).

The variable <val> is the sum of the decimal values of the bits that you want to enable.

Range 0–32767

Remarks The data in this register is continuously updated and reflects the current conditions.

Refer to Chapter 3 of the *E4428C/38C ESG Signal Generators Programming Guide* for more information.

:QUESTionable:BERT:PTRansition

Supported E4438C with Option UN7, 300 or both

:STATUS:QUESTionable:BERT:PTRansition <val>

:STATUS:QUESTionable:BERT:PTRansition?

This command determines which bits in the Data Questionable BERT Condition Register will set the corresponding bit in the Data Questionable BERT Event Register when that bit has a positive transition (0 to 1).

The variable <val> is the sum of the decimal values of the bits that you want to enable.

Range 0–32767

Remarks Refer to Chapter 3 of the *E4428C/38C ESG Signal Generators Programming Guide* for more information.

:QUESTionable:BERT[:EVENT]

Supported E4438C with Option UN7, 300 or both

CAUTION This is a destructive read. The data in the register is latched until it is queried. Once queried, the data is cleared.

:STATus:QUESTionable:BERT[:EVENT]?

This command returns the decimal value of the sum of the bits in the Data Questionable BERT Event Register.

Range 0–32767

Remarks Note that the register requires that the equivalent PTR or NTR filters be set before a condition register bit can set a bit in the Event register.

Refer to Chapter 3 of the *E4428C/38C ESG Signal Generators Programming Guide* for more information.

:QUESTionable:CALibration:CONDition

Supported All

:STATus:QUESTionable:CALibration:CONDition?

This query returns the decimal sum of the bits in the Data Questionable Calibration Condition Register. For example, if the DCFM or DCΦM zero calibration fails (bit 0), a value of 1 is returned.

Range 0–32767

Remarks The data in this register is continuously updated and reflects the current conditions.

Refer to Chapter 3 of the *E4428C/38C ESG Signal Generators Programming Guide* for more information.

:QUESTionable:CALibration:ENABle

Supported All

:STATus:QUESTionable:CALibration:ENABle <val>

:STATus:QUESTionable:CALibration:ENABle?

This command determines which bits in the Data Questionable Calibration Event Register will set the calibration summary bit (bit 8) in the Data Questionable Condition Register.

The variable <val> is the sum of the decimal values of the bits that you want to enable.

Range 0–32767

Remarks Refer to Chapter 3 of the *E4428C/38C ESG Signal Generators Programming Guide* for more information.

:QUESTionable:CALibration:NTRansition

Supported All

```
:STATus:QUESTionable:CALibration:NTRansition <val>  
:STATus:QUESTionable:CALibration:NTRansition?
```

This command determines which bits in the Data Questionable Calibration Condition Register will set the corresponding bit in the Data Questionable Calibration Event Register when that bit has a negative transition (1 to 0).

The variable <val> is the sum of the decimal values of the bits that you want to enable.

Range 0–32767

Remarks Refer to Chapter 3 of the *E4428C/38C ESG Signal Generators Programming Guide* for more information.

:QUESTionable:CALibration:PTRansition

Supported All

```
:STATus:QUESTionable:CALibration:PTRansition <val>  
:STATus:QUESTionable:CALibration:PTRansition?
```

This command determines which bits in the Data Questionable Calibration Condition Register will set the corresponding bit in the Data Questionable Calibration Event Register when that bit has a positive transition (0 to 1).

The variable <val> is the sum of the decimal values of the bits that you want to enable.

Range 0–32767

Remarks Refer to Chapter 3 of the *E4428C/38C ESG Signal Generators Programming Guide* for more information.

:QUESTIONable:CALibration[:EVENT]

Supported All

CAUTION This is a destructive read. The data in the register is latched until it is queried. Once queried, the data is cleared.

:STATUS:QUESTIONable:CALibration[:EVENT]?

This command returns the decimal sum of the bits in the Data Questionable Calibration Event Register.

Range 0–32767

Remarks The equivalent PTR or NTR filters must be set before the condition register can set the corresponding bit in the event register.

Refer to Chapter 3 of the *E4428C/38C ESG Signal Generators Programming Guide* for more information.

:QUESTIONable:CONDition

Supported All

:STATUS:QUESTIONable:CONDition?

This query returns the decimal sum of the bits in the Data Questionable Condition Register. For example, if the reference oscillator oven is cold (bit 4), a value of 16 is returned.

Range 0–32767

Remarks The data in this register is continuously updated and reflects current conditions.

Refer to Chapter 3 of the *E4428C/38C ESG Signal Generators Programming Guide* for more information.

:QUESTionable:ENABle

Supported All

```
:STATus:QUESTionable:ENABle <val>  
:STATus:QUESTionable:ENABle?
```

This command determines which bits in the Data Questionable Event Register will set the Data Questionable Status Group Summary bit (bit 3) in the Status Byte Register.

The variable <val> is the sum of the decimal values of the bits that you want to enable.

Range 0–32767

Remarks Refer to Chapter 3 of the *E4428C/38C ESG Signal Generators Programming Guide* for more information.

:QUESTionable:FREQuency:CONDition

Supported All

```
:STATus:QUESTionable:FREQuency:CONDition?
```

This query returns the decimal sum of the bits in the Data Questionable Frequency Condition Register. For example, if the 1 GHz internal reference clock is unlocked (bit 2), a value of 4 is returned.

Range 0–32767

Remarks The data in this register is continuously updated and reflects current conditions.
Refer to Chapter 3 of the *E4428C/38C ESG Signal Generators Programming Guide* for more information.

:QUESTionable:FREQuency:ENABle

Supported All

```
:STATus:QUESTionable:FREQuency:ENABle <val>  
:STATus:QUESTionable:FREQuency:ENABle?
```

This command determines which bits in the Data Questionable Frequency Event Register will set the frequency summary bit (bit 5) in the Data Questionable Condition Register.

The variable <val> is the sum of the decimal values of the bits that you want to enable.

Range 0–32767

Remarks Refer to Chapter 3 of the *E4428C/38C ESG Signal Generators Programming Guide* for more information.

:QUESTIONABLE:FREQUENCY:NTRANSITION**Supported** All`:STATUS:QUESTIONABLE:FREQUENCY:NTRANSITION <val>``:STATUS:QUESTIONABLE:FREQUENCY:NTRANSITION?`

This command determines which bits in the Data Questionable Frequency Condition Register will set the corresponding bit in the Data Questionable Frequency Event Register when that bit has a negative transition (1 to 0).

The variable <val> is the sum of the decimal values of the bits that you want to enable.

Range 0–32767**Remarks** Refer to Chapter 3 of the *E4428C/38C ESG Signal Generators Programming Guide* for more information.**:QUESTIONABLE:FREQUENCY:PTRANSITION****Supported** All`:STATUS:QUESTIONABLE:FREQUENCY:PTRANSITION <val>``:STATUS:QUESTIONABLE:FREQUENCY:PTRANSITION?`

This command determines which bits in the Data Questionable Frequency Condition Register will set the corresponding bit in the Data Questionable Frequency Event Register when that bit has a positive transition (0 to 1).

The variable <val> is the sum of the decimal values of the bits that you want to enable.

Range 0–32767**Remarks** Refer to Chapter 3 of the *E4428C/38C ESG Signal Generators Programming Guide* for more information.**:QUESTIONABLE:FREQUENCY[:EVENT]****Supported** All

CAUTION This is a destructive read. The data in the register is latched until it is queried. Once queried, the data is cleared.

`:STATUS:QUESTIONABLE:FREQUENCY[:EVENT]?`

This query returns the decimal sum of the bits in the Data Questionable Frequency Event Register.

Range 0–32767

Remarks The equivalent PTR or NTR filters must be set before the condition register can set the corresponding bit in the event register.

Refer to Chapter 3 of the *E4428C/38C ESG Signal Generators Programming Guide* for more information.

:QUESTionable:MODulation:CONDition

Supported All

`:STATus:QUESTionable:MODulation:CONDition?`

This command returns the decimal sum of the bits in the Data Questionable Modulation Condition Register. For example, if the modulation is uncalibrated (bit 4), a value of 16 is returned.

Range 0–32767

Remarks The data in this register is continuously updated and reflects current conditions.

Refer to Chapter 3 of the *E4428C/38C ESG Signal Generators Programming Guide* for more information.

:QUESTionable:MODulation:ENABLE

Supported All

`:STATus:QUESTionable:MODulation:ENABLE <val>`

`:STATus:QUESTionable:MODulation:ENABLE?`

This command determines which bits in the Data Questionable Modulation Event Register will set the modulation summary bit (bit 7) in the Data Questionable Condition Register.

The variable <val> is the sum of the decimal values of the bits that you want to enable.

Range 0–32767

Remarks Refer to Chapter 3 of the *E4428C/38C ESG Signal Generators Programming Guide* for more information.

:QUESTionable:MODulation:NTRansition**Supported** All`:STATUS:QUESTionable:MODulation:NTRansition <val>``:STATUS:QUESTionable:MODulation:NTRansition?`

This command determines which bits in the Data Questionable Modulation Condition Register will set the corresponding bit in the Data Questionable Modulation Event Register when that bit has a negative transition (1 to 0).

The variable <val> is the sum of the decimal values of the bits that you want to enable.

Range 0–32767

Remarks Refer to Chapter 3 of the *E4428C/38C ESG Signal Generators Programming Guide* for more information.

:QUESTionable:MODulation:PTRansition**Supported** All`:STATUS:QUESTionable:MODulation:PTRansition <val>``:STATUS:QUESTionable:MODulation:PTRansition?`

This command determines which bits in the Data Questionable Modulation Condition Register will set the corresponding bit in the Data Questionable Modulation Event Register when that bit has a positive transition (0 to 1).

The variable <val> is the sum of the decimal values of the bits that you want to enable.

Range 0–32767

Remarks Refer to Chapter 3 of the *E4428C/38C ESG Signal Generators Programming Guide* for more information.

:QUESTionable:MODulation[:EVENT]**Supported** All

CAUTION This is a destructive read. The data in the register is latched until it is queried. Once queried, the data is cleared.

`:STATUS:QUESTionable:MODulation[:EVENT]?`

This query returns the decimal sum of the bits in the Data Questionable Modulation Event Register.

Range 0–32767

Remarks The equivalent PTR or NTR filters must be set before the condition register can set the corresponding bit in the event register.

Refer to Chapter 3 of the *E4428C/38C ESG Signal Generators Programming Guide* for more information.

:QUESTionable:NTRansition

Supported All

```
:STATus:QUESTionable:NTRansition <val>  
:STATus:QUESTionable:NTRansition?
```

This command determines which bits in the Data Questionable Condition Register will set the corresponding bit in the Data Questionable Event Register when that bit has a negative transition (1 to 0).

The variable <val> is the sum of the decimal values of the bits that you want to enable.

Range 0–32767

Remarks Refer to Chapter 3 of the *E4428C/38C ESG Signal Generators Programming Guide* for more information.

:QUESTionable:POWer:CONDition

Supported All

```
:STATus:QUESTionable:POWer:CONDition?
```

This query returns the decimal sum of the bits in the Data Questionable Power Condition Register. For example, if the RF output signal is unlevelled (bit 1), a value of 2 is returned.

Range 0–32767

Remarks The data in this register is continuously updated and reflects current conditions.

Refer to Chapter 3 of the *E4428C/38C ESG Signal Generators Programming Guide* for more information.

:QUESTionable:POWer:ENABle**Supported** All

```
:STATUS:QUESTionable:POWer:ENABle <val>
:STATUS:QUESTionable:POWer:ENABle?
```

This command determines which bits in the Data Questionable Power Event Register will set the power summary bit (bit 3) in the Data Questionable Condition Register.

The variable <val> is the sum of the decimal values of the bits that you want to enable.

Range 0–32767

Remarks Refer to Chapter 3 of the *E4428C/38C ESG Signal Generators Programming Guide* for more information.

:QUESTionable:POWer:NTRansition**Supported** All

```
:STATUS:QUESTionable:POWer:NTRansition <val>
:STATUS:QUESTionable:POWer:NTRansition?
```

This command determines which bits in the Data Questionable Power Condition Register will set the corresponding bit in the Data Questionable Power Event Register when that bit has a negative transition (1 to 0).

The variable <val> is the sum of the decimal values of the bits that you want to enable.

Range 0–32767

Remarks Refer to Chapter 3 of the *E4428C/38C ESG Signal Generators Programming Guide* for more information.

:QUESTionable:POWer:PTRansition**Supported** All

```
:STATUS:QUESTionable:POWer:PTRansition <val>
:STATUS:QUESTionable:POWer:PTRansition?
```

This command determines which bits in the Data Questionable Power Condition Register will set the corresponding bit in the Data Questionable Power Event Register when that bit has a positive transition (0 to 1).

The variable <val> is the sum of the decimal values of the bits that you want to enable.

Range 0–32767

Remarks Refer to Chapter 3 of the *E4428C/38C ESG Signal Generators Programming Guide* for more information.

:QUESTionable:POWer[:EVENT]

Supported All

CAUTION This is a destructive read. The data in the register is latched until it is queried. Once queried, the data is cleared.

`:STATus:QUESTionable:POWer[:EVENT]?`

This query returns the decimal sum of the bits in the Data Questionable Power Event Register.

Range 0–32767

Remarks The equivalent PTR or NTR filters must be set before the condition register can set the corresponding bit in the event register.

Refer to Chapter 3 of the *E4428C/38C ESG Signal Generators Programming Guide* for more information.

:QUESTionable:PTRansition

Supported All

`:STATus:QUESTionable:PTRansition <val>`

`:STATus:QUESTionable:PTRansition?`

This command determines which bits in the Data Questionable Condition Register will set the corresponding bit in the Data Questionable Event Register when that bit has a positive transition (0 to 1).

The variable <val> is the sum of the decimal values of the bits that you want to enable.

Range 0–32767

Remarks Refer to Chapter 3 of the *E4428C/38C ESG Signal Generators Programming Guide* for more information.

:QUESTionable[:EVENT]

Supported All

CAUTION This is a destructive read. The data in the register is latched until it is queried. Once queried, the data is cleared.

:STATus:QUESTionable[:EVENT]?

This query returns the decimal sum of the bits in the Data Questionable Event Register.

Range 0–32767

Remarks The equivalent PTR or NTR filters must be set before the condition register can set the corresponding bit in the event register.

Refer to Chapter 3 of the *E4428C/38C ESG Signal Generators Programming Guide* for more information.

System Subsystem (:SYSTem)

:CAPability

Supported All

:SYSTem:CAPability?

This query returns the signal generator's capabilities and outputs the appropriate specifiers:

(RFSOURCE WITH (AM | FM | PULM | PM | LFO) & (FSSWEEP | FLIST) & (PSSWEEP | PLIST)
&TRIGGER&REFERENCE)

This is a list of the SCPI-defined basic functionality of the signal generator and the additional capabilities it has in parallel (a&b) and singularly (a|b).

:DATE

Supported All

:SYSTem:DATE <year>, <month>, <day>

:SYSTem:DATE?

This command sets the date as shown in the lower right area of the signal generator display.

<year> This variable requires a four digit integer.

The query returns the date in the following format:

<+year>, <+month>, <+day>

Range <month>: 1–12 <day>: 1–31

Key Entry Time/Date

:ERRor[:NEXT]

Supported All

:SYSTem:ERRor[:NEXT] ?

This query returns the most recent error message from the signal generator error queue. If there are no error messages, the query returns the following output:

```
+0, "No error"
```

When there is more than one error message, the query will need to be sent for each message.

Key Entry **Error Info** **View Next Error Message**

Remarks The ESG deletes the error messages after viewing the last message.

:ERRor:SCPI[:SYNTax]

Supported All

:SYSTem:ERRor:SCPI[:SYNTax] ON|OFF|1|0

:SYSTem:ERRor:SCPI[:SYNTax] ?

This command enables or disables the reporting of SCPI syntax errors to the error queue.

***RST** 1

:FILEsystem:SAFEmode

Supported All

:SYSTem:FILEsystem:SAFEmode ON|OFF|1|0

:SYSTem:FILEsystem:SAFEmode?

This command selects the safe mode for file handling. When safe mode is set to OFF, volatile waveform files can be edited and saved while the signal generator plays the file without signal interruption. However, it is possible with complex waveforms, for corruption of memory to occur which will be reported as an error on the front-panel display and require a reboot of the signal generator to resolve.

Example

```
:SYST:FILE:SAVE ON
```

The preceding example enables the safe mode setting and waveform files cannot be edited without signal disruption while the signal generator plays them.

***RST** On

:HELP:MODE

Supported All

:SYSTem:HELP:MODE SINGLE|CONTInuous

:SYSTem:HELP:MODE?

This command sets the help function mode of the signal generator.

SINGLE Help is provided only for the next key that you press.

CONTInuous Help is provided for each key you press. In addition, the function of the key is executed.

When the help dialog box is displayed, pressing the **Help** hardkey in either mode will turn help off.

Key Entry **Help Mode Single Cont**

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

:IDN

Supported All

:SYSTem:IDN "string"

This command modifies the identification string that the *IDN? query returns. Sending an empty string returns the query output of *IDN? to its factory shipped setting. The maximum string length is 72 characters.

Remarks Modification of the *IDN? query output enables the signal generator to identify itself as another signal generator when used as a replacement.

The display diagnostic information, shown by pressing the **Diagnostic Info** softkey, is not affected by this command.

:LANGuage

Supported All

:SYSTem:LANGuage "SCPI"|"COMP"|"NADC"|"PDC"|"PHS"|"8648"

:SYSTem:LANGuage?

This command sets the remote language for the signal generator.

SCPI This choice provides compatibility for SCPI commands.

COMP This choice provides compatibility for the 8656B, 8657A/B signal generator which is supported by using the GPIB interface.

System Commands

System Subsystem (:SYSTem)

NADC	This choice provides compatibility for the 8657D NADC personality which is supported only through a GPIB interface (E4438C only).
PDC	This choice provides compatibility for the 8657D PDC personality which is supported only through a GPIB interface (E4438C only).
PHS	This choice provides compatibility for the 8657J PHS personality which is supported only through a GPIB interface (E4438C only).
8648	This choice provides compatibility for the 8648A/B/C/D signal generator which is supported only through a GPIB interface.
Key Entry	SCPI 8656B,8657A/B 8657D NADC 8657D PDC 8657J PHS 8648A/B/C/D
Remarks	The setting enabled by this command is not affected by signal generator power-on, preset, or *RST. For more information on supported SCPI commands and programming codes, refer to the <i>Programming Compatibility Guide</i> .

:PON:TYPE

Supported All

:SYSTem: PON: TYPE PRESet | LAST

:SYSTem: PON: TYPE?

This command sets the defined conditions for the signal generator at power on.

PRESet This choice sets the conditions to factory- or user-defined as determined by the choice for the preset type. Refer to “:PRESet:TYPE” on page 161 for selecting the type of preset.

LAST This choice retains the settings at the time the signal generator was last powered down.

NOTE When LAST is selected, no signal generator interaction can occur for at least 3 seconds prior to cycling the power for the current settings to be saved.

Key Entry **Power On Last Preset**

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

:PRESet

Supported All

SYSTem:PRESet

This command returns the signal generator to a set of defined conditions. It is equivalent to pressing the front panel **Preset** hardkey.

Key Entry **Preset**

Remarks The defined conditions are either factory- or user-defined. Refer to “:PRESet:TYPE” on page 161 for selecting the type of defined conditions.

:PRESet:ALL

Supported All

:SYSTem:PRESet:ALL

This command sets all states of the signal generator back to their factory default settings, including states that are not normally affected by signal generator power-on, preset, or *RST.

:PRESet:LANGUage

Supported All

:SYSTem:PRESet:LANGUage"SCPI"|"COMP"|"NADC"|"PDC"|"PHS"|"8648"
:SYSTem:PRESet:LANGUage?

This command sets the remote language that is available when the signal generator is preset.

SCPI This choice provides compatibility for SCPI commands.

COMP This choice provides compatibility for the 8656B, 8657A/B signal generator which is supported by using the GPIB interface.

NADC This choice provides compatibility for the 8657D NADC personality which is supported only through a GPIB interface (E4438C only).

PDC This choice provides compatibility for the 8657D PDC personality which is supported only through a GPIB interface (E4438C only).

PHS This choice provides compatibility for the 8657J PHS personality which is supported only through a GPIB interface (E4438C only).

System Commands

System Subsystem (:SYSTem)

8648 This choice provides compatibility for the 8648A/B/C/D signal generator which is supported only through a GPIB interface.

*RST "SCPI"

Key Entry **SCPI** **8656B,8657A/B** **8657D NADC** **8657D PDC** **8657J PHS**
8648A/B/C/D

:PRESet:PERSistent

Supported All

:SYSTem:PRESet:PERSistent

This command sets the states that are not affected by signal generator power-on, preset, or *RST to their factory default settings.

Key Entry **Restore Sys Defaults**

:PRESet:PN9

Supported E4438C Option with Option 001/601 or 002/602

:SYSTem:PRESet:PN9 NORMal|QUICK

:SYSTem:PRESet:PN9?

This command sets the preset length of the PN9 sequence for personalities that require software PRBS generation.

NORMal This choice produces a maximal length PN9 sequence.

QUICK This choice produces a truncated (216 bits) PN9 sequence.

*RST NORM

Key Entry **PN9 Mode Preset**

:PRESet:TYPE

Supported All

:SYSTem:PRESet:TYPE NORMAl | USER

:SYSTem:PRESet:TYPE?

This command toggles the preset state between factory- and user-defined conditions.

Key Entry Preset Normal User

Remarks Refer to “:PRESet[:USER]:SAVE” for saving the USER choice preset settings.

The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

:PRESet[:USER]:SAVE

Supported All

:SYSTem:PRESet [:USER] :SAVE

This command saves your user-defined preset conditions to a state file.

Key Entry Save User Preset

Remarks Only one user-defined preset file can be saved. Subsequent saved user-defined preset files will overwrite the previously saved file.

:SECurity:DISPlay**Supported** All Models

```
:SYSTem:SECurity:DISPlay ON|OFF|1|0
:SYSTem:SECurity:DISPlay?
```

This command enables or disables the secure display mode.

On(1) This selection turns the signal generator display back on, showing the current settings. Cycling the signal generator power also restores the display, however the current settings may change depending on the power-on configuration choice. See “:PON:TYPE” on page 158 for information on the power-on choices available.

OFF(0) This selection blanks the signal generator’s display, hiding the settings and disabling the front panel keys. While in this mode, the display shows
*** SECURE DISPLAY ACTIVATED ***.

For more information about security functions, refer to the *E4428C/38C ESG Signal Generators User’s Guide*.

Example

```
:SYST:SEC:DISP OFF
```

The preceding example enables the secure display mode.

***RST** 1

Range N/A

Key Entry **Activate Security Display**

:SECurity:ERASeall**Supported** All Models

```
:SYSTem:SECurity:ERASall
```

This command removes all user files, flatness correction files, and baseband generator files. In addition, all table editor files are returned to their original factory values.

This command differs from the :DELeTe:ALL command, which does not reset table editors to factory values. For more information about security functions, refer to the *E4428C/38C ESG Signal Generators User’s Guide*.

Key Entry **Erase All**

:SECurity:LEVel

Supported All Models

```
:SYSTEM:SECurity:LEVel NONE | ERASe | OVERwrite | SANitize
:SYSTEM:SECurity:LEVel?
```

This command selects the security level operation for the signal generator.

NONE	This selection causes the signal generator to reset to factory default settings.
ERASe	This selection removes all user files, table editor files, flatness correction files, and baseband generator files.
OVERwrite	This selection removes all user files, table editor files, flatness correction files, and baseband generator files. The memory is then overwritten with random data.
SRAM	All addressable locations will be overwritten with random characters.
Hard Disk	All addressable locations will be overwritten with random characters.
Flash Memory	The flash blocks will be erased.
SANitize	This selection removes all user files, table editor files, flatness correction files, and baseband generator files using the same techniques as the OVERwrite selection for SRAM and flash memory. For the hard disk, the signal generator overwrites all addressable locations with a single character, its complement, and then with a random character.

Once you select the security level, you must execute the command from “:SECurity:LEVel:STATE” to arm the security level.

NOTE Once you select a security level and arm it, you cannot change the level.

For other cleaning and security operation descriptions, see “:SECurity:ERASeall” on page 162, “:SECurity:OVERwrite” on page 164, and “:SECurity:SANitize” on page 165. For more information about security functions, refer to the *E4428C/38C ESG Signal Generators User’s Guide*.

Example

```
:SYST:SEC:LEV NONE
```

The preceding example sets the secure mode so it resets the signal generator to factory settings after completing the security operation.

Key Entry **None** **Erase** **Overwrite** **Sanitize**

:SECurity:LEVel:STATe**Supported** All Models

CAUTION Ensure that you select the security level prior to executing this command with the ON (1) selection. Once you enable the state, you cannot reduce the security level.

```
:SYSTem:SECurity:LEVel:STATe ON|OFF|1|0
:SYSTem:SECurity:LEVel:STATe?
```

This command arms and executes the current security level parameter.

- On (1) This selection arms and prevents any changes to the current security level. Refer to “:SECurity:LEVel” on page 163 for setting the security level.
- OFF (0) This selection performs the actions required for the current security level setting. Cycling the signal generator power also performs the same function.

For more information about security functions, refer to the *E4428C/38C ESG Signal Generators User's Guide*.

Example

```
:SYST:SEC:LEV:STAT ON
```

The preceding example arms the secure mode selected with the SYSTem:SECurity:LEVel command.

Key Entry Enter Secure Mode**:SECurity:OVERwrite****Supported** All Models

```
:SYSTem:SECurity:OVERwrite
```

This command removes all user files, table editor files values, flatness correction files, and baseband generator files. The memory is then overwritten with random data as described below. For more information about security functions, refer to the *E4428C/38C ESG Signal Generators User's Guide*.

- SRAM All addressable locations will be overwritten with random characters.
- HARD DISK All addressable locations will be overwritten with random characters.
- FLASH MEMORY The flash blocks will be erased.

Key Entry Erase and Overwrite All

:SECurity:SANitize

Supported All Models

:SYSTem:SECurity:SANitize

This command removes all user files, table editor files values, flatness correction files, and baseband generator files. The memory is then overwritten with a sequence of data as described below. For more information about security functions, refer to the *E4428C/38C ESG Signal Generators User's Guide*.

SRAM All addressable locations will be overwritten with random characters.

HARD DISK All addressable locations will be overwritten with a single character and then a random character.

FLASH MEMORY The flash blocks will be erased.

Key Entry Erase and Sanitize All

:SSAVer:DELay

Supported All

:SYSTem:SSAVer:DELay <val>

:SYSTem:SSAVer:DELay?

This command sets the amount of time before the display light or display light and text is switched off. This will occur if there is no input via the front panel during the delay period.

The variable <val> is a whole number measured in hours.

Range 1–12

Key Entry Screen Saver Delay:

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

Refer to “:SSAVer:MODE” on page 166 for selecting the screen saver mode.

:SSAVer:MODE

Supported All

:SYSTem:SSAVer:MODE LIGHT|TEXT

:SYSTem:SSAVer:MODE?

This command toggles the screen saver mode between light only or light and text.

LIGHT This choice enables only the light to turn off during the screen saver operation while leaving the text visible on the darkened screen.

TEXT This choice enables both the display light and text to turn off during the screen saver operation.

Key Entry **Screen Saver Mode**

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

:SSAVer:STATe

Supported All

:SYSTem:SSAVer:STATe ON|OFF|1|0

:SYSTem:SSAVer:STATe?

This command enables or disables the display screen saver.

Key Entry **Screen Saver Off On**

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

:TIME

Supported All

:SYSTem:TIME <hour>, <minute>, <second>

:SYSTem:TIME?

This command sets the time displayed in the lower right area of the signal generator's display.

Range <hour>: 0-23 <minute>: 0-59 <second>: 0-59

Key Entry **Time/Date**

:VERSion

Supported All

:SYSTem:VERSion?

This command returns the SCPI version number with which the signal generator complies.

Trigger Subsystem

:ABORt

Supported All

:ABORt

This command causes the List or Step sweep in progress to abort. If INIT:CONT[:ALL] is set to ON, the sweep will immediately re-initiate. The pending operation flag affecting *OPC, *OPC?, and *WAI will undergo a transition once the sweep has been reset.

:INITiate:CONTinuous[:ALL]

Supported All

:INITiate:CONTinuous[:ALL] ON|OFF|1|0

:INITiate:CONTinuous[:ALL]?

This command selects either a continuous or single list or step sweep.

ON (1) This choice selects continuous sweep where, after the completion of the previous sweep, the current sweep will restart automatically or wait until the appropriate trigger source is received.

OFF (0) This choice selects a single sweep. Refer to “:INITiate[:IMMediate][:ALL]” on [page 169](#) for single sweep triggering information.

*RST 0

Key Entry **Sweep Repeat Single Cont**

Remarks Execution of this command will not affect a sweep in progress.

:INITiate[:IMMediate][:ALL]

Supported All

```
:INITiate[:IMMediate][:ALL]
```

This command either sets or sets and starts a single List or Step sweep, depending on the trigger type. The command performs the following:

- arms a single sweep when BUS, EXTERNAL, or KEY is the trigger source selection
- arms and starts a single sweep when IMMEDIATE is the trigger source selection

This command is ignored if a sweep is in progress. See “:INITiate:CONTinuous[:ALL]” on page 168 for setting continuous or single sweep. See “:TRIGger[:SEQuence]:SOURce” on page 170 to select the trigger source.

In some atypical cases, the :INIT command could be ignored if it immediately follows an *OPC? command. If the :INIT command is ignored, then use a 10ms sleep function before sending the command.

Key Entry **Single Sweep**

:TRIGger:OUTPut:POLarity

Supported All

```
:TRIGger:OUTPut:POLarity POSitive|NEGative
:TRIGger:OUTPut:POLarity?
```

Sets the TTL signal level present at the TRIGGER OUT connector to either high (5 vdc) or low (0 vdc). The trigger out is asserted after the frequency and/or power is set while the sweep is waiting for its step trigger. In addition, the swept-sine sends a pulse to the TRIGGER OUT at the beginning of each sweep.

Example

```
:TRIG:OUTP:POL NEG
```

The preceding example enables the continuous mode as the sweep type.

***RST** POS

Key Entry **Trigger Out Polarity Neg Pos**

:TRIGger[:SEQuence]:SLOPe

Supported All

:TRIGger[:SEQuence]:SLOPe POSitive|NEGative

:TRIGger[:SEQuence]:SLOPe?

This command sets the polarity of the ramp or sawtooth waveform slope present at the TRIG IN connector that will trigger a list or step sweep.

***RST** POS

Key Entry **Trigger In Polarity Neg Pos**

:TRIGger[:SEQuence]:SOURce

Supported All

:TRIGger[:SEQuence]:SOURce BUS|IMMediate|EXTErnal|KEY

:TRIGger[:SEQuence]:SOURce?

This command sets the sweep trigger source for a list or step sweep.

BUS This choice enables GPIB triggering using the *TRG or GET command or LAN and RS-232 triggering using the *TRG command.

IMMediate This choice enables immediate triggering of the sweep event.

EXTErnal This choice enables the triggering of a sweep event by an externally applied signal at the TRIG IN connector.

KEY This choice enables triggering through front panel interaction by pressing the **Trigger** hardkey.

***RST** IMM

Remarks The wait for the BUS, EXTErnal, or KEY trigger can be bypassed by sending the :TRIGger[:SEQuence][:IMMediate] command.

Example

```
:TRIG:SOUR BUS
```

The preceding example sets the sweep trigger source to BUS.

***RST** IMM

Key Entry **Bus Free Run Ext Trigger Key**

:TRIGger[:SEQuence][:IMMediate]

Supported All Models

:TRIGger [:SEQuence] [:IMMediate]

This event command causes an armed List or Step sweep to immediately start without the selected trigger occurring.

In some atypical cases, the :TRIG command could be ignored if it immediately follows an*OPC? command. If the :TRIG command is ignored, then use a 10ms sleep function before sending the command.

Unit Subsystem (:UNIT)

:POWer

Supported All

```
:UNIT:POWer DBM|DBuV|DBuVemf|V|Vemf|DB  
:UNIT:POWer?
```

This command terminates an amplitude value in the selected unit of measure.

If the amplitude reference state is set to on, the query returns units expressed in DB and the DB choice will be displayed. Setting any other unit will cause a setting conflict error stating that the amplitude reference state must be set to off. Refer to, “[:REFerence:STATe](#)” on page 66 for more information.

***RST** DBM

Key Entry dBm dBuV dBuVemf mV uV mVemf uVemf DB

Remarks All power values in this chapter are shown with DBM as the unit of measure. If a different unit of measure is selected, replace DBM with the newly selected unit whenever it is indicated for the value.

4 Analog Commands

This chapter provides SCPI descriptions for subsystems dedicated to analog commands common to all ESG signal generator models. This chapter contains the following major sections:

- “Amplitude Modulation Subsystem ([:SOURce])” on page 174
- “Frequency Modulation Subsystem ([:SOURce])” on page 181
- “Low Frequency Output Subsystem ([:SOURce]:LFOOutput)” on page 188
- “Phase Modulation Subsystem ([:SOURce])” on page 193
- “Pulse Modulation Subsystem ([:SOURce]:PULM)” on page 201

Amplitude Modulation Subsystem ([:SOURce])

:AM[1]|2...

Supported All Models

[:SOURce] :AM[1] | 2 . . .

This prefix enables the selection of the AM path and is part of most SCPI commands associated with this subsystem. The two paths are equivalent to the **AM Path 1 2** softkey.

AM[1] **AM Path 1 2** with 1 selected

AM2 **AM Path 1 2** with 2 selected

When just AM is shown in a command, this means the command applies globally to both paths.

Each path is set up separately. When a SCPI command uses AM[1], only path one is affected. Consequently, when AM2 is selected, only path two is set up. However, the depth of the signals for the two paths can be coupled.

Depth coupling links the depth value of AM[1] to AM2. Changing the deviation value for one path will change it for the other path.

These two paths can be on at the same time provided the following conditions have been met:

- DUALsine or SWEPTSine is not the selection for the waveform type
- each path uses a different source (Internal 1, Ext1, or Ext2)

:AM:INTernal:FREQuency:STEP[:INCRement]

Supported All Models

[:SOURce] :AM:INTernal:FREQuency:STEP[:INCRement] <num>

[:SOURce] :AM:INTernal:FREQuency:STEP[:INCRement] ?

This command sets the step increment for the amplitude modulation internal frequency.

The variable <num> is expressed in units of Hertz.

Range 0.5–1E6

Key Entry **Incr Set**

Remarks The value set by this command is used with the UP and DOWN choices for the AM frequency setting. Refer to “:AM[1]|2:INTernal[1]:FREQuency” on page 176 for more information.

The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

:AM:WIDeband:STATe

Supported All Models

[[:SOURCE]:AM:WIDeband:STATe ON|OFF|1|0

[[:SOURCE]:AM:WIDeband:STATe?

This command enables or disables the wideband amplitude modulation for the selected path.

***RST** 0

Key Entry **AM Off On**

Remarks The RF carrier is modulated when the modulation state of the signal generator is set to ON, see “:MODUlation[:STATe]” on page 129 for more information.

Whenever amplitude modulation is enabled, the AM annunciator is turned on in the display

The two paths for amplitude modulation can be simultaneously enabled. Refer to “:AM[1]2...” on page 174 for more information.

:AM[1]|2:EXTErnal[1]|2:COUPling

Supported All Models

[[:SOURCE]:AM[1]|2:EXTErnal[1]|2:COUPling AC|DC

[[:SOURCE]:AM[1]|2:EXTErnal[1]|2:COUPling?

This command sets the coupling for the amplitude modulation source through the selected external input connector.

AC This choice will only pass ac signal components.

DC This choice will pass both ac and dc signal components.

***RST** DC

Key Entry **Ext Coupling DC AC**

Remarks The command does not change the currently active source or switch the current modulation on or off. The modulating signal may be the sum of several signals, either internal or external sources.

:AM[1] | 2:INTernal[1]:FREQuency**Supported** All Models

```
[:SOURce] :AM[1] | 2:INTernal [1] :FREQuency <val><unit> | UP | DOWN
[:SOURce] :AM[1] | 2:INTernal [1] :FREQuency?
```

This command sets the internal amplitude modulation rate for the following applications:

- the first tone of a dual-sine waveform
- the start frequency for a swept-sine waveform
- the frequency rate for all other waveforms

***RST** +4.00000000E+002

Range Dual Sine, Swept-Sine & Sine: 0.1HZ–100kHz
All Other Waveforms: 0.1HZ–20kHz

Key Entry **AM Tone 1 Rate** **AM Start Rate** **AM Rate**

:AM[1] | 2:INTernal[1]:FREQuency:ALternate**Supported** All Models

```
[:SOURce] :AM[1] | 2:INTernal [1] :FREQuency:ALternate <val><unit>
[:SOURce] :AM[1] | 2:INTernal [1] :FREQuency:ALternate?
```

This command sets the frequency for the alternate signal.

***RST** +4.00000000E+002

Range Dual-Sine: 0.1HZ–100kHz Swept-Sine: 0.1HZ–100kHz

Key Entry **AM Tone 2 Rate** **AM Stop Rate**

Remarks The alternate signal frequency is the second tone of a dual-sine or the stop frequency of a swept-sine waveform.

Refer to “:AM[1]2:INTernal[1]:FUNction:SHAPE” on page 177 for the waveform selection.

:AM[1] | 2:INTernal[1]:FREQuency:ALternate:AMPLitude:PERCent**Supported** All Models

```
[:SOURce] :AM[1] | 2:INTernal [1] :FREQuency:ALternate:AMPLitude:
PERCent <val><unit>
[:SOURce] :AM[1] | 2:INTernal [1] :FREQuency:ALternate:AMPLitude:PERCent?
```

This command sets the amplitude of the second tone for a dual-sine waveform as a percentage of the total amplitude. For example, if the second tone makes up 30% of the total amplitude, then the first tone is 70% of the total amplitude.

***RST** +5.00000000E+001
Range 0–100PCT
Key Entry **AM Tone 2 Ampl Percent Of Peak**
Remarks Refer to “[:AM\[1\]|2:INteRnal\[1\]:FUNcTion:SHAPE](#)” on page 177 for the waveform selection.

:AM[1]|2:INteRnal[1]:FUNcTion:SHAPE

Supported All Models

[[:SOURCE]:AM[1]|2:INteRnal[1]:FUNcTion:SHAPE SINE|TRIangle|SQUare|RAMP|NOISe|DUALsine|SWEPTsine

[[:SOURCE]:AM[1]|2:INteRnal[1]:FUNcTion:SHAPE?

This command sets the AM waveform type.

***RST** SINE
Key Entry **Sine Triangle Square Ramp Noise Dual-Sine Swept-Sine**

:AM[1]|2:INteRnal[1]:SWEep:TIME

Supported All Models

[[:SOURCE]:AM[1]|2:INteRnal[1]:SWEep:TIME <val><unit>

[[:SOURCE]:AM[1]|2:INteRnal[1]:SWEep:TIME?

This command sets the sweep rate for the amplitude-modulated, swept-sine waveform.

***RST** +1.00000000E-001
Range 1mS–65.535S
Key Entry **AM Sweep Time**

:AM[1] | 2:INTernal[1]:SWEep:TRIGger**Supported** All Models

```
[:SOURce]:AM[1] | 2:INTernal [1] :SWEep:TRIGger BUS | IMMEDIATE | EXTernal | KEY
[:SOURce]:AM[1] | 2:INTernal [1] :SWEep:TRIGger?
```

This command sets the trigger source for the amplitude modulated swept-sine waveform.

BUS This choice enables GPIB triggering using the *TRG or GET command or LAN and RS-232 triggering using the *TRG command.

IMMEDIATE This choice enables immediate triggering of the sweep event.

EXTernal This choice enables the triggering of a sweep event by an externally applied signal at the TRIG IN connector.

KEY This choice enables triggering through front panel interaction by pressing the **Trigger** hardkey.

***RST** IMM

Key Entry **Bus** **Free Run** **Ext** **Trigger Key**

Remarks Refer to “:AM[1]|2:INTernal[1]:FUNCTION:SHAPE” on page 177 for the waveform selection.

:AM[1] | 2:SOURce**Supported** All Models

```
[:SOURce]:AM[1] | 2:SOURce INT [1] | EXT [1] | EXT2
[:SOURce]:AM[1] | 2:SOURce?
```

This command sets the source to generate the amplitude modulation.

INT This choice selects the internal source to provide an ac-coupled signal.

EXT This choice selects the EXT 1 INPUT or the EXT 2 INPUT connector to provide an externally applied signal that can be ac- or dc-coupled.

***RST** INT

Key Entry **Internal** **Ext1** **Ext2**

Remarks A 1.0 V_p input is required for calibrated AM depth settings.

The externally applied, ac-coupled input signal is tested for a voltage level and a display annunciator will report a high or low condition if that voltage is > ±3% of 1 V_p.

:AM[1] | 2:STATe

Supported All Models

[:SOURce] :AM [1] | 2 :STATe ON | OFF | 1 | 0

[:SOURce] :AM [1] | 2 :STATe ?

This command enables or disables the amplitude modulation for the selected path.

***RST** 0

Key Entry **AM Off On**

Remarks The RF carrier is modulated when you have set the signal generator's modulation state to ON, see “:MODulation[:STATe]” on page 129 for more information.

Whenever amplitude modulation is enabled, the AM annunciator is turned on in the display.

The two paths for amplitude modulation can be simultaneously enabled. Refer to “:AM[1]2...” on page 174 for more information.

:AM[1] | 2[:DEPTH]

Supported All Models

[:SOURce] :AM [1] | 2 [:DEPTH] <val><unit> | UP | DOWN

[:SOURce] :AM [1] | 2 [:DEPTH] ?

This commands sets the amplitude modulation depth in percent.

***RST** +1.00000000E-001

Range 0.00–100PCT

Key Entry **AM Depth**

Remarks The value of AM depth applies only to whichever AM path configuration (AM[1]2) you have currently selected.

When the depth values are coupled, a change made to one path is applied to both. Refer to “:AM[1]2[:DEPTH]:TRACK” on page 180 for AM depth value coupling.

Refer to “:AM[:DEPTH]:STEP[:INCRement]” on page 180 for setting the value associated with UP and DOWN choices.

:AM[1] | 2[:DEPTH]:TRACK**Supported** All Models

[:SOURce] :AM[1] | 2[:DEPTH] :TRACK ON|OFF|1|0

[:SOURce] :AM[1] | 2[:DEPTH] :TRACK?

This command enables or disables the coupling of the AM depth values between the paths (AM[1] and AM2).

ON (1) This choice will link the depth value of AM[1] with AM2; AM2 will assume the AM[1] depth value. For example, if AM[1] depth is set to 15% and AM2 is set to 11%, enabling the depth tracking will cause the AM2 depth value to change to 15%. This applies regardless of the path (AM[1] or AM2) selected in this command

OFF (0) This choice disables the coupling and both paths will have independent depth values.

RST** 0**Key Entry** **AM Depth Couple Off On*Remarks** When the depth values are coupled, a change made to one path is applied both.**:AM[:DEPTH]:STEP[:INCRement]****Supported** All Models

[:SOURce] :AM[:DEPTH] :STEP[:INCRement] <val><unit>

[:SOURce] :AM[:DEPTH] :STEP[:INCRement] ?

This command sets the AM depth step increment.

Range 0.1–100PCT**Key Entry** **Incr Set**

Remarks The value set by this command is used with the UP and DOWN choices for the AM depth setting. Refer to “:AM[1]2[:DEPTH]” on page 179 for more information.

The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

Frequency Modulation Subsystem ([:SOURce])

:FM[1] | 2...

Supported All Models

[[:SOURce] :FM[1] | 2 . . .

This prefix enables the selection of the FM path and is part of most SCPI commands associated with this subsystem. The two paths are equivalent to the **FM Path 1 2** softkey.

FM[1] **FM Path 1 2** with 1 selected

FM2 **FM Path 1 2** with 2 selected

When just FM is shown in a command, this means the command applies globally to both paths.

Each path is set up separately. When a SCPI command uses FM[1], only path one is affected. Consequently, when FM2 is selected, only path two is set up. However, the deviation of the signals for the two paths can be coupled.

Deviation coupling links the deviation value of FM[1] to FM2. Changing the deviation value for one path will change it for the other path.

These two paths can be on at the same time provided the following conditions have been met:

- DUALsine or SWEPTSine is not the selection for the waveform type
- each path uses a different source (Internal 1, Ext1, or Ext2)
- FM2 must be set to a deviation less than FM[1]

:FM:INTernal:FREQuency:STEP[:INCRement]**Supported** All Models

[:SOURce] :FM:INTernal:FREQuency:STEP[:INCRement] <num>

[:SOURce] :FM:INTernal:FREQuency:STEP[:INCRement] ?

This command sets the step increment for the internal frequency modulation.

The variable <num> sets the entered value in units of Hertz.

***RST** +5.00000000E+002**Range** 0.5–1E6**Key Entry** **Incr Set**

Remarks The value set by this command is used with the UP and DOWN choices for the FM frequency setting. Refer to “:FM[1]2:INTernal[1]:FREQuency” on page 183 for more information.

The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

:FM[1] | 2:EXTernal[1] | 2:COUPLing**Supported** All Models

[:SOURce] :FM[1] | 2:EXTernal [1] | 2:COUPLing AC|DC

[:SOURce] :FM[1] | 2:EXTernal [1] | 2:COUPLing?

This command sets the coupling for the frequency modulation source through the selected external input connector.

AC This choice will only pass ac signal components.

DC This choice will pass both ac and dc signal components.

***RST** DC**Key Entry** **Ext Coupling DC AC**

Remarks The command does not change the currently active source or switch the current modulation on or off. The modulating signal may be the sum of several signals, either internal or external sources.

:FM[1] | 2:INTernal[1]:FREQuency

Supported All Models

[:SOURce] : FM [1] | 2 : INTernal [1] : FREQuency <val><unit> | UP | DOWN

[:SOURce] : FM [1] | 2 : INTernal [1] : FREQuency?

This command sets the internal frequency modulation rate for the following applications:

- the first tone of a dual-sine waveform
- the start frequency for a swept-sine waveform
- the frequency rate for all other waveforms

***RST** +4.00000000E+002

Range Dual-Sine: 0.1HZ–100KHZ Swept-Sine: 0.1HZ–100KHZ
 All Other Waveforms: 0.1HZ–20KHZ

Key Entry **FM Tone 1 Rate** **FM Start Rate** **FM Rate**

:FM[1] | 2:INTernal[1]:FREQuency:ALternate

Supported All Models

[:SOURce] : FM [1] | 2 : INTernal [1] : FREQuency:ALternate <val><unit>

[:SOURce] : FM [1] | 2 : INTernal [1] : FREQuency:ALternate?

This command sets the frequency for the alternate signal.

***RST** +4.00000000E+002

Range Dual-Sine: 0.5HZ–1MHZ Swept-Sine: 1HZ–1MHZ

Key Entry **FM Tone 2 Rate** **FM Stop Rate**

Remarks The alternate signal frequency is the second tone of a dual-sine or the stop frequency of a swept-sine waveform.

Refer to “:FM[1]2:INTernal[1]:FUNCtion:SHApe” on page 184 for the waveform selection.

:FM[1] | 2:INTernal[1]:FREQuency:ALternate:AMPLitude:PERCent**Supported** All Models[:SOURce] :FM[1] | 2:INTernal [1] :FREQuency:ALternate:AMPLitude:
PERCent <val><unit>

[:SOURce] :FM[1] | 2:INTernal [1] :FREQuency:ALternate:AMPLitude:PERCent?

This command sets the amplitude of the second tone for a dual-sine waveform as a percentage of the total amplitude. For example, if the second tone makes up 30% of the total amplitude, then the first tone is 70% of the total amplitude.

RST** +1.00000000E+002**Range** 0–100PCT**Key Entry** **FM Tone 2 Ampl Percent Of Peak*Remarks** Refer to “:FM[1]2:INTernal[1]:FUNction:SHApe” for the waveform selection.**:FM[1] | 2:INTernal[1]:FUNction:SHApe****Supported** All Models[:SOURce] :FM[1] | 2:INTernal [1] | :FUNction:SHApe SINE|TRIangle|SQUare|RAMP|
NOISe|DUALsine|SWEPTsine

[:SOURce] :FM[1] | 2:INTernal [1] | :FUNction:SHApe?

This command sets the FM waveform type.

RST** SINE**Key Entry** **Sine Triangle Square Ramp Noise Dual-Sine Swept-Sine*Remarks** The waveform selection is only valid when INT[1] is the source selection. Refer to “:FM[1]2:SOURce” on page 186 for type source selection.

:FM[1] | 2:INTErnal[1]:SWEep:TIME

Supported All Models

[:SOURce] :FM[1] | 2:INTErnal [1] :SWEep:TIME <val><unit>

[:SOURce] :FM[1] | 2:INTErnal [1] :SWEep:TIME?

This command sets the sweep time for the swept-sine waveform.

***RST** +1.00000000E-001

Range 1.0mS-65.535S

Key Entry **FM Sweep Time**

Remarks Refer to “:FM[1]2:INTErnal[1]:FUNCTion:SHApe” on page 184 for the waveform selection.

:FM[1] | 2:INTErnal[1]:SWEep:TRIGger

Supported All Models

[:SOURce] :FM[1] | 2:INTErnal [1] :SWEep:TRIGger BUS|IMMEdiate|EXTErnal|KEY

[:SOURce] :FM[1] | 2:INTErnal [1] :SWEep:TRIGger?

This command sets the trigger source for the frequency modulated swept-sine waveform.

BUS This choice enables GPIB triggering using the *TRG or GET command or LAN and RS-232 triggering using the *TRG command.

IMMEdiate This choice enables immediate triggering of the sweep event.

EXTErnal This choice enables the triggering of a sweep event by an externally applied signal at the TRIG IN connector.

KEY This choice enables triggering through front panel interaction by pressing the **Trigger** hardkey.

***RST** IMM

Key Entry **Bus Free Run Ext Trigger Key**

Remarks Refer to “:FM[1]2:INTErnal[1]:FUNCTion:SHApe” on page 184 for the waveform selection.

Frequency Modulation Subsystem ([:SOURce])

:FM[1] | 2:SOURce**Supported** All Models

[:SOURce] :FM[1] | 2:SOURce INT [1] | EXT1 | EXT2

[:SOURce] :FM[1] | 2:SOURce?

This command sets the source to generate the frequency modulation.

INT This choice selects the internal source to provide an ac-coupled signal.**EXT** This choice selects the EXT 1 INPUT or the EXT 2 INPUT connector to provide an externally applied signal that can be ac- or dc-coupled.***RST** INT**Key Entry** **Internal Ext1 Ext2****Remarks** The externally applied, ac-coupled input signal is tested for a voltage level and a display annunciator will report a high or low condition if that voltage is $> \pm 3\%$ of $1 V_p$.**:FM[1] | 2:STATe****Supported** All Models

[:SOURce] :FM[1] | 2:STATe ON | OFF | 1 | 0

[:SOURce] :FM[1] | 2:STATe?

This command enables or disables the frequency modulation for the selected path.

RST** 0**Key Entry** **FM Off On*Remarks** The RF carrier is modulated when you set the signal generator's modulation state to ON, see “[:MODulation[:STATe]]” on page 129 for more information.

Whenever frequency modulation is enabled, the FM annunciator is turned on in the display.

The two paths for frequency modulation can be simultaneously enabled. Refer to “[:FM[1]2...” on page 181 for more information.

:FM[1] | 2[:DEVIation]

Supported All Models

[:SOURCE] :FM[1] | 2[:DEVIation] <val><unit>

[:SOURCE] :FM[1] | 2[:DEVIation] ?

This command sets the frequency modulation deviation.

***RST** +1.00000000E+003

Range	<i>Frequency</i>	<i>Deviation</i>	Deviation Option UNJ
	250kHz–249.999MHZ	0–8MHZ	0–1MHZ
	> 249.999–500MHZ	0–4MHZ	0–500kHz
	> 500MHZ–1GHZ	0–8MHZ	0–1MHZ
	> 1–2GHZ	0–16MHZ	0–2MHZ
	> 2–4GHZ	0–32MHZ	0–4MHZ
	> 4–6GHZ	0–8MHZ	0–8MHZ

Key Entry **FM DEV**

Remarks If deviation tracking is ON, a change to the deviation value on one path will apply to both. Refer to “[:FM\[1\]|2\[:DEVIation\]:TRACK](#)” on page 187 for more information and setting the deviation tracking.

:FM[1] | 2[:DEVIation]:TRACK

Supported All Models

[:SOURCE] :FM[1] | 2[:DEVIation] :TRACK ON|OFF|1|0

[:SOURCE] :FM[1] | 2[:DEVIation] :TRACK?

This command enables or disables the deviation coupling between the paths (FM[1] and FM2).

ON (1) This choice will link the deviation value of FM[1] with FM2; FM2 will assume the FM[1] deviation value. For example, if FM[1] deviation is set to 500 Hz and FM2 is set to 2 kHz, enabling the deviation tracking will cause the FM2 deviation value to change to 500 Hz. This applies regardless of the path (FM[1] or FM2) selected in this command

OFF (0) This choice disables the coupling and both paths will have independent deviation values.

***RST** 0

Key Entry **FM Dev Couple Off On**

Remarks This command uses exact match tracking, not offset tracking.

Low Frequency Output Subsystem ([:SOURce]:LFOutput)

:AMPLitude

Supported All Models

[:SOURce]:LFOutput:AMPLitude <val><unit>

[:SOURce]:LFOutput:AMPLitude?

This command sets the amplitude for the signal at the LF OUTPUT connector.

***RST** 0.00

Range 0.000VP–5.0VP

Key Entry **LF Out Amplitude**

:FUNction[1]:FREQuency

Supported All Models

[:SOURce]:LFOutput:FUNction[1]:FREQuency <val><unit>

[:SOURce]:LFOutput:FUNction[1]:FREQuency?

This command sets the internal modulation frequency for the following applications:

- the first tone of a dual-sine waveform
- the start frequency for a swept-sine waveform
- the frequency rate for all other waveforms

***RST** +4.00000000E+002

Range Sine: 0.1HZ–100KHZ Dual-Sine: 0.1HZ–100KHZ
Swept-Sine: 0.1HZ–100KHZ
All Other Waveforms: 0.1HZ–20KHZ

Key Entry **LF Out Tone 1 Freq** **LF Out Start Freq** **LF Out Freq**

Remarks Refer to [“:FUNction\[1\]:SHAPE” on page 191](#) for selecting the waveform type.

:FUNCTION[1]:FREQUENCY:ALTERNATE**Supported** All Models

[:SOURce]:LFOutput:FUNCTION[1]:FREQUENCY:ALTERNATE <val><unit>

[:SOURce]:LFOutput:FUNCTION[1]:FREQUENCY:ALTERNATE?

This command sets the frequency for the alternate LF output signal.

RST** +4.00000000E+002**Range** Dual-Sine: 0.1HZ–100KHZ Swept-Sine: 0.1HZ–100KHZ**Key Entry** **LF Out Tone 2 Freq** **LF Out Stop Freq*Remarks** The alternate frequency is the second tone of a dual-sine or the stop frequency of a swept-sine waveform.

Refer to “:FUNCTION[1]:SHAPE” on page 191 for selecting the waveform type.

:FUNCTION[1]:FREQUENCY:ALTERNATE:AMPLITUDE:PERCENT**Supported** All Models

[:SOURce]:LFOutput:FUNCTION[1]:FREQUENCY:ALTERNATE:AMPLITUDE:

PERCENT <val><unit>

[:SOURce]:LFOutput:FUNCTION[1]:FREQUENCY:ALTERNATE:AMPLITUDE:PERCENT?

This command sets the amplitude of the second tone for a dual-sine waveform as a percentage of the total LF output amplitude. For example, if the second tone makes up 30% of the total amplitude, then the first tone is 70% of the total amplitude.

RST** +5.00000000E+001**Range** 0–100PCT**Key Entry** **LF Out Tone 2 Ampl % of Peak*Remarks** Refer to “:FUNCTION[1]:SHAPE” on page 191 for selecting the waveform type.

:FUNction[1]:PERiod**Supported** All Models

[:SOURce]:LFOutput:FUNction[1]:PERiod <val><unit>

[:SOURce]:LFOutput:FUNction[1]:PERiod?

This command sets the pulse period of the internally generated pulsed low frequency waveform.

RST** +1.60000000E-005**Range** 16uS-30S**Key Entry** **LF Out Period*:FUNction[1]:PWIDth****Supported** All Models

[:SOURce]:LFOutput:FUNction[1]:PWIDth <val><unit>

[:SOURce]:LFOutput:FUNction[1]:PWIDth?

This command sets the pulse width of the internally-generated pulsed low frequency waveform.

The upper limit range value is restricted by the current value of the pulse period. For example, if the pulse period value is set to 16 μ S, the pulse width is limited to a maximum range value of 16 μ S.

RST** +8.00000000E-006**Range** 8uS-30S**Key Entry** **LF Out Width*Remarks** To change the pulse period value, refer to “:FUNction[1]:PERiod” on page 190.

:FUNCTION[1]:SHAPE**Supported** All Models

[:SOURce]:LFOutput:FUNCTION[1]:SHAPE SINE|DUALsine|SWEptsine|TRIangle|SQUare|RAMP|PULSe|NOISe|DC

[:SOURce]:LFOutput:FUNCTION[1]:SHAPE?

This command sets the waveform type for the generated signal at the LF output.

***RST** SINE

Key Entry	Sine	Dual-Sine	Swept-Sine	Triangle	Square	Ramp	Pulse
	Noise	DC					

Remarks Function Generator must be the source selection to support DUALsine or the SWEptsine waveform. Refer to “:SOURce” on page 192.**:FUNCTION[1]:SWEep:TIME****Supported** All Models

[:SOURce]:LFOutput:FUNCTION[1]:SWEep:TIME <val><unit>

[:SOURce]:LFOutput:FUNCTION[1]:SWEep:TIME?

This command sets the sweep time for an internally generated swept-sine signal at the LF output.

RST** +1.00000000E-001**Range** 1mS-65.535S**Key Entry** **LF Out Sweep Time*:FUNCTION[1]:SWEep:TRIGger****Supported** All Models

[:SOURce]:LFOutput:FUNCTION[1]:SWEep:TRIGger BUS|IMMEDIATE|EXTernal|KEY

[:SOURce]:LFOutput:FUNCTION[1]:SWEep:TRIGger?

This command sets the trigger source for the internally generated swept-sine waveform signal at the LF output.

BUS This choice enables GPIB triggering using the *TRG or GET command or LAN and RS-232 triggering using the *TRG command.**IMMEDIATE** This choice enables immediate triggering of the sweep event.**EXTernal** This choice enables the triggering of a sweep event by an externally applied signal at the TRIG IN connector.

Analog Commands

Low Frequency Output Subsystem ([:SOURce]:LFOutput)

KEY	This choice enables triggering through front panel interaction by pressing the Trigger hardkey.
*RST	IMM
Key Entry	Bus Free Run Ext Trigger Key
Remarks	Refer to “:FUNCTION[1]:SHAPE” on page 191 for selecting the waveform type.

:SOURce

Supported All Models

```
[:SOURce]:LFOutput:SOURce INT[1] | FUNCTION  
[:SOURce]:LFOutput:SOURce?
```

This command sets the low frequency source for the LF output.

INT[1] This choice enables you to output a signal where the frequency and shape of the signal is set by the internal source as it is being used by a modulation. For example, if the internal source is currently assigned to an AM path configuration and AM is turned on, the signal output at the LF OUTPUT connector will have the frequency and shape of the amplitude modulating signal.

FUNCTION This choice enables the selection of an internal function generator.

***RST** FUNC

Key Entry **Internal Monitor** **Function Generator**

:STATe

Supported All Models

```
[:SOURce]:LFOutput:STATe ON | OFF | 1 | 0  
[:SOURce]:LFOutput:STATe?
```

This command enables or disables the low frequency output.

***RST** 0

Key Entry **LF Out Off On**

Phase Modulation Subsystem ([:SOURCE])

:PM[1]|2...

Supported All Models

[[:SOURCE] :PM[1] | 2 . . .

This prefix enables the selection of the Φ M path and is part of most SCPI commands associated with this subsystem. The two paths are equivalent to the Φ M Path 1 2 softkey.

PM[1] Φ M Path 1 2 with 1 selected

PM2 Φ M Path 1 2 with 2 selected

When just PM is shown in a command, this means the command applies globally to both paths.

Each path is set up separately. When a SCPI command uses PM[1], only path one is affected. Consequently, when PM2 is selected, only path two is set up. However, the deviation of the signals for the two paths can be coupled.

Deviation coupling links the deviation value of PM[1] to PM2. Changing the deviation value for one path will change it for the other path.

These two paths can be on at the same time provided the following conditions have been met:

- DUALsine or SWEPTsine is not the selection for the waveform type
- each path uses a different source (Internal 1, Ext1, or Ext2)
- PM2 must be set to a deviation less than or equal to PM[1]

Phase Modulation Subsystem (:SOURce)**:PM:INTernal:FREQuency:STEP[:INCRement]****Supported** All Models

[:SOURce] :PM:INTernal:FREQuency:STEP[:INCRement] <num>

[:SOURce] :PM:INTernal:FREQuency:STEP[:INCRement] ?

This command sets the step increment of the phase modulation internal frequency.

The variable <num> sets the entered value in units of Hertz.

Range 0.5–1E6**Key Entry** **Incr Set**

Remarks The value set by this command is used with the UP and DOWN choices for the FM frequency command. Refer to “:PM[1]2:INTernal[1]:FREQuency” on [page 195](#) for more information.

The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

:PM[1] | 2:BANDwidth | BWIDth**Supported** All Models

[:SOURce] :PM[1] | 2:BANDwidth | BWIDth NORMal | HIGH

[:SOURce] :PM[1] | 2:BANDwidth | BWIDth ?

This command toggles between normal phase modulation and high bandwidth phase modulation mode.

***RST** NORM**Key Entry** **FM ΦM Normal High BW**

:PM[1] | 2:EXtErnal[1]:COUPling

Supported All Models

[:SOURce] : PM [1] | 2 : EXtErnal [1] : COUPling AC | DC

[:SOURce] : PM [1] | 2 : EXtErnal [1] : COUPling?

This command sets the coupling for the phase modulation source through the selected external input connector.

AC This choice will only pass ac signal components.

DC This choice will pass both ac and dc signal components.

***RST** DC

Key Entry **Ext Coupling DC AC**

Remarks This command does not change the currently active source or switch the current modulation on or off. The modulating signal may be the sum of several signals, either internal or external sources.

:PM[1] | 2:INtErnal[1]:FREQuency

Supported All Models

[:SOURce] : PM [1] | 2 : INtErnal [1] : FREQuency <val><unit> | UP | DOWN

[:SOURce] : PM [1] | 2 : INtErnal [1] : FREQuency?

This command sets the internal modulation frequency rate for the following applications:

- the first tone of a dual-sine waveform
- the start frequency for a swept-sine waveform
- the frequency rate for all other waveforms

***RST** +4.00000000E+002

Range Dual-Sine: 0.1HZ–100KHZ Swept-Sine: 0.1HZ–100KHZ

All Other Waveforms: 0.1HZ–20KHZ

Key Entry **ΦMTone 1 Rate ΦM Start Rate ΦM Rate**

Remarks Refer to [“:FUNCTION\[1\]:SHAPE” on page 191](#) for selecting the waveform type.

:PM[1] | 2:INTernal[1]:FREQuency:ALternate**Supported** All Models

[:SOURce] :PM[1] | 2:INTernal [1] :FREQuency:ALternate <val><unit>

[:SOURce] :PM[1] | 2:INTernal [1] :FREQuency:ALternate?

This command sets the frequency for the alternate signal.

RST** +4.00000000E+002**Range** Dual-Sine: 0.1HZ–100KHZ Swept-Sine: 0.1HZ–100KHZ**Key Entry** **ΦM Stop Rate** **ΦM Tone 2 Rate*Remarks** The alternate frequency is the second tone of a dual-sine or the stop frequency of a swept-sine waveform.

Refer to “:PM[1]2:INTernal[1]:FUNctioN:SHAPE” on page 197 for the waveform selection.

:PM[1] | 2:INTernal[1]:FREQuency:ALternate:AMPLitude:PERCent**Supported** All Models

[:SOURce] :PM[1] | 2:INTernal [1] :FREQuency:ALternate:AMPLitude:

PERCent <val><unit>

[:SOURce] :PM[1] | 2:INTernal [1] :FREQuency:ALternate:AMPLitude:PERCent?

This command sets the amplitude of the second tone for the dual-sine waveform as a percentage of the total amplitude. For example, if the second tone makes up 30% of the total amplitude, then the first tone is 70% of the total amplitude.

RST** +5.00000000E+001**Range** 0–100PCT**Key Entry** **ΦM Tone 2 Ampl Percent of Peak*Remarks** Refer to “:PM[1]2:INTernal[1]:FUNctioN:SHAPE” on page 197 for the waveform selection.

:PM[1] | 2:INteRnal[1]:FUNcTion:SHApe

Supported All Models

```
[:SOURCE]:PM[1] | 2:INteRnal[1]:FUNcTion:SHApe SINE|TRIangle|SQUare|RAMP|
NOISe|DUALsine|SWEPTsine
```

```
[:SOURCE]:PM[1] | 2:INteRnal[1]:FUNcTion:SHApe?
```

This command sets the phase modulation waveform type.

***RST** SINE

Key Entry Sine Triangle Square Ramp Noise Dual-Sine Swept-Sine

Remarks The INteRnal1 source selection does not support the DUALsine and SWEPTsine waveform choices.

:PM[1] | 2:INteRnal[1]:SWEep:TIME

Supported All Models

```
[:SOURCE]:PM[1] | 2:INteRnal[1]:SWEep:TIME <val><unit>
```

```
[:SOURCE]:PM[1] | 2:INteRnal[1]:SWEep:TIME?
```

This command sets the sweep time for a phase-modulated, swept-sine waveform.

***RST** +1.00000000E-001

Range 1.0mS-65.535S

Key Entry Φ M Sweep Time

Remarks Refer to “:PM[1]2:INteRnal[1]:FUNcTion:SHApe” for the waveform selection.

:PM[1] | 2:INteRnal[1]:SWEep:TRIGger

Supported All Models

```
[:SOURCE]:PM[1] | 2:INteRnal[1]:SWEep:TRIGger BUS|IMMediate|EXteRnal|KEY
```

```
[:SOURCE]:PM[1] | 2:INteRnal[1]:SWEep:TRIGger?
```

This command sets the trigger source for the phase-modulated, swept-sine waveform.

BUS This choice enables GPIB triggering using the *TRG or GET command or LAN and RS-232 triggering using the *TRG command.

IMMediate This choice enables immediate triggering of the sweep event.

EXteRnal This choice enables the triggering of a sweep event by an externally applied signal at the TRIG IN connector.

Phase Modulation Subsystem ([:SOURce])

KEY	This choice enables triggering through front panel interaction by pressing the Trigger hardkey.
*RST	IMM
Key Entry	Bus Free Run Ext Trigger Key
Remarks	Refer to “:PM[1]2:INTernal[1]:FUNCTion:SHAPE” on page 197 for the waveform selection.

:PM[1] | 2:SOURce

Supported	All Models
	[:SOURce] :PM[1] 2:SOURce INT [1] EXT1 EXT2 [:SOURce] :PM[1] 2:SOURce?
	This command sets the source to generate the phase modulation.
INT	This choice selects internal source 1 to provide an ac-coupled signal.
EXT	This choice selects the EXT 1 INPUT or the EXT 2 INPUT connector to provide an externally applied signal that can be ac- or dc-coupled.
*RST	INT
Key Entry	Internal 1 Ext1 Ext2
Remarks	The externally applied, ac-coupled input signal is tested for a voltage level and a display annunciator will report a high or low condition if that voltage is $> \pm 3\%$ of $1 V_p$.

:PM[1] | 2:STATe

Supported	All Models
	[:SOURce] :PM[1] 2:STATe ON OFF 1 0 [:SOURce] :PM[1] 2:STATe?
	This command enables or disables the phase modulation for the selected path.
*RST	0
Key Entry	ΦM Off On
Remarks	The RF carrier is modulated when you set the signal generator’s modulation state to ON, see “:MODulation[:STATe]” on page 129 for more information. Whenever phase modulation is enabled, the ΦM annunciator is turned on in the display

The two paths for phase modulation can be simultaneously enabled. Refer to “:PM[1]2...” on page 193 for more information.

:PM[1] | 2[:DEVIation]

Supported All Models

```
[:SOURce]:PM[1] | 2[:DEVIation] <val><unit>|UP|DOWN
[:SOURce]:PM[1] | 2[:DEVIation]?
```

This command sets the deviation of the phase modulation.

The variable <unit> will accept RAD (radians), PIRAD (pi-radians), and DEG (degrees); however, the query will only return values in radians.

***RST** +0.00000000E+000

Range	<i>Frequency</i>	<i>Normal Bandwidth</i>	<i>High Bandwidth</i>
	250kHz–249.999MHz	0–10RAD	0–1RAD
	> 249.999–500MHz	0–5RAD	0–0.5RAD
	> 500MHz–1GHz	0–10RAD	0–1RAD
	> 1–2GHz	0–20RAD	0–2RAD
	> 2–4GHz	0–40RAD	0–4RAD
	> 4–6GHz	0–80RAD	0–8RAD

Key Entry **ΦM Dev**

Remarks If deviation tracking is active, a change to the deviation value on one path will apply to both.

Refer to “:PM[:DEVIation]:STEP[:INCRement]” on page 200 for setting the value associated with the UP and DOWN choices.

:PM[1] | 2[:DEVIation]:TRACk

Supported All Models

```
[:SOURce]:PM[1] | 2[:DEVIation]:TRACk ON|OFF|1|0
[:SOURce]:PM[1] | 2[:DEVIation]:TRACk?
```

This command enables or disables the deviation coupling between the paths (PM[1] and PM2).

ON (1) This choice will link the deviation value of PM[1] with PM2; PM2 will assume the PM[1] deviation value. For example, if PM[1] deviation is set to 500 Hz and

Phase Modulation Subsystem ([:SOURce])

	PM2 is set to 2 kHz, enabling the deviation tracking will cause the PM2 deviation value to change to 500 Hz. This applies regardless of the path (PM[1] or PM2) selected in this command.
OFF (0)	This choice disables the coupling and both paths will have independent deviation values.
*RST	0
Key Entry	ΦM Dev Couple Off On
Remarks	This command uses exact match tracking, not offset tracking.

:PM[:DEVIation]:STEP[:INCRement]

Supported All Models

```
[:SOURce]:PM[:DEVIation]:STEP[:INCRement] <val><unit>
[:SOURce]:PM[:DEVIation]:STEP[:INCRement]?
```

This command sets the phase modulation deviation step increment.

Range 0.001–1E3RAD

Key Entry **Incr Set**

Remarks The value set by this command is used with the UP and DOWN choices for the FM deviation command. Refer to “:PM[1]2[:DEVIation]” on page 199 for more information.

The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

Pulse Modulation Subsystem ([:SOURce]:PULM)

:INTErnal[1]:FREQUency

Supported All Models

```
[:SOURce]:PULM:INTErnal [1]:FREQUency <val><unit>|UP|DOWN
[:SOURce]:PULM:INTErnal [1]:FREQUency?
```

This command sets the rate of the internal square wave pulse modulation source.

***RST** +4.00000000E+002

Range 0.1HZ–20.0kHz

Key Entry **Pulse Rate**

Remarks This command is used when SQUare is the current pulse modulation type. Refer to “[:SOURce]” on page 204 for the pulse modulation type selection.

:INTErnal[1]:FREQUency:STEP

Supported All Models

```
[:SOURce]:PULM:INTErnal [1]:FREQUency:STEP [:INCREment] <frequency>
[:SOURce]:PULM:INTErnal [1]:FREQUency:STEP [INCREment] ?
```

This command sets the step value for the internally-generated square wave pulse rate.

This command is used when SQUare is the pulse modulation type. Refer to “[:SOURce]” on page 204 for the pulse modulation type selection. The step value, set with this command, is used with the UP and DOWN choices in the :INTErnal[1]:FREQUency command.

The step value set with this command is not affected by a power-on, preset, or *RST command.

Example

```
:PULM:INT:FREQ:STEP MIN
```

The preceding example sets the step value for the square wave pulse rate to 0.1 Hz, the minimum rate.

Range 0.1HZ–10MHZ

:INTERNAL[1]:FUNCTION:SHAPE**Supported** All Models

[:SOURCE]:PULM:INTERNAL[1]:FUNCTION:SHAPE PULSe|SQUare

[:SOURCE]:PULM:INTERNAL[1]:FUNCTION:SHAPE?

This command sets the internal pulse modulation waveform type.

RST** PULS**Key Entry** Internal Square Internal Pulse**:INTERNAL[1]:PERIOD*Supported** All Models

[:SOURCE]:PULM:INTERNAL[1]:PERIOD <val><unit>|UP|DOWN

[:SOURCE]:PULM:INTERNAL[1]:PERIOD?

This command sets the period for the internally generated pulse modulation source.

RST** +8.00000000E-005**Range** 8uS–30S**Key Entry** Pulse Period**Remarks** If the entered value for the pulse period is equal to or less than the value for the pulse width, the pulse width changes to a value that is equal to the pulse period.Refer to “[:INTERNAL\[1\]:PERIOD:STEP\[:INCREMENT\]](#)” on page 202 for setting the value associated with the UP and DOWN choices.**:INTERNAL[1]:PERIOD:STEP[:INCREMENT]*Supported** All Models

[:SOURCE]:PULM:INTERNAL[1]:PERIOD:STEP[:INCREMENT] <val><unit>|UP|DOWN

[:SOURCE]:PULM:INTERNAL[1]:PERIOD:STEP[:INCREMENT]?

This command sets the period time step increment for the internally-generated pulse modulation source.

***RST** +1.00000000E-006**Range** 4uS–30S**Key Entry** Incr Set

Remarks The value set by this command is used with the UP and DOWN choices for the pulse period command. Refer to “:INTernal[1]:PERiod” on page 202 for more information.

:INTernal[1]:PWIDth

Supported All Models

```
[:SOURce]:PULM:INTernal [1]:PWIDth <val><unit> |UP|DOWN
[:SOURce]:PULM:INTernal [1]:PWIDth?
```

This command sets the pulse width for the internally generated pulse modulation source.

NOTE A power search is recommended for signals with pulse widths less than one microsecond. Refer to “:ALC:SEARCh” on page 58.

***RST** +4.00000000E-005

Range 4uS–30S

Key Entry **Pulse Width**

Remarks If the entered value for the pulse width is equal to or greater than the value for the pulse period, the pulse width will change to a value that is equal to the pulse period.

Refer to “:INTernal[1]:PWIDth:STEP” on page 203 for setting the value associated with the UP and DOWN choices.

:INTernal[1]:PWIDth:STEP

Supported All Models

```
[:SOURce]:PULM:INTernal [1]:PWIDth:STEP <num>[<time suffix>]
[:SOURce]:PULM:INTernal [1]:PWIDth:STEP?
```

This command sets the step increment for the pulse width.

The optional variable [<time suffix>] accepts nS (nano-seconds) to S (seconds).

***RST** +1.00000000E-006

Range 4uS–30S

Remarks The value set by this command is used by the UP and DOWN choices for the pulse width command. Refer to “:INTernal[1]:PWIDth” on page 203 for more information.

Pulse Modulation Subsystem ([:SOURce]:PULM)

:SOURce

Supported All Models

[:SOURce] :PULM :SOURce INT | EXT [1] | EXT2

[:SOURce] :PULM :SOURce?

This command sets the source that will generate the pulse modulation.

***RST** INT

Key Entry Internal Square Internal Pulse Ext1 DC-Coupled Ext2 DC-Coupled

:STATe

Supported All Models

[:SOURce] :PULM :STATe ON | OFF | 1 | 0

[:SOURce] :PULM :STATe?

This command enables or disables the operating state of the pulse modulation source.

***RST** 0

Key Entry Pulse Off On

Remarks When pulse modulation is enabled, the PULSE annunciator is shown in the display

5 Component Test Digital Commands

This chapter provides SCPI descriptions for commands dedicated to digital component testing using the E4438C ESG Vector Signal Generator. This chapter contains the following major sections:

- “All Subsystem–Option 001/601 or 002/602 ([:SOURce])” on page 206
- “AWGN ARB Subsystem–Option 403 ([:SOURce]:RADio:AWGN:ARB)” on page 207
- “CDMA ARB Subsystem–Option 401 ([:SOURce]:RADio:CDMA:ARB)” on page 216
- “CDMA2000 ARB Subsystem–Option 401 ([:SOURce]:RADio:CDMA2000:ARB)” on page 242
- “Dmodulation Subsystem–Option 001/601 or 002/602 ([:SOURce]:RADio:DMODulation:ARB)” on page 274
- “Dual ARB Subsystem–Option 001/601 or 002/602 ([:SOURce]:RADio:ARB)” on page 297
- “Multitone Subsystem–Option 001/601 or 002/602 ([:SOURce]:RADio:MTONe:ARB)” on page 321
- “Wideband CDMA ARB Subsystem–Option 400 ([:SOURce]:RADio:WCDMa:TGPP:ARB)” on page 333

All Subsystem–Option 001/601 or 002/602 ([:SOURce])

:RADio:ALL:OFF

Supported E4438C with Option 001/601 or 002/602

[:SOURce] :RADio:ALL:OFF

This command disables all digital modulation personalities on a particular baseband.

Remarks This command does not affect analog modulation.

AWGN ARB Subsystem—Option 403 ([:SOURce]:RADio:AWGN:ARB)

:BWIDth

Supported E4438C with Option 403

[:SOURce] :RADio:AWGN:ARB:BWIDth <val>

[:SOURce] :RADio:AWGN:ARB:BWIDth?

This command adjusts the bandwidth of the AWGN waveform.

The variable <val> is expressed in units of Hertz (Hz–MHz).

***RST** +1.00000000E+006

Range 5E4–1.5E7

Key Entry **Bandwidth**

:IQ:EXTernal:FILTer

Supported E4438C with Option 403

[:SOURce] :RADio:AWGN:ARB:IQ:EXTernal:FILTer 40e6 |THRough

[:SOURce] :RADio:AWGN:ARB:IQ:EXTernal:FILTer?

This command selects the filter or through path for I/Q signals routed to the rear panel I and Q outputs. Selecting a filter setting with this command will automatically set the “:IQ:EXTernal:FILTer:AUTO” on page 208 command to Off mode.

40e6 This choice applies a 40 MHz baseband filter.

THRough This choice bypasses filtering.

***RST** THR

Key Entry **40.000 MHz** **Through**

:IQ:EXternal:FILTer:AUTO

Supported E4438C with Option 403

[:SOURce] :RADio:AWGN:ARB:IQ:EXternal:FILTer:AUTO ON|OFF|1|0

[:SOURce] :RADio:AWGN:ARB:IQ:EXternal:FILTer:AUTO?

This command enables or disables the automatic selection of the filters for I/Q signals routed to the rear panel I/Q outputs.

ON(1) This choice will automatically select a digital modulation filter optimized for the current signal generator settings.

OFF(0) This choice disables the auto feature which lets you select a digital modulation filter or through path. Refer to “[:IQ:EXternal:FILTer](#)” on page 207 for selecting a filter or through path.

*RST ON

Key Entry I/Q Output Filter Manual Auto

:HEADer:CLEar

Supported E4438C with Option 403

[:SOURce] :RADio:AWGN:ARB:HEADer:CLEar

This command clears the header information from the header file used by this modulation format.

Key Entry Clear Header

Remarks The **AWGN Off On** softkey must be set to On for this command to function.

:HEADer:SAVE

Supported E4438C with Option 403

[:SOURce] :RADio:AWGN:ARB:HEADer:SAVE

This command saves the header information to the header file used by this modulation format.

Key Entry Save Setup To Header

Remarks The **AWGN Off On** softkey must be set to On for this command to function.

:IQ:MODulation:ATTen

Supported E4438C with Option 403

`[:SOURce] :RADio:AWGN:ARB:IQ:MODulation:ATTen <val>`

`[:SOURce] :RADio:AWGN:ARB:IQ:MODulation:ATTen?`

This command attenuates the I/Q signals being modulated through the signal generator RF path.

The variable <val> is expressed in units of decibels (dB).

***RST** +2.00000000E+000

Range 0–40

Key Entry **Modulator Atten Manual Auto**

:IQ:MODulation:ATTen:AUTO

Supported E4438C with Option 403

`[:SOURce] :RADio:AWGN:ARB:IQ:MODulation:ATTen:AUTO ON|OFF|1|0`

`[:SOURce] :RADio:AWGN:ARB:IQ:MODulation:ATTen:AUTO?`

This command enables or disables the I/Q attenuation auto mode.

ON (1) This choice enables the attenuation auto mode which optimizes the modulator attenuation for the current conditions.

OFF (0) This choice holds the attenuator at its current setting or at a selected value. Refer to [“:IQ:MODulation:ATTen” on page 209](#) for setting the attenuation value.

***RST** 1

Key Entry **Modulator Atten Manual Auto**

:IQ:MODulation:FILTer**Supported** E4438C with Option 403

```
[:SOURce]:RADio:AWGN:ARB:IQ:MODulation:FILTer 2.1e6|40e6|THROUGH
[:SOURce]:RADio:AWGN:ARB:IQ:MODulation:FILTer?
```

This command enables you to select a filter or through path for I/Q signals modulated onto the RF carrier. Selecting a filter with this command will automatically set “:IQ:MODulation:ATTen:AUTO” on page 209 to Off(0) mode.

2.1E6 This choice applies a 2.1 MHz baseband filter to the I/Q signals.

40E6 This choice applies a 40 MHz baseband filter to the I/Q signals.

THROUGH This choice bypasses filtering.

***RST** THR

Key Entry 2.100 MHz 40.000 MHz Through

:IQ:MODulation:FILTer:AUTO**Supported** E4438C with Option 403

```
[:SOURce]:RADio:AWGN:ARB:IQ:MODulation:FILTer:AUTO ON|OFF|1|0
[:SOURce]:RADio:AWGN:ARB:IQ:MODulation:FILTer:AUTO?
```

This command enables or disables the automatic selection of the filters for I/Q signals modulated onto the RF carrier.

ON(1) This choice will automatically select a digital modulation filter.

OFF(0) This choice disables the auto feature which lets you select a digital modulation filter or through path. Refer to “:IQ:MODulation:FILTer” on page 302 for selecting a filter or through path.

***RST** 1

Key Entry I/Q Mod Filter Manual Auto

:MDEStination:PULSe

Supported E4438C with Option 403

```
[ :SOURCE ] :RADio:AWGN:ARB:MDEStination:PULSe NONE |M1 |M2 |M3 |M4  
[ :SOURCE ] :RADio:AWGN:ARB:MDEStination:PULSe?
```

This command routes the selected marker to the Pulse/RF Blanking function. The NONE parameter clears the marker for the Pulse/RF Blanking functions.

***RST** NONE

Key Entry **None** **Marker 1** **Marker 2** **Marker 3** **Marker 4**

:MDEStination:AAMPLitude

Supported E4438C with Option 403

```
[ :SOURCE ] :RADio:AWGN:ARB:MDEStination:AAMPLitude NONE |M1 |M2 |M3 |M4  
[ :SOURCE ] :RADio:AWGN:ARB:MDEStination:AAMPLitude?
```

This command routes the selected marker to the Alternate Amplitude function. The NONE parameter clears the marker for the Alternate Amplitude function.

***RST** NONE

Key Entry **None** **Marker 1** **Marker 2** **Marker 3** **Marker 4**

:MDEStination:ALCHold

Supported E4438C with Option 403

```
[ :SOURCE ] :RADio:AWGN:ARB:MDEStination:ALCHold NONE |M1 |M2 |M3 |M4  
[ :SOURCE ] :RADio:AWGN:ARB:MDEStination:ALCHold?
```

This command routes the selected marker to the ALC Hold function. The NONE parameter clears the marker for the ALC Hold function.

***RST** NONE

Key Entry **None** **Marker 1** **Marker 2** **Marker 3** **Marker 4**

:MPOLarity:MARKer1

Supported E4438C with Option 403

[:SOURce] :RADio:AWGN:ARB:MPOLarity:MARKer1 NEGative | POSitive
[:SOURce] :RADio:AWGN:ARB:MPOLarity:MARKer1?

This command sets the polarity for marker 1.

***RST** POS

Key Entry **Marker 1 Polarity Neg Pos**

:MPOLarity:MARKer2

Supported E4438C with Option 403

[:SOURce] :RADio:AWGN:ARB:MPOLarity:MARKer2 NEGative | POSitive
[:SOURce] :RADio:AWGN:ARB:MPOLarity:MARKer2?

This command sets the polarity for marker 2.

***RST** POS

Key Entry **Marker 2 Polarity Neg Pos**

:MPOLarity:MARKer3

Supported E4438C with Option 403

[:SOURce] :RADio:AWGN:ARB:MPOLarity:MARKer3 NEGative | POSitive
[:SOURce] :RADio:AWGN:ARB:MPOLarity:MARKer3?

This command sets the polarity for marker 3.

***RST** POS

Key Entry **Marker 3 Polarity Neg Pos**

:MPOLarity:MARKer4

Supported E4438C with Option 403

[:SOURce] :RADio:AWGN:ARB:MPOLarity:MARKer4 NEGative | POSitive
[:SOURce] :RADio:AWGN:ARB:MPOLarity:MARKer4?

This command sets the polarity for marker 4.

***RST** POS

Key Entry **Marker 4 Polarity Neg Pos**

:LENgth

Supported E4438C with Option 403

```
[ :SOURce ] :RADio:AWGN:ARB:LENgth 1048576 | 524288 | 262144 | 131072 | 65536 |  
32768 | 16384
```

```
[ :SOURce ] :RADio:AWGN:ARB:LENgth?
```

This command specifies the length (number of points) of the AWGN waveform.

***RST** +524288

Key Entry **1048576** **524288** **262144** **131072** **65536** **32768** **16384**

Remarks A longer waveform yields a statistically more correct waveform.

:REFerence:EXTernal:FREQuency

Supported E4438C with Option 403

```
[ :SOURce ] :RADio:AWGN:ARB:REFerence:EXTernal:FREQuency <val>
```

```
[ :SOURce ] :RADio:AWGN:ARB:REFerence:EXTernal:FREQuency?
```

This command allows you to enter the frequency of the applied external reference.

The variable <val> is expressed in units of Hertz (Hz–MHz).

***RST** +1.00000000E+007

Range 2.5E5–1E8

Key Entry **Reference Freq**

Remarks The value specified by this command is effective only when you are using an external ARB reference applied to the BASEBAND GEN REF IN rear panel connector.

To specify external as the ARB reference source type, refer to
[“:REFerence\[:SOURce\]” on page 283.](#)

:REFeRence[:SOURce]

Supported E4438C with Option 403

```
[ :SOURce ] :RADio:AWGN:ARB:REFeRence [ :SOURce ] INTernal | EXTeRnal
[ :SOURce ] :RADio:AWGN:ARB:REFeRence [ :SOURce ] ?
```

This command selects either an internal or external reference for the waveform clock.

***RST** INT

Key Entry **ARB Reference Ext Int**

Remarks If the EXTeRnal choice is selected, the external frequency *value must* be entered and the signal must be applied to the BASEBAND GEN REF IN rear panel connector.

Refer to “[:REFeRence:EXTeRnal:FREQUency]” on page 282 to enter the external reference frequency.

:SCLock:RATE

Supported E4438C with Option 403

```
[ :SOURce ] :RADio:AWGN:ARB:SCLock:RATE <val>
[ :SOURce ] :RADio:AWGN:ARB:SCLock:RATE?
```

This command sets the sample clock rate for the AWGN modulation format.

The variable <val> is expressed in units of hertz.

***RST** +1.00000000E+008

Range 1–1E8

Key Entry **ARB Sample Clock**

Remarks The modulation format should be active before executing this command. If this command is executed before the modulation format is active, the entered value will be overridden by a calculated factory default value. Refer to “[:STATe]” on page 215 to activate the modulation format.

:SEED

Supported E4438C with Option 403

[:SOURce] :RADio:AWGN:ARB:SEED FIXed | RANDom

[:SOURce] :RADio:AWGN:ARB:SEED?

This command toggles the AWGN waveform noise seed value type.

FIXed This choice selects a fixed noise seed value.

RANDom This choice selects a randomly generated noise seed value.

***RST** FIX

Key Entry **Noise Seed Fixed Random**

[:STATe]

Supported E4438C with Option 403

[:SOURce] :RADio:AWGN:ARB [:STATe] ON | OFF | 1 | 0

[:SOURce] :RADio:AWGN:ARB [:STATe] ?

This command enables or disables the AWGN generator function.

***RST** 0

Key Entry **Arb AWGN Off On**

CDMA ARB Subsystem–Option 401 ([:SOURCE]:RADio:CDMA:ARB)

:CLIPping:I

Supported E4438C with Option 401

[:SOURCE]:RADio:CDMA:ARB:CLIPping:I <val>

[:SOURCE]:RADio:CDMA:ARB:CLIPping:I?

This command clips (limits) the modulation level of the waveform's I component to a percentage of full scale.

The variable <val> is expressed in units of percent.

***RST** +1.00000000E+002

Range 10–100

Key Entry Clip |I| To

:CLIPping:POSition

Supported E4438C with Option 401

[:SOURCE]:RADio:CDMA:ARB:CLIPping:POSition PRE|POST

[:SOURCE]:RADio:CDMA:ARB:CLIPping:POSition?

This command specifies whether a waveform is clipped before (PRE) or after (POST) FIR filtering.

***RST** PRE

Key Entry Clip At PRE POST FIR Filter

:CLIPping:Q

Supported E4438C with Option 401

[:SOURCE] :RADio:CDMA:ARB:CLIPping:Q <val>

[:SOURCE] :RADio:CDMA:ARB:CLIPping:Q?

This command clips (limits) the modulation level of the waveform's Q component to a percentage of full scale.

The variable <val> is expressed in units of percent.

***RST** +1.00000000E+002

Range 10–100

Key Entry Clip |Q| To

:CLIPping:TYPE

Supported E4438C with Option 401

[:SOURCE] :RADio:CDMA:ARB:CLIPping:TYPE IJQ|IORQ

[:SOURCE] :RADio:CDMA:ARB:CLIPping:TYPE?

This command selects either IJQ or IORQ as the clipping type.

IJQ The combined I and Q waveform will be clipped (*circular clipping*).

IORQ The I and Q components of the waveform are clipped independently (*rectangular clipping*). I and Q can be clipped to different levels using this mode.

***RST** IJQ

Key Entry Clipping Type |I+jQ| |I|,|Q|

:CLIPping[:IJQ]

Supported E4438C with Option 401

[:SOURCE] :RADIO:CDMA:ARB:CLIPping [:IJQ] <val>

[:SOURCE] :RADIO:CDMA:ARB:CLIPping [:IJQ] ?

This command clips (limits) the modulation level of the combined I and Q waveform to a percentage of full scale.

The variable <val> is expressed in units of percent.

***RST** +1.00000000E+002

Range 10–100

Key Entry Clip |I+jQ| To

:CRATe

Supported E4438C with Option 401

[:SOURCE] :RADIO:CDMA:ARB:CRATe <val>

[:SOURCE] :RADIO:CDMA:ARB:CRATe?

This command sets the chip rate value.

The variable <val> is expressed as chips per second (cps–Mcps).

***RST** +1.22880000E+006

Range 10–8E6

Key Entry Chip Rate

:IQ:EXternal:FILTer

Supported E4438C with Option 401

```
[ :SOURCE ] :RADio:CDMA:ARB:IQ:EXternal:FILTer 40e6 | THROugh
[ :SOURCE ] :RADio:CDMA:ARB:IQ:EXternal:FILTer?
```

This command selects the filter or through path for I/Q signals routed to the rear panel I and Q outputs. Selecting a filter using this command will automatically set “:IQ:EXternal:FILTer:AUTO” on [page 219](#) to OFF(0) mode.

40e6 This choice applies a 40 MHz baseband filter.

THROugh This choice bypasses filtering.

***RST** THR

Key Entry **40.000 MHz Through**

:IQ:EXternal:FILTer:AUTO

Supported E4438C with Option 401

```
[ :SOURCE ] :RADio:CDMA:ARB:IQ:EXternal:FILTer:AUTO ON|OFF | 1 | 0
[ :SOURCE ] :RADio:CDMA:ARB:IQ:EXternal:FILTer:AUTO?
```

This command enables or disables the automatic selection of the filters for I/Q signals routed to the rear panel I/Q outputs.

ON(1) This choice will automatically select a digital modulation filter optimized for the current signal generator settings.

OFF(0) This choice disables the auto feature which lets you select a digital modulation filter or through path. Refer to “:IQ:EXternal:FILTer” on [page 219](#) for selecting a filter or through path.

***RST** 1

Key Entry **I/Q Output Filter Manual Auto**

:FILTer

Supported E4438C with Option 401

```
[:SOURCE]:RADIO:CDMA:ARB:FILTer RNYquist|NYquist|GAUSSian|RECTangle|
IS95|IS95_EQ|IS95_MOD|IS95_MOD_EQ|WCDMA|AC4Fm|IS2000SR3DS|UGGaussian|
"<user FIR>"
[:SOURCE]:RADIO:CDMA:ARB:FILTer?
```

This command selects the pre-modulation filter type.

- IS95 This choice selects a filter that meets the criteria of the IS-95 standard.
- IS95_EQ This choice selects a filter which is a combination of the IS-95 filter (above) and the equalizer filter described in the IS-95 standard. This filter is only used for IS-95 baseband filtering.
- IS95_MOD This choice selects a filter that meets the criteria of the IS-95 error function (for improved adjacent channel performance) with lower passband rejection than the filter specified in the IS-95 standard.
- IS95_MOD_EQ This choice selects a filter which is a combination of the equalizer filter described in the IS-95 standard and a filter that meets the criteria of the IS-95 error function (for improved adjacent channel performance), with lower passband rejection.
- WCDMa This choice selects a 0.22 Nyquist filter optimized for ACP.
- AC4Fm This choice selects a predefined Association of Public Safety Communications Officials (APCO) specified compatible 4-level frequency modulation (C4FM) filter.
- IS2000SR3DS This choice selects an IS-2000 standard, spread rate 3 direct spread filter.
- UGGaussian This choice selects a backwards compatible GSM Gaussian filter (Gaussian filter with a fixed BbT value of 0.300) for the ESG E44xxB Option UN3 or UN4.
- "<user FIR>" This variable is any FIR filter file that you have stored in memory. The variable needs no directory path indicating the location of the file, such as FIR: or /USER/FIR. The command assumes the FIR directory. Refer to [“File Name Variables” on page 13](#) for more information on file names.

***RST** IS95_MOD_EQ

Key Entry	Root Nyquist	Nyquist	Gaussian	Rectangle	IS-95	IS-95 w/EQ
	IS-95 Mod	IS-95 Mod w/EQ	WCDMA	APCO 25 C4FM	IS-2000 SR3 DS	
	UN3/4 GSM Gaussian	User FIR				

:FILTer:ALPHA

Supported E4438C with Option 401

[:SOURce] :RADio:CDMA:ARB:FILTer:ALPHA <val>

[:SOURce] :RADio:CDMA:ARB:FILTer:ALPHA?

This command changes the Nyquist or root Nyquist filter's alpha value.

The filter alpha value can be set to the minimum level (0), the maximum level (1), or in between by using fractional numeric values (0.001–0.999).

***RST** +5.00000000E–001

Range 0.000–1.000

Key Entry Filter Alpha

Remarks To change the current filter type, refer to “:FILTer” on page 220.

:FILTer:BBT

Supported E4438C with Option 401

[:SOURce] :RADio:CDMA:ARB:FILTer:BBT <val>

[:SOURce] :RADio:CDMA:ARB:FILTer:BBT?

This command changes the bandwidth-multiplied-by-bit-time (BbT) filter parameter.

The filter BbT value can be set to the minimum level (0), the maximum level (1), or in between by using fractional numeric values (0.001–0.999).

***RST** +5.00000000E–001

Range 0.000–1.000

Key Entry Filter BbT

Remarks This command is effective only after choosing a Gaussian filter. It does not have an effect on other types of filters.

To change the current filter type, refer to “:FILTer” on page 220.

:FILTER:CHANnel

Supported E4438C with Option 401

[:SOURCE] :RADio:CDMA:ARB:FILTer:CHANnel EVM|ACP

[:SOURCE] :RADio:CDMA:ARB:FILTer:CHANnel?

This command optimizes the Nyquist and root Nyquist filters to minimize error vector magnitude (EVM) or to minimize adjacent channel power (ACP).

EVM This choice provides the most ideal passband.

ACP This choice improves stopband rejection.

***RST** EVM

Key Entry **Optimize FIR For EVM ACP**

Remarks To change the current filter type, refer to “:FILTer” on page 220.

:HEADer:CLEar

Supported E4438C with Option 401

[:SOURCE] :RADio:CDMA:ARB:HEADer:CLEar

This command clears the header information from the header file used by this modulation format.

Key Entry **Clear Header**

Remarks The **CDMA Off On** softkey must be set to On for this command to function.

:HEADer:SAVE

Supported E4438C with Option 401

[:SOURCE] :RADio:CDMA:ARB:HEADer:SAVE

This command saves the header information to the header file used by this modulation format.

Key Entry **Save Setup To Header**

Remarks The **CDMA Off On** softkey must be set to On for this command to function.

:IQMap

Supported E4438C with Option 401

```
[:SOURce]:RADio:CDMA:ARB:IQMap NORMAL|INVerted  
[:SOURce]:RADio:CDMA:ARB:IQMap?
```

This command selects whether the Q output will be normal or inverted.

NORMAL This choice selects normal polarity.

INVerted This choice inverts the internal Q signal.

***RST** NORM

Key Entry **I/Q Mapping Normal Invert**

Remarks Inverting the Q output inverts the RF spectrum after the modulation.

:IQ:MODulation:ATTen

Supported E4438C with Option 401

```
[:SOURce]:RADio:CDMA:ARB:IQ:MODulation:ATTen <val>  
[:SOURce]:RADio:CDMA:ARB:IQ:MODulation:ATTen?
```

This command attenuates the I/Q signals being modulated through the signal generator RF path.

The variable <val> is expressed in units of decibels (dB).

***RST** +2.00000000E+000

Range 0–40

Key Entry **Modulator Atten Manual Auto**

:IQ:MODulation:ATTen:AUTO

Supported E4438C with Option 401

```
[:SOURce]:RADio:CDMA:ARB:IQ:MODulation:ATTen:AUTO ON|OFF|1|0  
[:SOURce]:RADio:CDMA:ARB:IQ:MODulation:ATTen:AUTO?
```

This command enables or disables the I/Q attenuation auto mode.

ON (1) This choice enables the attenuation auto mode which optimizes the modulator attenuation for the current conditions.

OFF (0)	This choice holds the attenuator at its current setting or at a selected value. Refer to “[:IQ:MODulation:ATTen” on page 223 for setting the attenuation value.
*RST	1
Key Entry	Modulator Atten Manual Auto

:IQ:MODulation:FILTer

Supported E4438C with Option 401

```
[ :SOURce ] :RADio:CDMA:ARB:IQ:MODulation:FILTer 2.1e6|40e6|THROUGH
[:SOURce]:RADio:CDMA:ARB:IQ:MODulation:FILTer?
```

This command enables you to select a filter or through path for I/Q signals modulated onto the RF carrier. Selecting a filter using this command will automatically set “[:IQ:MODulation:ATTen:AUTO” on page 223 to OFF(0) mode.

2.1E6	This choice applies a 2.1 MHz baseband filter to the I/Q signals.
40E6	This choice applies a 40 MHz baseband filter to the I/Q signals.
THROUGH	This choice bypasses filtering.
*RST	THR
Key Entry	2.100 MHz 40.000 MHz Through

:IQ:MODulation:FILTer:AUTO

Supported E4438C with Option 401

```
[ :SOURce ] :RADio:CDMA:ARB:IQ:MODulation:FILTer:AUTO ON|OFF|1|0
[:SOURce]:RADio:CDMA:ARB:IQ:MODulation:FILTer:AUTO?
```

This command enables or disables the automatic selection of the filters for I/Q signals modulated onto the RF carrier.

ON(1)	This choice will automatically select a digital modulation filter.
OFF(0)	This choice disables the auto feature which lets you select a digital modulation filter or through path. Refer to “[:IQ:MODulation:FILTer” on page 302 for selecting a filter or through path.
*RST	1
Key Entry	I/Q Mod Filter Manual Auto

:MDEStination:PULSe

Supported E4438C with Option 401

[:SOURCE] :RADIo:CDMA:ARB:MDEStination:PULSe NONE |M1 |M2 |M3 |M4
 [:SOURCE] :RADIo:CDMA:ARB:MDEStination:PULSe?

This command routes the selected marker to the Pulse/RF Blanking function. The NONE parameter clears the marker for the Pulse/RF Blanking functions.

***RST** NONE

Key Entry **None** **Marker 1** **Marker 2** **Marker 3** **Marker 4**

:MDEStination:AAMPlitude

Supported E4438C with Option 401

[:SOURCE] :RADIo:CDMA:ARB:MDEStination:AAMPlitude NONE |M1 |M2 |M3 |M4
 [:SOURCE] :RADIo:CDMA:ARB:MDEStination:AAMPlitude?

This command routes the selected marker to the Alternate Amplitude function. The NONE parameter clears the marker for the Alternate Amplitude function.

***RST** NONE

Key Entry **None** **Marker 1** **Marker 2** **Marker 3** **Marker 4**

:MDEStination:ALCHold

Supported E4438C with Option 401

[:SOURCE] :RADIo:CDMA:ARB:MDEStination:ALCHold NONE |M1 |M2 |M3 |M4
 [:SOURCE] :RADIo:CDMA:ARB:MDEStination:ALCHold?

This command routes the selected marker to the ALC Hold function. The NONE parameter clears the marker for the ALC Hold function.

***RST** NONE

Key Entry **None** **Marker 1** **Marker 2** **Marker 3** **Marker 4**

:MPOLarity:MARKer1

Supported E4438C with Option 401

[:SOURCE] :RADio:CDMA:ARB:MPOLarity:MARKer1 NEGative | POSitive
[:SOURCE] :RADio:CDMA:ARB:MPOLarity:MARKer1?

This command sets the polarity for marker 1.

***RST** POS

Key Entry **Marker 1 Polarity Neg Pos**

:MPOLarity:MARKer2

Supported E4438C with Option 401

[:SOURCE] :RADio:CDMA:ARB:MPOLarity:MARKer2 NEGative | POSitive
[:SOURCE] :RADio:CDMA:ARB:MPOLarity:MARKer2?

This command sets the polarity for marker 2.

***RST** POS

Key Entry **Marker 2 Polarity Neg Pos**

:MPOLarity:MARKer3

Supported E4438C with Option 401

[:SOURCE] :RADio:CDMA:ARB:MPOLarity:MARKer3 NEGative | POSitive
[:SOURCE] :RADio:CDMA:ARB:MPOLarity:MARKer3?

This command sets the polarity for marker 3.

***RST** POS

Key Entry **Marker 3 Polarity Neg Pos**

:MPOLarity:MARKer4

Supported E4438C with Option 401

[:SOURCE] :RADio:CDMA:ARB:MPOLarity:MARKer4 NEGative | POSitive
[:SOURCE] :RADio:CDMA:ARB:MPOLarity:MARKer4?

This command sets the polarity for marker 4.

***RST** POS

Key Entry **Marker 4 Polarity Neg Pos**

:OSAMple

Supported E4438C with Option 401

[:SOURce]:RADio:CDMA:ARB:OSAMple <val>

[:SOURce]:RADio:CDMA:ARB:OSAMple?

This command sets the oversampling ratio (number of filter taps per symbol) for CDMA modulation.

***RST** +5

Range 2–8

Key Entry **Oversample Ratio**

Remarks The upper limit of the oversample ratio is adjusted based on the waveform length and chip rate.

Using larger oversample ratios result in more completely filtered images, but this action also uses up more waveform memory.

The maximum oversample ratio is the smaller of 8, 40 Mcps/Chip Rate, or 32/Waveform Length (number of CDMA short codes).

:REFerence:EXTernal:FREQuency

Supported E4438C with Option 401

[:SOURce]:RADio:CDMA:ARB:REFerence:EXTernal:FREQuency <val>

[:SOURce]:RADio:CDMA:ARB:REFerence:EXTernal:FREQuency?

This command allows you to enter the frequency of the applied external reference.

The variable <val> is expressed in units of Hertz (Hz–MHz).

***RST** +1.00000000E+007

Range 2.5E5–1E8

Key Entry **Reference Freq**

Remarks The value specified by this command is effective only when you are using an external ARB reference applied to the BASEBAND GEN REF IN rear panel connector.

To specify external as the ARB reference source type, refer to [“:REFerence\[:SOURce\]” on page 228](#).

:REference[:SOURCE]

Supported E4438C with Option 401

```
[ :SOURCE ] :RADio:CDMA:ARB:REference [ :SOURCE ] INTernal | EXTernal
[ :SOURCE ] :RADio:CDMA:ARB:REference [ :SOURCE ] ?
```

This command selects either an internal or external reference for the waveform clock.

***RST** INT

Key Entry **ARB Reference Ext Int**

Remarks If the EXTernal choice is selected, the external frequency value *must* be entered and the signal must be applied to the BASEBAND GEN REF IN rear panel connector.

Refer to “[:REference:EXTernal:FREQUENCY](#)” on page 227 to enter the external reference frequency.

:RETRigger

Supported E4438C with Option 401

```
[ :SOURCE ] :RADio:CDMA:ARB:RETRigger ON | OFF | IMMEDIATE
[ :SOURCE ] :RADio:CDMA:ARB:RETRigger?
```

This command enables or disables the ARB retriggering mode; the retrigger mode controls how the retriggering function performs while a waveform is playing.

ON(1) This choice specifies that if a trigger occurs while a waveform is playing, the waveform will retrigger at the end of the current waveform sequence and play once more.

OFF(0) This choice specifies that if a trigger occurs while a waveform is playing, the trigger will be ignored.

IMMEDIATE This choice specifies that if a trigger occurs while a waveform is playing, the waveform will reset and replay from the start immediately upon receiving a trigger.

***RST** ON

Key Entry **On Off Immediate**

:SCLock:RATE

Supported E4438C with Option 401

[:SOURCE]:RADio:CDMA:ARB:SCLock:RATE <val>

[:SOURCE]:RADio:CDMA:ARB:SCLock:RATE?

This command sets the sample clock rate for the CDMA modulation format.

The variable <val> is expressed in units of hertz.

***RST** +1.00000000E+008

Range 1–1E8

Key Entry **ARB Sample Clock**

Remarks The modulation format should be active before executing this command. If this command is executed before the modulation format is active, the entered value will be overridden by a calculated factory default value. Refer to “[:STaTe]” on [page 241](#) to activate the modulation format.

:SETup

Supported E4438C with Option 401

[:SOURCE]:RADio:CDMA:ARB:SETup FWD9|FWD32|FWD64|PILOt|REVerse|MCARrier |
 "<file name>"

[:SOURCE]:RADio:CDMA:ARB:SETup?

This command selects a pre-defined CDMA channel setup.

FWD9 This CDMA setup consists of 9 forward channels (pilot, paging, sync, and 6 traffic channels) at IS-97-defined power levels.

FWD32 This CDMA setup consists of 32 forward channels (pilot, paging, sync, and 29 traffic channels) at IS-97-defined power levels.

FWD64 This CDMA setup consists of 64 forward channels (pilot, 7 paging, sync, and 55 traffic channels) at IS-97-defined power levels.

PILOt This choice selects single pilot channel.

REVerse A single reverse link traffic channel.

MCARrier This choice activates Multicarrier mode (3 carrier setup) and deactivates any other mode that was previously selected. To change multicarrier setup, refer to “[:SETup:MCARrier]” on [page 231](#).

***RST** FWD9

CDMA ARB Subsystem—Option 401 ([:SOURce]:RADio:CDMA:ARB)

Key Entry	9 Ch Fwd 32 Ch Fwd 64 Ch Fwd Pilot Reverse Multicarrier Off On
	Multicarrier Off On Custom CDMA State
Remarks	Refer to “File Name Variables” on page 13 for information on the file name syntax.

:SETup:CHANnel

Supported E4438C with Option 401

```
[:SOURce]:RADio:CDMA:ARB:SETup:CHANnel IS97|EQUAL|SCALE|NONE {, PILOt |
SYNC|PAGing|TRAFfic, <walsh_value>, <power_value>, <pn_offset>, RANDom |
<data_value>}
[:SOURce]:RADio:CDMA:ARB:SETup:CHANnel?
```

This command defines the channel parameters of the CDMA signal. This allows for customizing of the channel type, the channel parameters, and the data value.

The variable <power_value> is expressed in units of decibels (dB).

- IS97 This choice sets the channel power levels to IS-97-defined power levels.
- EQUAL This choice sets the channel power levels so that all channels are of equal power and the total power equals 0 dBm.
- SCALE This choice scales all of the current channel powers so that the total power equals 0 dB while keeping the previous power ratios between the individual channels.
- NONE This choice bypasses the power level setting.
- PILot This choice selects a single traffic channel.
- SYNC This choice selects a sync channel.
- PAGing This choice selects a paging channel.
- TRAFfic This choice selects a traffic channel.
- RANDom This choice selects a randomly generated data value.

The channel type, walsh code, power, PN offset, and data values are returned when a query is initiated. The output format is as follows:

```
<channel type>, <walsh_value>, <power>, <pn_offset>, <data_value>
```

*RST	Channel #	Channel Type	Walsh Code	Power	PN Offset	Data
	1	PIL	+0	-7.00000000E+000	+0	+0
	2	PAG	+1	-7.26000023E+000	+0	RAND
	3	TRAF	+8	-1.02600002E+001	+0	RAND
	4	TRAF	+9	-1.02600002E+001	+0	RAND

*RST	Channel #	Channel Type	Walsh Code	Power	PN Offset	Data
	5	TRAF	+10	-1.02600002E+001	+0	RAND
	6	TRAF	+11	-1.02600002E+001	+0	RAND
	7	TRAF	+12	-1.02600002E+001	+0	RAND
	8	TRAF	+13	-1.02600002E+001	+0	RAND
	9	SYNC	+32	-1.02600002E+001	+0	RAND

Range <power_value>: -40 to 0 <walsh_value>: 0-63 <pn_offset>: 0-511

Key Entry **IS-97 Levels** **Equal Powers** **Scale to 0dB** **Sync** **Pilot** **Paging** **Traffic**

:SETup:MCARrier

Supported E4438C with Option 401

```
[ :SOURCE]:RADio:CDMA:ARB:SETup:MCARrier CAR3 | CAR4 | "<file name>"
[ :SOURCE]:RADio:CDMA:ARB:SETup:MCARrier?
```

This command selects a pre-defined type of multicarrier CDMA setup required for your application.

CAR3 This choice selects three 9 channel forward carriers with a power level of 0.00 dB, the first with a -1.25 MHz frequency offset, the second with no frequency offset, and the third with +1.25 MHz frequency offset.

CAR4 This choice selects four 9 channel forward carriers with a power level of 0.00 dB, the first with a -1.875 MHz frequency offset, the second with a -625 kHz frequency offset, the third with +625 kHz frequency offset, and the fourth with a +1.875 MHz frequency offset.

***RST** CAR3

Key Entry **3 Carriers** **4 Carriers** **Custom CDMA Multicarrier**

Remarks Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:SETup:MCARrier:STORe

Supported E4438C with Option 401

```
[:SOURCE]:RADio:CDMA:ARB:SETup:MCARrier:STORe "<file name>"
```

This command stores the current multicarrier setup information.

The stored file contains information including the digital modulation format, number of carriers, frequency spacing, and power settings for the multicarrier setup.

Key Entry **Store Custom Multicarrier**

Remarks Refer to “[File Name Variables](#)” on page 13 for information on the file name syntax.

:SETup:MCARrier:TABLE

Supported E4438C with Option 401

```
[:SOURCE]:RADio:CDMA:ARB:SETup:MCARrier:TABLE {FWD9|FWD32|FWD64|PILot|CUSTom,"<file name>"|"",<freq_offset>,<power>}
[:SOURCE]:RADio:CDMA:ARB:SETup:MCARrier:TABLE?
```

This command defines the multicarrier CDMA waveform.

The variable <freq_offset> is expressed in units of Hertz (kHz to MHz).

The variable <power> is expressed in units of decibels (dB).

The carrier type, carrier name, frequency offset, and power level are returned when a query is initiated. The output format is as follows:

```
<carrier type>,<carrier_name>,<freq_offset>,<power>
```

FWD9 This CDMA setup consists of 9 forward channels (pilot, paging, sync, and 6 traffic channels) at IS-97-defined power levels.

FWD32 This CDMA setup consists of 32 forward channels (pilot, paging, sync, and 29 traffic channels) at IS-97-defined power levels.

FWD64 This CDMA setup consists of 64 forward channels (pilot, 7 paging, sync, and 55 traffic channels) at IS-97-defined power levels.

PILot This choice selects single pilot channel.

" " A null string, entered for any non-custom carrier.

*RST	carrier type: FWD9 <freq_offset>: +1.25000000E+006 <power>: +0.00000000E+000
Range	<freq_offset>: -7.5E6 to 7.5E6 <power>: -40 to 0
Key Entry	9 Ch Fwd 32 Ch Fwd 64 Ch Fwd Pilot Custom CDMA State
Remarks	Refer to “File Name Variables” on page 13 for information on the file name syntax. To store a multicarrier setup refer to “:SETup:MCARrier:STORe” on page 232 The file name specified must be a single carrier CDMA file.

:SETup:STORe

Supported E4438C with Option 401

`[:SOURce] :RADio :CDMA :ARB :SETup :STORe "<file name>"`

This command stores the current custom CDMA state, using a designated file name, to the signal generator non-volatile memory.

Along with the contents of the CDMA channel table editor (channel types, Walsh code, power levels, PN offset, and data), this command stores the following information to the signal generator non-volatile memory:

- FIR filter
- FIR filter file name
- FIR filter alpha
- FIR filter BbT
- FIR filter channel (EVM or ACP)
- chip rate
- waveform length
- oversample ratio
- ARB reference clock source (internal or external)
- ARB reference clock frequency

Key Entry **Store Custom CDMA State**

Remarks Recall the stored file by executing the following command:

`[:SOURce] :RADio :CDMA :ARB :SETup : "<file name>"`

Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:TRIGger:TYPE

Supported E4438C with Option 401

```
[ :SOURCE ] :RADio:CDMA:ARB:TRIGger:TYPE CONTInuous | SINGle | GATE
[ :SOURCE ] :RADio:CDMA:ARB:TRIGger:TYPE?
```

This command sets the trigger mode (type) that controls the waveform’s playback.

Triggers control the playback by telling the ESG when to play the modulating signal (waveform). Depending on the trigger settings for the ESG, the waveform playback can occur once, continuously, or the ESG may start and stop playing the waveform repeatedly (GATE mode).

A trigger signal comprises both positive and negative signal transitions (states), which are also called high and low periods. You can configure the ESG to trigger on either state of the trigger signal. It is common to have multiple triggers, also referred to as trigger occurrences or events, occur when the signal generator requires only a single trigger. In this situation, the ESG recognizes the first trigger and ignores the rest.

When you select a trigger mode, you may lose the signal (carrier plus modulating) from the RF output until you trigger the waveform. This is because the ESG sets the I and Q signals to zero volts prior to the first trigger event, which suppresses the carrier. After the first trigger event, the waveform’s final I and Q levels determine whether you will see the carrier signal or not (zero = no carrier, other values = carrier visible). At the end of most files, the final I and Q points are set to a value other than zero.

There are four parts to configuring the trigger:

- Choosing the trigger type, which controls the waveform’s transmission.
- Setting the waveform’s response to triggers:
 - CONTInuous, see “:TRIGger:TYPE:CONTInuous[:TYPE]” on page 235
 - SINGle, see “:RETRigger” on page 228
 - GATE, selecting the mode also sets the response
- Selecting the trigger source (see “:TRIGger[:SOURCE]” on page 236), which determines how the ESG receives its trigger signal, internally or externally. The GATE choice requires an external trigger.
- Setting the trigger polarity when using an external source:
 - CONTInuous and SINGle see “:TRIGger[:SOURCE]:EXTernal:SLOPe” on page 239
 - GATE, see “:TRIGger:TYPE:GATE:ACTive” on page 236

For more information on triggering, see the *E4428C/38C ESG Signal Generators User’s Guide*.

The following list describes the trigger type command choices:

CONTInuous Upon triggering, the waveform repeats continuously.

SINGLE	Upon triggering, the waveform segment or sequence plays once.
GATE	An external trigger signal repeatedly starts and stops the waveform’s playback (transmission). The time duration for playback depends on the duty period of the trigger signal and the gate polarity selection (see “:TRIGger:TYPE:GATE:ACTive” on page 236). The waveform plays during the inactive state and stops during the active polarity selection state. The active state can be set high or low. The gate mode works only with an external trigger source.

NOTE The ARB gating behavior described above is opposite to the gating behavior for real-time custom mode.

*RST	CONT
Key Entry	Continuous Single Gated

:TRIGger:TYPE:CONTInuous[:TYPE]

Supported E4438C with Option 401

```
[ :SOURce ] :RADio:CDMA:ARB:TRIGger:TYPE:CONTInuous [ :TYPE ] FREE | TRIGger |
RESet
[ :SOURce ] :RADio:CDMA:ARB:TRIGger:TYPE:CONTInuous [ :TYPE ] ?
```

This commands selects the waveform’s response to a trigger signal while using the continuous trigger mode.

For more information on triggering and to select the continuous trigger mode, see [“:TRIGger:TYPE”](#) on page 234.

The following list describes the waveform’s response to each of the command choices:

FREE	Turning the ARB format on immediately triggers the waveform. The waveform repeats until you turn the format off, select another trigger, or choose another waveform file.
TRIGger	The waveform waits for a trigger before play begins. When the waveform receives the trigger, it plays continuously until you turn the format off, select another trigger, or choose another waveform file.
RESet	The waveform waits for a trigger before play begins. When the waveform receives the trigger, it plays continuously. Subsequent triggers reset the waveform

to the beginning. For a waveform sequence, this means to the beginning of the first segment in the sequence.

*RST	FREE		
Key Entry	Free Run	Trigger & Run	Reset & Run

:TRIGger:TYPE:GATE:ACTive

Supported E4438C with Option 401

```
[ :SOURCE ] :RADio:CDMA:ARB:TRIGger:TYPE:GATE:ACTive LOW|HIGH
[ :SOURCE ] :RADio:CDMA:ARB:TRIGger:TYPE:GATE:ACTive?
```

This command selects the active state (gate polarity) of the gate while using the gating trigger mode.

The LOW and HIGH selections correspond to the low and high states of an external trigger signal. For example, when you select HIGH, the active state occurs during the high of the trigger signal. When the active state occurs, the ESG stops the waveform playback at the last played sample point, then restarts the playback at the next sample point when the inactive state occurs. For more information on triggering and to select gating as the trigger mode, see “:TRIGger:TYPE” on page 234.

The following list describes the ESG’s gating behavior for the polarity selections:

LOW The waveform playback stops when the trigger signal goes low (active state) and restarts when the trigger signal goes high (inactive state).

HIGH The waveform playback stops when the trigger signal goes high (active state) and restarts when the trigger signal goes low (inactive state).

***RST** HIGH

Key Entry **Gate Active Low High**

:TRIGger[:SOURCE]

Supported E4438C with Option 401

```
[ :SOURCE ] :RADio:CDMA:ARB:TRIGger [ :SOURCE ] KEY|EXT|BUS
[ :SOURCE ] :RADio:CDMA:ARB:TRIGger [ :SOURCE ] ?
```

This command sets the trigger source.

For more information on triggering, see “:TRIGger:TYPE” on page 234. The following list describes the command choices:

KEY This choice enables manual triggering by pressing the front-panel **Trigger** hardkey.

EXT An externally applied signal triggers the waveform. This is the only choice that works with gating. The following conditions affect an external trigger:

- The input connector selected for the trigger signal. You have a choice between the rear-panel PATTERN TRIG IN connector or the PATT TRIG IN 2 pin on the rear-panel AUXILIARY I/O connector. To make the connector selection, see “:TRIGger[:SOURce]:EXTernal[:SOURce]” on page 239.

For more information on the connectors and on connecting the cables, see the *ESG User’s Guide*.

- The trigger signal polarity:
 - gating mode, see “:TRIGger:TYPE:GATE:ACTive” on page 236
 - continuous and single modes, see “:TRIGger[:SOURce]:EXTernal:SLOPe” on page 239
- The time delay between when the ESG receives a trigger and when the waveform responds to the trigger. There are two parts to setting the delay:
 - setting the amount of delay, see “:TRIGger[:SOURce]:EXTernal:DELay” on page 238
 - turning the delay on, see “:TRIGger[:SOURce]:EXTernal:DELay:STATe” on page 238

BUS This choice enables triggering over the GPIB or LAN using the *TRG or GET commands or the AUXILIARY INTERFACE (RS-232) using the *TRG command.

***RST** KEY

Key Entry **Trigger Key** **Ext** **Bus**

:TRIGger[:SOURCE]:EXternal:DELay**Supported** E4438C with Option 401

```
[:SOURCE]:RADio:CDMA:ARB:TRIGger[:SOURCE]:EXternal:DELay <val>
[:SOURCE]:RADio:CDMA:ARB:TRIGger[:SOURCE]:EXternal:DELay?
```

This command sets the amount of time to delay the ESG's response to an external trigger.

The delay is a path (time) delay between when the ESG receives the trigger and when it responds to the trigger. For example, configuring a trigger delay of two seconds, causes the ESG to wait two seconds after receipt of the trigger before the ESG plays the waveform.

The delay does not occur until you turn it on (see “:TRIGger[:SOURCE]:EXternal:DELay:STATe” on page 238). You can set the delay value either before or after turning it on.

For more information on configuring an external trigger source and to select external as the trigger source, see “:TRIGger[:SOURCE]” on page 236.

The unit of measurement for the variable <val> is in seconds (nsec–sec).

RST** +1.00000000E–003**Range** 1E–8 to 4E1**Key Entry** Ext Delay Time**:TRIGger[:SOURCE]:EXternal:DELay:STATe*Supported** E4438C with Option 401

```
[:SOURCE]:RADio:CDMA:ARB:TRIGger[:SOURCE]:EXternal:DELay:STATe ON|OFF|
1|0
[:SOURCE]:RADio:CDMA:ARB:TRIGger[:SOURCE]:EXternal:DELay:STATe?
```

This command enables or disables the operating state of the external trigger delay function.

For setting the delay time, see “:TRIGger[:SOURCE]:EXternal:DELay” on page 238, and for more information on configuring an external source, see “:TRIGger[:SOURCE]” on page 236.

***RST** 0**Key Entry** Ext Delay Off On

:TRIGger[:SOURce]:EXTernal:SLOPe

Supported E4438C with Option 401

```
[ :SOURce ] :RADio:CDMA:ARB:TRIGger[:SOURce]:EXTernal:SLOPe POSitive|
NEGative
[:SOURce]:RADio:CDMA:ARB:TRIGger[:SOURce]:EXTernal:SLOPe?
```

This command sets the polarity for an external trigger signal while using the continuous, single triggering mode. To set the polarity for gating, see “[:TRIGger:TYPE:GATE:ACTive](#)” on page 236.

The POSitive and NEGative selections correspond to the high (positive) and low (negative) states of the external trigger signal. For example, when you select POSitive, the waveform responds (plays) during the high state of the trigger signal. When the PSG receives multiple trigger occurrences when only one is required, the signal generator uses the first trigger and ignores the rest.

For more information on configuring an external trigger source and to select external as the trigger source, see “[:TRIGger\[:SOURce\]](#)” on page 236.

***RST** NEG

Key Entry **Ext Polarity Neg Pos**

:TRIGger[:SOURce]:EXTernal[:SOURce]

Supported E4438C with Option 401

```
[ :SOURce ] :RADio:CDMA:ARB:TRIGger[:SOURce]:EXTernal[:SOURce] EPT1|EPT2|
EPTRIGGER1|EPTRIGGER2
[:SOURce]:RADio:CDMA:ARB:TRIGger[:SOURce]:EXTernal[:SOURce]?
```

This command selects which PATTERN TRIG IN connection the ESG uses to accept an externally applied trigger signal when external is the trigger source selection.

For more information on configuring an external trigger source and to select external as the trigger source, see “[:TRIGger\[:SOURce\]](#)” on page 236. For more information on the rear-panel connectors, see the *E4428C/38C ESG Signal Generators User’s Guide*.

The following list describes the command choices:

- | | |
|------------|---|
| EPT1 | This choice is synonymous with EPTRIGGER1 and selects the PATTERN TRIG IN rear-panel connector. |
| EPT2 | This choice is synonymous with EPTRIGGER2 and selects the PATT TRIG IN 2 pin on the rear-panel AUXILIARY I/O connector. |
| EPTRIGGER1 | This choice is synonymous with EPT1 and selects the PATTERN TRIG IN rear-panel connector. |

CDMA ARB Subsystem—Option 401 ([:SOURCE]:RADio:CDMA:ARB)

EPTRIGGER2 This choice is synonymous with EPT2 and selects the PATT TRIG IN 2 pin on the rear-panel AUXILIARY I/O connector.

***RST** EPT1

Key Entry **Patt Trig In 1** **Patt Trig In 2**

:WLENgth

Supported E4438C with Option 401

[:SOURCE] :RADio:CDMA:ARB:WLENgth <val>

[:SOURCE] :RADio:CDMA:ARB:WLENgth?

This command specifies the waveform length (in short codes).

***RST** +1

Range 1–6

Key Entry **Waveform Length**

Remarks The upper limit is adjusted based on the oversample ratio to fit the signal within the available memory.

The maximum waveform length is 32/oversample ratio.

[:STATe]

Supported E4438C with Option 401

[:SOURCE]:RADio:CDMA:ARB[:STATe] ON|OFF|1|0

[:SOURCE]:RADio:CDMA:ARB[:STATe] ?

This command enables or disables the CDMA modulation format.

Executing the command [:SOURCE]:RADio:CDMA:ARB[:STATe] ON sets up the internal hardware to generate the currently selected CDMA signal selection. This also activates the I/Q state and sets the I/Q source to internal.

ON (1) This choice sets up the internal hardware to generate the currently selected CDMA signal selection. This also activates the I/Q state and sets the I/Q source to internal.

OFF (0) This choice disables the CDMA modulation format.

*RST 0

Key Entry CDMA Off On

Remarks The enabled modulation is not present on RF carrier until you have activated the modulation by executing the command :OUTPut:MODulation[:STATe] ON.

Overriding the I/Q state and I/Q source functions can be achieved by using the I/Q menu.

CDMA2000 ARB Subsystem—Option 401 ([:SOURce]:RADio:CDMA2000:ARB)

:CLIPping:I

Supported E4438C with Option 401

`[:SOURce]:RADio:CDMA2000:ARB:CLIPping:I <val>`

`[:SOURce]:RADio:CDMA2000:ARB:CLIPping:I?`

This command clips (limits) the modulation level of the waveform's I component to a percentage of full scale.

The variable <val> is expressed in units of percent.

***RST** +1.00000000E+002

Range 10–100

Key Entry Clip |I| To

:CLIPping:POSition

Supported E4438C with Option 401

`[:SOURce]:RADio:CDMA2000:ARB:CLIPping:POSition PRE|POST`

`[:SOURce]:RADio:CDMA2000:ARB:CLIPping:POSition?`

This command specifies whether a waveform is clipped before (PRE) or after (POST) FIR filtering.

***RST** PRE

Key Entry Clip At PRE POST FIR Filter

:CLIPping:Q

Supported E4438C with Option 401

[:SOURce] :RADio:CDMA2000:ARB:CLIPping:Q <val>

[:SOURce] :RADio:CDMA2000:ARB:CLIPping:Q?

This command clips (limits) the modulation level of the waveform's Q component to a percentage of full scale.

The variable <val> is expressed in units of percent.

***RST** +1.00000000E+002

Range 10–100

Key Entry **Clip | Q | To**

:CLIPping:TYPE

Supported E4438C with Option 401

[:SOURce] :RADio:CDMA2000:ARB:CLIPping:TYPE IJQ | IORQ

[:SOURce] :RADio:CDMA2000:ARB:CLIPping:TYPE?

This command selects either IJQ or IORQ as the clipping type.

IJQ This choice clips (circular clipping) the combined I and Q waveform.

IORQ This choice independently clips (rectangular clipping) I and Q components of the waveform. I and Q can be clipped to different levels using this mode.

***RST** IORQ

Key Entry **Clipping Type | I+jQ | I | , | Q |**

:CLIPping[:IJQ]**Supported** E4438C with Option 401

[:SOURce]:RADio:CDMA2000:ARB:CLIPping[:IJQ] <val>

[:SOURce]:RADio:CDMA2000:ARB:CLIPping[:IJQ] ?

This command clips (limits) the modulation level of the combined I and Q waveform to a percentage of full scale.

The variable <val> is expressed in units of percent.

RST** +1.00000000E+002**Range** 10–100**Key Entry** **Clip |I+jQ| To*:IQ:EXtErnal:FILTer****Supported** E4438C with Option 401

[:SOURce]:RADio:CDMA2000:ARB:IQ:EXtErnal:FILTer 40e6 |THRough

[:SOURce]:RADio:CDMA2000:ARB:IQ:EXtErnal:FILTer?

This command selects the filter or through path for I/Q signals routed to the rear panel I and Q outputs. Selecting a filter using this command will automatically set “:IQ:EXtErnal:FILTer:AUTO” on [page 244](#) to OFF(0) mode.

40e6 This choice applies a 40 MHz baseband filter.

THRough This choice bypasses filtering.

RST** THR**Key Entry** **40.000 MHz Through*:IQ:EXtErnal:FILTer:AUTO****Supported** E4438C with Option 401

[:SOURce]:RADio:ARB:IQ:EXtErnal:FILTer:AUTO ON|OFF|1|0

[:SOURce]:RADio:ARB:IQ:EXtErnal:FILTer:AUTO?

This command enables or disables the automatic selection of the filters for I/Q signals routed to the rear panel I/Q outputs.

ON(1) This choice will automatically select a digital modulation filter optimized for the current signal generator settings.

OFF(0)	This choice disables the auto feature which lets you select a digital modulation filter or through path. Refer to “:IQ:EXTERNAL:FILTer” on page 244 for selecting a filter or through path.
*RST	1
Key Entry	I/Q Output Filter Manual Auto

:FILTer

Supported E4438C with Option 401

```
[:SOURce]:RADio:CDMA2000:ARB:FILTer RNYquist|NYquist|GAUSSian|RECTangle|
IS95|IS95_EQ|IS95_MOD|IS95_MOD_EQ|AC4Fm|WCDMA|IS2000SR3DS|UGGaussian|
"<user FIR>"
[:SOURce]:RADio:CDMA2000:ARB:FILTer?
```

This command selects the pre-modulation filter type.

IS95	This choice selects a filter that meets the criteria of the IS-95 standard.
IS95_EQ	This choice selects a filter which is a combination of the IS-95 filter (above) and the equalizer filter described in the IS-95 standard. This filter is only used for IS-95 baseband filtering.
IS95_MOD	This choice selects a filter that meets the criteria of the IS-95 error function (for improved adjacent channel performance) with lower passband rejection than the filter specified in the IS-95 standard.
IS95_MOD_EQ	This choice selects a filter which is a combination of the equalizer filter described in the IS-95 standard and a filter that meets the criteria of the IS-95 error function (for improved adjacent channel performance), with lower passband rejection.
WCDMa	This choice selects a 0.22 Nyquist filter optimized for ACP.
AC4Fm	This choice selects the Association of Public Safety Communications Officials (APCO) specified compatible 4-level frequency modulation (C4FM) filter.
IS2000SR3DS	This choice selects an IS-2000 standard, spread rate 3 direct spread filter.
UGGaussian	This choice selects a backwards compatible GSM Gaussian filter (Gaussian filter with a fixed BbT value of 0.300) for the ESG E44xxB Option UN3 or UN4.
"<user FIR>"	This variable is any FIR filter file that you have stored in memory. The variable needs no directory path indicating the location of the file, such as FIR: or

/USER/FIR. The command assumes the FIR directory. Refer to “File Name Variables” on page 13 for more information on file names.

***RST** IS95_MOD_EQ

Key Entry **Root Nyquist** **Nyquist** **Gaussian** **Rectangle** **IS-95** **IS-95 w/EQ**
IS-95 Mod **IS-95 Mod w/EQ** **APCO 25 C4FM** **WCDMA**
UN3/4 GSM Gaussian **IS-2000 SR3 DS** **User FIR**

:FILTer:ALPHa

Supported E4438C with Option 401

[:SOURce] :RADio:CDMA2000:ARB:FILTer:ALPHa <val>

[:SOURce] :RADio:CDMA2000:ARB:FILTer:ALPHa?

This command changes the Nyquist or root Nyquist filter alpha value.

The filter alpha value can be set to the minimum level (0), the maximum level (1), or in between by using fractional numeric values (0.001–0.999).

***RST** +5.00000000E–001

Range 0.000–1.000

Key Entry **Filter Alpha**

Remarks To change the current filter type, refer to “:FILTer” on page 245.

:FILTer:BBT

Supported E4438C with Option 401

[:SOURce] :RADio:CDMA2000:ARB:FILTer:BBT <val>

[:SOURce] :RADio:CDMA2000:ARB:FILTer:BBT?

This command changes the bandwidth-multiplied-by-bit-time (BbT) filter parameter.

The filter BbT value can be set to the minimum level (0), the maximum level (1), or in between by using fractional numeric values (0.001–0.999).

***RST** +5.00000000E–001

Range 0.000–1.000

Key Entry **Filter BbT**

Remarks This command is effective only after choosing a Gaussian filter. It does not have an effect on other types of filters.

To change the current filter type, refer to “:FILTer” on page 245.

:FILTer:CHANnel

Supported E4438C with Option 401

```
[ :SOURce] :RADio:CDMA2000:ARB:FILTer:CHANnel EVM|ACP  
[:SOURce]:RADio:CDMA2000:ARB:FILTer:CHANnel?
```

This command optimizes the Nyquist and root Nyquist filters to minimize error vector magnitude (EVM) or to minimize adjacent channel power (ACP).

EVM This choice provides the most ideal passband.

ACP This choice improves stopband rejection.

***RST** EVM

Key Entry **Optimize FIR For EVM ACP**

Remarks To change the current filter type, refer to “:FILTer” on page 245.

:HEADer:CLEar

Supported E4438C with Option 401

```
[ :SOURce] :RADio:CDMA2000:ARB:HEADer:CLEar
```

This command clears the header information from the header file used by this modulation format.

Key Entry **Clear Header**

Remarks The **CDMA2000 Off On** softkey must be set to On for this command to function.

:HEADer:SAVE

Supported E4438C with Option 401

```
[ :SOURce] :RADio:CDMA2000:ARB:HEADer:SAVE
```

This command saves the header information to the header file used by this modulation format.

Key Entry **Save Setup To Header**

Remarks The **CDMA2000 Off On** softkey must be set to On for this command to function.

:IQ:MODulation:ATTen

Supported E4438C with Option 401

```
[ :SOURCE ] :RADio:CDMA2000:ARB:IQ:MODulation:ATTen <val>
```

```
[ :SOURCE ] :RADio:CDMA2000:ARB:IQ:MODulation:ATTen?
```

This command attenuates the I/Q signals being modulated through the signal generator RF path.

The variable <val> is expressed in units of decibels (dB).

***RST** +2.00000000E+000

Range 0–40

Key Entry **Modulator Atten Manual Auto**

:IQ:MODulation:ATTen:AUTO

Supported E4438C with Option 401

```
[ :SOURCE ] :RADio:CDMA2000:ARB:IQ:MODulation:ATTen:AUTO ON|OFF|1|0
```

```
[ :SOURCE ] :RADio:CDMA2000:ARB:IQ:MODulation:ATTen:AUTO?
```

This command enables or disables the I/Q attenuation auto mode.

ON (1) This choice enables the attenuation auto mode which optimizes the modulator attenuation for the current conditions.

OFF (0) This choice holds the attenuator at its current setting or at a selected value. Refer to “:IQ:MODulation:ATTen” on page 248 for setting the attenuation value.

***RST** 1

Key Entry **Modulator Atten Manual Auto**

:IQ:MODulation:FILTer

Supported E4438C with Option 401

```
[ :SOURce ] :RADio:CDMA2000:ARB:IQ:MODulation:FILTer 2.1e6 | 40e6 | THRUgh
[ :SOURce ] :RADio:CDMA2000:ARB:IQ:MODulation:FILTer?
```

This command enables you to select a filter or through path for I/Q signals modulated onto the RF carrier. Selecting a filter using this command will automatically set “[:IQ:MODulation:FILTer:AUTO](#)” on [page 249](#) to OFF(0) mode.

2.1E6 This choice applies a 2.1 MHz baseband filter to the I/Q signals.

40E6 This choice applies a 40 MHz baseband filter to the I/Q signals.

THRUgh This choice bypasses filtering.

***RST** THR

Key Entry 2.100 MHz 40.000 MHz Through

:IQ:MODulation:FILTer:AUTO

Supported E4438C with Option 401

```
[ :SOURce ] :RADio:CDMA2000:ARB:IQ:MODulation:FILTer:AUTO ON | OFF | 1 | 0
[ :SOURce ] :RADio:CDMA2000:ARB:IQ:MODulation:FILTer:AUTO?
```

This command enables or disables the automatic selection of the filters for I/Q signals modulated onto the RF carrier.

ON(1) This choice will automatically select a digital modulation filter.

OFF(0) This choice disables the auto feature which lets you select a digital modulation filter or through path. Refer to “[:IQ:MODulation:FILTer](#)” on [page 302](#) for selecting a filter or through path.

***RST** 1

Key Entry I/Q Mod Filter Manual Auto

:IQMap

Supported E4438C with Option 401

```
[:SOURCE]:RADIO:CDMA2000:ARB:IQMap NORMAL|INVERTed
[:SOURCE]:RADIO:CDMA2000:ARB:IQMap?
```

This command selects whether the Q output will be normal or inverted.

NORMAL This choice selects normal polarity.

INVERTed This choice inverts the internal Q signal.

***RST** NORM

Key Entry **I/Q Mapping Normal Invert**

Remarks Inverting the Q output inverts the RF spectrum after the modulation.

:LINK

Supported E4438C with Option 401

```
[:SOURCE]:RADIO:CDMA2000:ARB:LINK FORWARD|REVERSE
[:SOURCE]:RADIO:CDMA2000:ARB:LINK?
```

This command selects the CDMA2000 forward or reverse link channel setup.

FORW This choice selects a basestation to mobile configuration.

REV This choice selects a mobile to basestation configuration.

***RST** FORW

Key Entry **Link Forward Reverse**

:LINK:FORWARD:SETup

Supported E4438C with Option 401

```
[:SOURCE]:RADIO:CDMA2000:ARB:LINK:FORWARD:SETup S1Pilot|S3DPilot|
S3MPilot|S19Chan|S3D9chan|S3M9chan|MCARrier|"<file name>"
[:SOURCE]:RADIO:CDMA2000:ARB:LINK:FORWARD:SETup?
```

This command selects a previously defined channel configuration for the CDMA2000 forward link.

S1Pilot This choice selects a spread rate 1, pilot-channel setup.

S3DPilot This choice selects a spread rate 3, direct spread, pilot-channel setup.

S3MPilot This choice selects a spread rate 3, multicarrier spread, pilot-channel setup.

S19Chan	This choice selects a spread rate 1, 9-channel setup.
S3D9Chan	This choice selects a spread rate 3, direct spread, 9-channel setup.
S3M9Chan	This choice selects a spread rate 3, multicarrier spread, 9-channel setup.
MCARrier	This choice enables the multicarrier mode. To set the CDMA2000 multicarrier type, refer to “” on page 251.
*RST	S19C
Key Entry	Pilot 9 Channel Spread Rate 1 Spread Rate 3 Multicarrier Off On Spreading Type Direct Mcarrier Custom CDMA2000 Carrier
Remarks	Refer to “File Name Variables” on page 13 for information on the file name syntax.

:LINK:FORWARD:SETup:MCARrier

Supported E4438C with Option 401

```
[ :SOURCE ] :RADIO:CDMA2000:ARB:LINK:FORWARD:SETup:MCARrier CAR2 | CAR3 | CAR4 |
"<file name>"
[ :SOURCE ] :RADIO:CDMA2000:ARB:LINK:FORWARD:SETup:MCARrier?
```

This command defines the type of multicarrier CDMA2000 setup.

CAR2	This choice specifies the following standard 2-carrier setup: Carrier 1: spread rate 3, direct spread, 9 channel; -2.5 MHz frequency offset; 0 dB power Carrier 2: spread rate 3, direct spread, 9 channel; 2.5 MHz frequency offset; 0 dB power
CAR3	This choice specifies the following standard 3-carrier setup: Carrier 1: spread rate 1, 9 channel; -1.25 MHz frequency offset; 0 dB power Carrier 2: spread rate 1, 9 channel; 0 kHz frequency offset; 0 dB power Carrier 3: spread rate 1, 9 channel; 1.25 MHz frequency offset; 0 dB power
CAR4	This choice specifies the following standard 2-carrier setup: Carrier 1: spread rate 1, 9 channel; -1.875 MHz frequency offset; 0 dB power Carrier 2: spread rate 1, 9 channel; -625 kHz frequency offset; 0 dB power

CDMA2000 ARB Subsystem—Option 401 ([:SOURCE]:RADIO:CDMA2000:ARB)

Carrier 3: spread rate 1, 9 channel; 625 kHz frequency offset; 0 dB power

Carrier 4: spread rate 1, 9 channel; 1.875 MHz frequency offset; 0 dB power

***RST**

CAR2

Key Entry

2 SR3 Carriers 3 Carriers 4 Carriers Custom CDMA2000 Multicarrier

Remarks

Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:LINK:FORWARD:SETup:MCARrier:STORe

Supported

E4438C with Option 401

```
[ :SOURCE ] :RADio:CDMA2000:ARB:LiNK:FORWard:SETup:MCARrier:
STORe "<file name>"
```

This command stores the current multicarrier setup information.

The stored file contains information including the digital modulation format, number of carriers, frequency spacing, and power settings for the multicarrier setup.

Key Entry

Store Custom Multicarrier

Remarks

Recall stored files from memory by executing the following command:

```
[ :SOURCE ] :RADio:CDMA2000:ARB:LiNK:FORWard:SETup:
MCARrier "<file name>"
```

Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:LINK:FORWARD:SETup:MCARrier:TABLE

Supported

E4438C with Option 401

```
[ :SOURCE ] :RADio:CDMA2000:ARB:LiNK:FORWard:SETup:MCARrier:TABLE INIT |
APPend|<chan_num>,S1Pilot|S3DPilot|S3MPilot|S19Chan|S3D9chan|S3M9chan|
"<file name>",<freq_offset>,<power>
[ :SOURCE ] :RADio:CDMA2000:ARB:LiNK:FORWard:SETup:MCARrier:
TABLE? <chan_num>
```

This command defines the multicarrier CDMA2000 waveform.

The variable <freq_offset> is expressed in units of Hertz (MHz).

The variable <power> is expressed in units of decibels (dB).

Channel type, frequency offset, and power level are returned when a query is initiated. The output format is as follows:

<channel type>, <freq_offset>, <power>

INIT	This choice clears the current information and creates a new one-row table, allowing for further definition using additional parameters.				
APPend	This choice adds rows to an existing table. The maximum number of rows for one table is 25.				
S1Pilot	This choice sets a single SR1 Pilot forward channel.				
S3DPilot	This choice sets a single direct spread pilot forward channel.				
S3MPilot	This choice sets a single SR3 multicarrier spread pilot forward channel.				
S19Chan	This choice sets a SR1 9 forward channel.				
S3D9chan	This choice sets a SR3 direct spread forward channel.				
S3M9chan	This choice sets a SR3 multicarrier spread 9 forward channel.				
*RST	channel type:	S3D9CHAN	<freq_offset>:	-2.50000000E+006	
	<power>:	+0.00000000E+000			
Range	<freq_offset>:	-15E6 to 15E6	<power>:	-40 to 0	
Key Entry	Select File	Insert Row	SR1 Pilot	SR3 Direct Pilot	SR3 Mcarrier Pilot
	SR3 Mcarrier Pilot	SR1 9 Channel	SR3 Direct 9 Channel		
	SR3 Mcarrier 9 Channel	Custom CDMA2000 Carrier			
Field Entry	Freq Offset	Power			
Remarks	Refer to “File Name Variables” on page 13 for information on the file name syntax.				

:LINK:FORWARD:SETup:MCARrier:TABLE:NCARriers

Supported E4438C with Option 401

[:SOURCE] :RADio:CDMA2000:ARB:LINK:FORWARD:SETup:MCARrier:TABLE:NCARriers?

This command queries the number of carriers specified for the multicarrier CDMA2000 waveform.

***RST** +2

:LINK:FORWARD:SETup:STORe

Supported E4438C with Option 401

```
[ :SOURCE ] :RADio:CDMA2000:ARB:LINK:FORWARD:SETup:STORe "<file name>"
```

This command stores the current custom CDMA2000 state, using a designated file name, to the signal generator memory.

Along with the contents of the CDMA2000 channel table editor (channel types, Walsh code, power levels, PN offset, and data), this command stores the following information to the signal generator memory:

- FIR filter
- FIR filter file name
- FIR filter alpha
- FIR filter BbT
- FIR filter channel (EVM or ACP)
- I/Q mapping
- link
- spread type
- spread rate
- ARB reference clock source (internal or external)
- ARB reference clock frequency
- clipping
- multicarrier spacing
- radio configuration

Key Entry **Store Custom CDMA State**

Remarks Recall this stored file by executing the following command:

```
[ :SOURCE ] :RADio:CDMA2000:ARB:LINK:FORWARD:
SETup "<file name>"
```

Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:LINK:FORWARD:SETup:TABLE:APPLy

Supported E4438C with Option 401

```
[ :SOURCE ] :RADio:CDMA2000:ARB:LINK:FORWARD:SETup:TABLE:APPLy
```

This command generates a CDMA2000 signal based on the current values in the CDMA2000 channel setup table editor.

Key Entry Apply Channel Setup

:LINK:FORWARD:SETup:TABLE:CHANnel

Supported E4438C with Option 401

```
[ :SOURCE ] :RADio:CDMA2000:ARB:LINK:FORWARD:SETup:TABLE:CHANnel INIT |
APPend|<chan_num>,<chan_type>,<config>,<data_rate>,<walsh>,<power>,<pn_offset>,RANDOM|<data_val>
```

```
[ :SOURCE ] :RADio:CDMA2000:ARB:LINK:FORWARD:SETup:TABLE:
CHANnel? <chan_num>
```

This command defines the channel parameters of the CDMA2000 signal.

The variable <power> is expressed in units of decibels (dB).

The variable <data_rate> is expressed in units bits per second (bps).

The channel type, configuration type, data rate, walsh code, power, pn offset, and data value are returned when a query is initiated. The output format is as follows:

```
<chan_type>,<config>,<data_rate>,<walsh>,<power>,<pn_offset>,<data_val>
```

INIT This choice clears the current information and creates a new one-row table, allowing for further definition using additional parameters.

APPend This choice adds rows to an existing table.

RANDom This choice selects a randomly generated data value.

<data_val> This variable specifies a specific data value.

***RST** channel type: PIL <config>: +3 <data_rate>: +3.84000000E+004
<walsh>: +0 <power>: -7.00000000E+000 <pn_offset>: +0
<data_val>: 0

Range <data_rate>: 1500–307200 <walsh>: 0–63 <power>: –40 to 0
<pn_offset>: 0–511 <data_val>: 0000000–11111111

Key Entry **Edit Channel Setup** **Insert Row** **Config** **Rate**
Walsh Code **PN Offset**

Remarks Queries initiated for this command must be followed by a specific channel number.

The above *RST value represents a query of channel one.

:LINK:FORWARD:SETup:TABLE:NCHannels**Supported** E4438C with Option 401

[:SOURCE]:RADIO:CDMA2000:ARB:LINK:FORWARD:SETup:TABLE:NCHannels?

This command queries the number of channels specified for the CDMA2000 link setup.

RST** +9**:LINK:FORWARD:SETup:TABLE:PADJust*Supported** E4438C with Option 401

[:SOURCE]:RADIO:CDMA2000:ARB:LINK:FORWARD:SETup:TABLE:PADJust EQUAL | SCALE

This command sets the code domain power (the relative power in each of the channels).

EQUAL Sets all channels to equal power, and the total power to 0 dB.

SCALE Scales all of the current channel powers so that the total power equals 0 dB, keeping the previous power ratios between the individual channels.

Key Entry **Equal Powers** **Scale To 0dB****:LINK:REVERSE:RCONfig****Supported** E4438C with Option 401

[:SOURCE]:RADIO:CDMA2000:ARB:LINK:REVERSE:RCONfig <val>

[:SOURCE]:RADIO:CDMA2000:ARB:LINK:REVERSE:RCONfig?

This command sets the radio configuration for all reverse link channels.

RST** +1**Range** 1–4**Key Entry** **Radio Config*Remarks** Changing the radio configuration results in changes to the channel data rate.

:LINK:REVerse:SETup

Supported E4438C with Option 401

```
[:SOURce]:RADio:CDMA2000:ARB:LINK:REVerse:SETup S1Pilot|S3Pilot|
S15Chan|S35Chan|S18Chan| "<file name>"
[:SOURce]:RADio:CDMA2000:ARB:LINK:REVerse:SETup?
```

This command selects a previously defined channel configuration for the CDMA2000 reverse link.

- S1Pilot This choice selects a spread rate 1, pilot-channel setup.
- S3Pilot This choice selects a spread rate 3, pilot-channel setup.
- S15Chan This choice selects a spread rate 1, 5-channel setup.
- S35Chan This choice selects a spread rate 3, 5-channel setup.
- S18Chan This choice selects a spread rate 1, 8-channel setup.

***RST** S15Chan

Key Entry **Pilot 5 Channel 8 Channel Custom CDMA2000 State**
Spread Rate 1 Spread Rate 3

Remarks Refer to [“File Name Variables”](#) on page 13 for information on the file name syntax.

:LINK:REVerse:SETup:STORE

Supported E4438C with Option 401

```
[ :SOURCE ] :RADio:CDMA2000:ARB:LINK:REVerse:SETup:STORE "<file name>"
```

This command stores the current custom CDMA2000 state, using a designated file name, to the signal generator memory.

Along with the contents of the CDMA2000 channel table editor (channel types, Walsh code, power levels, PN offset, and data), this command stores the following information to the signal generator memory:

- FIR filter
- FIR filter file name
- FIR filter alpha
- FIR filter BbT
- FIR filter channel (EVM or ACP)
- I/Q mapping
- link
- spread type
- spread rate
- ARB reference clock source (internal or external)
- ARB reference clock frequency
- clipping
- multicarrier spacing
- radio configuration

Key Entry **Store Custom CDMA State**

Remarks Recall this stored file by executing the following command:

```
[ :SOURCE ] :RADio:CDMA2000:ARB:LINK:REVerse:
SETup "<file name>"
```

Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:LINK:REVerse:SETup:TABLE:APPLY

Supported E4438C with Option 401

```
[ :SOURCE ] :RADio:CDMA2000:ARB:LINK:REVerse:SETup:TABLE:APPLY
```

This command generates a CDMA2000 signal based on the current values in the CDMA2000 channel setup table editor.

Key Entry **Apply Channel Setup**

:LINK:REVerse:SETup:TABLE:CHANnel

Supported E4438C with Option 401

```
[ :SOURCE] :RADio:CDMA2000:ARB:LINK:REVerse:SETup:TABLE:CHANnel INIT|
APPend|<chan_num>, <chan_type>, <data_rate>, <power>, RANDOM| <data_val>
[:SOURCE] :RADio:CDMA2000:ARB:LINK:REVerse:SETup:TABLE:
CHANnel? <chan_num>
```

This command defines the channel parameters for the CDMA2000 signal.

The channel number, configuration type, data rate, walsh code, power, pn offset, and data value are returned when a query is initiated. The output format is as follows:

```
<chan_type>,<data_rate>,<power>,<data_val>
```

The variable <data_rate> is expressed as bits per second (bps).

The variable <power> is expressed in units of decibels (dB).

INIT This choice clears the current information and creates a new one-row table, allowing for further definition using additional parameters.

APPend This choice adds rows to an existing table. The maximum number of channels in a table is eight.

RANDom This choice selects a randomly generated data value.

<data_val> This variable customizes a specific data value.

***RST** *channel type: PIL <data_rate>: +3.84000000E+004*
<power>: -7.00000000E+000 <pn_offset>: +0 <data_val>: 0

Range *<data_rate>: 1500–9600 <power>: –40 to 0*
<data_val>: 0000000–11111111

Key Entry **Edit Channel Setup Insert Row Config Rate**
Walsh Code PN Offset

Remarks Queries initiated for this command must be followed by a specific channel number.

The above *RST value represents a query of channel one.

:LINK:REverse:SETup:TABLE:NCHannels**Supported** E4438C with Option 401

[:SOURCE]:RADIO:CDMA2000:ARB:LINK:REverse:SETup:TABLE:NCHannels?

This command query returns the number of channels for the CDMA2000 link reverse setup.

RST** +5**:LINK:REverse:SETup:TABLE:PADJust*Supported** E4438C with Option 401

[:SOURCE]:RADIO:CDMA2000:ARB:LINK:REverse:SETup:TABLE:PADJust EQUAL | SCALE

This command customizes the code domain power (the relative power in each of the channels).

EQUAL This choice changes all channels to equal power, and the total power to 0 dB.

SCALE This choice scales all of the current channel powers so that the total power equals 0 dB, keeping the previous power ratios between the individual channels.

Key Entry **Equal Powers** **Scale To 0dB****:MDESTination:PULSE****Supported** E4438C with Option 401[:SOURCE]:RADIO:CDMA2000:ARB:MDESTination:PULSE NONE | M1 | M2 | M3 | M4
[:SOURCE]:RADIO:CDMA2000:ARB:MDESTination:PULSE?

This command routes the selected marker to the Pulse/RF Blanking function. The NONE parameter clears the marker for the Pulse/RF Blanking function.

***RST** NONE**Key Entry** **None** **Marker 1** **Marker 2** **Marker 3** **Marker 4**

:MDESTINATION:AAMPLITUDE

Supported E4438C with Option 401

```
[ :SOURCE ] :RADIO:CDMA2000:ARB:MDESTINATION:AAMPLITUDE NONE | M1 | M2 | M3 | M4  
[ :SOURCE ] :RADIO:CDMA2000:ARB:MDESTINATION:AAMPLITUDE?
```

This command routes the selected marker to the Alternate Amplitude function. The NONE parameter clears the marker for the Alternate Amplitude function.

***RST** NONE

Key Entry **None** **Marker 1** **Marker 2** **Marker 3** **Marker 4**

:MDESTINATION:ALCHOLD

Supported E4438C with Option 401

```
[ :SOURCE ] :RADIO:CDMA2000:ARB:MDESTINATION:ALCHOLD NONE | M1 | M2 | M3 | M4  
[ :SOURCE ] :RADIO:CDMA2000:ARB:MDESTINATION:ALCHOLD?
```

This command routes the selected marker to the ALC Hold function. The NONE parameter clears the marker for the ALC Hold function.

***RST** NONE

:MPOLARITY:MARKER1

Supported E4438C with Option 401

```
[ :SOURCE ] :RADIO:CDMA2000:ARB:MPOLARITY:MARKER1 NEGATIVE | POSITIVE  
[ :SOURCE ] :RADIO:CDMA2000:ARB:MPOLARITY:MARKER1?
```

This command sets the polarity for marker 1.

***RST** POS

Key Entry **Marker 1 Polarity Neg Pos**

:MPOLarity:MARKer2

Supported E4438C with Option 401

```
[ :SOURCE ] :RADIO:CDMA2000:ARB:MPOLarity:MARKer2 NEGative|POSitive  
[ :SOURCE ] :RADIO:CDMA2000:ARB:MPOLarity:MARKer2?
```

This command sets the polarity for marker 2.

***RST** POS

Key Entry **Marker 2 Polarity Neg Pos**

:MPOLarity:MARKer3

Supported E4438C with Option 401

```
[ :SOURCE ] :RADIO:CDMA2000:ARB:MPOLarity:MARKer3 NEGative|POSitive  
[ :SOURCE ] :RADIO:CDMA2000:ARB:MPOLarity:MARKer3?
```

This command sets the polarity for marker 3.

***RST** POS

Key Entry **Marker 3 Polarity Neg Pos**

:MPOLarity:MARKer4

Supported E4438C with Option 401

```
[ :SOURCE ] :RADIO:CDMA2000:ARB:MPOLarity:MARKer4 NEGative|POSitive  
[ :SOURCE ] :RADIO:CDMA2000:ARB:MPOLarity:MARKer4?
```

This command sets the polarity for marker 4.

***RST** POS

Key Entry **Marker 4 Polarity Neg Pos**

:REFeRence:EXTeRnal:FREQuency

Supported E4438C with Option 401

```
[ :SOURCE ] :RADio:CDMA2000:ARB:REFeRence:EXTeRnal:FREQuency <val>  
[ :SOURCE ] :RADio:CDMA2000:ARB:REFeRence:EXTeRnal:FREQuency?
```

This command allows you to enter the frequency of the applied external reference.

The variable <val> is expressed in units of Hertz (KHz–MHz).

***RST** +1.00000000E+007

Range 2.5E5–1E8

Key Entry **Reference Freq**

Remarks The value specified by this command is effective only when you are using an external ARB reference applied to the BASEBAND GEN REF IN rear panel connector.

To specify external as the ARB reference source type, refer to “:REFeRence[:SOURCE]” on page 263.

:REFeRence[:SOURCE]

Supported E4438C with Option 401

```
[ :SOURCE ] :RADio:CDMA2000:ARB:REFeRence [ :SOURCE ] INTernal | EXTeRnal  
[ :SOURCE ] :RADio:CDMA2000:ARB:REFeRence [ :SOURCE ] ?
```

This command selects either an internal or external reference for the waveform clock.

***RST** INT

Key Entry ARB Reference Ext Int

Remarks If the EXTeRnal choice is selected, the external frequency value *must* be entered and the signal must be applied to the BASEBAND GEN REF IN rear panel connector.

Refer to “:REFeRence:EXTeRnal:FREQuency” on page 263 to enter the external reference frequency.

:RETRigger**Supported** E4438C with Option 401

[:SOURce]:RADio:CDMA:ARB:RETRigger ON|OFF|IMMEDIATE

[:SOURce]:RADio:CDMA:ARB:RETRigger?

This command enables or disables the ARB retriggering mode; the retrigger mode controls how the retriggering function performs while a waveform is playing.

ON (1) This choice specifies that if a trigger occurs while a waveform is playing, the waveform will retrigger at the end of the current waveform sequence and play once more.

OFF (0) This choice specifies that if a trigger occurs while a waveform is playing, the trigger will be ignored.

IMMEDIATE This choice specifies that if a trigger occurs while a waveform is playing, the waveform will reset and replay from the start immediately upon receiving a trigger.

RST** ON**Key Entry** **On Off Immediate*:REVision****Supported** E4438C with Option 401

[:SOURce]:RADio:CDMA2000:ARB:REVision?

This command queries the revision number of the current CDMA2000 format.

RST** 8**:SCLock:RATE*Supported** E4438C with Option 401

[:SOURce]:RADio:CDMA2000:ARB:SCLock:RATE <val>

[:SOURce]:RADio:CDMA2000:ARB:SCLock:RATE?

This command sets the sample clock rate for the CDMA2000 modulation format.

The variable <val> is expressed in units of hertz.

***RST** +1.00000000E+008**Range** 1–1E8**Key Entry** **ARB Sample Clock**

Remarks The modulation format should be active before executing this command. If this command is executed before the modulation format is active, the entered value will be overridden by a calculated factory default value. Refer to “[:STATe]” on [page 273](#) to activate the modulation format.

:SPReading:RATE

Supported E4438C with Option 401

```
[:SOURce]:RADio:CDMA2000:ARB:SPReading:RATE 1|3
[:SOURce]:RADio:CDMA2000:ARB:SPReading:RATE?
```

This command opens a submenu that provides the available spread rate choices for the CDMA2000 waveform.

***RST** +1

Key Entry **Spread Rate 1** **Spread Rate 3**

Remarks The spread rate multiplied by 1.2288 MHz is equal to the chip rate. For example, spread rate 3 equals a 3.6864 Mcps chip rate.

Higher data rates can be achieved using spread rate 3, though offset by greater bandwidth/spectrum usage.

Changing the spread rate to either 1 or 3 will also change the initial setup menu, resulting in a configuration that is specific to the current spread rate.

:SPReading:TYPE

Supported E4438C with Option 401

```
[:SOURce]:RADio:CDMA2000:ARB:SPReading:TYPE DIRect|MCARrier
[:SOURce]:RADio:CDMA2000:ARB:SPReading:TYPE?
```

This command selects the spreading type for a CDMA2000 waveform.

***RST** DIR

Key Entry **Spreading Type Direct Mcarrier**

Remarks Multicarrier is not available in the reverse link setup.

Note that changing the spreading type will result in the setup changing to a setup for the current spreading type.

:SPReading:TYPE:MCARrier:SPACing**Supported** E4438C with Option 401

```
[:SOURce]:RADio:CDMA2000:ARB:SPReading:TYPE:MCARrier:SPACing 1.23MHz |
1.25MHz
[:SOURce]:RADio:CDMA2000:ARB:SPReading:TYPE:MCARrier:SPACing?
```

This command selects the multicarrier frequency spacing.

RST** +1.25000000E+006**Key Entry** **1.23 MHz** **1.25 MHz*Remarks** Cellular band uses 1.23 MHz and PCS band uses 1.25 MHz.**:TRIGger:TYPE****Supported** E4438C with Option 401

```
[:SOURce]:RADio:CDMA2000:ARB:TRIGger:TYPE CONTinuous | SINGLE | GATE
[:SOURce]:RADio:CDMA2000:ARB:TRIGger:TYPE?
```

:TRIGger:TYPE**Supported** E4438C with Option 401

```
[:SOURce]:RADio:CDMA:ARB:TRIGger:TYPE CONTinuous | SINGLE | GATE
[:SOURce]:RADio:CDMA:ARB:TRIGger:TYPE?
```

This command sets the trigger mode (type) that controls the waveform's playback.

Triggers control the playback by telling the ESG when to play the modulating signal (waveform). Depending on the trigger settings for the ESG, the waveform playback can occur once, continuously, or the ESG may start and stop playing the waveform repeatedly (GATE mode).

A trigger signal comprises both positive and negative signal transitions (states), which are also called high and low periods. You can configure the ESG to trigger on either state of the trigger signal. It is common to have multiple triggers, also referred to as trigger occurrences or events, occur when the signal generator requires only a single trigger. In this situation, the ESG recognizes the first trigger and ignores the rest.

When you select a trigger mode, you may lose the signal (carrier plus modulating) from the RF output until you trigger the waveform. This is because the ESG sets the I and Q signals to zero volts prior to the first trigger event, which suppresses the carrier. After the first trigger event, the waveform's final I

and Q levels determine whether you will see the carrier signal or not (zero = no carrier, other values = carrier visible). At the end of most files, the final I and Q points are set to a value other than zero.

There are four parts to configuring the trigger:

- Choosing the trigger type, which controls the waveform’s transmission.
- Setting the waveform’s response to triggers:
 - CONTInuous, see “:TRIGger:TYPE:CONTInuous[:TYPE]” on page 268
 - SINGle, see “:RETRigger” on page 264
 - GATE, selecting the mode also sets the response
- Selecting the trigger source (see “:TRIGger[:SOURce]” on page 269), which determines how the ESG receives its trigger signal, internally or externally. The GATE choice requires an external trigger.
- Setting the trigger polarity when using an external source:
 - CONTInuous and SINGle see “:TRIGger[:SOURce]:EXTernal:SLOPe” on page 271
 - GATE, see “:TRIGger:TYPE:GATE:ACTive” on page 268

For more information on triggering, see the *E4428C/38C ESG Signal Generators User’s Guide*.

The following list describes the trigger type command choices:

CONTInuous	Upon triggering, the waveform repeats continuously.
SINGle	Upon triggering, the waveform segment or sequence plays once.
GATE	An external trigger signal repeatedly starts and stops the waveform’s playback (transmission). The time duration for playback depends on the duty period of the trigger signal and the gate polarity selection (see “:TRIGger:TYPE:GATE:ACTive” on page 268). The waveform plays during the inactive state and stops during the active polarity selection state. The active state can be set high or low. The gate mode works only with an external trigger source.

NOTE The ARB gating behavior described above is opposite to the gating behavior for real-time custom mode.

*RST	CONT		
Key Entry	Continuous	Single	Gated

:TRIGger:TYPE:CONTInuous[:TYPE]**Supported** E4438C with Option 401

```
[:SOURce]:RADio:CDMA2000:ARB:TRIGger:TYPE:CONTInuous[:TYPE] FREE|
TRIGger|RESet
[:SOURce]:RADio:CDMA2000:ARB:TRIGger:TYPE:CONTInuous[:TYPE] ?
```

This command selects the waveform's response to a trigger signal while using the continuous trigger mode.

For more information on triggering and to select the continuous trigger mode, see [“:TRIGger:TYPE” on page 266](#).

The following list describes the waveform's response to each of the command choices:

FREE	Turning the ARB format on immediately triggers the waveform. The waveform repeats until you turn the format off, select another trigger, or choose another waveform file.
TRIGger	The waveform waits for a trigger before play begins. When the waveform receives the trigger, it plays continuously until you turn the format off, select another trigger, or choose another waveform file.
RESet	The waveform waits for a trigger before play begins. When the waveform receives the trigger, it plays continuously. Subsequent triggers reset the waveform to the beginning. For a waveform sequence, this means to the beginning of the first segment in the sequence.
*RST	FREE
Key Entry	Free Run Trigger & Run Reset & Run

:TRIGger:TYPE:GATE:ACTive**Supported** E4438C with Option 401

```
[:SOURce]:RADio:CDMA2000:ARB:TRIGger:TYPE:GATE:ACTive LOW|HIGH
[:SOURce]:RADio:CDMA2000:ARB:TRIGger:TYPE:GATE:ACTive?
```

This command selects the active state (gate polarity) of the gate while using the gating trigger mode.

The LOW and HIGH selections correspond to the low and high states of an external trigger signal. For example, when you select HIGH, the active state occurs during the high of the trigger signal. When the active state occurs, the ESG stops the waveform playback at the last played sample point, then restarts the playback at the next sample point when the inactive state occurs. For more information on triggering and to select gating as the trigger mode, see [“:TRIGger:TYPE” on page 266](#).

The following list describes the ESG’s gating behavior for the polarity selections:

LOW	The waveform playback stops when the trigger signal goes low (active state) and restarts when the trigger signal goes high (inactive state).
HIGH	The waveform playback stops when the trigger signal goes high (active state) and restarts when the trigger signal goes low (inactive state).
*RST	HIGH
Key Entry	Gate Active Low High

:TRIGger[:SOURce]

Supported E4438C with Option 401

```
[ :SOURce ] :RADio:CDMA2000:ARB:TRIGger [ :SOURce ] KEY|EXT|BUS
[ :SOURce ] :RADio:CDMA2000:ARB:TRIGger [ :SOURce ] ?
```

This command sets the trigger source.

For more information on triggering, see “[:TRIGger:TYPE](#)” on page 266. The following list describes the command choices:

KEY	This choice enables manual triggering by pressing the front-panel Trigger hardkey.
EXT	An externally applied signal triggers the waveform. This is the only choice that works with gating. The following conditions affect an external trigger: <ul style="list-style-type: none"> • The input connector selected for the trigger signal. You have a choice between the rear-panel PATTERN TRIG IN connector or the PATT TRIG IN 2 pin on the rear-panel AUXILIARY I/O connector. To make the connector selection, see “:TRIGger[:SOURce]:EXTernal[:SOURce]” on page 272. For more information on the connectors and on connecting the cables, see the <i>ESG User’s Guide</i>. • The trigger signal polarity: <ul style="list-style-type: none"> — gating mode, see “:TRIGger:TYPE:GATE:ACTive” on page 268 — continuous and single modes, see “:TRIGger[:SOURce]:EXTernal:SLOPe” on page 271

- The time delay between when the ESG receives a trigger and when the waveform responds to the trigger. There are two parts to setting the delay:
 - setting the amount of delay, see “[:TRIGger[:SOURce]:EXternal:DElay” on page 270
 - turning the delay on, see “[:TRIGger[:SOURce]:EXternal:DElay:STATe” on page 271

BUS This choice enables triggering over the GPIB or LAN using the *TRG or GET commands or the AUXILIARY INTERFACE (RS-232) using the *TRG command.

***RST** EXT

Key Entry **Trigger Key** **Ext** **Bus**

[:TRIGger[:SOURce]:EXternal:DElay

Supported E4438C with Option 401

```
[ :SOURce ] :RADio:CDMA2000:ARB:TRIGger [ :SOURce ] :EXternal:DElay <val>
[ :SOURce ] :RADio:CDMA2000:ARB:TRIGger [ :SOURce ] :EXternal:DElay?
```

This command sets the amount of time to delay the ESG’s response to an external trigger.

The delay is a path (time) delay between when the ESG receives the trigger and when it responds to the trigger. For example, configuring a trigger delay of two seconds, causes the ESG to wait two seconds after receipt of the trigger before the ESG plays the waveform.

The delay does not occur until you turn it on (see “[:TRIGger[:SOURce]:EXternal:DElay:STATe” on page 271). You can set the delay value either before or after turning it on.

For more information on configuring an external trigger source and to select external as the trigger source, see “[:TRIGger[:SOURce]]” on page 269.

The unit of measurement for the variable <val> is in seconds (nsec–sec).

***RST** +1.00000000E–003

Range 1E–8 to 4E1

Key Entry **Ext Delay Time**

:TRIGger[:SOURce]:EXTErnal:DELay:STATe

Supported E4438C with Option 401

```
[ :SOURce ] :RADio:CDMA2000:ARB:TRIGger [ :SOURce ] :EXTErnal:DELay:STATe ON |  
OFF | 1 | 0  
[ :SOURce ] :RADio:CDMA2000:ARB:TRIGger [ :SOURce ] :EXTErnal:DELay:STATe?
```

This command enables or disables the operating state of the external trigger delay function.

For setting the delay time, see “:TRIGger[:SOURce]:EXTErnal:DELay” on page 270, and for more information on configuring an external source, see “:TRIGger[:SOURce]” on page 269.

***RST** 0

Key Entry Ext Delay Off On

:TRIGger[:SOURce]:EXTErnal:SLOPe

Supported E4438C with Option 401

```
[ :SOURce ] :RADio:CDMA2000:ARB:TRIGger [ :SOURce ] :EXTErnal:SLOPe POSitive |  
NEGative  
[ :SOURce ] :RADio:CDMA2000:ARB:TRIGger [ :SOURce ] :EXTErnal:SLOPe?
```

This command sets the polarity for an external trigger signal while using the continuous, single triggering mode. To set the polarity for gating, see “:TRIGger:TYPE:GATE:ACTive” on page 268.

The POSitive and NEGative selections correspond to the high (positive) and low (negative) states of the external trigger signal. For example, when you select POSitive, the waveform responds (plays) during the high state of the trigger signal. When the PSG receives multiple trigger occurrences when only one is required, the signal generator uses the first trigger and ignores the rest.

For more information on configuring an external trigger source and to select external as the trigger source, see “:TRIGger[:SOURce]” on page 269.

***RST** NEG

Key Entry Ext Polarity Neg Pos

:TRIGger[:SOURce]:EXTernal[:SOURce]

Supported E4438C with Option 401

```
[ :SOURce ] :RADio:CDMA2000:ARB:TRIGger [ :SOURce ] :EXTernal [ :SOURce ] EPT1 |
EPT2 | EPTRIGGER1 | EPTRIGGER2
[ :SOURce ] :RADio:CDMA2000:ARB:TRIGger [ :SOURce ] :EXTernal [ :SOURce ] ?
```

This command selects which PATTERN TRIG IN connection the ESG uses to accept an externally applied trigger signal when external is the trigger source selection.

For more information on configuring an external trigger source and to select external as the trigger source, see “:TRIGger[:SOURce]” on page 269. For more information on the rear-panel connectors, see the *E4428C/38C ESG Signal Generators User’s Guide*.

The following list describes the command choices:

EPT1	This choice is synonymous with EPTRIGGER1 and selects the PATTERN TRIG IN rear-panel connector.
EPT2	This choice is synonymous with EPTRIGGER2 and selects the PATT TRIG IN 2 pin on the rear-panel AUXILIARY I/O connector.
EPTRIGGER1	This choice is synonymous with EPT1 and selects the PATTERN TRIG IN rear-panel connector.
EPTRIGGER2	This choice is synonymous with EPT2 and selects the PATT TRIG IN 2 pin on the rear-panel AUXILIARY I/O connector.
*RST	EPT1
Key Entry	Patt Trig In 1 Patt Trig In 2

[:STATE]

Supported E4438C with Option 401

[:SOURCE] :RADIO:CDMA2000:ARB [:STATE] ON | OFF | 1 | 0

[:SOURCE] :RADIO:CDMA2000:ARB [:STATE] ?

This command enables or disables the CDMA2000 modulation format.

ON (1) This choice enables the CDMA2000 modulation capability and sets up the internal hardware to generate the currently selected CDMA2000 signal selection.

This choice also activates the I/Q state and sets the I/Q source to internal.

OFF (0) This choice disables the CDMA2000 baseband signal capability.

***RST** 0

Key Entry **CDMA2000 Off On**

Dmodulation Subsystem—Option 001/601 or 002/602 ([:SOURce]:RADio:DMODulation:ARB)

:IQ:EXTErnal:FILTer

Supported E4438C with Option 001/601 or 002/602

```
[:SOURce]:RADio:DMODulation:ARB:IQ:EXTErnal:FILTer 40e6|THROUGH
[:SOURce]:RADio:DMODulation:ARB:IQ:EXTErnal:FILTer?
```

This command selects the filter or through path for I/Q signals routed to the rear panel I and Q outputs. Selecting a filter using this command will automatically set “:IQ:EXTErnal:FILTer:AUTO” on [page 274](#) to OFF(0) mode.

40e6 This choice applies a 40 MHz baseband filter.

THROUGH This choice bypasses filtering.

*RST THR

Key Entry 40.000 MHz Through

:IQ:EXTErnal:FILTer:AUTO

Supported E4438C with Option 001/601 or 002/602

```
[:SOURce]:RADio:DMODulation:ARB:IQ:EXTErnal:FILTer:AUTO ON|OFF|1|0
[:SOURce]:RADio:DMODulation:ARB:IQ:EXTErnal:FILTer:AUTO?
```

This command enables or disables the automatic selection of the filters for I/Q signals routed to the rear panel I/Q outputs.

ON(1) This choice will automatically select a digital modulation filter optimized for the current signal generator settings.

OFF(0) This choice disables the auto feature which lets you select a digital modulation filter or through path. Refer to “:IQ:EXTErnal:FILTer” on [page 274](#) for selecting a filter or through path.

*RST 1

Key Entry I/Q Output Filter Manual Auto

:FILTer

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURce] :RADio:DMODulation:ARB:FILTer RNYQuist | NYQuist | GAUSSian |
RECTangle | IS95 | IS95_EQ | IS95_MOD | IS95_MOD_EQ | WCDMa | AC4Fm | IS2000SR3DS |
UGGaussian | "<user FIR>"
[:SOURce] :RADio:DMODulation:ARB:FILTer?
```

This command specifies the pre-modulation filter type.

IS95	This choice selects a filter that meets the criteria of the IS-95 standard.
IS95_EQ	This choice selects a filter which is a combination of the IS-95 filter (above) and the equalizer filter described in the IS-95 standard. This filter is only used for IS-95 baseband filtering.
IS95_MOD	This choice selects a filter that meets the criteria of the IS-95 error function (for improved adjacent channel performance) with lower passband rejection than the filter specified in the IS-95 standard.
IS95_MOD_EQ	This choice selects a filter which is a combination of the equalizer filter described in the IS-95 standard and a filter that meets the criteria of the IS-95 error function (for improved adjacent channel performance), with lower passband rejection.
WCDMa	This choice selects a 0.22 Nyquist filter optimized for ACP.
AC4Fm	This choice selects a predefined Association of Public Safety Communications Officials (APCO) specified compatible 4-level frequency modulation (C4FM) filter.
IS2000SR3DS	This choice selects an IS-2000 standard, spread rate 3 direct spread filter.
UGGaussian	This choice selects a backwards compatible GSM Gaussian filter (Gaussian filter with a fixed BbT value of 0.300) for the ESG E44xxB Option UN3 or UN4.
"<user FIR>"	This variable is any FIR filter file that you have stored in memory. The variable needs no directory path indicating the location of the file, such as FIR: or /USER/FIR. The command assumes the FIR directory. Refer to “File Name Variables” on page 13 for more information on file names.

***RST** RNYQ

Key Entry	Root Nyquist	Nyquist	Gaussian	Rectangle	IS-95	IS-95 w/EQ
	IS-95 Mod	IS-95 Mod w/EQ	WCDMA	IS-2000 SR3 DS	APCO 25 C4FM	
	UN3/4 GSM Gaussian	User FIR				

:FILTer:ALPHa

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURCE ] :RADio:DMODulation:ARB:FILTer:ALPHa <val>
```

```
[ :SOURCE ] :RADio:DMODulation:ARB:FILTer:ALPHa?
```

This command changes the Nyquist or root Nyquist filter alpha value.

The filter alpha value can be set to the minimum level (0), the maximum level (1), or in between by using fractional numeric values (0.001–0.999).

***RST** +3.50000000E–001

Range 0.000–1.000

Key Entry **Filter Alpha**

Remarks To change the current filter type, refer to “:FILTer” on page 275.

:FILTer:BBT

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURCE ] :RADio:DMODulation:ARB:FILTer:BBT <val>
```

```
[ :SOURCE ] :RADio:DMODulation:ARB:FILTer:BBT?
```

This command changes the bandwidth-multiplied-by-bit-time (BbT) filter parameter.

The filter BbT value can be set to the minimum level (0), the maximum level (1), or in between by using fractional numeric values (0.001–0.999).

***RST** +5.00000000E–001

Range 0.000–1.000

Key Entry **Filter BbT**

Remarks This command is effective only after choosing a Gaussian filter. It does not have an effect on other types of filters.

To change the current filter type, refer to “:FILTer” on page 275.

:FILTer:CHANnel

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURce ] :RADio:DMODulation:ARB:FILTer:CHANnel EVM|ACP
[ :SOURce ] :RADio:DMODulation:ARB:FILTer:CHANnel?
```

This command optimizes the Nyquist and root Nyquist filters to minimize error vector magnitude (EVM) or to minimize adjacent channel power (ACP).

EVM This choice provides the most ideal passband.

ACP This choice improves stopband rejection.

***RST** EVM

Key Entry **Optimize FIR For EVM ACP**

Remarks To change the current filter type, refer to “:FILTer” on page 275.

:HEADer:CLEar

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURce ] :RADio:DMODulation:ARB:HEADer:CLEar
```

This command clears the header information from the header file used by this modulation format.

Key Entry **Clear Header**

Remarks The **Digital Modulation Off On** softkey must be set to On for this command to function.

:HEADer:SAVE

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURce ] :RADio:DMODulation:ARB:HEADer:SAVE
```

This command saves the header information to the header file used by this modulation format.

Key Entry **Save Setup To Header**

Remarks The **Digital Modulation Off On** softkey must be set to On for this command to function.

:IQ:MODulation:ATTen

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURce ] :RADio:DMODulation:ARB:IQ:MODulation:ATTen <val>
```

```
[ :SOURce ] :RADio:DMODulation:ARB:IQ:MODulation:ATTen?
```

This command sets the attenuation level of the I/Q signals being modulated through the signal generator RF path.

The variable <val> is expressed in units of decibels (dB).

***RST** +2.00000000E+000

Range 0–40

Key Entry **Modulator Atten Manual Auto**

:IQ:MODulation:ATTen:AUTO

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURce ] :RADio:DMODulation:ARB:IQ:MODulation:ATTen:AUTO ON|OFF|1|0
```

```
[ :SOURce ] :RADio:DMODulation:ARB:IQ:MODulation:ATTen:AUTO?
```

This command enables or disables the I/Q attenuation auto mode.

ON (1) This choice enables the attenuation auto mode which optimizes the modulator attenuation for the current conditions.

OFF (0) This choice holds the attenuator at its current setting or at a selected value. Refer to [“” on page 278](#) for setting the attenuation value.

***RST** 1

Key Entry **Modulator Atten Manual Auto**

:IQ:MODulation:FILTer

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURce ] :RADio:DMODulation:ARB:IQ:MODulation:FILTer 2.1e6 | 40e6 | THROugh
[ :SOURce ] :RADio:DMODulation:ARB:IQ:MODulation:FILTer?
```

This command enables you to select a filter or through path for I/Q signals modulated onto the RF carrier. Selecting a filter using this command will automatically set “[:IQ:MODulation:FILTer:AUTO](#)” on [page 279](#) to OFF(0) mode.

2.1E6 This choice applies a 2.1 MHz baseband filter to the I/Q signals.

40E6 This choice applies a 40 MHz baseband filter to the I/Q signals.

THROugh This choice bypasses filtering.

***RST** THR

Key Entry 2.100 MHz 40.000 MHz Through

:IQ:MODulation:FILTer:AUTO

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURce ] :RADio:DMODulation:ARB:IQ:MODulation:FILTer:AUTO ON | OFF | 1 | 0
[ :SOURce ] :RADio:DMODulation:ARB:IQ:MODulation:FILTer:AUTO?
```

This command enables or disables the automatic selection of the filters for I/Q signals modulated onto the RF carrier.

ON(1) This choice will automatically select a digital modulation filter.

OFF(0) This choice disables the auto feature which lets you select a digital modulation filter or through path. Refer to “[:IQ:MODulation:FILTer](#)” on [page 302](#) for selecting a filter or through path.

***RST** 1

Key Entry I/Q Mod Filter Manual Auto

:MDEStination:PULSe

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURCE ] :RADio:DMODulation:ARB:MDEStination:PULSe NONE | M1 | M2 | M3 | M4
[ :SOURCE ] :RADio:DMODulation:ARB:MDEStination:PULSe?
```

This command routes the selected marker to the Pulse/RF Blanking function. The NONE parameter clears the marker for the Pulse/RF Blanking function.

***RST** NONE

Key Entry **None** **Marker 1** **Marker 2** **Marker 3** **Marker 4**

:MDEStination:AAMPlitude

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURCE ] :RADio:DMODulation:ARB:MDEStination:AAMPlitude NONE | M1 | M2 | M3 | M4
[ :SOURCE ] :RADio:DMODulation:ARB:MDEStination:AAMPlitude?
```

This command routes the selected marker to the Alternate Amplitude function. The NONE parameter clears the marker for the Alternate Amplitude function.

***RST** NONE

Key Entry **None** **Marker 1** **Marker 2** **Marker 3** **Marker 4**

:MDEStination:ALCHold

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURCE ] :RADio:DMODulation:ARB:MDEStination:ALCHold NONE | M1 | M2 | M3 | M4
[ :SOURCE ] :RADio:DMODulation:ARB:MDEStination:ALCHold?
```

This command routes the selected marker to the ALC Hold function. The NONE parameter clears the marker for the ALC Hold function.

***RST** NONE

Key Entry **None** **Marker 1** **Marker 2** **Marker 3** **Marker 4**

:MODulation:FSK[:DEVIation]

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURCE ] :RADio:DMODulation:ARB:MODulation:FSK[:DEVIation] <val>
[ :SOURCE ] :RADio:DMODulation:ARB:MODulation:FSK[:DEVIation]?
```

This command sets the symmetric FSK frequency deviation value.

Dmodulation Subsystem—Option 001/601 or 002/602 ([:SOURCE]:RADio:DMODulation:ARB)

The variable <val> is expressed in units of Hertz and the maximum range value equals the current symbol rate value multiplied by ten, limited to 20 MHz.

***RST** +4.00000000E+002

Range 0–2E7

Key Entry **Freq Dev**

Remarks To change the modulation type, refer to “:MODulation[:TYPE]” on page 281.

Refer to “:SRATE” on page 288 for a list of the minimum and maximum symbol rate values.

To set an asymmetric FSK deviation value, refer to the *E4428C/38C ESG Signal Generators User’s Guide* for more information.

:MODulation[:TYPE]

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURCE ] :RADio:DMODulation:ARB:MODulation[:TYPE] BPSK|QPSK|IS95QPSK|
GRAYQPSK|OQPSK|IS95OQPSK|P4DQPSK|PSK8|PSK16|D8PSK|EDGE|MSK|FSK2|FSK4|
FSK8|FSK16|C4FM|QAM4|QAM16|QAM32|QAM64|QAM128|QAM256
[:SOURCE]:RADio:DMODulation:ARB:MODulation[:TYPE]?
```

This command sets the modulation type for the digital modulation personality.

***RST** P4DQPSK

Key Entry	BPSK	QPSK	IS-95 QPSK	Gray Coded QPSK	OQPSK			
	IS-95 OQPSK	$\pi/4$ DQPSK	8PSK	16PSK	D8PSK	EDGE	MSK	
	2-Lvl FSK	4-Lvl FSK	8-Lvl FSK	16-Lvl FSK	C4FM	40AM	160AM	
	320AM	640AM	1280AM	2560AM				

:MPOLarity:MARKer1

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURCE ] :RADio:DMODulation:ARB:MPOLarity:MARKer1 NEGative|POSitive
[:SOURCE]:RADio:DMODulation:ARB:MPOLarity:MARKer1?
```

This command sets the polarity for marker 1.

***RST** POS

Key Entry **Marker 1 Polarity Neg Pos**

:MPOLarity:MARKer2

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURCE ] :RADio:DMODulation:ARB:MPOLarity:MARKer2 NEGative | POSitive  
[ :SOURCE ] :RADio:DMODulation:ARB:MPOLarity:MARKer2?
```

This command sets the polarity for marker 2.

***RST** POS

Key Entry **Marker 2 Polarity Neg Pos**

:MPOLarity:MARKer3

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURCE ] :RADio:DMODulation:ARB:MPOLarity:MARKer3 NEGative | POSitive  
[ :SOURCE ] :RADio:DMODulation:ARB:MPOLarity:MARKer3?
```

This command sets the polarity for marker 3.

***RST** POS

Key Entry **Marker 3 Polarity Neg Pos**

:MPOLarity:MARKer4

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURCE ] :RADio:DMODulation:ARB:MPOLarity:MARKer4 NEGative | POSitive  
[ :SOURCE ] :RADio:DMODulation:ARB:MPOLarity:MARKer4?
```

This command sets the polarity for marker 4.

***RST** POS

Key Entry **Marker 4 Polarity Neg Pos**

:REFerence:EXTernal:FREQuency

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURCE ] :RADio:DMODulation:ARB:REFerence:EXTernal:FREQuency <val>  
[ :SOURCE ] :RADio:DMODulation:ARB:REFerence:EXTernal:FREQuency?
```

This command conveys the expected reference frequency value of an externally applied reference the signal generator.

The variable <val> is expressed in units of Hertz (Hz–MHz).

Dmodulation Subsystem—Option 001/601 or 002/602 ([:SOURCE]:RADio:DMODulation:ARB)

*RST	+1.00000000E+007
Range	2.5E5–1E8
Key Entry	Reference Freq
Remarks	The value specified by this command is effective only when you are using an external ARB reference applied to the BASEBAND GEN REF IN rear panel connector. To specify external as the ARB reference source type, refer to “:REFerence[:SOURCE]” on page 283 .

:REFerence[:SOURCE]

Supported	E4438C with Option 001/601 or 002/602
	<code>[:SOURCE]:RADio:DMODulation:ARB:REFerence[:SOURCE] INTERNAL EXTERNAL</code> <code>[:SOURCE]:RADio:DMODulation:ARB:REFerence[:SOURCE]?</code>

This command selects either an internal or external reference for the waveform clock.

*RST	INT
Key Entry	ARB Reference Ext Int
Remarks	If the EXTERNAL choice is selected, the external frequency value <i>must</i> be entered and the signal must be applied to the BASEBAND GEN REF IN rear panel connector. Refer to “:REFerence:EXTERNAL:FREQUENCY” on page 282 to enter the external reference frequency.

:RETRigger

Supported	E4438C with Option 001/601 or 002/602
	<code>[:SOURCE]:RADio:DMODulation:ARB:RETRigger ON OFF IMMEDIATE</code> <code>[:SOURCE]:RADio:DMODulation:ARB:RETRigger?</code>

This command enables or disables the ARB retriggering mode; the retrigger mode controls how the retriggering function performs while a waveform is playing.

ON (1)	This choice specifies that if a trigger occurs while a waveform is playing, the waveform will retrigger at the end of the current waveform sequence and play once more.
--------	---

Dmodulation Subsystem—Option 001/601 or 002/602 ([:SOURce]:RADio:DMODulation:ARB)

OFF (0)	This choice specifies that if a trigger occurs while a waveform is playing, the trigger will be ignored.
IMMEDIATE	This choice specifies that if a trigger occurs while a waveform is playing, the waveform will reset and replay from the start immediately upon receiving a trigger.
*RST	ON
Key Entry	On Off Immediate

:SCLock:RATE

Supported	E4438C with Option 001/601 or 002/602
	<code>[:SOURce]:RADio:DMODulation:ARB:SCLock:RATE <val></code> <code>[:SOURce]:RADio:DMODulation:ARB:SCLock:RATE?</code>
	This command sets the sample clock rate.
	The variable <val> is expressed in units of Hertz (Hz – MHz)
*RST	+1.00000000E+008
Range	1–1E8
Key Entry	ARB Sample Clock
Remarks	The modulation format should be active before executing this command. If this command is executed before the modulation format is active, the entered value will be overridden by a calculated factory default value. Refer to “[:STATe]” on page 296 to activate the modulation format.

:SETup

Supported	E4438C with Option 001/601 or 002/602
	<code>[:SOURce]:RADio:DMODulation:ARB:SETup GSM NADC PDC PHS DECT AC4Fm ACQPsk CDPD PWT EDGE TETRA MCARrier "<file name>"</code> <code>[:SOURce]:RADio:DMODulation:ARB:SETup?</code>
	This command selects the digital modulation format type.
*RST	NADC
Key Entry	GSM NADC PDC PHS DECT APCO 25 w/C4FM APCO w/CQPSK CDPD PWT EDGE TETRA Multicarrier Off On Select File
Remarks	Refer to “File Name Variables” on page 13 for information on the file name syntax.

:SETup:MCARrier

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURCE ] :RADio:DMODulation:ARB:SETup:MCARrier (GSM|NADC|PDC|PHS|DECT|
AC4Fm|ACQPsk|CDPD|PWT|EDGE|TETRA, <num carriers>, <freq spacing> ) |
"<file name>"
[ :SOURCE ] :RADio:DMODulation:ARB:SETup:MCARrier?
```

This command builds a table with the specified number of carriers and frequency spacing or retrieves the setup stored in the specified user file.

The carrier type, number of carriers, and frequency spacing value are returned when a query is initiated. The output format is as follows:

```
<carrier type>, <num carriers>, <freq spacing>
```

If a specific file is loaded and then queried, only the file name is returned.

The variable <freq spacing> is expressed in units of Hertz (kHz–MHz).

```
*RST          Carrier: NADC    <num carriers>: 2
              <freq spacing>: +1.0000000000000E+06
```

```
Range          <num carriers>: 2–100
              <freq spacing>: 2 ÷ (<num carriers> – 1) × 80 MHz
```

```
Key Entry     GSM   NADC   PDC   PHS   DECT   APCO 25 w/C4FM   APCO w/CQPSK
CDPD   PWT   EDGE   TETRA   # of Carriers   Freq Spacing
Custom Digital Mod State
```

Remarks Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

The file specified must be a single carrier CDMA file. To store a multicarrier setup refer to [“:SETup:MCARrier:STORE” on page 232](#).

:SETup:MCARrier:PHASe

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURCE ] :RADio:DMODulation:ARB:SETup:MCARrier:PHASe FIXed | RANDom
[ :SOURCE ] :RADio:DMODulation:ARB:SETup:MCARrier:PHASe?
```

This command toggles the phase settings for multicarrier digital modulation.

FIXed This choice sets the phase of all carriers to 0.

RANDom This choice sets random phase values for all of the carriers.

***RST** FIX

Key Entry **Carrier Phases Fixed Random**

:SETup:MCARrier:STORE

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURCE ] :RADio:DMODulation:ARB:SETup:MCARrier:STORE "<file name>"
```

This command stores the current multicarrier setup information.

The stored file contains information that includes the digital modulation format, number of carriers, frequency spacing, and power settings for the multicarrier setup.

Key Entry **Load/Store**

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:SETup:MCARrier:TABLE

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURCE ] :RADio:DMODulation:ARB:SETup:MCARrier:TABLE INIT | APPend |
<carrier_num>, GSM | NADC | PDC | PHS | DECT | AC4Fm | ACQPsk | CDPD | PWT | EDGE | TETRA |
"<file name>", <freq_offset>, <power>
[ :SOURCE ] :RADio:DMODulation:ARB:SETup:MCARrier:TABLE? <carrier_num>
```

This command modifies the parameters of one of the available multicarrier digital modulation formats.

The variable <freq_offset> is expressed in units of Hertz (kHz–MHz).

The variable <power> is expressed in units of decibels (dB).

Dmodulation Subsystem—Option 001/601 or 002/602 ([:SOURCE]:RADio:DMODulation:ARB)

INIT	This choice clears the current information and creates a new one-row table, allowing for further definition using additional parameters.
APPend	This choice adds rows to an existing table.
<carrier_num>	This variable specifies the number of the carriers in the multicarrier table that will be modified. The value of the variable <carrier_num> must be specified prior to selecting the digital modulation format.

Carrier type, frequency offset, and power level are returned when a query is initiated. The output format is as follows:

<carrier type>, <freq_offset>, <power>

***RST** *carrier type*: NADC <freq_offset>: -5.00000000E+004
 <power>: +0.00000000E+000

Range <freq_offset>: -1E5 to 1E6 <power>: -40 to 0

Key Entry **Initialize Table Insert Row GSM NADC PDC PHS DECT**
APCO 25 w/C4FM APCO w/CQPSK CDPD PWT EDGE TETRA
Custom Digital Mod State

Remarks Refer to “[File Name Variables](#)” on page 13 for information on the file name syntax.

The file specified must be a single carrier CDMA file. To store a multicarrier setup refer to “[:SETup:MCARrier:STORE](#)” on page 232.

:SETup:MCARrier:TABLE:NCARriers

Supported E4438C with Option 001/601 or 002/602

[:SOURCE] :RADio:DMODulation:ARB:SETup:MCARrier:TABLE:NCARriers?

This query returns the number of carriers in the current multicarrier setup.

***RST** +2

Range 1–100

Key Entry **# of Carriers**

:SETup:STORe

Supported E4438C with Option 001/601 or 002/602

```
[:SOURCE]:RADio:DMODulation:ARB:SETup:STORe "<file name>"
```

This command stores the current custom digital modulation state.

The saved file contains information that includes the modulation type, filter and symbol rate for the custom modulation setup.

Key Entry **Store Custom Dig Mod State**

Remarks Refer to “[File Name Variables](#)” on page 13 for information on the file name syntax.

:SRATe

Supported E4438C with Option 001/601 or 002/602

```
[:SOURCE]:RADio:DMODulation:ARB:SRATe <val>
[:SOURCE]:RADio:DMODulation:ARB:SRATe?
```

This command sets the transmission symbol rate.

The variable <val> is expressed in units of bits per second (bps–Mbps) and the maximum range value is dependent upon the source of data (internal or external), the modulation type, and filter.

***RST** +2.43000000E+004

Range	Modulation Type	Bits per Symbol	Internal Data	External Serial Data
	BPSK	1	1–50 Msps	1–50 Msps
	FSK2			
	MSK			
	C4FM	2	1–50 Msps	1–25 Msps
	FSK4			
	OQPSK			
	OQPSK195			
	P4QPPSK			
	QAM4			
	QPSK			
	QPSKIS95			
	QPSKISAT			
EDGE				
FSK8				
PSK8				

Range	Modulation Type	Bits per Symbol	Internal Data	External Serial Data
	FSK16	4	1–25 Msps	1–12.5 Msps
	PSK16			
	QAM16			
	QAM32	5	1–20 Msps	1–10 Msps
	QAM64	6	1–16.67 Msps	1–8.33 Msps
	QAM256	7	1–12.50 Msps	1–6.25 Msps

Key Entry**Symbol Rate****Remarks**

When user-defined filters are selected using the command in section “:FILTer” on page 275, the upper bit rate will be restricted in line with the following symbol rate restriction:

- FIR filter length > 32 symbols: upper limit is 12.5 Msps
- FIR filter length > 16 symbols: upper limit is 25 Msps

When internal FIR filters are used, the limits of the above table always apply. For higher symbol rates, the FIR filter length will be truncated as follows:

- Above 12.5 Msps, the FIR length will be truncated to 32 symbols
- Above 25 Msps, the FIR length will be truncated to 16 symbols

This will impact the relative timing of the modulated data, as well as the actual filter response.

To change the modulation type, refer to “:MODulation[:TYPE]” on page 281.

:TRIGger:TYPE**Supported**

E4438C with Option 001/601 or 002/602

```
[:SOURCE]:RADio:DMODulation:ARB:TRIGger:TYPE CONTinuous|SINGle|GATE
[:SOURCE]:RADio:DMODulation:ARB:TRIGger:TYPE?
```

This command sets the trigger mode (type) that controls the waveform’s playback.

Triggers control the playback by telling the ESG when to play the modulating signal (waveform). Depending on the trigger settings for the ESG, the waveform playback can occur once, continuously, or the ESG may start and stop playing the waveform repeatedly (GATE mode).

A trigger signal comprises both positive and negative signal transitions (states), which are also called high and low periods. You can configure the ESG to trigger on either state of the trigger signal. It is common to have multiple triggers, also referred to as trigger occurrences or events, occur when the signal generator requires only a single trigger. In this situation, the ESG recognizes the first trigger and ignores the rest.

When you select a trigger mode, you may lose the signal (carrier plus modulating) from the RF output until you trigger the waveform. This is because the ESG sets the I and Q signals to zero volts prior to the first trigger event, which suppresses the carrier. After the first trigger event, the waveform’s final I and Q levels determine whether you will see the carrier signal or not (zero = no carrier, other values = carrier visible). At the end of most files, the final I and Q points are set to a value other than zero.

There are four parts to configuring the trigger:

- Choosing the trigger type, which controls the waveform’s transmission.
- Setting the waveform’s response to triggers:
 - CONTInuous, see “:TRIGger:TYPE:CONTInuous[:TYPE]” on page 291
 - SINGle, see “:RETRigger” on page 283
 - GATE, selecting the mode also sets the response
- Selecting the trigger source (see “:TRIGger[:SOURce]” on page 292), which determines how the ESG receives its trigger signal, internally or externally. The GATE choice requires an external trigger.
- Setting the trigger polarity when using an external source:
 - CONTInuous and SINGle see “:TRIGger[:SOURce]:EXTernal:SLOPe” on page 294
 - GATE, see “:TRIGger:TYPE:GATE:ACTive” on page 291

For more information on triggering, see the *E4428C/38C ESG Signal Generators User’s Guide*.

The following list describes the trigger type command choices:

CONTInuous	Upon triggering, the waveform repeats continuously.
SINGle	Upon triggering, the waveform segment or sequence plays once.
GATE	An external trigger signal repeatedly starts and stops the waveform’s playback (transmission). The time duration for playback depends on the duty period of the trigger signal and the gate polarity selection (see “:TRIGger:TYPE:GATE:ACTive” on page 291). The waveform plays during the inactive state and stops during the active polarity selection state. The active state can be set high or low. The gate mode works only with an external trigger source.

NOTE The ARB gating behavior described above is opposite to the gating behavior for real-time custom mode.

*RST	CONT
Key Entry	Continuous Single Gated

:TRIGger:TYPE:CONTInuous[:TYPE]

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURce ] :RADio:DMODulation:ARB:TRIGger:TYPE:CONTInuous [ :TYPE ] FREE |
TRIGger | RESet
[ :SOURce ] :RADio:DMODulation:ARB:TRIGger:TYPE:CONTInuous [ :TYPE ] ?
```

This command selects the waveform's response to a trigger signal while using the continuous trigger mode.

For more information on triggering and to select the continuous trigger mode, see [“:TRIGger:TYPE” on page 289](#).

The following list describes the waveform's response to each of the command choices:

FREE	Turning the ARB format on immediately triggers the waveform. The waveform repeats until you turn the format off, select another trigger, or choose another waveform file.
TRIGger	The waveform waits for a trigger before play begins. When the waveform receives the trigger, it plays continuously until you turn the format off, select another trigger, or choose another waveform file.
RESet	The waveform waits for a trigger before play begins. When the waveform receives the trigger, it plays continuously. Subsequent triggers reset the waveform to the beginning. For a waveform sequence, this means to the beginning of the first segment in the sequence.
*RST	FREE
Key Entry	Free Run Trigger & Run Reset & Run

:TRIGger:TYPE:GATE:ACTive

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURce ] :RADio:DMODulation:ARB:TRIGger:TYPE:GATE:ACTive LOW | HIGH
[ :SOURce ] :RADio:DMODulation:ARB:TRIGger:TYPE:GATE:ACTive ?
```

This command selects the active state (gate polarity) of the gate while using the gating trigger mode.

The LOW and HIGH selections correspond to the low and high states of an external trigger signal. For example, when you select HIGH, the active state occurs during the high of the trigger signal. When the active state occurs, the ESG stops the waveform playback at the last played sample point, then restarts

the playback at the next sample point when the inactive state occurs. For more information on triggering and to select gating as the trigger mode, see “:TRIGger:TYPE” on page 289.

The following list describes the ESG’s gating behavior for the polarity selections:

LOW	The waveform playback stops when the trigger signal goes low (active state) and restarts when the trigger signal goes high (inactive state).
HIGH	The waveform playback stops when the trigger signal goes high (active state) and restarts when the trigger signal goes low (inactive state).
*RST	HIGH
Key Entry	Gate Active Low High

:TRIGger[:SOURCE]

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURCE ] :RADio:DMODulation:ARB:TRIGger [ :SOURCE ] KEY | EXT | BUS
[ :SOURCE ] :RADio:DMODulation:ARB:TRIGger [ :SOURCE ] ?
```

This command sets the trigger source.

For more information on triggering, see “:TRIGger:TYPE” on page 289. The following list describes the command choices:

KEY	This choice enables manual triggering by pressing the front-panel Trigger hardkey.
EXT	An externally applied signal triggers the waveform. This is the only choice that works with gating. The following conditions affect an external trigger:

- The input connector selected for the trigger signal. You have a choice between the rear-panel PATTERN TRIG IN connector or the PATT TRIG IN 2 pin on the rear-panel AUXILIARY I/O connector. To make the connector selection, see “:TRIGger[:SOURCE]:EXTernal[:SOURCE]” on page 295.

For more information on the connectors and on connecting the cables, see the *ESG User’s Guide*.

- The trigger signal polarity:
 - gating mode, see “:TRIGger:TYPE:GATE:ACTive” on page 291
 - continuous and single modes, see “:TRIGger[:SOURCE]:EXTernal:SLOPe” on page 294

- The time delay between when the ESG receives a trigger and when the waveform responds to the trigger. There are two parts to setting the delay:
 - setting the amount of delay, see “[:TRIGger[:SOURce]:EXternal:DELay” on page 293
 - turning the delay on, see “[:TRIGger[:SOURce]:EXternal:DELay:STATe” on page 294

BUS This choice enables triggering over the GPIB or LAN using the *TRG or GET commands or the AUXILIARY INTERFACE (RS-232) using the *TRG command.

***RST** EXT

Key Entry **Trigger Key** **Ext** **Bus**

[:TRIGger[:SOURce]:EXternal:DELay

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURce ] :RADio:DMODulation:ARB:TRIGger [ :SOURce ] :EXternal:DELay <val>
[ :SOURce ] :RADio:DMODulation:ARB:TRIGger [ :SOURce ] :EXternal:DELay?
```

This command sets the amount of time to delay the ESG’s response to an external trigger.

The delay is a path (time) delay between when the ESG receives the trigger and when it responds to the trigger. For example, configuring a trigger delay of two seconds, causes the ESG to wait two seconds after receipt of the trigger before the ESG plays the waveform.

The delay does not occur until you turn it on (see “[:TRIGger[:SOURce]:EXternal:DELay:STATe” on page 294). You can set the delay value either before or after turning it on.

For more information on configuring an external trigger source and to select external as the trigger source, see “[:TRIGger[:SOURce]]” on page 292.

The unit of measurement for the variable <val> is in seconds (nsec–sec).

***RST** +1.00000000E–003

Range 1E–8 to 4E1

Key Entry **Ext Delay Time**

:TRIGger[:SOURCE]:EXTernal:DELay:STATe

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURCE ] :RADio:DMODulation:ARB:TRIGger [ :SOURCE ] :EXTernal:DELay:
STATe ON|OFF|1|0
[ :SOURCE ] :RADio:DMODulation:ARB:TRIGger [ :SOURCE ] :EXTernal:DELay:STATe?
```

This command enables or disables the external trigger delay function.

For setting the delay time, see “:TRIGger[:SOURCE]:EXTernal:DELay” on page 293, and for more information on configuring an external source, see “:TRIGger[:SOURCE]” on page 292.

***RST** 0

Key Entry Ext Delay Off On

:TRIGger[:SOURCE]:EXTernal:SLOPe

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURCE ] :RADio:DMODulation:ARB:TRIGger [ :SOURCE ] :EXTernal:
SLOPe POSitive|NEGative
[ :SOURCE ] :RADio:DMODulation:ARB:TRIGger [ :SOURCE ] :EXTernal:SLOPe?
```

This command sets the polarity for an external trigger signal while using the continuous, single triggering mode. To set the polarity for gating, see “:TRIGger:TYPE:GATE:ACTive” on page 291.

The POSitive and NEGative selections correspond to the high (positive) and low (negative) states of the external trigger signal. For example, when you select POSitive, the waveform responds (plays) during the high state of the trigger signal. When the PSG receives multiple trigger occurrences when only one is required, the signal generator uses the first trigger and ignores the rest.

For more information on configuring an external trigger source and to select external as the trigger source, see “:TRIGger[:SOURCE]” on page 292.

***RST** NEG

Key Entry Ext Polarity Neg Pos

:TRIGger[:SOURCE]:EXTernal[:SOURCE]

Supported E4438C with Option 001/601 or 002/602

```
[:SOURCE]:RADio:DMODulation:ARB:TRIGger[:SOURCE]:
EXTernal[:SOURCE] EPT1|EPT2|EPTRIGGER1|EPTRIGGER2
[:SOURCE]:RADio:DMODulation:ARB:TRIGger[:SOURCE]:EXTernal[:SOURCE]?
```

This command selects which PATTERN TRIG IN connection the ESG uses to accept an externally applied trigger signal when external is the trigger source selection.

For more information on configuring an external trigger source and to select external as the trigger source, see “:TRIGger[:SOURCE]” on page 292. For more information on the rear-panel connectors, see the *E4428C/38C ESG Signal Generators User’s Guide*.

The following list describes the command choices:

EPT1	This choice is synonymous with EPTRIGGER1 and selects the PATTERN TRIG IN rear-panel connector.
EPT2	This choice is synonymous with EPTRIGGER2 and selects the PATT TRIG IN 2 pin on the rear-panel AUXILIARY I/O connector.
EPTRIGGER1	This choice is synonymous with EPT1 and selects the PATTERN TRIG IN rear-panel connector.
EPTRIGGER2	This choice is synonymous with EPT2 and selects the PATT TRIG IN 2 pin on the rear-panel AUXILIARY I/O connector.
*RST	EPT1
Key Entry	Patt Trig In 1 Patt Trig In 2

[[:STATE]]

Supported E4438C with Option 001/601 or 002/602

`[[:SOURCE]:RADio:DMODulation:ARB[:STATE]] ON|OFF|1|0`

`[[:SOURCE]:RADio:DMODulation:ARB[:STATE]]?`

This command enables or disables the digital modulation capability.

ON (1) This choice sets up the internal hardware to generate the currently selected digital modulation format signal selection.

OFF (0) This choice disables the digital modulation capability.

***RST** 0

Key Entry **Digital Modulation Off On**

Remarks When ON is selected, the I/Q state is activated and the I/Q source is set to internal.

Dual ARB Subsystem—Option 001/601 or 002/602 ([:SOURce]:RADio:ARB)

:CLIPping

Supported E4438C with Option 001/601 or 002/602

```
[:SOURce]:RADio:ARB:CLIPping "<file name>", IJQ| IORQ, <val> [, <val>]
```

This command sets the clipping level of the selected waveform segment to a percentage of its highest peak.

The variable <val> is expressed in units of percent.

IJQ This choice clips the composite I/Q waveform.

IORQ This choice clips I and Q separately. When this choice is enabled, percentage values for both I and Q must be specified.

***RST** IJQ <val>: +100

Range <val>: 10–100 (0.1% resolution)

Key Entry **Clipping Type** |I+jQ| |I|,|Q|

Remarks A value of 100 percent equates to no clipping.

Refer to “[File Name Variables](#)” on page 13 for information on the file name syntax.

:GENerate:SINE

Supported E4438C with Option 001/601 or 002/602

```
[:SOURce]:RADio:ARB:GENerate:SINE ["<filename>"] [, <osr>] [, <scale>]  
[, I|Q| IQ]
```

This command creates a file (using a specific file name) and stores a generated sine wave.

<osr> This variable sets the oversample ratio, which must be a value that is ≥ 4 . If the specified over sample ratio is < 60 (the minimum number of samples), multiple periods are generated to create a waveform with at least 60 samples. The number of periods that will be created is $60 \div \text{osr}$ (quotient will round off to a whole number). A waveform with an oversample ratio ≥ 60 has one period.

The maximum value for the range below is determined by the option and available baseband memory.

Range <osr> **Option 001:** 4–8Msamples
Option 002: 4–32Msamples

Remarks Executing this command without the "<file name>" variable will generate a factory default SINE_TEST_WFM file.

When using the variable "<file name>" for this command, the "@" or ":" character is not allowed.

The file is always generated as "WFM#: <file name>", where "#" is replaced by the baseband generator number.

:HEADer:CLEar

Supported E4438C with Option 001/601 or 002/602

[:SOURCE] :RADio:ARB:HEADer:CLEar

This command clears the header information from the header file used by this modulation format.

Key Entry Clear Header

Remarks The **ARB Off On** softkey must be set to On for this command to function.

:HEADer:RMS

Supported E4438C with Option 001/601 or 002/602

[:SOURCE] :RADio:ARB:HEADer:RMS "<file_name>", <val> | UNSpecified
[:SOURCE] :RADio:ARB:HEADer:RMS? "<file_name>"

This command sets the RMS value in the header file for the waveform designated by the "<file_name>" variable. The RMS value is expressed in volts. The filename variable includes the directory path and can designate a file in either the WFM1, NVWFM, or SEQ directories. For information on the file name syntax, refer to ["File Name Variables" on page 13](#) and [Table 3-1 on page 122](#). When a file is created with no header information then a header is automatically generated with all fields set to unspecified.

The <val> variable is the user-measured RMS value for the specified waveform. The UNSpecified parameter means that the signal generator will calculate the RMS value when it is needed. The signal generator calculation includes rise times and does not include consecutive zero level samples. DC offsets and noise are also included in the RMS measurement. Because the RMS calculation done by the signal generator, is slow and may not be appropriate for your application, it is recommended that the user calculate and enter in their measured RMS value for the waveform file.

The RMS value is calculated as:

$$\sqrt{\sum_{n=1}^N (i_n^2 + q_n^2) * \frac{1}{N}}$$

N = # of Samples

Examples

```
[ :SOURce ] :RADio:ARB:HEADer:RMS "WFm1:Sine_Wave", .835
:RAD:ARB:HEADer:RMS "WFm1:Sine_Wave", UNSP
```

The first example sets a user-measured RMS value for the `Sine_Wave` waveform file in the waveform's header file. In the second example, the signal generator will calculate the RMS value when needed.

Range 0 – 1.414213562373095

:HEADer:SAVE

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURce ] :RADio:ARB:HEADer:SAVE
```

This command saves the header information to the header file used by this modulation format.

Key Entry **Save Setup To Header**

Remarks The **ARB Off On** softkey must be set to On for this command to function.

:HCRest[:STATe]

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURce ] :RADio:ARB:HCRest [ :STATe ] ON | OFF | 1 | 0
[ :SOURce ] :RADio:ARB:HCRest [ :STATe ] ?
```

This command enables or disables the operating state of the high crest mode.

ON(1) This choice turns high crest mode on for arbitrary I/Q waveforms with high crest factors (such as downloaded Signal Studio for 802.11 signals). High crest mode reduces the ALC vernier level by 7.5 dB, allowing the signal generator to process these signals with less distortion and improved EVM. For crest factors higher than

4 dB, I/Q drive levels should be reduced by 1 dB for each dB above that level. In high crest mode, the maximum output level is reduced and power level accuracy is degraded.

OFF(0) This choice disables the high crest mode.

*RST 0

Key Entry High Crest Mode Off On

Remarks The high crest mode is automatically turned on by some Signal Studio applications. You can manually override this automatic selection at any time.

:IQ:EXtErnal:FiLTeR

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURce ] :RADio:ARB:IQ:EXtErnal:FiLTeR 40e6 | THRough
[ :SOURce ] :RADio:ARB:IQ:EXtErnal:FiLTeR?
```

This command selects the filter or through path for I/Q signals routed to the rear panel I and Q outputs. The filter has not effect on the modulated RF signal. Selecting a filter using this command will automatically set “:IQ:EXtErnal:FiLTeR:AUTO” on page 300 to OFF(0) mode.

40e6 This choice applies a 40 MHz baseband filter.

THRough This choice bypasses filtering.

*RST THR

Key Entry 40.000 MHz Through

:IQ:EXtErnal:FiLTeR:AUTO

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURce ] :RADio:ARB:IQ:EXtErnal:FiLTeR:AUTO ON | OFF | 1 | 0
[ :SOURce ] :RADio:ARB:IQ:EXtErnal:FiLTeR:AUTO?
```

This command enables or disables the automatic selection of the filters for I/Q signals routed to the rear panel I/Q outputs.

ON(1) This choice will automatically select a digital modulation filter optimized for the current signal generator settings.

OFF(0) This choice disables the auto feature which lets you select a digital modulation filter or through path. Refer to “:IQ:EXtErnal:FILTer” on page 300 for selecting a filter or through path.

*RST 1

Key Entry I/Q Output Filter Manual Auto

:IQ:MODulation:ATTen

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURce ] :RADio:ARB:IQ:MODulation:ATTen <val>
```

```
[ :SOURce ] :RADio:ARB:IQ:MODulation:ATTen?
```

This command sets the attenuation level of the I/Q signals being modulated through the signal generator RF path.

The variable <val> is expressed in units of decibels (dB).

*RST +2.00000000E+000

Range 0–40

Key Entry Modulator Atten Manual Auto

:IQ:MODulation:ATTen:AUTO

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURce ] :RADio:ARB:IQ:MODulation:ATTen:AUTO ON|OFF|1|0
```

```
[ :SOURce ] :RADio:ARB:IQ:MODulation:ATTen:AUTO?
```

This command enables or disables the I/Q attenuation auto mode.

ON (1) This choice enables the attenuation auto mode which optimizes the modulator attenuation for the current conditions.

OFF (0) This choice holds the attenuator at its current setting or at a selected value. Refer to “:IQ:MODulation:ATTen” on page 301 for setting the attenuation value.

*RST 1

Key Entry Modulator Atten Manual Auto

:IQ:MODulation:FILTer

Supported E4438C with Option 001/601 or 002/602

```
[:SOURce]:RADio:ARB:IQ:MODulation:FILTer 2.1e6|40e6|THROUGH
[:SOURce]:RADio:ARB:IQ:MODulation:FILTer?
```

This command enables you to select a filter or through path for I/Q signals modulated onto the RF carrier. This filter has no effect on the I/Q signal out the rear panel. Selecting a filter using this command will automatically set “:IQ:MODulation:FILTer:AUTO” on page 302 to OFF(0) mode.

2.1E6 This choice applies a 2.1 MHz baseband filter to the I/Q signals.

40E6 This choice applies a 40 MHz baseband filter to the I/Q signals.

THROUGH This choice bypasses filtering.

***RST** THR

Key Entry 2.100 MHz 40.000 MHz Through

:IQ:MODulation:FILTer:AUTO

Supported E4438C with Option 001/601 or 002/602

```
[:SOURce]:RADio:ARB:IQ:MODulation:FILTer:AUTO ON|OFF|1|0
[:SOURce]:RADio:ARB:IQ:MODulation:FILTer:AUTO?
```

This command enables or disables the automatic selection of the filters for I/Q signals modulated onto the RF carrier.

ON(1) This choice will automatically select a digital modulation filter.

OFF(0) This choice disables the auto feature which lets you select a digital modulation filter or through path. Refer to “:IQ:MODulation:FILTer” on page 302 for selecting a filter or through path.

***RST** 1

Key Entry I/Q Mod Filter Manual Auto

:MARKer:CLEar

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURce ] :RADio:ARB:MARKer:CLEar "<filename>", <mkr1 | 2 | 3 | 4>,
<first_point>, <last_point>
```

This command clears markers from a waveform segment.

"<file name>" This variable specifies the name of the waveform segment file.

<mkr1|2|3|4> This variable designates which marker is to be cleared (1, 2, 3, or 4).

<first_point> This variable defines the first point in a range of points (must be ≥ 1 , and \leq the total number of waveform points).

<last_point> This variable defines the last point in a range of points (must be ≥ 1 , and \leq the total number of waveform points).

Range <first_Point>: 1–# of waveform points
 <last_point>: 1–# of waveform points

Key Entry **Marker 1 2 3 4 First Mkr Point Last Mkr Point**

Remarks Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:MARKer:CLEar:ALL

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURce ] :RADio:ARB:MARKer:CLEar:ALL "<file name>", <mkr1 | 2 | 3 | 4>
```

This command clears all markers from a waveform segment simultaneously.

"<file name>" This variable specifies the name of the waveform segment file.

<mkr1|2|3|4> This variable designates which marker is to be cleared (1, 2, 3, or 4).

Key Entry **Set Marker Off All Points**

Remarks Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

Remarks Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:MARKer:ROTate

Supported E4438C with Option 001/601 or 002/602

```
[:SOURce]:RADio:ARB:MARKer:ROTate "<file name>", <rotate_count>
```

This command shifts the marker bits in a waveform segment.

Range <rotate_count>: number of points in the waveform – 1

Remarks To define the maximum allowable points in a waveform, refer to “:MARKer:[SET]” on page 304.

Refer to “File Name Variables” on page 13 for information on the file name syntax.

:MARKer:[SET]

Supported E4438C with Option 001/601 or 002/602

```
[:SOURce]:RADio:ARB:MARKer: [SET] "<filename>", <mkr1|2|3|4>, <first_point>, <last_point>, <skip_count>
```

This command defines a marker over a range of points on a waveform segment.

"<file name>" This choice specifies the name of the waveform segment file.

<mkr1|2|3|4> This variable designates which marker is to be set (1, 2, 3, or 4).

<first_point> This variable defines the first point in the range over which the marker will be placed. This number must be greater than or equal to 1, and less than or equal to the total number of waveform points.

If you enter a value for either the first marker point or the last marker point that would make the first marker point occur after the last, the last marker point is automatically adjusted to match the first marker point.

<last_point> This variable defines the last point in the range over which the marker will be placed. This value must be greater than or equal to 1, and less than or equal to the total number of waveform points.

<skip_count> This variable creates a repeating pattern of markers.

Defining a skip count causes the marker to appear on the first point in the defined range, disappear over the number of points defined as the skip count, then reappear for one point. The pattern repeats until the end of the defined range. This

enables you to set repetitively spaced markers. For example, a skip of 2 produces two points between each marker across the defined range.

Range	<first_Point>: 1–# of waveform points <last_point>: 1–# of waveform points <skip_count>: 0–65535
Key Entry	Marker 1 2 3 4 First Mkr Point Last Mkr Point # Skipped Points
Remarks	Refer to “File Name Variables” on page 13 for information on the file name syntax.

:MDEStination:PULSe

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURce ] :RADio:ARB:MDEStination:PULSe NONE | M1 | M2 | M3 | M4
[ :SOURce ] :RADio:ARB:MDEStination:PULSe?
```

This command routes the selected marker to the Pulse/RF Blanking function. The NONE parameter clears the marker for the Pulse/RF Blanking function.

***RST** NONE

Key Entry **None Marker 1 Marker 2 Marker 3 Marker 4**

:MDEStination:AAMPlitude

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURce ] :RADio:ARB:MDEStination:AAMPlitude NONE | M1 | M2 | M3 | M4
[ :SOURce ] :RADio:ARB:MDEStination:AAMPlitude?
```

This command routes the selected marker to the Alternate Amplitude function. The NONE parameter clears the marker for the Alternate Amplitude function.

***RST** NONE

Key Entry **None Marker 1 Marker 2 Marker 3 Marker 4**

:MDEStination:ALCHold

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURCE ] :RADio:ARB:MDEStination:ALCHold NONE | M1 | M2 | M3 | M4
[ :SOURCE ] :RADio:ARB:MDEStination:ALCHold?
```

This command routes the selected marker to the ALC Hold function. The NONE parameter clears the marker for the ALC Hold function.

***RST** NONE

Key Entry **None** **Marker 1** **Marker 2** **Marker 3** **Marker 4**

:MPOLarity:MARKer1

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURCE ] :RADio:ARB:MPOLarity:MARKer1 NEGative | POSitive
[ :SOURCE ] :RADio:ARB:MPOLarity:MARKer1?
```

This command sets the polarity for marker 1.

***RST** POS

Key Entry **Marker 1 Polarity Neg Pos**

:MPOLarity:MARKer2

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURCE ] :RADio:ARB:MPOLarity:MARKer2 NEGative | POSitive
[ :SOURCE ] :RADio:ARB:MPOLarity:MARKer2?
```

This command sets the polarity for marker 2.

***RST** POS

Key Entry **Marker 2 Polarity Neg Pos**

:MPOLarity:MARKer3

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURCE ] :RADio:ARB:MPOLarity:MARKer3 NEGative | POSitive  
[ :SOURCE ] :RADio:ARB:MPOLarity:MARKer3 ?
```

This command sets the polarity for marker 3.

***RST** POS

Key Entry **Marker 3 Polarity Neg Pos**

:MPOLarity:MARKer4

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURCE ] :RADio:ARB:MPOLarity:MARKer4 NEGative | POSitive  
[ :SOURCE ] :RADio:ARB:MPOLarity:MARKer4 ?
```

This command sets the polarity for marker 4.

***RST** POS

Key Entry **Marker 4 Polarity Neg Pos**

:NOISe

Supported E4438C with Option 001/601 or 002/602 and Option 403

```
[ :SOURCE ] :RADio:ARB:NOISe [ :STATe ] ON | { OFF } | 1 | 0  
[ :SOURCE ] :RADio:ARB:NOISe [ :STATe ] ?
```

This command enables or disables adding real-time, non-repeating, additive white gaussian noise (AWGN) to the carrier modulated by the waveform being played by the Dual ARB waveform player. The noise bandwidth will be at least 0.8 times the sample rate, or 1.6 times the sample rate depending on the bandwidth factor. For information on the bandwidth factor, refer to “:NOISe:BFACtor”.

When the bandwidth factor is 2 and the sample rate is greater than 50 megasamples per/second, noise cannot be enabled. Maximum bandwidth cannot exceed 80 MHz. Any oversampling in the waveform increases the noise bandwidth by a factor equal to the oversampling.

Example

```
:RAD:ARB:NOIS ON
```

The preceding example applies real-time AWGN to the carrier.

***RST** 0

Key Entry **Real-time Noise Off On**

:NOISe:BFACtor

Supported E4438C with Option 001/601 or 002/602, and Option 403

```
[ :SOURce ] :RADio:ARB:NOISe:BFACtor <val>
[ :SOURce ] :RADio:ARB:NOISe:BFACtor?
```

This command sets the flat noise bandwidth for applied real-time noise. The bandwidth factor will set the noise bandwidth to at least 0.8 times the sample rate when the bandwidth factor is 1 or to 1.6 times the sample rate, if the bandwidth factor is 2. Maximum bandwidth cannot exceed 80 MHz.

When the bandwidth factor is 2 and the sample rate is greater than 50 megasamples/second, noise cannot be enabled. Any oversampling in the waveform increases the noise bandwidth by a factor equal to the oversampling.

Example

```
:RAD:ARB:NOIS:BFAC 2
```

The preceding example sets the bandwidth factor to 2 and increases the flat noise bandwidth by at least 1.6 times the ARB sample clock rate.

***RST** +1

Key Entry **Noise Bandwidth Factor**

:NOISe:CBWidth

Supported E4438C with Option 001/601 or 002/602 and Option 403

```
[ :SOURce ] :RADio:ARB:NOISe:CBWidth <val><unit>
[ :SOURce ] :RADio:ARB:NOISe:CBWidth?
```

This command selects the carrier bandwidth over which the AWGN (additive white gaussian noise) is applied. The noise power will be integrated over the selected bandwidth for the purposes of calculating C/N (carrier to noise ratio). The carrier bandwidth is limited to the ARB sample rate but cannot exceed 80 MHz. For more information refer to “:NOISe” and “:NOISe:BFACtor” on page 308.

***RST** +1.00000000E+000

Range 1Hz to 80 MHz

Key Entry **Carrier Bandwidth**

:NOISe:CN

Supported E4438C with Option 001/601 or 002/602 and Option 403

[[:SOURce]:RADio:ARB:NOISe:CN <val><unit>

[[:SOURce]:RADio:ARB:NOISe:CN?

This command sets the carrier to noise ratio in dB. The carrier power is defined as the total modulated signal power without noise power added. The noise power is applied over the specified bandwidth of the carrier signal. For more information, refer to “:NOISe:CBWidth” on page 308.

Example

```
:RAD:ARB:NOIS:CN 50DB
```

The preceding example sets the carrier to noise ratio to 50 dB.

***RST** +0.00000000E+000

Range –100 to 100 dB

Key Entry **Carrier to Noise Ratio**

:REFerence:EXTernal:FREQuency

Supported E4438C with Option 001/601 or 002/602

[[:SOURce]:RADio:ARB:REFerence:EXTernal:FREQuency <value>

[[:SOURce]:RADio:ARB:REFerence:EXTernal:FREQuency?

This command enters the frequency of the applied external reference.

The variable <val> is expressed in units of Hertz (Hz–MHz).

***RST** +1.00000000E+007

Range 2.5E5–1E8

Key Entry **Reference Freq**

Remarks The value specified by this command is effective only when you are using an external ARB reference applied to the BASEBAND GEN REF IN rear panel connector.

To specify external as the ARB reference source type, refer to “:REFerence[:SOURce]” on page 310.

:REference[:SOURCE]

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURCE ] :RADio:ARB:REference [ :SOURCE ] INTernal | EXTernal
[ :SOURCE ] :RADio:ARB:REference [ :SOURCE ] ?
```

This command selects either an internal or external reference for the waveform clock.

***RST** INT

Key Entry **ARB Reference Ext Int**

Remarks If the EXTernal choice is selected, the external frequency value *must* be entered and the signal must be applied to the BASEBAND GEN REF IN rear panel connector.

Refer to “:REference:EXTernal:FREQUENCY” on page 309 to enter the external reference frequency.

:RETRigger

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURCE ] :RADio:ARB:RETRigger ON | OFF | IMMEDIATE
[ :SOURCE ] :RADio:ARB:RETRigger ?
```

This command enables or disables the ARB retriggering mode; the retrigger mode controls how the retriggering function performs while a waveform is playing.

ON (1) This choice specifies that if a trigger occurs while a waveform is playing, the waveform will retrigger at the end of the current waveform sequence and play once more.

OFF (0) This choice specifies that if a trigger occurs while a waveform is playing, the trigger will be ignored.

IMMEDIATE This choice specifies that if a trigger occurs while a waveform is playing, the waveform will reset and replay from the start immediately upon receiving a trigger.

***RST** ON

Key Entry **On Off Immediate**

:RSCALing

Supported E4438C with Option 001/601 or 002/602

`[:SOURCE]:RADio:ARB:RSCALing <val>`

`[:SOURCE]:RADio:ARB:RSCALing?`

This command adjusts the scaling value that is applied to a waveform while it is playing.

The variable <val> is expressed in units of percent.

***RST** +7.00000000E+001

Range 1–100

Key Entry **Waveform Runtime Scaling**

Remarks Runtime scaling does not alter the waveform data file.

:SCALing

Supported E4438C with Option 001/601 or 002/602

`[:SOURCE]:RADio:ARB:SCALing "<file name>", <val>`

This command sets the scaling value of the selected waveform segment.

The variable <val> is expressed in units of percent.

Range <val>: 1–100

Key Entry **Scaling**

Remarks Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:SCLock:RATE

Supported E4438C with Option 001/601 or 002/602

`[:SOURCE]:RADio:ARB:SCLock:RATE <val>`

`[:SOURCE]:RADio:ARB:SCLock:RATE?`

This command sets the sample clock rate for the Dual ARB format.

The variable <val> is expressed in units of hertz.

***RST** +1.00000000E+008

Range 1–1E8

Key Entry **ARB Sample Clock**

:SEquence

Supported E4438C with Option 001/601 or 002/602

```
[:SOURCE]:RADio:ARB:SEquence "<file name>", "<waveform>", <reps>, NONE | M1 |
M2 | M3 | M4 | M1M2 | M1M3 | M1M4 | M2M3 | M2M4 | M3M4 | M1M2M3 | M1M2M4 | M1M3M4 | M2M3M4 |
M1M2M3M4 | ALL, { , , , NONE | M1 | M2 | M3 | M4 | M1M2 | M1M3 | M1M4 | M2M3 | M2M4 | M3M4 | M1M2M3 |
M1M2M4 | M1M3M4 | M2M3M4 | M1M2M3M4 | ALL, }
[:SOURCE]:RADio:ARB:SEquence? "<file name>"
```

This command creates or defines a waveform sequence. The waveform file consists of the subsequent waveform segment files (combined in the same order in which the variables are listed above).

"<file name>" This variable specifies the name of the waveform sequence file.

"<waveform>" This variable specifies the exact name of the waveform file.

<reps> This variable edits the number times the waveform should repeat.

M1–4 This variable designates the marker number to be toggled on.

Range <reps>: 1–65535

Key Entry	Build New Waveform Sequence	Edit Selected Waveform Sequence	
	Toggle Marker 1	Toggle Marker 2	Toggle Marker 3
	Toggle Marker 4	Edit Repetitions	

Remarks Refer to “[File Name Variables](#)” on [page 13](#) for information on the file name syntax. compilations.

:TRIGger:TYPE

Supported E4438C with Option 001/601 or 002/602

```
[:SOURCE]:RADio:ARB:TRIGger:TYPE CONTinuous | SINGle | GATE | SADVance
[:SOURCE]:RADio:ARB:TRIGger:TYPE?
```

This command sets the trigger mode (type) that controls the waveform’s playback.

Triggers control the playback by telling the ESG when to play the modulating signal (waveform). Depending on the trigger settings for the ESG, the waveform playback can occur once, continuously, or the ESG may start and stop playing the waveform repeatedly (GATE mode).

A trigger signal comprises both positive and negative signal transitions (states), which are also called high and low periods. You can configure the ESG to trigger on either state of the trigger signal. It is common to have multiple triggers, also referred to as trigger occurrences or events, occur when the signal generator requires only a single trigger. In this situation, the ESG recognizes the first trigger and ignores the rest.

When you select a trigger mode, you may lose the signal (carrier plus modulating) from the RF output until you trigger the waveform. This is because the ESG sets the I and Q signals to zero volts prior to the first trigger event, which suppresses the carrier. After the first trigger event, the waveform’s final I and Q levels determine whether you will see the carrier signal or not (zero = no carrier, other values = carrier visible). At the end of most files, the final I and Q points are set to a value other than zero.

There are four parts to configuring the trigger:

- Choosing the trigger type, which controls the waveform’s transmission.
- Setting the waveform’s response to triggers:
 - CONTInuous, see “:TRIGger:TYPE:CONTInuous[:TYPE]” on page 314
 - SINGle, see “:RETRigger” on page 310
 - GATE, selecting the mode also sets the response
- Selecting the trigger source (see “:TRIGger[:SOURce]” on page 315), which determines how the ESG receives its trigger signal, internally or externally. The GATE choice requires an external trigger.
- Setting the trigger polarity when using an external source:
 - CONTInuous and SINGle see “:TRIGger[:SOURce]:EXTeRnal:SLOPe” on page 317
 - GATE, see “:TRIGger:TYPE:GATE:ACTive” on page 314

For more information on triggering, see the *E4428C/38C ESG Signal Generators User’s Guide*.

The following list describes the trigger type command choices:

CONTInuous	Upon triggering, the waveform repeats continuously.
SINGle	Upon triggering, the waveform segment or sequence plays once.
GATE	An external trigger signal repeatedly starts and stops the waveform’s playback (transmission). The time duration for playback depends on the duty period of the trigger signal and the gate polarity selection (see “:TRIGger:TYPE:GATE:ACTive” on page 314). The waveform plays during the inactive state and stops during the active polarity selection state. The active state can be set high or low. The gate mode works only with an external trigger source.

NOTE The ARB gating behavior described above is opposite to the gating behavior for real-time custom mode.

*RST	CONT			
Key Entry	Continuous	Single	Gate	Segment Advance

:TRIGger:TYPE:CONTInuous[:TYPE]

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURce ] :RADio:ARB:TRIGger:TYPE:CONTInuous [ :TYPE ] FREE | TRIGger | RESet
[ :SOURce ] :RADio:ARB:TRIGger:TYPE:CONTInuous [ :TYPE ] ?
```

This command selects the waveform's response to a trigger signal while using the continuous trigger mode.

For more information on triggering and to select the continuous trigger mode, see [“:TRIGger:TYPE” on page 312](#).

The following list describes the waveform's response to each of the command choices:

FREE	Turning the ARB format on immediately triggers the waveform. The waveform repeats until you turn the format off, select another trigger, or choose another waveform file.
TRIGger	The waveform waits for a trigger before play begins. When the waveform receives the trigger, it plays continuously until you turn the format off, select another trigger, or choose another waveform file.
RESet	The waveform waits for a trigger before play begins. When the waveform receives the trigger, it plays continuously. Subsequent triggers reset the waveform to the beginning. For a waveform sequence, this means to the beginning of the first segment in the sequence.
*RST	FREE
Key Entry	Free Run Trigger & Run Reset & Run

:TRIGger:TYPE:GATE:ACTive

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURce ] :RADio:ARB:TRIGger:TYPE:GATE:ACTive LOW | HIGH
[ :SOURce ] :RADio:ARB:TRIGger:TYPE:GATE:ACTive ?
```

This command selects the active state (gate polarity) of the gate while using the gating trigger mode.

The LOW and HIGH selections correspond to the low and high states of an external trigger signal. For example, when you select HIGH, the active state occurs during the high of the trigger signal. When the active state occurs, the ESG stops the waveform playback at the last played sample point, then restarts the playback at the next sample point when the inactive state occurs. For more information on triggering and to select gating as the trigger mode, see [“:TRIGger:TYPE” on page 312](#).

The following list describes the ESG’s gating behavior for the polarity selections:

LOW	The waveform playback stops when the trigger signal goes low (active state) and restarts when the trigger signal goes high (inactive state).
HIGH	The waveform playback stops when the trigger signal goes high (active state) and restarts when the trigger signal goes low (inactive state).
*RST	HIGH
Key Entry	Gate Active Low High

:TRIGger:TYPE:SADVance[:TYPE]

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURce ] :RADio:ARB:TRIGger:TYPE:SADVance [ :TYPE ] SINGLE | CONTinuous
[ :SOURce ] :RADio:ARB:TRIGger:TYPE:SADVance [ :TYPE ] ?
```

This command customizes the segment advance trigger type setting.

SINGLE	This choice will play the next segment in the sequence only once.
CONTinuous	This choice will instruct the sequencer to continually play the next segments in the waveform sequence in a continuous pattern.
*RST	CONT
Key Entry	Single Continuous
Remarks	This command is valid when SADVance has been selected as the trigger type.

To select SADVance as the trigger type, refer to “:TRIGger:TYPE” on page 312.

:TRIGger[:SOURce]

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURce ] :RADio:ARB:TRIGger [ :SOURce ] KEY | EXT | BUS
[ :SOURce ] :RADio:ARB:TRIGger [ :SOURce ] ?
```

This command sets the trigger source.

For more information on triggering, see “:TRIGger:TYPE” on page 312. The following list describes the command choices:

KEY	This choice enables manual triggering by pressing the front-panel Trigger hardkey.
-----	---

- EXT** An externally applied signal triggers the waveform. This is the only choice that works with gating. The following conditions affect an external trigger:
- The input connector selected for the trigger signal. You have a choice between the rear-panel PATTERN TRIG IN connector or the PATT TRIG IN 2 pin on the rear-panel AUXILIARY I/O connector. To make the connector selection, see “[:TRIGger[:SOURce]:EXTErnal[:SOURce]]” on page 318.
For more information on the connectors and on connecting the cables, see the *ESG User’s Guide*.
 - The trigger signal polarity:
 - gating mode, see “[:TRIGger:TYPE:GATE:ACTive]” on page 314
 - continuous and single modes, see “[:TRIGger[:SOURce]:EXTErnal:SLOPe]” on page 317
 - The time delay between when the ESG receives a trigger and when the waveform responds to the trigger. There are two parts to setting the delay:
 - setting the amount of delay, see “[:TRIGger[SOURce]:EXTErnal:DELAy]” on page 316
 - turning the delay on, see “[:TRIGger[:SOURce]:EXTErnal:DELAy:STATe]” on page 317
- BUS** This choice enables triggering over the GPIB or LAN using the *TRG or GET commands or the AUXILIARY INTERFACE (RS-232) using the *TRG command.

***RST** EXT

Key Entry	Trigger Key	Ext	Bus
-----------	-------------	-----	-----

:TRIGger[SOURce]:EXTErnal:DELAy

Supported E4438C with Option 001/601 or 002/602

```
[:SOURce]:RADio:ARB:TRIGger[:SOURce]:EXTErnal:DELAy <val>
[:SOURce]:RADio:ARB:TRIGger[:SOURce]:EXTErnal:DELAy?
```

This command sets the amount of time to delay the ESG’s response to an external trigger.

The delay is a path (time) delay between when the ESG receives the trigger and when it responds to the trigger. For example, configuring a trigger delay of two seconds, causes the ESG to wait two seconds after receipt of the trigger before the ESG plays the waveform.

The delay does not occur until you turn it on (see “[:TRIGger[:SOURce]:EXTErnal:DELAy:STATe]” on page 317). You can set the delay value either before or after turning it on.

For more information on configuring an external trigger source and to select external as the trigger source, see “:TRIGger[:SOURce]” on page 315.

The unit of measurement for the variable <val> is in seconds (nsec–sec).

***RST** +1.00000000E–003

Range 1E–8 to 4E1

Key Entry **Ext Delay Time**

:TRIGger[:SOURce]:EXTernal:DELay:STATe

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURce ] :RADio:ARB:TRIGger [ :SOURce ] :EXTernal:DELay:STATe ON|OFF|1|0
[ :SOURce ] :RADio:ARB:TRIGger [ :SOURce ] :EXTernal:DELay:STATe?
```

This command enables or disables the operating state of the external trigger delay function.

For setting the delay time, see “:TRIGger[SOURce]:EXTernal:DELay” on page 316, and for more information on configuring an external source, see “:TRIGger[:SOURce]” on page 315.

***RST** 0

Key Entry **Ext Delay Off On**

:TRIGger[:SOURce]:EXTernal:SLOPe

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURce ] :RADio:ARB:TRIGger [ :SOURce ] :EXTernal:SLOPe POSitive|NEGative
[ :SOURce ] :RADio:ARB:TRIGger [ :SOURce ] :EXTernal:SLOPe?
```

This command sets the polarity for an external trigger signal while using the continuous, single triggering mode. To set the polarity for gating, see “:TRIGger:TYPE:GATE:ACTive” on page 314.

The POSitive and NEGative selections correspond to the high (positive) and low (negative) states of the external trigger signal. For example, when you select POSitive, the waveform responds (plays) during the high state of the trigger signal. When the PSG receives multiple trigger occurrences when only one is required, the signal generator uses the first trigger and ignores the rest.

For more information on configuring an external trigger source and to select external as the trigger source, see “:TRIGger[:SOURce]” on page 315.

***RST** NEG

Key Entry **Ext Polarity Neg Pos**

:TRIGger[:SOURce]:EXTRnal[:SOURce]

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURce ] :RADio:ARB:TRIGger [ :SOURce ] :EXTRnal [ :SOURce ] EPT1 | EPT2 |
EPTRIGGER1 | EPTRIGGER2
[ :SOURce ] :RADio:ARB:TRIGger [ :SOURce ] :EXTRnal [ :SOURce ] ?
```

This command selects which PATTERN TRIG IN connection the ESG uses to accept an externally applied trigger signal when external is the trigger source selection.

For more information on configuring an external trigger source and to select external as the trigger source, see “:TRIGger[:SOURce]” on page 315. For more information on the rear-panel connectors, see the *E4428C/38C ESG Signal Generators User’s Guide*.

The following list describes the command choices:

EPT1	This choice is synonymous with EPTRIGGER1 and selects the PATTERN TRIG IN rear-panel connector.
EPT2	This choice is synonymous with EPTRIGGER2 and selects the PATT TRIG IN 2 pin on the rear-panel AUXILIARY I/O connector.
EPTRIGGER1	This choice is synonymous with EPT1 and selects the PATTERN TRIG IN rear-panel connector.
EPTRIGGER2	This choice is synonymous with EPT2 and selects the PATT TRIG IN 2 pin on the rear-panel AUXILIARY I/O connector.
*RST	EPT1
Key Entry	Patt Trig In 1 Patt Trig In 2

:WAVeform

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURce ] :RADio:ARB:WAVeform "WFM1:file_name" | "SEQ:file_name"
[ :SOURce ] :RADio:ARB:WAVeform?
```

This command selects a waveform file or sequence, for the Dual ARB player to play. The file must be present in volatile memory, WFM1 : or in the SEQ directory. If a file is in non-volatile memory (NVWFM), use the command “:COPY” on page 124 to copy the file to WFM1.

"WFM1:file_name" This variable names a waveform file residing in volatile memory:WFM1. For information on the file name syntax, see “File Name Variables” on page 13.

"SEQ:file_name" This variable names a sequence file residing in the catalog of sequence files. For more information on the file name syntax, see [“File Name Variables” on page 13](#).

Example

```
:RAD:ARB:WAV "WFM1:Test_Data"
```

The preceding example selects the file `Test_Data` from the list of files in volatile waveform memory, WFM1, and applies its header settings.

Key Entry **Select Waveform**

:Waveform:NHEAders

Supported E4438C with Option 001/601 or 002/602

```
[:SOURce]:RADio:ARB:WAVEform:NHEAders "WFM1:file_name" | "SEQ:filename"  
[:SOURce]:RADio:ARB:WAVEform:NHEAders?
```

This command, for the Dual ARB mode, allows for a fast selection of a waveform file or sequence. No header information or settings are applied to the waveform or sequence when this command is used. This will improve the access or loading speed of the waveform file or sequence to approximately 100 mS for a single segment. The file must be in volatile waveform memory, WFM1, or in the SEQ directory. If a file is in non-volatile waveform memory (NVWFM), use the command [“:COPY” on page 124](#) to copy files to WFM1.

"WFM1:file_name" This variable names a waveform file residing in volatile memory:WFM1. For information on the file name syntax, see [“File Name Variables” on page 13](#).

"SEQ:filename" This variable names a sequence file residing in the catalog of sequence files. For more information on the file name syntax, see [“File Name Variables” on page 13](#).

Example

```
:RAD:ARB:WAV:NHEA "Test_Data"
```

The preceding example selects the file `Test_Data`, without applying header settings.

[:STATe]

Supported E4438C with Option 001/601 or 002/602

[:SOURce] :RADio:ARB [:STATe] ON | OFF | 1 | 0

[:SOURce] :RADio:ARB [:STATe] ?

This command enables or disables the arbitrary waveform generator function.

***RST** 0

Key Entry **ARB Off On**

Multitone Subsystem—Option 001/601 or 002/602 ([:SOURce]:RADio:MTONe:ARB)

Creating a Multitone Waveform

Use the following steps to create a multitone waveform:

1. Initialize the phase for the multitone waveform. Refer to “:SETup:TABLE:PHASe:INITialize” on page 331.
2. Assign the frequency spacing between the tones. Refer to “:SETup:TABLE:FSPacing” on page 330.
3. Define the number of tones within the waveform. Refer to “:SETup:TABLE:NTONes” on page 331.
4. Modify the power level, phase, and state of any individual tones. Refer to “:ROW” on page 328.

:HEADer:CLEar

Supported E4438C with Option 001/601 or 002/602

[:SOURce] :RADio:MTONe:ARB:HEADer:CLEar

This command clears the header information from the header file used by this modulation format.

Key Entry Clear Header

Remarks The **Multitone Off On** softkey must be set to On for this command to function.

:HEADer:SAVE

Supported E4438C with Option 001/601 or 002/602

[:SOURce] :RADio:MTONe:ARB:HEADer:SAVE

This command saves the header information to the header file used by this modulation format.

Key Entry Save Setup To Header

Remarks The **Multitone Off On** softkey must be set to On for this command to function.

:IQ:EXternal:FILTer

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURCE ] :RADio:MTONE:ARB:IQ:EXternal:FILTer 40e6 | THRough
[ :SOURCE ] :RADio:MTONE:ARB:IQ:EXternal:FILTer?
```

This command selects the filter or through path for I/Q signals routed to the rear panel I and Q outputs. Selecting a filter using this command will automatically set “:IQ:EXternal:FILTer:AUTO” on [page 322](#) to OFF(0) mode.

40e6 This choice applies a 40 MHz baseband filter.

THRough This choice bypasses filtering.

***RST** THR

Key Entry 40.000 MHz Through

:IQ:EXternal:FILTer:AUTO

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURCE ] :RADio:MTONE:ARB:IQ:EXternal:FILTer:AUTO ON | OFF | 1 | 0
[ :SOURCE ] :RADio:MTONE:ARB:IQ:EXternal:FILTer:AUTO?
```

This command enables or disables the automatic selection of the filters for I/Q signals routed to the rear panel I/Q outputs.

ON(1) This choice will automatically select a digital modulation filter optimized for the current signal generator settings.

OFF(0) This choice disables the auto feature which lets you select a digital modulation filter or through path. Refer to “:IQ:EXternal:FILTer” on [page 322](#) for selecting a filter or through path.

***RST** 1

Key Entry I/Q Output Filter Manual Auto

:IQ:MODulation:ATTen

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURce ] :RADio:MTONE:ARB:IQ:MODulation:ATTen <val>
```

```
[ :SOURce ] :RADio:MTONE:ARB:IQ:MODulation:ATTen?
```

This command attenuates the I/Q signals being modulated through the signal generator RF path.

The variable <val> is expressed in units of decibels (dB).

***RST** +2.00000000E+000

Range 0–40

Key Entry **Modulator Atten Manual Auto**

:IQ:MODulation:ATTen:AUTO

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURce ] :RADio:MTONE:ARB:IQ:MODulation:ATTen:AUTO ON|OFF|1|0
```

```
[ :SOURce ] :RADio:MTONE:ARB:IQ:MODulation:ATTen:AUTO?
```

This command enables or disables the I/Q attenuation auto mode.

ON (1) This choice enables the attenuation auto mode which optimizes the modulator attenuation for the current conditions.

OFF (0) This choice holds the attenuator at its current setting or at a selected value. Refer to “:IQ:MODulation:ATTen” on page 323 for setting the attenuation value.

***RST** 1

Key Entry **Modulator Atten Manual Auto**

:IQ:MODulation:FILTer

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURce ] :RADio:MTONE:ARB:IQ:MODulation:FILTer 2.1e6 | 40e6 | THROugh
[ :SOURce ] :RADio:MTONE:ARB:IQ:MODulation:FILTer?
```

This command enables you to select a filter or through path for I/Q signals modulated onto the RF carrier. Selecting a filter using this command will automatically set “[:IQ:MODulation:FILTer:AUTO](#)” on [page 324](#) to OFF(0) mode.

2.1E6 This choice applies a 2.1 MHz baseband filter to the I/Q signals.

40E6 This choice applies a 40 MHz baseband filter to the I/Q signals.

THROugh This choice bypasses filtering.

***RST** THR

Key Entry 2.100 MHz 40.000 MHz Through

:IQ:MODulation:FILTer:AUTO

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURce ] :RADio:MTONE:ARB:IQ:MODulation:FILTer:AUTO ON | OFF | 1 | 0
[ :SOURce ] :RADio:MTONE:ARB:IQ:MODulation:FILTer:AUTO?
```

This command enables or disables the automatic selection of the filters for I/Q signals modulated onto the RF carrier.

ON(1) This choice will automatically select a digital modulation filter.

OFF(0) This choice disables the auto feature which lets you select a digital modulation filter or through path. Refer to “[:IQ:MODulation:FILTer](#)” on [page 302](#) for selecting a filter or through path.

***RST** 1

Key Entry I/Q Mod Filter Manual Auto

:MDEStination:PULSe

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURCE ] :RADio:MTONE:ARB:MDEStination:PULSe NONE | M1 | M2 | M3 | M4  
[ :SOURCE ] :RADio:MTONE:ARB:MDEStination:PULSe?
```

This command routes the selected marker to the Pulse/RF Blanking function. The NONE parameter clears the marker for the Pulse/RF Blanking function.

***RST** NONE

Key Entry **None** **Marker 1** **Marker 2** **Marker 3** **Marker 4**

:MDEStination:AAMPlitude

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURCE ] :RADio:MTONE:ARB:MDEStination:AAMPlitude NONE | M1 | M2 | M3 | M4  
[ :SOURCE ] :RADio:MTONE:ARB:MDEStination:AAMPlitude?
```

This command routes the selected marker to the Alternate Amplitude function. The NONE parameter clears the marker for the Alternate Amplitude function.

***RST** NONE

Key Entry **None** **Marker 1** **Marker 2** **Marker 3** **Marker 4**

:MDEStination:ALCHold

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURCE ] :RADio:MTONE:ARB:MDEStination:ALCHold NONE | M1 | M2 | M3 | M4  
[ :SOURCE ] :RADio:MTONE:ARB:MDEStination:ALCHold?
```

This command routes the selected marker to the ALC Hold function. The NONE parameter clears the marker for the ALC Hold function.

***RST** NONE

Key Entry **None** **Marker 1** **Marker 2** **Marker 3** **Marker 4**

:MPOLarity:MARKer1

Supported E4438C with Option 001/601 or 002/602

[:SOURCE] :RADio:MTONE:ARB:MPOLarity:MARKer1 NEGative | POSitive
[:SOURCE] :RADio:MTONE:ARB:MPOLarity:MARKer1?

This command sets the polarity for marker 1.

***RST** POS

Key Entry **Marker 1 Polarity Neg Pos**

:MPOLarity:MARKer2

Supported E4438C with Option 001/601 or 002/602

[:SOURCE] :RADio:MTONE:ARB:MPOLarity:MARKer2 NEGative | POSitive
[:SOURCE] :RADio:MTONE:ARB:MPOLarity:MARKer2?

This command sets the polarity for marker 2.

***RST** POS

Key Entry **Marker 2 Polarity Neg Pos**

:MPOLarity:MARKer3

Supported E4438C with Option 001/601 or 002/602

[:SOURCE] :RADio:MTONE:ARB:MPOLarity:MARKer3 NEGative | POSitive
[:SOURCE] :RADio:MTONE:ARB:MPOLarity:MARKer3?

This command sets the polarity for marker 3.

***RST** POS

Key Entry **Marker 3 Polarity Neg Pos**

:MPOLarity:MARKer4

Supported E4438C with Option 001/601 or 002/602

[:SOURCE] :RADio:MTONE:ARB:MPOLarity:MARKer4 NEGative | POSitive
[:SOURCE] :RADio:MTONE:ARB:MPOLarity:MARKer4?

This command sets the polarity for marker 4.

***RST** POS

Key Entry **Marker 4 Polarity Neg Pos**

:REference:EXternal:FREquency

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURCE ] :RADio:MTONE:ARB:REference:EXternal:FREquency <val>
```

```
[ :SOURCE ] :RADio:MTONE:ARB:REference:EXternal:FREquency?
```

This command allows you to enter the frequency of the applied external reference.

The variable <val> is expressed in units of Hertz (Hz–MHz).

***RST** +1.00000000E+007

Range 2.5E5–1E8

Key Entry **Reference Freq**

Remarks The value specified by this command is effective only when you are using an external ARB reference applied to the BASEBAND GEN REF IN rear panel connector.

To specify external as the ARB reference source type, refer to “:REference[:SOURCE]” on page 327.

:REference[:SOURCE]

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURCE ] :RADio:MTONE:ARB:REference [ :SOURCE ] INTernal | EXternal
```

```
[ :SOURCE ] :RADio:MTONE:ARB:REference [ :SOURCE ] ?
```

This command selects either an internal or external reference for the waveform clock.

***RST** INT

Key Entry ARB Reference Ext Int

Remarks If the EXternal choice is selected, the external frequency *value must* be entered and the signal must be applied to the BASEBAND GEN REF IN rear panel connector.

Refer to “:REference:EXternal:FREquency” on page 327 to enter the external reference frequency.

:ROW

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURce] :RADio:MTONe:ARB:SETup:TABLE:ROW <row_number>, <power>,
<phase>, <state>
```

```
[ :SOURce] :RADio:MTONe:ARB:SETup:TABLE:ROW? <row_number>
```

This command modifies the indicated tone (row) of the multitone waveform.

<row_number> The number of rows for this variable are determined by the :SETup:TABLE command.

The variable <power> is expressed in units of decibels (dB).

The variable <phase> is expressed in units of degrees (deg).

Frequency offset, power, phase, and state value are returned when a query is initiated. The output format is as follows:

```
<frequency offset>, <power>, <phase>, <state>
```

```
*RST          frequency offset: -3.50000000E+004      <power>: +0.00000000E+000
              <phase>: +0.00000000E+000      <state>: 1
```

```
Range         frequency offset: -4E7 to 4E7      <power>: -80 to 0      <phase>: 0-359
              <state>: 1
```

Key Entry **Goto Row** **Toggle State**

Remarks Refer to “:SETup:TABLE” on page 330 for information on how to change the number of rows.

This command is the final step in creating a multitone waveform. Refer to “Creating a Multitone Waveform” on page 321 for all four steps.

:SCLock:RATE

Supported E4438C with Option 001/601 or 002/602

[:SOURce] :RADio:MTONE:ARB:SCLock:RATE <val>

[:SOURce] :RADio:MTONE:ARB:SCLock:RATE?

This command sets the sample clock rate for the Multitone modulation format.

The variable <val> is expressed in units of hertz.

***RST** +1.00000000E+008

Range 1–1E8

Key Entry **ARB Sample Clock**

Remarks The modulation format should be active before executing this command. If this command is executed before the modulation format is active, the entered value will be overridden by a calculated factory default value. Refer to “[:STaTe]” on [page 332](#) to activate the modulation format.

:SETup

Supported E4438C with Option 001/601 or 002/602

[:SOURce] :RADio:MTONE:ARB:SETup "<file name>"

[:SOURce] :RADio:MTONE:ARB:SETup?

This command retrieves a multitone waveform file.

Key Entry Load From Selected File

Remarks The name of a multitone waveform file is stored in the signal generator file system of MTONE files. This information is held in memory until you send the command that turns the waveform on.

Refer to “[File Name Variables](#)” on [page 13](#) for information on the file name syntax.

:SETup:STORe

Supported E4438C with Option 001/601 or 002/602

[:SOURce] :RADio:MTONE:ARB:SETup:STORe "<file name>"

This command stores the current multitone waveform setup in the signal generator file system of MTONE files.

Key Entry **Store To File**

:SETup:TABLE

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURce ] :RADio:MTONe:ARB:SETup:TABLE <freq_spacing>,
<num_tones>, { <phase>, <state> }
[ :SOURce ] :RADio:MTONe:ARB:SETup:TABLE?
```

This command creates and configures a multitone waveform.

The frequency offset, power, phase, and state value are returned when a query is initiated. The output format is as follows:

```
<frequency_offset>, <power>, <phase>, <state>
```

The variable <freq_spacing> is expressed in units of Hertz (Hz–MHz).

The variable <power> is expressed in units of decibels (dB).

*RST	Tone	<frequency offset>	<power>	<phase>	<state>
	Tone 1	-35000	+0.00000000E+000	+0	+1
	Tone 2	-25000	+0.00000000E+000	+0	+1
	Tone 3	-15000	+0.00000000E+000	+0	+1
	Tone 4	-5000	+0.00000000E+000	+0	+1
	Tone 5	+5000	+0.00000000E+000	+0	+1
	Tone 6	+15000	+0.00000000E+000	+0	+1
	Tone 7	+25000	+0.00000000E+000	+0	+1
	Tone 8	+35000	+0.00000000E+000	+0	+1

Range <freq_spacing> (2 tones): 1E4–8E7 <num_tones>: 2–64
 <freq_spacing> (>2 tones): 1E4 to (80 MHz ÷ (num_tones – 1))
 <phase>: 0–359

Key Entry Freq Spacing Number Of Tones Toggle State

Remarks To set the frequency spacing, refer to “:SETup:TABLE:FSPacing” on page 330.

:SETup:TABLE:FSPacing

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURce ] :RADio:MTONe:ARB:SETup:TABLE:FSPacing <freq_spacing>
[ :SOURce ] :RADio:MTONe:ARB:SETup:TABLE:FSPacing?
```

This command sets the frequency spacing between the tones.

The variable <freq_spacing> is expressed in units of Hertz (Hz–MHz).

*RST +1.00000000E+004

Range <freq_spacing> (2 tones): 1E4–8E7

Multitone Subsystem—Option 001/601 or 002/602 ([:SOURCE]:RADio:MTONe:ARB)

<freq_spacing> (>2 tones): 1E4 to (80 MHz ÷ (num_tones – 1))

Key Entry	Freq Spacing
Remarks	To set frequency spacing and additional parameters required to create or configure a multitone waveform, refer to “:SETup:TABLE” on page 330. This command is the second step in creating a multitone waveform. Refer to “Creating a Multitone Waveform” on page 321 for all four steps.

:SETup:TABLE:NTONes

Supported	E4438C with Option 001/601 or 002/602
	[:SOURCE] :RADio:MTONe:ARB:SETup:TABLE:NTONes <num_tones> [:SOURCE] :RADio:MTONe:ARB:SETup:TABLE:NTONes?
	This command defines the number of tones in the multitone waveform.
*RST	+8
Range	2–64
Key Entry	Number Of Tones
Remarks	To specify the number of tones and additional parameters required to create or configure a multitone waveform, refer to “:SETup:TABLE” on page 330. This command is the third step in creating a multitone waveform. Refer to “Creating a Multitone Waveform” on page 321 for all four steps.

:SETup:TABLE:PHASe:INITialize

Supported	E4438C with Option 001/601 or 002/602
	[:SOURCE] :RADio:MTONe:ARB:SETup:TABLE:PHASe:INITialize FIXed RANDom [:SOURCE] :RADio:MTONe:ARB:SETup:TABLE:PHASe:INITialize?
	This command initializes the phase in the multitone waveform table.
FIXed	This choice sets the phase of all tones to the fixed value of 0 degrees.
RANDom	This choice sets the phase of all tones to random values based on the setting on the random seed generator.
*RST	FIX
Key Entry	Initialize Phase Fixed Random
Remarks	To change the random number generator seed value, refer to “:SETup:TABLE:PHASe:INITialize:SEED” on page 332.

Multitone Subsystem—Option 001/601 or 002/602 (:SOURce):RADio:MTONe:ARB)

This command is the first step in creating a multitone waveform. Refer to “Creating a Multitone Waveform” on page 321 for all four steps.

:SETup:TABLE:PHASe:INITialize:SEED

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURce ] :RADio:MTONe:ARB:SETup:TABLE:PHASe:INITialize:SEED FIXed | RANDom
[ :SOURce ] :RADio:MTONe:ARB:SETup:TABLE:PHASe:INITialize:SEED?
```

This command initializes the random number generator seed that is used to generate the random phase values for the multitone waveform.

FIXed This choice sets the random number generator seed to a fixed value.

RANDom This choice sets the random number generator seed to a random value. This changes the phase value after each initialization of the phase.

***RST** FIX

Key Entry **Random Seed Fixed Random**

[:STATe]

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURce ] :RADio:MTONe:ARB [ :STATe ] ON | OFF | 1 | 0
[ :SOURce ] :RADio:MTONe:ARB [ :STATe ] ?
```

This command enables or disables the multitone waveform generator function.

***RST** 0

Key Entry **Multitone Off On**

Wideband CDMA ARB Subsystem–Option 400 ([:SOURce]:RADio:WCDMa:TGPP:ARB)

:CLIPping:I

Supported E4438C with Option 400

```
[ :SOURce] :RADio:WCDMa:TGPP:ARB:CLIPping:I <val>
```

```
[ :SOURce] :RADio:WCDMa:TGPP:ARB:CLIPping:I?
```

This command limits the modulation level of the waveform's I component to a percentage of full scale.

The variable <val> is expressed in units of percent.

***RST** +1.00000000E+002

Range 10–100

Key Entry **Clip III To**

:CLIPping:POSition

Supported E4438C with Option 400

```
[ :SOURce] :RADio:WCDMa:TGPP:ARB:CLIPping:POSition PRE|POST
```

```
[ :SOURce] :RADio:WCDMa:TGPP:ARB:CLIPping:POSition?
```

This command specifies whether a waveform is clipped before (PRE) or after (POST) FIR filtering.

***RST** PRE

Key Entry **Clip At PRE POST FIR Filter**

:CLIPping:Q

Supported E4438C with Option 400

[:SOURce]:RADio:WCDMa:TGPP:ARB:CLIPping:Q <val>

[:SOURce]:RADio:WCDMa:TGPP:ARB:CLIPping:Q?

This command limits the modulation level of the waveform's Q component to a percentage of full scale.

The variable <val> is expressed in units of percent.

***RST** +1.00000000E+002

Range 10–100

Key Entry **Clip | Q | To**

:CLIPping:TYPE

Supported E4438C with Option 400

[:SOURce]:RADio:WCDMa:TGPP:ARB:CLIPping:TYPE IJQ | IORQ

[:SOURce]:RADio:WCDMa:TGPP:ARB:CLIPping:TYPE?

This command selects either IJQ or IORQ as the clipping type.

IJQ The combined I and Q waveform will be clipped (*circular* clipping).

IORQ The I and Q components of the waveform are clipped independently (*rectangular* clipping). I and Q can be clipped to different levels using this mode.

***RST** IJQ

Key Entry **Clipping Type | I+jQ | | I |, | Q |**

:CLIPping[:IJQ]

Supported E4438C with Option 400

[:SOURce] :RADio:WCDMa:TGPP:ARB:CLIPping [:IJQ] <val>

[:SOURce] :RADio:WCDMa:TGPP:ARB:CLIPping [:IJQ] ?

This command clips (limits) the modulation level of the combined I and Q waveform to a percentage of full scale.

The variable <val> is expressed in units of percent.

***RST** +1.00000000E+002

Range 10–100

Key Entry **Clip |I+jQ| To**

:CRATe

Supported E4438C with Option 400

[:SOURce] :RADio:WCDMa:TGPP:ARB:CRATe <val>

[:SOURce] :RADio:WCDMa:TGPP:ARB:CRATe?

This command sets the chip rate value.

***RST** +3.84000000E+006

Range 3456000–4224000

Key Entry **Chip Rate**

:FILTer

Supported E4438C with Option 400

```
[:SOURce]:RADio:WCDMa:TGPP:ARB:FILTer RNYQuist|NYQuist|GAUSSian|
RECTangle|WCDMA|AC4Fm|IS2000SR3DS|UGGaussian|"<user FIR>"
[:SOURce]:RADio:WCDMa:TGPP:ARB:FILTer?
```

This command selects the pre-modulation filter type.

WCDMA This choice selects a 0.22 Nyquist filter optimized for ACP.

AC4Fm This choice selects a predefined Association of Public Safety Communications Officials (APCO) specified compatible 4-level frequency modulation (C4FM) filter.

IS2000SR3DS This choice selects an IS-2000 standard, spread rate 3 direct spread filter.

UGGaussian This choice selects a backwards compatible GSM Gaussian filter (Gaussian filter with a fixed BbT value of 0.300) for the ESG E44xxB Option UN3 or UN4.

"<user FIR>" This variable is any FIR filter file that you have stored in memory. The variable needs no directory path indicating the location of the file, such as FIR: or /USER/FIR. The command assumes the FIR directory. Refer to [“File Name Variables” on page 13](#) for more information on file names.

***RST** NYQ

Key Entry	Root Nyquist	Nyquist	Gaussian	Rectangle	WCDMA
	APCO 25 C4FM	IS-95	UN3/4 GSM Gaussian		IS-2000 SR3 DS
	User FIR				

:FILTer:ALPHA

Supported E4438C with Option 400

```
[:SOURce]:RADio:WCDMa:TGPP:ARB:FILTer:ALPHA <val>
[:SOURce]:RADio:WCDMa:TGPP:ARB:FILTer:ALPHA?
```

This command sets the alpha value for the Nyquist or root Nyquist filter.

The filter alpha value can be set to the minimum level (0), the maximum level (1), or in between by using fractional numeric values (0.001–0.999).

***RST** +2.20000000E-001

Range 0.000–1.000

Key Entry **FiLter Alpha**

Remarks To change the current filter type, refer to “:FILTer” on page 336.

:FILTer:BBT

Supported E4438C with Option 400

```
[ :SOURCE ] :RADIo:WCDMa:TGPP:ARB:FILTer:BBT <val>
```

```
[ :SOURCE ] :RADIo:WCDMa:TGPP:ARB:FILTer:BBT?
```

This command changes the bandwidth-multiplied-by-bit-time (BbT) filter parameter.

The filter BbT value can be set to the minimum level (0), the maximum level (1), or in between by using fractional numeric values (0.001–0.999).

***RST** +5.00000000E-001

Range 0.000–1.000

Key Entry **Filter BbT**

Remarks This command is effective only after choosing a Gaussian filter. It does not have an effect on other types of filters.

To change the current filter type, refer to “:FILTer” on page 336.

:FILTer:CHANnel

Supported E4438C with Option 400

```
[ :SOURCE ] :RADIo:WCDMa:TGPP:ARB:FILTer:CHANnel EVM|ACP
```

```
[ :SOURCE ] :RADIo:WCDMa:TGPP:ARB:FILTer:CHANnel?
```

This command optimizes the Nyquist and root Nyquist filters to minimize error vector magnitude (EVM) or to minimize adjacent channel power (ACP).

EVM This choice provides the most ideal passband.

ACP This choice improves stopband rejection.

***RST** ACP

Key Entry **Optimize FIR For EVM ACP**

Remarks To change the current filter type, refer to “:FILTer” on page 336.

:HEADer:CLEAr**Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP:ARB:HEADer:CLEAr

This command clears the header information from the header file used by this modulation format.

Key Entry Clear Header**Remarks** The **W-CDMA Off On** softkey must be set to On for this command to function.**:HEADer:SAVE****Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP:ARB:HEADer:SAVE

This command saves the header information to the header file used by this modulation format.

Key Entry Save Setup To Header**Remarks** The **W-CDMA Off On** softkey must be set to On for this command to function.**:IQ:EXTErnal:FILTer****Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP:ARB:IQ:EXTErnal:FILTer 40e6|THROUGH

[:SOURCE]:RADio:WCDMa:TGPP:ARB:IQ:EXTErnal:FILTer?

This command selects the filter or through path for I/Q signals routed to the rear panel I and Q outputs. Selecting a filter using this command will automatically set “:IQ:EXTErnal:FILTer:AUTO” on [page 338](#) to OFF(0) mode.

40e6 This choice applies a 40 MHz baseband filter.

THROUGH This choice bypasses filtering.

RST** THR**Key Entry** 40.000 MHz Through**:IQ:EXTErnal:FILTer:AUTO*Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP:ARB:IQ:EXTErnal:FILTer:AUTO ON|OFF|1|0

[:SOURCE]:RADio:WCDMa:TGPP:ARB:IQ:EXTErnal:FILTer:AUTO?

This command enables or disables the automatic selection of the filters for I/Q signals routed to the rear panel I/Q outputs.

ON(1)	This choice will automatically select a digital modulation filter optimized for the current signal generator settings.
OFF(0)	This choice disables the auto feature which lets you select a digital modulation filter or through path. Refer to “:IQ:EXTERNAL:FILTER” on page 338 for selecting a filter or through path.
*RST	1
Key Entry	I/Q Output Filter Manual Auto

:IQMap

Supported	E4438C with Option 400
	[:SOURCE] :RADIO:WCDMA:TGPP:ARB:IQMap NORMAL INVERT [:SOURCE] :RADIO:WCDMA:TGPP:ARB:IQMap?
	This command selects whether or not the I/Q outputs will be inverted.
NORMAL	This choice selects normal polarity.
INVERTED	This choice inverts the internal Q signal.
*RST	NORM
Key Entry	I/Q Mapping Normal Invert

:IQ:MODulation:ATTen

Supported	E4438C with Option 400
	[:SOURCE] :RADIO:WCDMA:TGPP:ARB:IQ:MODulation:ATTen <val> [:SOURCE] :RADIO:WCDMA:TGPP:ARB:IQ:MODulation:ATTen?
	This command attenuates the I/Q signals being modulated through the signal generator RF path.
	The variable <val> is expressed in units of decibels (dB).
*RST	+2.00000000E+00
Range	0–40
Key Entry	Modulator Atten Manual Auto

:IQ:MODulation:ATTen:AUTO

Supported E4438C with Option 400

```
[ :SOURCE ] :RADio:WCDMa:TGPP:ARB:IQ:MODulation:ATTen:AUTO ON|OFF|1|0
```

```
[ :SOURCE ] :RADio:WCDMa:TGPP:ARB:IQ:MODulation:ATTen:AUTO?
```

This command enables or disables the I/Q attenuation auto mode.

ON (1) This choice enables the attenuation auto mode which optimizes the modulator attenuation for the current conditions.

OFF (0) This choice holds the attenuator at its current setting or at a selected value. Refer to “:IQ:MODulation:ATTen” on page 339 for setting the attenuation value.

***RST** 1

Key Entry Modulator Atten Manual Auto

:IQ:MODulation:FILTer

Supported E4438C with Option 400

```
[ :SOURCE ] :RADio:WCDMa:TGPP:ARB:IQ:MODulation:FILTer 2.1e6|40e6|THROUGH
```

```
[ :SOURCE ] :RADio:WCDMa:TGPP:ARB:IQ:MODulation:FILTer?
```

This command enables you to select a filter or through path for I/Q signals modulated onto the RF carrier. Selecting a filter using this command will automatically set “:IQ:MODulation:FILTer:AUTO” on page 341 to OFF(0) mode.

2.1E6 This choice applies a 2.1 MHz baseband filter to the I/Q signals.

40E6 This choice applies a 40 MHz baseband filter to the I/Q signals.

THROUGH This choice bypasses filtering.

***RST** THR

Key Entry 2.100 MHz 40.000 MHz Through

:IQ:MODulation:FILTer:AUTO

Supported E4438C with Option 400

```
[ :SOURCE ] :RADIo:WCDMa:TGPP:ARB:IQ:MODulation:FILTer:AUTO ON|OFF|1|0
```

```
[ :SOURCE ] :RADIo:WCDMa:TGPP:ARB:IQ:MODulation:FILTer:AUTO?
```

This command enables or disables the automatic selection of the filters for I/Q signals modulated onto the RF carrier.

ON(1) This choice will automatically select a digital modulation filter.

OFF(0) This choice disables the auto feature which lets you select a digital modulation filter or through path. Refer to “[:IQ:MODulation:FILTer](#)” on page 302 for selecting a filter or through path.

***RST** 1

Key Entry **I/Q Mod Filter Manual Auto**

:LINK

Supported E4438C with Option 400

```
[ :SOURCE ] :RADIo:WCDMa:TGPP:ARB:LINK DOWN|UP
```

```
[ :SOURCE ] :RADIo:WCDMa:TGPP:ARB:LINK?
```

This command selects either a downlink or uplink channel configuration.

***RST** DOWN

Key Entry **Link Down Up**

:LINK:DOWN:OACP

Supported E4438C with Option 400

```
[ :SOURCE ] :RADio:WCDMa:TGPP:ARB:LINK:DOWN:OACP ADJ | ALT
```

```
[ :SOURCE ] :RADio:WCDMa:TGPP:ARB:LINK:DOWN:OACP?
```

This command selects the channel power optimization type for any downlink channel W-CDMA setup.

ADJ This choice optimizes for adjacent channel power.

ALT This choice optimizes for alternate channel power.

*RST ADJ

Key Entry **Optimize ACP ADJ ALT**

Remarks This command is operational for any downlink channel W-CDMA setup.

To change the current W-CDMA setup information, refer to
[“:LINK:DOWN:SETup” on page 342.](#)

:LINK:DOWN:SETup

Supported E4438C with Option 400

```
[ :SOURCE ] :RADio:WCDMa:TGPP:ARB:LINK:DOWN:SETup DPCH1 | DPCH3 | PPSCH |  
PPDPCH1 | PPDPCH3 | TM1D16 | TM1D32 | TM1D64 | TM2 | TM3D16 | TM3D32 | TM4 | TM5H2 | TM5H4 |  
TM5H8 | MCArrier | "<file name>"
```

```
[ :SOURCE ] :RADio:WCDMa:TGPP:ARB:LINK:DOWN:SETup?
```

This command defines the multicarrier waveform.

DPCH1 This choice selects 1 dedicated physical channel.

DPCH3 This choice selects 3 dedicated physical channels.

PPSCH This choice selects a primary command control physical channel (PCCPCH) with a synchronization channel (SCH).

PPDPCH1 This choice selects a primary command control physical channel (PCCPCH) with a dedicated physical channel (DPCH).

PPDPCH3 This choice selects a primary command control physical channel (PCCPCH) with 3 dedicated physical channels.

TM1D16 This choice selects a Test Model 1 with 16 dedicated physical channels.

TM1D32 This choice selects a Test Model 1 with 32 dedicated physical channels.

TM1D64 This choice selects a Test Model 1 with 64 dedicated physical channels.

Wideband CDMA ARB Subsystem—Option 400 ([:SOURCE]:RADIO:WCDMA:TGPP:ARB)

TM2	This choice selects a Test Model 2 downlink W-CDMA setup.																								
TM3D16	This choice selects a Test Model 3 with 16 dedicated physical channels.																								
TM3D32	This choice selects a Test Model 3 with 32 dedicated physical channels.																								
TM4	This choice selects a Test Model 4 downlink W-CDMA setup.																								
TM5H2	This choice selects a Test Model 5 with 6 DPCH and 2 HS-PDSCH (high speed physical shared channel) channels downlink W-CDMA setup.																								
TM5H4	This choice selects a Test Model 5 with 14 DPCH and 4 HS-PDSCH (high speed-physical downlink shared channel) channels downlink W-CDMA setup.																								
TM5H8	This choice selects a Test Model 5 with 30 DPCH and 8 HS-PDSCH (high speed physical shared channel) channels downlink WCDMA setup.																								
*RST	DPCH1																								
Key Entry	<table border="0"> <tr> <td>1 DPCH</td> <td>3 DPCH</td> <td>PCCPCH + SCH</td> <td>PCCPCH + SCH + 1 DPCH</td> </tr> <tr> <td>PCCPCH + SCH + 3 DPCH</td> <td colspan="3">Test Model 1 w/ 16 DPCH</td> </tr> <tr> <td>Test Model 1 w/ 32 DPCH</td> <td>Test Model 1 w/ 64 DPCH</td> <td colspan="2">Test Model 2</td> </tr> <tr> <td>Test Model 3 w/ 16 DPCH</td> <td>Test Model 3 w/ 32 DPCH</td> <td colspan="2">Test Model 4</td> </tr> <tr> <td>Test Model 5 w/2HSPDSCH</td> <td colspan="3">Test Model 5 w/4HSPDSCH</td> </tr> <tr> <td colspan="4">Test Model 5 w/8HSPDSCH</td> </tr> </table>	1 DPCH	3 DPCH	PCCPCH + SCH	PCCPCH + SCH + 1 DPCH	PCCPCH + SCH + 3 DPCH	Test Model 1 w/ 16 DPCH			Test Model 1 w/ 32 DPCH	Test Model 1 w/ 64 DPCH	Test Model 2		Test Model 3 w/ 16 DPCH	Test Model 3 w/ 32 DPCH	Test Model 4		Test Model 5 w/2HSPDSCH	Test Model 5 w/4HSPDSCH			Test Model 5 w/8HSPDSCH			
1 DPCH	3 DPCH	PCCPCH + SCH	PCCPCH + SCH + 1 DPCH																						
PCCPCH + SCH + 3 DPCH	Test Model 1 w/ 16 DPCH																								
Test Model 1 w/ 32 DPCH	Test Model 1 w/ 64 DPCH	Test Model 2																							
Test Model 3 w/ 16 DPCH	Test Model 3 w/ 32 DPCH	Test Model 4																							
Test Model 5 w/2HSPDSCH	Test Model 5 w/4HSPDSCH																								
Test Model 5 w/8HSPDSCH																									
Remarks	Refer to “ File Name Variables ” on page 13 for information on the file name syntax.																								

:LINK:DOWN:SETup:MCARrier

Supported E4438C with Option 400

```
[ :SOURCE ] :RADIO:WCDMA:TGPP:ARB:LINK:DOWN:SETup:MCARrier CAR2 | CAR3 | CAR4 |
CAR4TM1D64 | "<file name>"
```

```
[ :SOURCE ] :RADIO:WCDMA:TGPP:ARB:LINK:DOWN:SETup:MCARrier?
```

This command defines the type of multicarrier W-CDMA setup.

CAR2 a standard 2-carrier setup with the following settings:

Carrier 1: PCCPCH + SCH, -7.5 MHz frequency offset, 0 dB power

Carrier 2: PCCPCH + SCH, 7.5 MHz frequency offset, 0 dB power

CAR3	<p>a standard 3-carrier setup with the following settings:</p> <p style="padding-left: 40px;">Carrier 1: PCCPCH + SCH, -5 MHz frequency offset, 0 dB power</p> <p style="padding-left: 40px;">Carrier 2: PCCPCH + SCH, 0 kHz frequency offset, 0 dB power</p> <p style="padding-left: 40px;">Carrier 3: PCCPCH + SCH, 5 MHz frequency offset, 0 dB power</p>
CAR4	<p>a standard 4-carrier setup with the following settings:</p> <p style="padding-left: 40px;">Carrier 1: PCCPCH + SCH, -7.5 MHz frequency offset, 0 dB power</p> <p style="padding-left: 40px;">Carrier 2: PCCPCH + SCH, -2.5 MHz frequency offset, 0 dB power</p> <p style="padding-left: 40px;">Carrier 3: PCCPCH + SCH, 2.5 MHz frequency offset, 0 dB power</p> <p style="padding-left: 40px;">Carrier 4: PCCPCH + SCH, 7.5 MHz frequency offset, 0 dB power</p>
CAR4TM1D64	<p>a standard 4-carrier test model 1 with 64 dedicated physical channels setup with the following settings:</p> <p style="padding-left: 40px;">Carrier 1: Test Model 1 w/64 DPCH, -7.5 MHz frequency offset, 0 dB power</p> <p style="padding-left: 40px;">Carrier 2: Test Model 1 w/64 DPCH, -2.5 MHz frequency offset, 0 dB power</p> <p style="padding-left: 40px;">Carrier 3: Test Model 1 w/64 DPCH, 2.5 MHz frequency offset, 0 dB power</p> <p style="padding-left: 40px;">Carrier 4: Test Model 1 w/64 DPCH, 7.5 MHz frequency offset, 0 dB power</p>
*RST	CAR2
Key Entry	2 Carriers 3 Carriers 4 Carriers
Remarks	Refer to “File Name Variables” on page 13 for information on the file name syntax.

:LINK:DOWN:SETup:MCARrier:CLIPping:I**Supported** E4438C with Option 400

[:SOURCE]:RADIO:WCDMA:TGPP:ARB:LINK:DOWN:SETup:MCARrier:CLIPping:I <val>

[:SOURCE]:RADIO:WCDMA:TGPP:ARB:LINK:DOWN:SETup:MCARrier:CLIPping:I?

This command limits the modulation level of the waveform's I component to a percentage of full scale.

The variable <val> is expressed in units of percent.

RST** +1.00000000E+002**Range** 10–100**Key Entry** **Clip III To*:LINK:DOWN:SETup:MCARrier:CLIPping:Q****Supported** E4438C with Option 400

[:SOURCE]:RADIO:WCDMA:TGPP:ARB:LINK:DOWN:SETup:MCARrier:CLIPping:Q <val>

[:SOURCE]:RADIO:WCDMA:TGPP:ARB:LINK:DOWN:SETup:MCARrier:CLIPping:Q?

This command limits the modulation level of the waveform's Q component to a percentage of full scale.

The variable <val> is expressed in units of percent.

***RST** +1.00000000E+002**Range** 10–100**Key Entry** **Clip |Q| To**

:LINK:DOWN:SETup:MCARrier:CLIPping:TYPE**Supported** E4438C with Option 400

```
[:SOURce]:RADio:WCDMa:TGPP:ARB:LINK:DOWN:SETup:MCARrier:CLIPping:
TYPE IJQ|IORQ
[:SOURce]:RADio:WCDMa:TGPP:ARB:LINK:DOWN:SETup:MCARrier:CLIPping:TYPE?
```

This command selects either IJQ or IORQ as the clipping type.

IJQ The combined I and Q waveform will be clipped (*circular clipping*).

IORQ The I and Q components of the waveform are clipped independently (*rectangular clipping*). I and Q can be clipped to different levels using this mode.

***RST** IJQ

Key Entry **Clipping Type** |I+jQ| |I|,|Q|

:LINK:DOWN:SETup:MCARrier:CLIPping[:IJQ]**Supported** E4438C with Option 400

```
[:SOURce]:RADio:WCDMa:TGPP:ARB:LINK:DOWN:SETup:MCARrier:
CLIPping[:IJQ] <val>
[:SOURce]:RADio:WCDMa:TGPP:ARB:LINK:DOWN:SETup:MCARrier:CLIPping[:IJQ]?
```

This command clips (limits) the modulation level of the combined I and Q waveform to a percentage of full scale.

The variable <val> is expressed in units of percent.

***RST** +1.00000000E+002

Range 10–100

Key Entry **Clip** |I+jQ| **To**

:LINK:DOWN:SETup:MCARrier:SCODE:AINCrement**Supported** E4438C with Option 400

```
[:SOURce]:RADio:WCDMa:TGPP:ARB:LINK:DOWN:SETup:MCARrier:SCODE:AINCrement
```

This command will sort carriers by frequency offset and auto-increment scramble codes starting from the current scramble code value for the lowest frequency carrier.

Key Entry **Increment Scramble Code**

Remarks If the lowest frequency carrier has a scramble code value of N/A, the auto-increment value will start at 0.

:LINK:DOWN:SETup:MCARrier:STORe**Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP:ARB:LINK:DOWN:SETup:MCARrier:STORe "<file name>"

This command stores the current multicarrier setup information.

The stored file contains information including the digital modulation format, number of carriers, frequency spacing, and power settings for the multicarrier setup.

Key Entry **Store Custom Multicarrier**

Remarks User defined files created using firmware prior to C.02.40 did not save the setting for Increment Scramble Code, Increment Timing Offset, and Clipping Type settings. When loading user defined files created with firmware prior to C.02.40, Increment Scramble Code and Increment Timing Offset will default to Off and the Clipping Type settings will default to 100%. Firmware C.02.40 will save the Increment Scramble Code, Increment Timing Offset and Clipping Type settings.

Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:LINK:DOWN:SETup:MCARrier:TABLE**Supported** E4438C with Option 400

```
[:SOURCE]:RADio:WCDMa:TGPP:ARB:LINK:DOWN:SETup:MCARrier:TABLE INIT |
APPend |<carrier_num>,DPCH1|DPCH3|PPSCH|PPDPCH1|PPDPCH3|TM1D16|TM1D32|
TM1D64|TM2|TM3D16|TM3D32|TM4|TM5H2|TM5H4|TM5H8|"<filename>",<freq_offset
>,<power>[,<scramble code>,<timing offset>,<initial phase>,<pre-FIR circular clipping>[<clipping units {pct}|dB>],
<post-FIR circularclipping>[<clipping units {pct}|dB>]]
[:SOURCE]:RADio:WCDMa:TGPP:ARB:LINK:DOWN:SETup:MCARrier:
TABLE? <carrier_num>
```

This command defines the multicarrier format and waveform.

Use INIT to clear the table and define the parameters for the first carrier; use APPend to add new channels. To edit an existing carrier, use its carrier number (<carrier_num>).

The variable <freq_offset> is expressed in units of Hertz (kHz–MHz).

The variable <power> is expressed in units of decibels (dB).

The carrier type, frequency offset, and power level are returned when a query is initiated. The output format is as follows:

```
<carrier type>,<freq_offset>,<power>
```

INIT	This choice clears the current information and creates a new one-row table, allowing for further definition using additional parameters.
APPend	This choice adds rows to an existing table. The maximum number of rows for one table is 16.
DPCH1	This choice selects 1 dedicated physical channel.
DPCH3	This choice selects 3 dedicated physical channels.
PPSCH	This choice selects a primary command control physical channel (PCCPCH) with a synchronization channel (SCH).
PPDPCH1	This choice selects a primary command control physical channel (PCCPCH) with a dedicated physical channel (DPCH).
PPDPCH3	This choice selects a primary command control physical channel (PCCPCH) with 3 dedicated physical channels.
TM1D16	This choice selects a test model 1 with 16 dedicated physical channels.
TM1D32	This choice selects a test model 1 with 32 dedicated physical channels.
TM1D64	This choice selects a test model 1 with 64 dedicated physical channels.
TM2	This choice selects a test model 2.
TM3D16	This choice selects a test model 3 with 16 dedicated physical channels.
TM3D32	This choice selects a test model 3 with 32 dedicated physical channels.
TM4	This choice selects a test model 4.
TM5H2	This choice selects a Test Model 5 with 6 DPCH and 2 HS-PDSCH (high speed physical shared channel) channels downlink W-CDMA setup.
TM5H4	This choice selects a Test Model 5 with 14 DPCH and 4 HS-PDSCH (high speed-physical downlink shared channel) channels downlink W-CDMA setup.
TM5H8	This choice selects a Test Model 5 with 30 DPCH and 8 HS-PDSCH (high speed physical shared channel) channels downlink W-CDMA setup.
<scramble code>	This variable sets the scramble code value.
<timing offset>	This variable sets the timing offset value.
<initial phase>	This variable sets the initial phase value. The units are not specified but the value represents degrees.
<clipping>	This variable sets the clipping value. If the units are not specified, the value will default to percent.

Wideband CDMA ARB Subsystem—Option 400 ([:SOURCE]:RADIO:WCDMA:TGPP:ARB)

<carrier_num>	This variable specifies the number of multicarriers.
*RST	<i>carrier type</i> : PPSCH <freq_offset>: +7.5000000E+006 <power>: +0.0000000E+000
Range	<freq_offset>: -37.5E6 to 37.5E6 <power>: -40 to 0 <i>scramble code</i> : 0-511 <i>timing offset</i> : 0-149 <i>initial phase</i> : 0-359 <i>clipping(in units of percent)</i> : 0.0-100.0 or 0.0 to -20.0 (if units are dB)
Key Entry	1 DPCH 3 DPCH PCCPCH + SCH PCCPCH + SCH + 1 DPCH PCCPCH + SCH + 3 DPCH Test Model 1 w/ 16 DPCH Test Model 1 w/ 32 DPCH Test Model 1 w/ 64 DPCH Test Model 2 Test Model 3 w/ 16 DPCH Test Model 3 w/ 32 DPCH Test Model 4 Test Model 5 w/2HSPDSCH Test Model 5 w/4HSPDSCH Test Model 5 w/8HSPDSCH
Remarks	Refer to “ File Name Variables ” on page 13 for information on the file name syntax. If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to “ :LINK:DOWN:SETup:TABLE:APPLY ” on page 350 .

:LINK:DOWN:SETup:MCARrier:TABLE:NCARriers

Supported	E4438C with Option 400
	[:SOURCE] :RADIO:WCDMA:TGPP:ARB:LINK:DOWN:SETup:MCARrier:TABLE:NCARriers?
	This command queries the number of carriers specified for the W-CDMA multicarrier waveform.
*RST	+2

:LINK:DOWN:SETup:MCARrier:TOFFset:AINCrement

Supported	E4438C with Option 400
	[:SOURCE] :RADIO:WCDMA:TGPP:ARB:LINK:DOWN:SETup:MCARrier:TOFFset:AINCrement
	This command will sort carriers by frequency offset and auto-increment timing offsets. The new values will start with the current timing offset for the lowest frequency carrier and increment by one for each subsequent carrier.
Key Entry	Increment Timing Offset

:LINK:DOWN:SETup:STORe

Supported E4438C with Option 400

```
[ :SOURce ] :RADio:WCDMa:TGPP:ARB:LINK:DOWN:SETup:STORe "<file name>"
```

This command stores the current downlink setup information into the memory catalog with the entered file name.

Along with the contents of the W-CDMA channel table editor (channel types, Walsh code, power levels, PN offset, and data), this command stores the following information to the signal generator memory:

- FIR filter
- FIR filter file name
- FIR filter alpha
- FIR filter BbT
- FIR filter channel (EVM or ACP)
- I/Q mapping
- increment scramble code
- increment timing offset
- link
- spread type
- spread rate
- ARB reference clock source (internal or external)
- ARB reference clock frequency
- clipping
- multicarrier spacing
- radio configuration

Key Entry **Store Custom W-CDMA State**

Remarks Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:LINK:DOWN:SETup:TABLE:APPLy

Supported E4438C with Option 400

```
[ :SOURce ] :RADio:WCDMa:TGPP:ARB:LINK:DOWN:SETup:TABLE:APPLy
```

This command generates a W-CDMA signal based on the current values in the W-CDMA channel setup table editor.

Key Entry **Apply Channel Setup**

:LINK:DOWN:SETup:TABLE:CHANnel

Supported E4438C with Option 400

```
[ :SOURCE ] :RADio:WCDMa:TGPP:ARB:LINK:DOWN:SETup:TABLE:CHANnel INIT|
APPend|<chan_num>, <chan_type>, <symbol_rate>, <spread_code>, <power>,
<timing_offset>, <TFCI>, <TPC>, <scramble_code>, STANdard|RALternate|
LALternate, <scramble_offset>, RANDom|PN9|PINDicator|
<data_val>, <TFCI_power>, <TPC_power>, <pilot_power>, <pilot_bits>
[ :SOURCE ] :RADio:WCDMa:TGPP:ARB:LINK:DOWN:SETup:TABLE:CHANnel? <chan_num>
```

This command sets up the W-CDMA downlink channel type parameters.

Use INIT to clear the table editor and define the parameters for the first channel; use APPend to add new channels. To edit an existing channel, use its channel number <chan_num>.

The <power>, <TFCI_power>, <TPC_power>, and <pilot_power> variables are expressed in units of decibels (dB).

The channel type, symbol rate, spread code, power, timing offset, TFCI value, TPC value, scramble code, scramble type, scramble offset, data type, TFCI power, TPC power, pilot power, and the number of pilot bits are returned when a query is initiated. The output format is as follows:

```
<chan_type>, <symbol_rate>, <spread_code>, <power>, <tDPCH_offset>, <TFCI>,
<TPC>, <scramble_code>, <scramble_type>, <scramble_code>, <scramble_offset>,
<data_type>, <TFCI_power>, <TPC_power>, <pilot_power>, <pilot_bits>
```

INIT	This choice clears the current information and creates a new one-row table, allowing for further definition using additional parameters.
APPend	This choice adds a row to an existing table.
<chan_num>	This variable sets the physical channel number.
<chan_type>	This variable sets the channel type.
<timing_offset>	This variable sets the symbol offset.
<TFCI>	This variable sets the transport format combination indicator.
<TPC>	This variable sets the transmit power control.
STANdard	This choice sets the scramble type to standard.
RALternate	This choice sets the scramble type to right alternate.
LALternate	This choice sets the scramble type to left alternate.
RANDom	This choice sets a randomly generated pseudo-random sequence pattern as output data.

- PN9 This choice sets an internally generated 9-bit pseudo-random sequence pattern as output data.
- PINDicator This choice sets the paging indicator channel (PICH).
- <data_val> This variable sets the data value.
- <TFCI_power> This variable sets the transport format combination indicator power offset.
- <TPC_power> This variable sets the transport power control power offset.
- <pilot_power> This variable sets the pilot power offset.
- <pilot_bits> This variable sets the number of pilot bits that will be in the dedicated physical channel (DPCH).

Table 5-1 Variables and Channel Types

	SSCH	CPICH	PCCPCH	SCCPCH	PICH	DPCH	OCNS	PSCH
Channel number	X	X	X	X	X	X	X	X
Symbol rate	N/A	N/A	N/A	X	N/A	X	X	N/A
Spread code	N/A	X	X	X	X	X	X	N/A
Power	X	X	X	X	X	X	X	X
Symbol offset	N/A	N/A	N/A	N/A	X	X	N/A	N/A
TFCI	N/A	N/A	N/A	X	N/A	X	N/A	N/A
TPC	N/A	N/A	N/A	N/A	N/A	X	N/A	N/A
Scramble code	X	X	X	X	X	X	X	N/A
Standard	X	X	X	N/A	X	X	X	N/A
Right alternate	X	X	X	N/A	X	X	X	N/A
Left alternate	X	X	X	N/A	X	X	X	N/A
Scramble offset	X	X	X	X	X	X	X	N/A
Random	N/A	N/A	X	X	X	X	X	N/A
PN9	N/A	N/A	X	X	X	X	X	N/A

Table 5-1 **Variables and Channel Types**

	SSCH	CPICH	PCCPCH	SCCPCH	PICH	DPCH	OCNS	PSCH
Paging Indicator	N/A	N/A	N/A	N/A	X	N/A	N/A	N/A
Data value	N/A	N/A	X	N/A	X	X	X	N/A
TFCI power	N/A	N/A	N/A	N/A	X	N/A	N/A	N/A
Pilot power offset	N/A	N/A	N/A	N/A	X	N/A	N/A	N/A
Pilot bits	N/A	N/A	N/A	X	X	N/A	N/A	N/A

Table 5-2 **Variables and Channel Types**

	HSPDSCH	HSSCCH
Channel number	X	X
Symbol rate	N/A (fixed to 30ksps)	N/A (fixed to 240ksps)
Spread code	X	X
Power	X	X
Symbol offset	X	X
TFCI	N/A	N/A
TPC	N/A	N/A
Scramble code	X	X
Standard	X	X
Right alternate	X	X
Left alternate	X	X
Scramble offset	X	X
Random	X	X
PN9	X	X
Paging Indicator	N/A	N/A

Table 5-2 Variables and Channel Types

	HSPDSCH	HSSCCH
Data value	X	X
TFCI power	N/A	N/A
Pilot power offset	N/A	N/A
Pilot bits	N/A	N/A

***RST** <chan_type>: DPCH <symbol_rate>: +3.00000000E+004
 <spread_code>: +8 <scramble_offset>: +0.00000000E+000
 power: +0.00000000E+000 <tDPCH_offset>: +0 <TFCI>: +0
 <TPC>: #H5555 <scramble_code>: +0 scramble type: STAN
 <TFCI_power>: +0.00000000E+000
 <TPC_power>: +0.00000000E+000 <pilot_power>: +0.00000000E+000
 <pilot_bits>: +4

Range <chan_type>: PSCH SSCH CPICH PCCPch SCCPch
 DPCH PICH OCNS HSSCch HSPDsch
 <power>: -40 to 0 <tDPCH_offset>: 0-149 <TFCI>: 0-1023
 <TPC>: 0000-7FFF <scramble_code>: 0-511
 <scramble_offset>: 0-15 <data_val>: 00000000-11111111
 <TFCI_power>: -20 to 20 <TPC_power>: -20 to 20
 <pilot_power>: 0000-7FFF <pilot_bits>: 0-511

SCCPCH Channel

<symbol_rate>	<spread_code>	*<pilot_bits>
15 ksps	0-256	0,8
30 ksps	0-128	0,8
60 ksps	0-64	0,8
120 ksps	0-32	0,8
240 ksps	0-16	0,16
480 ksps	0-8	0,16
960 ksps	0-4	0,16

All Other Channels

<symbol_rate>	<spread_code>	<pilot_bits>
7.5 ksps	0-511	4

Wideband CDMA ARB Subsystem—Option 400 ([:SOURCE]:RADio:WCDMa:TGPP:ARB)

All Other Channels

<symbol_rate>	<spread_code>	<pilot_bits>
15 ksps	0–255	2,4,8
30 ksps	0–127	4,8
60 ksps	0–63	8
120 ksps	0–31	8
240 ksps	0–15	16
480 ksps	0–7	16
960 ksps	0–3	16

Key Entry	Channel	Type	Symbol Rate	First Spread Code	Power		
	Spread Code	TFCI Field Off On	Scramble Code	Scramble Offset			
	Random	PN9	Standard	Left Alternate	Right Alternate		
	PCCPCH	SCCPCH	PSCH	SSCH	CPICH	DPCH	PICH
	HSPDSCH	HSSCCH					
Field Entry	Spread Code	Power	Timing	TFCI	Scramble Code		
			Offset				
	TFCI	TPC	Pilot Power	Pilot Bits	Data		
	Power	Power					
	Scramble	Scramble					
	Type	Offset					

Remarks For additional information, refer to the 3GPP TS 25.211 (V 3.7) standard.

If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to “:LINK:DOWN:SETup:TABLE:APPLY” on page 350.

:LINK:DOWN:SETup:TABLE:NChannels?

Supported E4438C with Option 400

[:SOURCE] :RADio:WCDMa:TGPP:ARB:LINK:DOWN:SETup:TABLE:NChannel?

This command queries the number of channels being used for the carrier.

***RST** 1

:LINK:DOWN:SETup:TABLE:PADJust

Supported E4438C with Option 400

```
[ :SOURCE ] :RADio:WCDMa:TGPP:ARB:LINK:DOWN:SETup:TABLE:PADJust EQUal|SCALE
```

This command sets the code domain power.

EQUal This choice will adjust all channel powers to have equal energy per symbol, referenced to 7.5 ksp/s and increasing by 3 dB for each doubling of the symbol rate.

SCALE This choice will scale the channel power levels so that the sum of the powers are equal to 0 dB.

Key Entry **Equal Energy per Symbol** **Scale To 0dB**

Remarks This command is available in downlink only.

:LINK:DOWN:TFCI

Supported E4438C with Option 400

```
[ :SOURCE ] :RADio:WCDMa:TGPP:ARB:LINK:DOWN:TFCI ON|OFF|1|0
```

```
[ :SOURCE ] :RADio:WCDMa:TGPP:ARB:LINK:DOWN:TFCI?
```

This command enables or disables the transport format combination indicator (TFCI) field for all channels.

***RST** 1

Key Entry **TFCI Field Off On**

:LINK:UP:OACP

Supported E4438C with Option 400

```
[ :SOURCE ] :RADio:WCDMa:TGPP:ARB:LINK:UP:OACP ADJ|ALT
```

```
[ :SOURCE ] :RADio:WCDMa:TGPP:ARB:LINK:UP:OACP?
```

This command selects the channel power optimization type for any uplink channel W-CDMA setup.

ADJ This choice optimizes for adjacent channel power.

ALT This choice optimizes for alternate channel power.

***RST** ADJ

Key Entry **Optimize ACP ADJ ALT**

Remarks This command is only operational for any uplink channel W-CDMA setup.

To change the current W-CDMA setup information, refer to “:LINK:UP:SETup” on page 357.

:LINK:UP:SCRAMBLE

Supported E4438C with Option 400

```
[ :SOURCE ] :RADio:WCDMa:TGPP:ARB:LINK:UP:SCRAMBLE <val>
[ :SOURCE ] :RADio:WCDMa:TGPP:ARB:LINK:UP:SCRAMBLE?
```

This command sets the scramble code for the uplink.

***RST** #H000000

Range #H0–FFFFFF

Key Entry Scramble Code

:LINK:UP:SDPDch

Supported E4438C with Option 400

```
[ :SOURCE ] :RADio:WCDMa:TGPP:ARB:LINK:UP:SDPDch I | Q
[ :SOURCE ] :RADio:WCDMa:TGPP:ARB:LINK:UP:SDPDch?
```

This command selects whether the second dedicated physical data channel (SDPDCH) will be put onto I or Q.

***RST** Q

Key Entry Second DPDCH I Q

:LINK:UP:SETup

Supported E4438C with Option 400

```
[ :SOURCE ] :RADio:WCDMa:TGPP:ARB:LINK:UP:SETup DPCCH|DDPDCH1|DDPDCH2|
DDPDCH3|DDPDCH4|DDPDCH5|"<file name>"
[ :SOURCE ] :RADio:WCDMa:TGPP:ARB:LINK:UP:SETup?
```

This command selects a dedicated physical control channel (DPCCH) for uplink with the option to add one or more dedicated physical data channel (DPDCH) or a previously stored setup.

DPCCH This choice selects 1 dedicated physical control channel.

DDPDCH1 This choice selects 1 dedicated physical control channel and 1 dedicated physical data channel.

Wideband CDMA ARB Subsystem—Option 400 ([:SOURce]:RADio:WCDMa:TGPP:ARB)

DDPDCH2	This choice selects 1 dedicated physical control channel and 2 dedicated physical data channel.			
DDPDCH3	This choice selects 1 dedicated physical control channel and 3 dedicated physical data channel.			
DDPDCH4	This choice selects 1 dedicated physical control channel and 4 dedicated physical data channel.			
DDPDCH5	This choice selects 1 dedicated physical control channel and 5 dedicated physical data channel.			
*RST	DPCCH			
Key Entry	DPCCH	DPCCH + 1 DPDCH	DPCCH + 2 DPDCH	DPCCH + 3 DPDCH
	DPCCH + 4 DPDCH	DPCCH + 5 DPDCH	Custom WCDMA State	
Remarks	Refer to “ File Name Variables ” on page 13 for information on the file name syntax.			
	If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to “ :LINK:UP:SETup:TABLE:APPLY ” on page 359.			

:LINK:UP:SETup:STORe

Supported E4438C with Option 400

[:SOURce] :RADio:WCDMa:TGPP:ARB:LINK:UP:SETup:STORe "<file name>"

This command stores the current state into a designated file name.

Key Entry **Store To File**

Remarks You can recall a saved state from signal generator memory (non-volatile) by executing the following commands (using a designated file name):

For downlink, refer to “[:LINK:DOWN:SETup](#)” on page 342.

For uplink, refer to “[:LINK:UP:SETup](#)” on page 357.

Refer to “[File Name Variables](#)” on page 13 for information on the file name syntax.

:LINK:UP:SETup:TABLE:APPLY

Supported E4438C with Option 400

```
[ :SOURCE ] :RADio:WCDMa:TGPP:ARB:LINK:UP:SETup:TABLE:APPLY
```

This command applies the signal based on the current values in the W-CDMA channel setup table editor.

Key Entry **Apply Channel Setup**

Remarks Refer to “[File Name Variables](#)” on page 13 for information on the file name syntax.

:LINK:UP:SETup:TABLE:CHANnel

Supported E4438C with Option 400

```
[ :SOURCE ] :RADio:WCDMa:TGPP:ARB:LINK:UP:SETup:TABLE:CHANnel  
INIT|APPend|<chan_num>,<chan_type>,<symbol_rate>,<spread_code>,<
```

```
power>,<TFCI>,<TCP>,<RANDOM|<data_val>,<fbi_bits_count>,<fbi_bits_value>  
[ :SOURCE ] :RADio:WCDMa:TGPP:ARB:LINK:UP:SETup:TABLE:CHANnel? <chan_num>
```

This command defines the channel parameters of the signal.

Use INIT to clear the table editor and define the parameters for the first channel; use APPend to add new channels. To edit an existing channel, use its channel number <chan_num>.

The variable <power> is expressed in units of decibels (dB).

The channel type, symbol rate, spread code, power, TFCI value, TPC value, data value, FBI bit count, and FBI bit value are returned when a query is initiated. The output format is as follows:

```
<chan_type>,<symbol_rate>,<spread_code>,<power>,<TFCI>,<TCP>,<data_val>,<  
<fbi_bits_count>,<fbi_bits_value>
```

INIT This choice clears the current information and creates a new one-row table, allowing for further definition using additional parameters.

APPend This choice adds a row to an existing table.

RANDom This choice selects random data format for the digital modulation signal.

<fbi_bits_count> This variable sets the number of feedback information (FBI) bits.

<fbi_bits_value> This variable sets the value of the FBI bits.

Wideband CDMA ARB Subsystem—Option 400 ([:SOURce]:RADio:WCDMa:TGPP:ARB)

```

*RST          <chan_type>: DPCH      <symbol_rate>: +1.50000000E+
                <spread_code>: +0      <power>: +0.00000000E+000      <TFCI>: +0
                <TPC>: #H5555      <data_val>: RAND      <FBI Bits Count>: +0
                <FBI Bit Count>: +0

Range        <power>: -40 to 0      <data_val>: 00000000-11111111
                <fbi_bits_count>: 0-2      <fbi_bits_value>: 0-3

                <symbol_rate> <spread_rate>
                7.5 ksps      0-511
                15 ksps      0-255
                30 ksps      0-127
                60 ksps      0-63
                120 ksps     0-31
                240 ksps     0-15
                480 ksps     0-7
                960 ksps     0-3
    
```

Key Entry	Channel	Type	Symbol Rate	First Spread Code	Power
	Spread Code	TFCI Field Off On	Scramble Code	Scramble Offset	
	Random				

Remarks If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to [“:LINK:UP:SETup:TABLE:APPLY” on page 359](#).

:LINK:UP:SETup:TABLE:GUNit

Supported E4438C with Option 400

```

[:SOURce]:RADio:WCDMa:TGPP:ARB:LINK:UP:SETup:TABLE:GUNit DB|LINear|INDex
[:SOURce]:RADio:WCDMa:TGPP:ARB:LINK:UP:SETup:TABLE:GUNit?
    
```

This command selects the uplink power measurement units.

DB The power is set in decibels-exponential.

LINear The power is set to increase linearly.

INDex The power is set at an index level - steps.

***RST** DB

Key Entry **Gain Unit dB Lin Index**

Remarks If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to [“:LINK:UP:SETup:TABLE:APPLY” on page 359](#).

:LINK:UP:SETup:TABLE:NCHannel**Supported** E4438C with Option 400

[:SOURCE]:RADIO:WCDMA:TGPP:ARB:LINK:UP:SETup:TABLE:NCHannels?

This command queries the setup table for the number of uplink channels.

RST** 1**:LINK:UP:TFCI*Supported** E4438C with Option 400

[:SOURCE]:RADIO:WCDMA:TGPP:ARB:LINK:UP:TFCI ON|OFF|1|0

[:SOURCE]:RADIO:WCDMA:TGPP:ARB:LINK:UP:TFCI?

This command enables or disables the transport format combination indicator (TFCI) field for all channels in the table.

RST** 1**Key Entry** TFCI Field Off On**:MDEStination:PULSe*Supported** E4438C with Option 400

[:SOURCE]:RADIO:WCDMA:TGPP:ARB:MDEStination:PULSe NONE|M1|M2|M3|M4

[:SOURCE]:RADIO:WCDMA:TGPP:ARB:MDEStination:PULSe?

This command routes the selected marker to the Pulse/RF Blanking function. The NONE parameter clears the marker for the Pulse/RF Blanking function.

***RST** NONE**Key Entry** None Marker 1 Marker 2 Marker 3 Marker 4

:MDESTINATION:AAMPLITUDE

Supported E4438C with Option 400

```
[ :SOURCE ] :RADIO:WCDMA:TGPP:ARB:MDESTINATION:AAMPLITUDE NONE | M1 | M2 | M3 | M4
[ :SOURCE ] :RADIO:WCDMA:TGPP:ARB:MDESTINATION:AAMPLITUDE?
```

This command routes the selected marker to the Alternate Amplitude function. The NONE parameter clears the marker to the Alternate Amplitude function.

***RST** NONE

Key Entry **None** **Marker 1** **Marker 2** **Marker 3** **Marker 4**

:MDESTINATION:ALCHOLD

Supported E4438C with Option 400

```
[ :SOURCE ] :RADIO:WCDMA:TGPP:ARB:MDESTINATION:ALCHOLD NONE | M1 | M2 | M3 | M4
[ :SOURCE ] :RADIO:WCDMA:TGPP:ARB:MDESTINATION:ALCHOLD?
```

This command routes the selected marker to the ALC Hold function. The NONE parameter clears the marker for the ALC Hold function.

***RST** NONE

Key Entry **None** **Marker 1** **Marker 2** **Marker 3** **Marker 4**

:MPOLARITY:MARKER1

Supported E4438C with Option 400

```
[ :SOURCE ] :RADIO:WCDMA:TGPP:ARB:MPOLARITY:MARKER1 NEGATIVE | POSITIVE
[ :SOURCE ] :RADIO:WCDMA:TGPP:ARB:MPOLARITY:MARKER1?
```

This command sets the polarity for marker 1.

***RST** POS

Key Entry **Marker 1 Polarity Neg Pos**

:MPOLarity:MARKer2

Supported E4438C with Option 400

```
[ :SOURCE ] :RADio:WCDMa:TGPP:ARB:MPOLarity:MARKer2 NEGative|POSitive  
[ :SOURCE ] :RADio:WCDMa:TGPP:ARB:MPOLarity:MARKer2?
```

This command sets the polarity for marker 2.

***RST** POS

Key Entry **Marker 2 Polarity Neg Pos**

:MPOLarity:MARKer3

Supported E4438C with Option 400

```
[ :SOURCE ] :RADio:WCDMa:TGPP:ARB:MPOLarity:MARKer3 NEGative|POSitive  
[ :SOURCE ] :RADio:WCDMa:TGPP:ARB:MPOLarity:MARKer3?
```

This command sets the polarity for marker 3.

***RST** POS

Key Entry **Marker 3 Polarity Neg Pos**

:MPOLarity:MARKer4

Supported E4438C with Option 400

```
[ :SOURCE ] :RADio:WCDMa:TGPP:ARB:MPOLarity:MARKer4 NEGative|POSitive  
[ :SOURCE ] :RADio:WCDMa:TGPP:ARB:MPOLarity:MARKer4?
```

This command sets the polarity for marker 4.

***RST** POS

Key Entry **Marker 4 Polarity Neg Pos**

:REFerence:EXTernal:FREQuency

Supported E4438C with Option 400

```
[ :SOURCE ] :RADio:WCDMa:TGPP:ARB:REFerence:EXTernal:FREQuency <val>
```

```
[ :SOURCE ] :RADio:WCDMa:TGPP:ARB:REFerence:EXTernal:FREQuency?
```

This command sets the external reference frequency.

The variable <val> is expressed in Hertz (Hz).

***RST** +1.00000000E+007

Range 2.5E5–1E8

Remarks The value specified by this command is effective only when you are using an external ARB reference applied to the BASEBAND GEN REF IN rear panel connector.

To specify external as the ARB reference source type, refer to “:REFerence[:SOURCE]” on page 214.

:REFerence[:SOURCE]

Supported E4438C with Option 400

```
[ :SOURCE ] :RADio:WCDMa:TGPP:ARB:REFerence [ :SOURCE ] INTernal | EXTernal
```

```
[ :SOURCE ] :RADio:WCDMa:TGPP:ARB:REFerence [ :SOURCE ] ?
```

This command selects either an internal or external reference for the waveform clock.

***RST** 0

Key Entry **ARB Reference Ext Int**

Remarks If the EXTernal choice is selected, the external frequency value *must* be entered and the signal must be applied to the BASEBAND GEN REF IN rear panel connector.

Refer to “:REFerence:EXTernal:FREQuency” on page 364 to enter the external reference frequency.

:RETRigger

Supported E4438C with Option 400

[:SOURCE] :RADio:WCDMa:TGPP:ARB:RETRigger ON | OFF | IMMEDIATE

[:SOURCE] :RADio:WCDMa:TGPP:ARB:RETRigger?

This command sets the retrigger mode.

ON This choice specifies that if a trigger occurs while a waveform is initiated, the waveform will retrigger at the end of the previous waveform sequence and play once more.

OFF This choice specifies that if a trigger occurs while a waveform is initiated, the action will be ignored.

IMMEDIATE This choice specifies that if a trigger occurs while a waveform is playing, the waveform will reset and replay from the start immediately upon receiving a trigger.

***RST** 0

Key Entry **Retrigger Mode Off On**

:REVISION

Supported E4438C with Option 400

[:SOURCE] :RADio:WCDMa:TGPP:ARB:REVISION?

This command checks the version for the arbitrary waveform generator firmware.

***RST** 3GPP 06-2001

:SCLock:RATE

Supported E4438C with Option 400

```
[ :SOURce ] :RADio:WCDMa:TGPP:ARB:SCLock:RATE <val>
```

```
[ :SOURce ] :RADio:WCDMa:TGPP:ARB:SCLock:RATE?
```

This command sets the sample clock rate for the W-CDMA modulation format.

The variable <val> is expressed in units of hertz.

***RST** +1.00000000E+008

Range 1–1E8

Key Entry **ARB Sample Clock**

Remarks The modulation format should be active before executing this command. If this command is executed before the modulation format is active, the entered value will be overridden by a calculated factory default value. Refer to “[:STATe]” on [page 373](#) to activate the modulation format.

:TRIGger:TYPE

Supported E4438C with Option 400

```
[ :SOURce ] :RADio:WCDMa:TGPP:ARB:TRIGger:TYPE CONTinuous | SINGLE | GATE
```

```
[ :SOURce ] :RADio:WCDMa:TGPP:ARB:TRIGger:TYPE?
```

This command sets the trigger mode (type) that controls the waveform’s playback.

Triggers control the playback by telling the ESG when to play the modulating signal (waveform). Depending on the trigger settings for the ESG, the waveform playback can occur once, continuously, or the ESG may start and stop playing the waveform repeatedly (GATE mode).

A trigger signal comprises both positive and negative signal transitions (states), which are also called high and low periods. You can configure the ESG to trigger on either state of the trigger signal. It is common to have multiple triggers, also referred to as trigger occurrences or events, occur when the signal generator requires only a single trigger. In this situation, the ESG recognizes the first trigger and ignores the rest.

When you select a trigger mode, you may lose the signal (carrier plus modulating) from the RF output until you trigger the waveform. This is because the ESG sets the I and Q signals to zero volts prior to the first trigger event, which suppresses the carrier. After the first trigger event, the waveform’s final I and Q levels determine whether you will see the carrier signal or not (zero = no carrier, other values = carrier visible). At the end of most files, the final I and Q points are set to a value other than zero.

There are four parts to configuring the trigger:

- Choosing the trigger type, which controls the waveform’s transmission.
- Setting the waveform’s response to triggers:
 - CONTInuous, see “:TRIGger:TYPE:CONTInuous[:TYPE]” on page 368
 - SINGle, see “:RETRigger” on page 365
 - GATE, selecting the mode also sets the response
- Selecting the trigger source (see “:TRIGger[:SOURCE]” on page 369), which determines how the ESG receives its trigger signal, internally or externally. The GATE choice requires an external trigger.
- Setting the trigger polarity when using an external source:
 - CONTInuous and SINGle see “:TRIGger[:SOURCE]:EXTernal:SLOPe” on page 372
 - GATE, see “:TRIGger:TYPE:GATE:ACTive” on page 369

For more information on triggering, see the *E4428C/38C ESG Signal Generators User’s Guide*.

The following list describes the trigger type command choices:

CONTInuous	Upon triggering, the waveform repeats continuously.
SINGle	Upon triggering, the waveform segment or sequence plays once.
GATE	An external trigger signal repeatedly starts and stops the waveform’s playback (transmission). The time duration for playback depends on the duty period of the trigger signal and the gate polarity selection (see “:TRIGger:TYPE:GATE:ACTive” on page 369). The waveform plays during the inactive state and stops during the active polarity selection state. The active state can be set high or low. The gate mode works only with an external trigger source.

NOTE The ARB gating behavior described above is opposite to the gating behavior for real-time custom mode.

*RST	CONT		
Key Entry	Continuous	Single	Gated

:TRIGger:TYPE:CONTInuous[:TYPE]

Supported E4438C with Option 400

```
[ :SOURce ] :RADio:WCDMa:TGPP:ARB:TRIGger:CONTInuous [ :TYPE ] FREE |
TRIGger | RESet
[ :SOURce ] :RADio:WCDMa:TGPP:ARB:TRIGger:CONTInuous [ :TYPE ] ?
```

This commands selects the waveform's response to a trigger signal while using the continuous trigger mode.

For more information on triggering and to select the continuous trigger mode, see [“:TRIGger:TYPE” on page 366](#).

The following list describes the waveform's response to each of the command choices:

FREE	Turning the ARB format on immediately triggers the waveform. The waveform repeats until you turn the format off, select another trigger, or choose another waveform file.
TRIGger	The waveform waits for a trigger before play begins. When the waveform receives the trigger, it plays continuously until you turn the format off, select another trigger, or choose another waveform file.
RESet	The waveform waits for a trigger before play begins. When the waveform receives the trigger, it plays continuously. Subsequent triggers reset the waveform to the beginning. For a waveform sequence, this means to the beginning of the first segment in the sequence.
*RST	FREE
Key Entry	Free Run Trigger & Run Reset & Run

:TRIGger:TYPE:GATE:ACTive**Supported** E4438C with Option 400

```
[:SOURCE]:RADIo:WCDMa:TGPP:ARB:TRIGger:TYPE:GATE:ACTive LOW|HIGH
[:SOURCE]:RADIo:WCDMa:TGPP:ARB:TRIGger:TYPE:GATE:ACTive?
```

This command selects the active state (gate polarity) of the gate while using the gating trigger mode.

The LOW and HIGH selections correspond to the low and high states of an external trigger signal. For example, when you select HIGH, the active state occurs during the high of the trigger signal. When the active state occurs, the ESG stops the waveform playback at the last played sample point, then restarts the playback at the next sample point when the inactive state occurs. For more information on triggering and to select gating as the trigger mode, see “:TRIGger:TYPE” on page 366.

The following list describes the ESG’s gating behavior for the polarity selections:

LOW	The waveform playback stops when the trigger signal goes low (active state) and restarts when the trigger signal goes high (inactive state).
HIGH	The waveform playback stops when the trigger signal goes high (active state) and restarts when the trigger signal goes low (inactive state).
*RST	HIGH
Key Entry	Gate Active Low High

:TRIGger[:SOURce]**Supported** E4438C with Option 400

```
[:SOURCE]:RADIo:WCDMa:TGPP:ARB:TRIGger[:SOURce] KEY|EXT|BUS
[:SOURCE]:RADIo:WCDMa:TGPP:ARB:TRIGger[:SOURce]?
```

This command sets the trigger source.

For more information on triggering, see “:TRIGger:TYPE” on page 366. The following list describes the command choices:

KEY	This choice enables manual triggering by pressing the front-panel Trigger hardkey.
EXT	An externally applied signal triggers the waveform. This is the only choice that works with gating. The following conditions affect an external trigger: <ul style="list-style-type: none"> The input connector selected for the trigger signal. You have a choice between the rear-panel PATTERN TRIG IN connector or the PATT TRIG IN 2 pin on

the rear-panel AUXILIARY I/O connector. To make the connector selection, see “:TRIGger[:SOURce]:EXTernal[:SOURce]” on page 372.

For more information on the connectors and on connecting the cables, see the *ESG User’s Guide*.

- The trigger signal polarity:
 - gating mode, see “:TRIGger:TYPE:GATE:ACTive” on page 369
 - continuous and single modes, see “:TRIGger[:SOURce]:EXTernal:SLOPe” on page 372
- The time delay between when the ESG receives a trigger and when the waveform responds to the trigger. There are two parts to setting the delay:
 - setting the amount of delay, see “:TRIGger[:SOURce]:EXTernal:DELay” on page 370
 - turning the delay on, see “:TRIGger[:SOURce]:EXTernal:DELay:STATe” on page 371

BUS This choice enables triggering over the GPIB or LAN using the *TRG or GET commands or the AUXILIARY INTERFACE (RS-232) using the *TRG command.

Key Entry **Trigger Key** **Bus** **Ext**

:TRIGger[:SOURce]:EXTernal:DELay

Supported E4438C with Option 400

```
[ :SOURce ] :RADio:WCDMa:TGPP:ARB:TRIGger [ :SOURce ] :EXTernal:DELay <val>
[ :SOURce ] :RADio:WCDMa:TGPP:ARB:TRIGger [ :SOURce ] :EXTernal:DELay?
```

This command sets the amount of time to delay the ESG’s response to an external trigger.

The delay is a path (time) delay between when the ESG receives the trigger and when it responds to the trigger. For example, configuring a trigger delay of two seconds, causes the ESG to wait two seconds after receipt of the trigger before the ESG plays the waveform.

The delay does not occur until you turn it on (see “:TRIGger[:SOURce]:EXTernal:DELay:STATe” on page 371). You can set the delay value either before or after turning it on.

For more information on configuring an external trigger source and to select external as the trigger source, see “:TRIGger[:SOURce]” on page 369.

The unit of measurement for the variable <val> is in seconds (nsec–sec).

***RST** +1.00000000E–003

Range 1E–8 to 4E1

Key Entry **Ext Delay Time**

Remarks This command is effective only if an external trigger is selected as the trigger source. Refer to “:TRIGger[:SOURCE]” on page 369.

:TRIGger[:SOURCE]:EXTeRnal:DELAy:STATe

Supported E4438C with Option 400

[:SOURCE] :RADio:WCDMa:TGPP:ARB:TRIGger [:SOURCE] :EXTeRnal:DELAy:

STATe ON|OFF|1|0

[:SOURCE] :RADio:WCDMa:TGPP:ARB:TRIGger [:SOURCE] :EXTeRnal:DELAy:STATe?

This command enables or disables the arbitrary waveform generator’s external trigger delay.

For setting the delay time, see “:TRIGger[:SOURCE]:EXTeRnal:DELAy” on page 370, and for more information on configuring an external source, see “:TRIGger[:SOURCE]” on page 369.

***RST** 0

Key Entry **Ext Delay Off On**

:TRIGger[:SOURce]:EXTernal:SLOPe

Supported E4438C with Option 400

```
[:SOURce]:RADio:WCDMa:TGPP:ARB:TRIGger[:SOURce]:EXTernal:
SLOPe POSitive|NEGative
```

```
[:SOURce]:RADio:WCDMa:TGPP:ARB:TRIGger[:SOURce]:EXTernal:SLOPe?
```

This command sets the polarity for an external trigger signal while using the continuous, single triggering mode. To set the polarity for gating, see “:TRIGger:TYPE:GATE:ACTive” on page 369.

The POSitive and NEGative selections correspond to the high (positive) and low (negative) states of the external trigger signal. For example, when you select POSitive, the waveform responds (plays) during the high state of the trigger signal. When the PSG receives multiple trigger occurrences when only one is required, the signal generator uses the first trigger and ignores the rest.

For more information on configuring an external trigger source and to select external as the trigger source, see “:TRIGger[:SOURce]” on page 369.

***RST** NEG

Key Entry Ext Polarity Neg Pos

:TRIGger[:SOURce]:EXTernal[:SOURce]

Supported E4438C with Option 400

```
[:SOURce]:RADio:WCDMa:TGPP:ARB:TRIGger[:SOURce]:EXTernal
```

```
[:SOURce] EPT1|EPT2|EPTRIGGER1|EPTRIGGER2
```

```
[:SOURce]:RADio:WCDMa:TGPP:ARB:TRIGger[:SOURce]:EXTernal[:SOURce]?
```

This command selects which PATTERN TRIG IN connection the ESG uses to accept an externally applied trigger signal when external is the trigger source selection.

For more information on configuring an external trigger source and to select external as the trigger source, see “:TRIGger[:SOURce]” on page 369. For more information on the rear-panel connectors, see the *E4428C/38C ESG Signal Generators User’s Guide*.

The following list describes the command choices:

- | | |
|------------|---|
| EPT1 | This choice is synonymous with EPTRIGGER1 and selects the PATTERN TRIG IN rear-panel connector. |
| EPT2 | This choice is synonymous with EPTRIGGER2 and selects the PATT TRIG IN 2 pin on the rear-panel AUXILIARY I/O connector. |
| EPTRIGGER1 | This choice is synonymous with EPT1 and selects the PATTERN TRIG IN rear-panel connector. |

Wideband CDMA ARB Subsystem–Option 400 ([:SOURCE]:RADIO:WCDMA:TGPP:ARB)

EPTRIGGER2	This choice is synonymous with EPT2 and selects the PATT TRIG IN 2 pin on the rear-panel AUXILIARY I/O connector.
*RST	EPT1
Choices	EPT1 EPT2 EPTRIGGER1 EPTRIGGER2

[:STATe]

Supported E4438C with Option 400

[:SOURCE] :RADIO:WCDMA:TGPP:ARB [:STATe] ON | OFF | 1 | 0

[:SOURCE] :RADIO:WCDMA:TGPP:ARB [:STATe] ?

This command enables or disables the W-CDMA modulation format.

ON (1) This choice enables the W-CDMA modulation capability and sets up the internal hardware to generate the currently selected W-CDMA signal selection.

OFF (0) This choice disables the W-CDMA baseband signal capability.

***RST** 0

Key Entry **W-CDMA Off On**

Remarks This choice also activates the I/Q state and sets the I/Q source to internal.

6 Digital Signal Interface Module Commands

This chapter provides SCPI descriptions for commands available with Agilent's N5102A Digital Signal Interface Module. Refer to the *ESG Signal Generators User's Guide* and *Key Reference* for more information on the N5102A.

- [“Digital Subsystem—Option 003 and 004 \(\[:SOURce\]\)” on page 376](#)

Digital Subsystem—Option 003 and 004 ([:SOURce])

:DIGital:CLOCK:CPS 1|2|4

Supported E4438C Option with option 003 or 004 or both

```
:DIGital:CLOCK:CPS 1|2|4  
:DIGital:CLOCK:CPS?
```

This command selects the number of clock cycles per sample. The command is used with parallel or parallel interleaved port configurations. If this command is executed with a serial port configuration or an IF signal type, the parameter value is changed, but it is not used by the interface module until the port configuration is changed to parallel or parallel interleaved, *and* the signal type is changed to IQ.

The query returns the currently set value. Regardless of the port configuration, you must query all four states (clocks per sample, port configuration, data direction, and signal type) to know the interface module's current setup.

Example

```
:DIG:CLOC:CPS 2
```

The preceding example sets two clock cycles for each sample.

***RST** 1

Range 1,2,or 4

Key Entry Clocks Per Sample

:DIGital:CLOCK:PHASe

Supported E4438C Option with option 003 or 004 or both

```
:DIGital:CLOCK:PHASe <val>  
:DIGital:CLOCK:PHASe?
```

This command sets the phase for the clock relative to the leading edge transition of the data. At 0 degrees the clock and leading edge of the data signal are aligned. Any phase value between 0 and 360 degrees can be used in the command, however, the signal generator rounds up or down to get 90, 180, 270 and 0 degree settings. For example, an entry of 140 degrees will cause the signal generator to use the 180 degree setting.

If this command is executed when the clock rate is less than 10 MHz or greater than 200 MHz, the resolution of this setting changes to 180 degrees, and the maximum phase becomes 180 degrees.

Example

```
:DIG:CLOC:PHAS 90DEG
```

The preceding example sets the clock phase to 90 degrees. The clock signal leading edge transition will be delayed by 1/4 of a clock period relative to the leading edge data transition.

***RST** +0.00000000E+000

Range 0 – 360 deg

Key Entry **Clock Phase**

:DIGital:CLOCK:POLarity

Supported E4438C Option with option 003 or 004 or both

```
:DIGital:CLOCK:POLarity POSitive|NEGative
```

```
:DIGital:CLOCK:POLarity?
```

This command sets the alignment for the clock signal to positive or negative. Positive selects the leading edge transition of the clock signal to align with the leading edge data transition and negative selects the falling edge transition of the clock signal to align with the leading edge of the data.

Example

```
:DIG:CLOC:POL NEG
```

The preceding example sets the clock falling edge transition to align with the leading edge data transition.

***RST** POS

Key Entry **Clock Polarity**

:DIGital:CLOCK:RATE

Supported E4438C Option with option 003 or 004 or both

```
:DIGital:CLOCK:RATE <val>  
:DIGital:CLOCK:RATE?
```

This command sets the clock rate. If an external clock is used, the rate set with this command must match the external clock rate. Only clock phase settings of 0 or 180 degrees are valid for a clock rate setting below 10 MHz or above 200 MHz. The variable <val> is expressed in hertz

Example

```
:DIG:CLOC:RATE 200MHZ
```

The preceding example sets the clock rate to 200 megahertz.

***RST** +1.00000000E+008

Range 1 kHz–400 MHz

Key Entry **Clock Rate**

:DIGital:CLOCK:REFERENCE:FREQUENCY

Supported E4438C Option with option 003 or 004 or both

```
:DIGital:CLOCK:REFERENCE:FREQUENCY <freq>  
:DIG:CLOC:REF:FREQ?
```

This command allows you to specify the frequency of the external reference supplied to the Freq Ref connector. This command is valid only when the clock source is set to internal.

If this command is executed when the clock source is not set to internal, the parameter value is changed, but it is not used by the signal generator until the clock source is changed to internal.

Because a query returns the currently set value, regardless of the clock source, you must query both states (reference frequency and clock source) to know the signal generator's current setup.

Example

```
:DIG:CLOC:REF:FREQ 50MHZ
```

The preceding example specifies a 50 megahertz external reference frequency.

***RST** +1.00000000E+007

Range 1kHz–100 MHz

Key Entry **Reference Frequency**

:DIGital:CLOCK:SKEW

Supported E4438C Option with option 003 or 004 or both

```
:DIGital:CLOCK:SKEW <val>  
:DIGital:CLOCK:SKEW?
```

This command sets the clock signal skew value. The skew is a fine-tune adjustment for the course tune clock phase function and helps to align the clock with valid data states. This is useful at high clock rates and available only for clock frequencies above 10 megahertz. The variable <val> is expressed in nanoseconds.

Example

```
:DIG:CLOC:SKEW 2NS
```

The preceding example sets the clock skew to 2 nanoseconds.

***RST** +0.00000000E+000

Range -5ns to 5ns

Key Entry **Clock Skew**

:DIGital:CLOCK:SOURCe

Supported E4438C Option with option 003 or 004 or both

```
:DIGital:CLOCK:SOURCe INTernal|EXTernal|DEVice  
:DIG:CLOC:SOURCe?
```

This command selects one of three possible clock sources.

Example

```
:DIG:CLOC:SOUR DEV
```

The preceding example uses the “Device Interface Connector” input clock.

***RST** INT

Key Entry **Clock Source**

:DIGital:DATA:ALIGNment

Supported E4438C Option with option 003 or 004 or both

```
:DIGital:DATA:ALIGNment MSB|LSB  
:DIGital:DATA:ALIGNment?
```

This command selects the bit alignment for word less than 16 bits in length. The MSB (most significant bit) selection maintains the MSB of the word on the same data line while the LSB (least significant bit) will move depending on the word size. The opposite effect occurs when the alignment is set to LSB.

Example

```
:DIG:DATA:ALIG MSB
```

The preceding example sets the MSB word format.

***RST** LSB

Key Entry Word Alignment

:DIGital:DATA:BORDER

Supported E4438C Option with option 003 or 004 or both

```
:DIGital:DATA:BORDER MSB|LSB  
:DIGital:DATA:BORDER?
```

This command selects the bit order for data transmitted through the N5102A module. Data can be in least significant (LSB) bit first or most significant (MSB) bit first.

Example

```
:DIG:DATA:BORD MSB
```

The preceding example specifies data in MSB first format.

***RST** LSB

Key Entry Bit Order

:DIGital:DATA:DIRection

Supported E4438C Option with option 003 or 004 or both

```
:DIGital:DATA:DIRection OUTPut | INPut  
:DIGital:DATA:DIRection?
```

This command selects an input or output direction for data flow through the N5102A module.

Example

```
:DIG:DATA:DIR INP
```

The preceding example selects input as the direction of data flow.

***RST** OUTP (unless only Option 004 is installed)

Key Entry **Direction**

:DIGital:DATA:IGain

Supported E4438C Option with option 003 or 004 or both

```
:DIGital:DATA:IGain <val>  
:DIGital:DATA:IGain?
```

This command adjust the gain of the I data in the N5102A module. The adjustment does not affect the Q data.

The variable <val> is expressed as a percentage delta from 100%. The offset is an adjustment to the analog level that is represented by the digital sample. The analog voltage is limited to a 16-bit data sample.

Example

```
:DIG:DATA:IG 10
```

The preceding example increases the I gain by 10%.

***RST** +0.00000000E+000

Range -12.5 through 12.5

Key Entry **I Gain**

:DIGital:DATA:INEGate

Supported E4438C Option with option 003 or 004 or both

```
:DIGital:DATA:INEGate OFF|ON|0|1  
:DIGital:DATA:INEGate?
```

This command enables or disables the negation of the I data sample. Negation changes the sample by expressing it in two's complement form, multiplying by negative one, and converting back to the selected numeric format. This can be done for I samples, Q samples, or both.

The sample or word represents a quantized analog voltage level. This analog voltage can be added or multiplied. For a 16-bit sample, the range is from 0 to 65535 in offset binary or -32768 to +32767 in 2's complement mode.

Example

```
:DIG:DATA:INEG ON
```

The preceding example enables negation of the I data.

```
*RST 0
```

Key Entry **Negate I**

:DIGital:DATA:IOFFset

Supported E4438C Option with option 003 or 004 or both

```
:DIGital:DATA:IOFFset <val>  
:DIGital:DATA:IOFFset?
```

This command adjusts the DC offset for I data. The command is available for the N5102A module output mode. The variable <val> is expressed as a +/- 100% of the full scale value.

Example

```
:DIG:DATA:IOFF 40
```

The preceding example sets the I offset to 40% of full scale.

```
*RST +0.00000000E+000
```

Range -100 to +100

Key Entry **I Offset**

:DIGital:DATA:IQSWap

Supported E4438C Option with option 003 or 004 or both

```
:DIGital:DATA:IQSWap OFF|ON|0|1  
:DIGital:DATA:IQSWap?
```

This command enables or disables swapping of the I and Q data. When enabled, the I data is sent to the N5102A's Q bus and the Q data is sent to the I bus.

Example

```
:DIG:DATA:IQSW ON
```

The preceding example enables swapping of I and Q data.

***RST** 0

Key Entry **Swap IQ**

:DIGital:DATA:NFORmat

Supported E4438C Option with option 003 or 004 or both

```
:DIGital:DATA:NFORmat OBINary|TCOMplement  
:DIGital:DATA:NFORmat?
```

This command selects the binary format used to represent the transmitted data values. The selections are offset binary or 2's complement.

Example

```
:DIG:DATA:NFOR OBIN
```

The preceding example selects the offset binary format to represent data values.

***RST** TCOM

Key Entry **Numeric Format**

:DIGital:DATA:POLarity:FRAME

Supported E4438C Option with option 003 or 004 or both

```
:DIGital:DATA:POLarity:FRAMe POSitive|NEGative  
:DIGital:DATA:POLarity:FRAMe?
```

This command selects the polarity of the frame marker for serial transmission. The frame marker indicates the beginning of each sample or byte of data. The command is valid for serial transmission only.

Digital Subsystem—Option 003 and 004 ([:SOURce])

- POS This choice selects a positive polarity. The frame marker is high for the first data sample.
- NEG This choice selects a negative polarity. The frame marker is low for the first data sample.

Example

```
:DIG:DATA:POL:FRAM NEG
```

The preceding example selects a negative polarity for the frame marker.

***RST** POS

Key Entry **Frame Polarity**

:DIGital:DATA:POLarity:IQ

Supported E4438C Option with option 003 or 004 or both

```
:DIGital:DATA:POLarity:IQ POSitive|NEGative  
:DIGital:DATA:POLarity:IQ?
```

This command selects the logic level for I and Q data. Positive selects a high logic level at the output as a digital one and negative selects a low logic level at the output as a digital one.

POS This choice selects a logic high level as digital one.

NEG This choice selects a logic low level as a digital one.

Example

```
:DIG:DATA:POL:IQ NEG
```

The preceding example selects a negative logic level for the I and Q data.

***RST** POS

Key Entry **IQ Polarity**

:DIGital:DATA:QGain

Supported E4438C Option with option 003 or 004 or both

```
:DIGital:DATA:QGain <val>  
:DIGital:DATA:QGain?
```

This command adjusts the gain for Q data in the N5102A module. The adjustment does not affect the I data.

The variable <val> is expressed as a percentage delta from 100%. The offset is an adjustment to the analog level that is represented by the digital sample. The analog voltage is limited to a 16-bit data sample.

Example

```
:DIG:DATA:QG 10
```

The preceding example increases the gain for Q data by 10%.

***RST** +0.00000000E+000

Range -12.5 through 12.5

Key Entry **Q Gain**

:DIGital:DATA:QNEGate

Supported E4438C Option with option 003 or 004 or both

```
:DIGital:DATA:QNEGate OFF|ON|0|1
```

```
:DIGital:DATA:QNEGate?
```

This command enables or disables the negation of the Q data sample. Negation changes the sample by expressing it in two's complement form, multiplying by negative one, and converting back to the selected numeric format.

The sample or word represents a quantized analog voltage level. This analog voltage can be added or multiplied. For a 16-bit sample, the range is from 0 to 65535 in offset binary or -32768 to +32767 in 2's complement mode.

Example

```
:DIG:DATA:QNEG ON
```

The preceding example enables negation of the Q data.

***RST** 0

Key Entry **Negate Q**

:DIGital:DATA:QOFFset

Supported E4438C Option with option 003 or 004 or both

```
:DIGital:DATA:QOFFset <val>  
:DIGital:DATA:QOFFset?
```

This command adjusts the DC offset for Q data. The command is available for the N5102A module output mode. The variable <val> is expressed as a +/- 100% of the full scale value.

Example

```
:DIG:DATA:QOFF 40
```

The preceding example sets the Q offset to 40% of full scale.

***RST** +0.00000000E+000

Range -100 through 100

Key Entry **Q Offset**

:DIGital:DATA:ROTation

Supported E4438C Option with option 003 or 004 or both

```
:DIGital:DATA:ROTation <val>  
:DIGital:DATA:ROTation?
```

This command rotates the IQ data in the IQ plane. This command is valid for the N5102A output mode. The variable <val> is expressed in degrees with a range from 0 to 360.

Example

```
:DIG:DATA:ROT 45
```

The preceding example rotates the IQ constellation 45 degrees.

***RST** +0.00000000E+000

Range 0–360

Key Entry **Rotation**

:DIGital:DATA:SCALing

Supported E4438C Option with option 003 or 004 or both

```
:DIGital:DATA:SCALing <val>  
:DIGital:DATA:SCALing?
```

This command enables scaling of the I and Q data to the level indicated by the <val> variable. This command is valid for the N5102A output mode. The variable <val> is expressed as a percentage.

Example

```
:DIG:DATA:SCAL 50
```

The preceding example scales the I and Q data to amplitude to 50%.

***RST** +7.00000000E+001

Range -100 through 100

Key Entry **Scaling**

:DIGital:DATA:SIZE

Supported E4438C Option with option 003 or 004 or both

```
:DIGital:DATA:SIZE <val>  
:DIGital:DATA:SIZE?
```

This command selects the number of bits in each sample. A sample can have a maximum word length of 16 bits.

Example

```
:DIG:DATA:SIZE 8
```

The preceding example sets the sample word size to eight bits.

***RST** +1.600000000E+001

Range 4–16

Key Entry **Word Size**

:DIGital:DATA:STYPe

Supported E4438C Option with option 003 or 004 or both

```
:DIGital:DATA:STYPe IQ|IF  
:DIGital:DATA:STYPe?
```

This command selects the output format for the IQ data. The IQ selection outputs digital I and Q data. Whereas the IF (intermediate frequency) selection modulates the I and Q data onto the IF frequency. The IF is calculated as 1/4 the clock sample rate. This command is valid only for the N5102A output mode.

IQ This choice outputs I and Q digital data.

IF This choice outputs a modulated signal.

Example

```
:DIG:DATA:STYP IF
```

The preceding example sets the output data to IF.

```
*RST IQ
```

Key Entry **Signal Type**

:DIGital:DATA:TYPE

Supported E4438C Option with option 003 or 004 or both

```
:DIGital:DATA:TYPE SAMPlEs|PFSAMPlEs  
:DIGital:DATA:TYPE?
```

This command selects filtered baseband data or unfiltered baseband data as the transmitted data type.

If this command is executed while an ARB modulation format is active, the parameter choice is changed, but it is not *used* by the interface module until a real-time modulation format is turned on.

Because a query returns the current choice, regardless of whether or not an ARB format is active, you must query both states (data type and the modulation format) to know the signal generator's current setup.

SAMPlEs This choice selects DAC samples at the data transmitted.

PFSAMPlEs This choice selects pre-filtered samples which are unfiltered I and Q data.

Example

```
:DIG:DATA:TYPE PFS
```


The preceding example sets the data type to pre-filtered I and Q data.

***RST** SAMP

Key Entry **Data Type**

:DIGital:DIAGnostic:LOOPback

Supported E4438C Option with option 003 or 004 or both

:DIGital:DIAGnostic:LOOPback? DIGBus | CABLe | N5102A | DEvice

This command selects and executes a loop back test that validates the integrity of digital data. Refer to the ESG *Key Reference* for more information.

DIGBus This choice selects a loop back test using the Digital Bus Loop Back Fixture test board.

CABLe This choice selects a loop back test on the ESG Digital Bus connector at the signal generator side.

N5102A This choice selects a loop back test for the N5102A module.

DEvice This choice selects a loop back test using the LOOP BACK TEST SINGLE ENDED IO DUAL 40 PIN board.

Example

:DIG:DIAG:LOOP? DEV

The preceding example runs the diagnostic test for device and returns a pass or fail state.

***RST** N/A

Key Entry **Loop Back Test Type**

:DIGital:LOGic[:TYPE]

Supported E4438C Option with option 003 or 004 or both

:DIGital:LOGic[:TYPE] LVDS | LVTT1 | CMOS15 | CMOS18 | CMOS25 | CMOS33
 :DIGital:LOGic[:TYPE] ?

This command selects the logic data type used by the device being tested.

LVDS This choice selects low voltage differential signaling as the logic data type.

LVTT1 This choice selects a low voltage TTL signal as the logic data type.

CMOS15 This choice selects a 1.5 volt CMOS signal as the logic data type.

Digital Subsystem—Option 003 and 004 ([:SOURce])

CMOS18 This choice selects a 1.8 volt CMOS signal as the logic data type.

CMOS25 This choice selects a 2.5 volt CMOS signal as the logic data type.

CMOS33 This choice selects a 3.3 volt CMOS signal as the logic data type.

Example

```
:DIG:LOG CMOS15
```

The preceding example selects 1.5 volt CMOS as the logic data type.

***RST** CMOS33

Key Entry **Logic Type**

:DIGital:PCONfig

Supported E4438C Option with option 003 or 004 or both

```
:DIGital:PCONfig PARallel|SERial|PINTIQ|PINTI  
:DIGital:PCONfig?
```

This command selects the data transmission type used for communication between the N5102A module and the device under test. Refer to the ESG *Key Reference* for more information.

PARallel This choice selects parallel data transmission.

SERial This choice selects serial data transmission.

PINTIQ This choice selects parallel interleaving data transmission. The I data is transmitted on the rising clock edge and the Q data on the falling edge.

PINTI This choice selects parallel interleaving data transmission. The Q data is transmitted on the rising clock edge and the I data on the falling edge.

Example

```
:DIG:PCON PINTI
```

The preceding example selects parallel interleaving using the QI format

***RST** PAR

Key Entry **Port Config**

:DIGital:PRESet:PTHRough

Supported E4438C Option with option 003 or 004 or both

:DIGital:PRESet:PTHRough

This command sets up the preset condition for the N5102A module and allows transmission of data through the module with no modifications. The command is valid only when a modulation format is active.

Example

:DIG:PRESet:PTHR

The preceding example sets the N5102A module to a preset condition and allows data to pass through unmodified.

Key Entry Pass Through Preset

:DIGital[:STATe]

Supported E4438C Option with option 003 or 004 or both

:DIGital[:STATe] 0|1|OFF|ON
:DIGital[:STATe]?

This command enables or disables the operating state of the N5102A module.

Example

:DIG ON

The preceding example turns on the N5102A module.

***RST** 0

Key Entry N5102A Off On

Digital Signal Interface Module Commands
Digital Subsystem—Option 003 and 004 ([:SOURce])

7 Bit Error Rate Test (BERT) Commands

This chapter provides SCPI description for commands dedicated to BERT testing using the E4438C ESG Vector Signal Generator. This chapter contains the following sections:

- “Calculate Subsystem–Option UN7 and 300 (:CALCulate:BERT)” on page 394
- “Data Subsystem–Option UN7 and 300 (:DATA)” on page 404
- “Input Subsystem–Option UN7 (:INPut:BERT[: BASeband])” on page 412
- “Measure Subsystem–Option 300 (:MEASure[:SCALar]:BERT:BTS:LOOPback)” on page 418
- “Sense Subsystem–Options UN7 and 300 ([:SOURce]:SENSE:BERT)” on page 421

Calculate Subsystem—Option UN7 and 300 (:CALCulate:BERT)

:BTS:LOOPback:EDGE:ETCH:F43:COMParator:CRITeria:ERATe

Supported E4438C with Option 300

:CALCulate:BERT:BTS:LOOPback:EDGE:ETCH:F43:COMParator:CRITeria:
ERATe <val>

:CALCulate:BERT:BTS:LOOPback:EDGE:ETCH:F43:COMParator:CRITeria:ERATe?

This command sets the error rate pass/fail threshold value.

The variable <val> is a decimal notation representing a percentage value.

***RST** +1.00000000E-001

Range 0.0–1.0

Key Entry Error Rate

:BTS:LOOPback:EDGE:ETCH:F43:COMParator:CRITeria[:SElect]

Supported E4438C with Option 300

:CALCulate:BERT:BTS:LOOPback:EDGE:ETCH:F43:COMParator:
CRITeria[:SElect] ERATe[NOLimit]

:CALCulate:BERT:BTS:LOOPback:EDGE:ETCH:F43:COMParator:CRITeria[:SElect]?

This command determines which of the following pass/fail limit (comparator) criteria is applied to the measurement.

ERATe This choice reports, on the front panel display of the signal generator, the pass or fail status compared to the specified threshold for the error rate.

NOLimit This choice disables the pass/fail indication.

***RST** NOLimit

Key Entry **Error Rate** **No Limits**

:BTS:LOOPback:EDGE:MCS5:COMParator:CRITeria:ERATe

Supported E4438C with Option 300

```
:CALCulate:BERT:BTS:LOOPback:EDGE:MCS5:COMParator:CRITeria:ERATe <val>  
:CALCulate:BERT:BTS:LOOPback:EDGE:MCS5:COMParator:CRITeria:ERATe?
```

This command sets the error rate pass/fail threshold value.

The variable <val> is a decimal notation representing a percentage value.

***RST** +1.00000000E-001

Range 0.0–1.0

Key Entry **Error Rate**

:BTS:LOOPback:EDGE:MCS5:COMParator:CRITeria[:SElect]

Supported E4438C with Option 300

```
:CALCulate:BERT:BTS:LOOPback:EDGE:MCS5:COMParator:  
CRITeria[:SElect] ERATe|NOLimit  
:CALCulate:BERT:BTS:LOOPback:EDGE:MCS5:COMParator:CRITeria[:SElect]?
```

This command determines which of the following pass/fail limit (comparator) criteria is applied to the measurement.

ERATe This choice reports, on the front panel display of the signal generator, the pass or fail status compared to the specified threshold for the error rate.

NOLimit This choice disables the pass/fail indication.

***RST** NOLimit

Key Entry **Error Rate** **No Limits**

:BTS:LOOPback:EDGE:MCS9:COMParator:CRITeria:ERATe

Supported E4438C with Option 300

```
:CALCulate:BERT:BTS:LOOPback:EDGE:MCS9:COMParator:CRITeria:ERATe <val>  
:CALCulate:BERT:BTS:LOOPback:EDGE:MCS9:COMParator:CRITeria:ERATe?
```

This command sets the error rate pass/fail threshold value.

The variable <val> is a decimal notation representing a percentage value.

***RST** +1.00000000E-001

Range 0.0–1.0

Key Entry **Error Rate**

Calculate Subsystem—Option UN7 and 300 (:CALCulate:BERT)

:BTS:LOOPback:EDGE:MCS9:COMParator:CRITeria[:SElect]

Supported E4438C with Option 300

:CALCulate:BERT:BTS:LOOPback:EDGE:MCS9:COMParator:
CRITeria[:SElect] ERATe|NOLimit

:CALCulate:BERT:BTS:LOOPback:EDGE:MCS9:COMParator:CRITeria[:SElect]?

This command determines which of the following pass/fail limit (comparator) criteria is applied to the measurement.

ERATe This choice reports, on the front panel display of the signal generator, the pass or fail status compared to the specified threshold for the error rate.

NOLimit This choice disables the pass/fail indication.

***RST** NOLimit

Key Entry **Error Rate** **No Limits**

:BTS:LOOPback:EDGE:UNCoded:COMParator:CRITeria:ERATe

Supported E4438C with Option 300

:CALCulate:BERT:BTS:LOOPback:EDGE:UNCoded:COMParator:CRITeria:
ERATe <val>

:CALCulate:BERT:BTS:LOOPback:EDGE:UNCoded:COMParator:CRITeria:ERATe?

This command sets the error rate pass/fail threshold value.

The variable <val> is a decimal notation representing a percentage value.

***RST** +2.00000000E-002

Range 0.0–1.0

Key Entry **Error Rate**

:BTS:LOOPback:EDGE:UNCoded:COMParator:CRITeria[:SElect]

Supported E4438C with Option 300

```
:CALCulate:BERT:BTS:LOOPback:EDGE:UNCoded:COMParator:  
CRITeria[:SElect] ERATe|NOLimit  
:CALCulate:BERT:BTS:LOOPback:EDGE:UNCoded:COMParator:CRITeria[:SElect]?
```

This command determines which of the following pass/fail limit (comparator) criteria is applied to the measurement.

ERATe This choice reports, on the front panel display of the signal generator, the pass or fail status compared to the specified threshold for the error rate.

NOLimit This choice disables the pass/fail indication.

***RST** NOLimit

Key Entry **Error Rate** **No Limits**

:BTS:LOOPback:GSM:CS1:COMParator:CRITeria:ERATe

Supported E4438C with Option 300

```
:CALCulate:BERT:BTS:LOOPback:GSM:CS1:COMParator:CRITeria:  
ERATe <val>  
:CALCulate:BERT:BTS:LOOPback:GSM:CS1:COMParator:CRITeria:ERATe?
```

This command sets the error rate pass/fail threshold value.

The variable <val> is a decimal notation representing a percentage value.

***RST** +1.00000000E-001

Range 0.0–1.0

Key Entry **Error Rate**

Calculate Subsystem—Option UN7 and 300 (:CALCulate:BERT)

:BTS:LOOPback:GSM:CS1:COMParator:CRITeria[:SElect]

Supported E4438C with Option 300

```
:CALCulate:BERT:BTS:LOOPback:GSM:CS1:COMParator:
CRITeria[:SElect] ERATe[NOLimit]
:CALCulate:BERT:BTS:LOOPback:GSM:CS1:COMParator:CRITeria[:SElect]?
```

This command determines which of the following pass/fail limit (comparator) criteria is applied to the measurement.

ERATe This choice reports, on the front panel display of the signal generator, the pass or fail status compared to the specified threshold for the error rate.

NOLimit This choice disables the pass/fail indication.

***RST** NOLimit

Key Entry **Error Rate** **No Limits**

:BTS:LOOPback:GSM:CS4:COMParator:CRITeria:ERATe

Supported E4438C with Option 300

```
:CALCulate:BERT:BTS:LOOPback:GSM:CS4:COMParator:CRITeria:
ERATe <val>
:CALCulate:BERT:BTS:LOOPback:GSM:CS4:COMParator:CRITeria:ERATe?
```

This command sets the error rate pass/fail threshold value.

The variable <val> is a decimal notation representing a percentage value.

***RST** +1.00000000E-001

Range 0.0–1.0

Key Entry **Error Rate**

:BTS:LOOPback:GSM:CS4:COMParator:CRITeria[:SElect]

Supported E4438C with Option 300

```
:CALCulate:BERT:BTS:LOOPback:GSM:CS4:COMParator:
CRITeria[:SElect] ERATe[NOLimit]
:CALCulate:BERT:BTS:LOOPback:GSM:CS4:COMParator:CRITeria[:SElect]?
```

This command determines which of the following pass/fail limit (comparator) criteria is applied to the measurement.

ERATe	This choice reports, on the front panel display of the signal generator, the pass or fail status compared to the specified threshold for the error rate.	
NOLimit	This choice disables the pass/fail indication.	
*RST	NOLimit	
Key Entry	Error Rate	No Limits

:BTS:LOOPback:GSM:MCS1:COMParator:CRITeria:ERATe

Supported E4438C with Option 300
:CALCulate:BERT:BTS:LOOPback:GSM:MCS1:COMParator:CRITeria:
ERATe <val>
:CALCulate:BERT:BTS:LOOPback:GSM:MCS1:COMParator:CRITeria:ERATe?

This command sets the error rate pass/fail threshold value.

The variable <val> is a decimal notation representing a percentage value.

*RST	+1.00000000E-001
Range	0.0–1.0
Key Entry	Error Rate

:BTS:LOOPback:GSM:MCS1:COMParator:CRITeria[:SElect]

Supported E4438C with Option 300
:CALCulate:BERT:BTS:LOOPback:GSM:MCS1:COMParator:
CRITeria[:SElect] ERATe|NOLimit
:CALCulate:BERT:BTS:LOOPback:GSM:MCS1:COMParator:CRITeria[:SElect]?

This command determines which of the following pass/fail limit (comparator) criteria is applied to the measurement.

ERATe	This choice reports, on the front panel display of the signal generator, the pass or fail status compared to the specified threshold for the error rate.	
NOLimit	This choice disables the pass/fail indication.	
*RST	ERAT	
Key Entry	Error Rate	No Limits

Calculate Subsystem—Option UN7 and 300 (:CALCulate:BERT)

:BTS:LOOPback:GSM:COMParator:CRITeria:CIB

Supported E4438C with Option 300

:CALCulate:BERT:BTS:LOOPback:GSM:COMParator:CRITeria:CIB <val>

:CALCulate:BERT:BTS:LOOPback:GSM:COMParator:CRITeria:CIB?

This command sets the Class II residual bit error rate pass/fail threshold value.

The variable <val> is a decimal notation representing a percentage value.

***RST** +4.00000000E-003

Range 0.0–1.0

Key Entry **Class Ib RBER**

:BTS:LOOPback:GSM:COMParator:CRITeria:CII

Supported E4438C with Option 300

:CALCulate:BERT:BTS:LOOPback:GSM:COMParator:CRITeria:CII <val>

:CALCulate:BERT:BTS:LOOPback:GSM:COMParator:CRITeria:CII?

This command sets the Class Ib residual bit error rate pass/fail threshold value.

The variable <val> is a decimal notation representing a percentage value.

***RST** +2.00000000E-002

Range 0.0–1.0

Key Entry **Class II RBER**

:BTS:LOOPback:GSM:COMParator:CRITeria:FERasure

Supported E4438C with Option 300

:CALCulate:BERT:BTS:LOOPback:GSM:COMParator:CRITeria:FERasure <val>

:CALCulate:BERT:BTS:LOOPback:GSM:COMParator:CRITeria:FERasure?

This command sets the frame erasure rate pass/fail threshold value.

The variable <val> is a decimal notation representing a percentage value.

***RST** +1.00000000E-003

Range 0.0–1.0

Key Entry **Frame Erasure**

:BTS:LOOPback:GSM:COMParator:CRITeria[:SElect]

Supported E4438C with Option 300

```
:CALCulate:BERT:BTS:LOOPback:GSM:COMParator:CRITeria[:SElect] FERasure|
CLIB|CLII|ANY|NOLimit
:CALCulate:BERT:BTS:LOOPback:GSM:COMParator:CRITeria[:SElect]?
```

This command determines which of the following pass/fail limit (comparator) criteria is applied to the measurement.

- FERasure This choice reports, on the front panel display of the signal generator, the pass or fail status compared to the specified threshold for frame erasure ratio.
- CLIB This choice reports, on the front panel display of the signal generator, the pass or fail status compared to the specified threshold for the number of Class Ib errors detected in the measurement.
- CLII This choice reports, on the front panel display of the signal generator, the pass or fail status compared to the specified threshold for the number of Class II errors detected in the measurement.
- ANY This choice reports, on the front panel display of the signal generator, the pass or fail status compared to all of the specified comparator criteria.
- NOLimit This choice disables the pass/fail indication.

***RST** NOLimit

Key Entry	Frame Erasure	Class Ib RBER	Class II RBER	Exceeds Any Limit
------------------	----------------------	----------------------	----------------------	--------------------------

No Limits

[:BAsband]:COMParator:MODE

Supported E4438C with Option UN7

```
:CALCulate:BERT[:BAsband]:COMParator:MODE CEND|FHOLD
:CALCulate:BERT[:BAsband]:COMParator:MODE?
```

This command selects the pass/fail judgement mode of the comparator function.

- CEND This choice selects the cycle end mode and each BER measurement result is compared with the limit value to make a pass/fail assessment at the end of a cycle.

Bit Error Rate Test (BERT) Commands

Calculate Subsystem—Option UN7 and 300 (:CALCulate:BERT)

FHOLD	This choice selects the fail hold mode and only one fail judgement is allowed during that BER measurement loop. Any failed judgement after the first failure is ignored.
*RST	CEND
Key Entry	Cycle End Fail Hold
Remarks	For automated tests, the results of this command can be accessed from the rear panel BER TEST OUT pin on the AUX I/O connector. For more information about the rear panel AUX I/O connector pin configuration, refer to the E4428C/38C ESG Signal Generators User's Guide.

[:BASEband] : COMPArator : THReshold

Supported E4438C with Option UN7

```
:CALCulate:BERT[:BASEband]:COMPArator:THReshold <val>  
:CALCulate:BERT[:BASEband]:COMPArator:THReshold?
```

This command specifies the threshold value for the pass/fail judgement function.

The variable <val> is a decimal notation representing a percentage value.

***RST** +1.00000000E-002

Range 0.0000001–1.00

Key Entry **Pass/Fail Limits**

Remarks This command is valid only while the BER pass/fail command is active. Refer to “[:BASEband] : COMPArator [:STATe] ” on page 402.

[:BASEband] : COMPArator [:STATe]

Supported E4438C with Option UN7

```
:CALCulate:BERT[:BASEband]:COMPArator[:STATe] ON|OFF|1|0  
:CALCulate:BERT[:BASEband]:COMPArator[:STATe]?
```

This command enables or disables the pass/fail judgement function.

***RST** 0

Key Entry **Pass/Fail Off On**

[:BASEband] :DISPlay:MODE:

Supported E4438C with Option UN7

```
:CALCulate:BERT[:BASEband]:DISPlay:MODE PERCent|SCIENTific  
:CALCulate:BERT[:BASEband]:DISPlay:MODE?
```

This command selects the display mode for the bit error rate (BER) measurement.

PERCent This choice reports measurement results as a percentage.

SCIENTific This choice reports measurement results in scientific notation.

***RST** PERC

Key Entry **BER Display % Exp**

[:BASEband] :DISPlay:UPDate:

Supported E4438C with Option UN7

```
:CALCulate:BERT[:BASEband]:DISPlay:UPDate CEND|CONT  
:CALCulate:BERT[:BASEband]:DISPlay:UPDate?
```

This command selects the display update mode during bit error rate (BER) measurements.

CEND This choice selects the cycle end mode and the previous BER measurement result is displayed during the current measurement cycle.

CONT This choice selects the continuous mode and the display shows the real-time intermediate results during that BER measurement cycle.

***RST** CONT

Key Entry **Update Display Cycle End Cont**

Data Subsystem—Option UN7 and 300 (:DATA)

:BERT:BTS:LOOPback:EDGE:ETCH:F43[:DATA]

Supported E4438C with Option 300

```
:DATA:BERT:BTS:LOOPback:EDGE:ETCH:F43[:DATA]? IEC|IEBC|DEFC|BCO|IER|IABer|ALL|TEC|TEBC|TDEFc|TBCO|TER|TABer|TALL|JUDGE|STOP|SCAuse
```

This data query returns the measurement result value for each variable.

IEC|IEBC|DEFC|BCO|IER|IABer are intermediate values, so during the measurement, these variables are updated as well as the display information.

At the end of the measurement, the final values are stored to: TEC|TEBC|TDEFc|TBCO|TER|TABer variables. These variables and JUDGE|STOP|SCAuse are not updated until the next BER measurement is completed.

IEC	This choice provides the intermediate error count with the following range: <Integer> 0 to 1500000.
IEBC	This choice provides the intermediate non-erased bit error blocks with the following range: <Integer> 0 to 1500000.
DEFC	This choice provides the intermediate downlink error frame count with the following range: <Integer> 0 to 750000.
BCO	This choice provides the intermediate block or bit count with the following range: <Integer> 0 to 1500000 (block).
IER	This choice provides the intermediate error ratio with the following range: <Real> 0 to 1 (0 to 100%).
IABer	This choice provides the intermediate average BER within blocks that have errors. The range is as follows: <Real> 0 to 1.
ALL	This choice returns all intermediate values (IEC, IEBC, DEFC, BCO, IER, and IABer) at the same time.
TEC	This choice provides the total error count with the following range: <Integer> 0 to 1500000 (block).
TEBC	This choice provides the total non-erased bit error blocks count with the following range: <Integer> 0 to 1500000.
TDEFc	This choice provides the total downlink error frame count with the following range: <Integer> 0 to 65535.

TBCO	This choice provides the total block count with the following range: <Integer> 0 to 1500000 (block).
TER	This choice provides the total error ratio with the following range: <Real> 0 to 1 (0 to 100%).
TABer	This choice provides the total average BER within blocks that have errors. The range is as follows: <Real> 0 to 1.
TALL	This choice returns all total values (TEC, TEBC, TDEFc, TBCO, TER, TABer, JUDGE, STOP, and SCAuse) at the same time. If accidental TCH synchronization loss caused the measurement to stop, TSLoss is returned.
JUDGE	This choice provides the pass or fail string. If pass/fail criteria is NOLimit, NONE is returned.
STOP	This choice checks to see if the stop threshold is met and returns one of the following values: <Enumerated set> TRUE FALSE. When threshold to stop criteria is NONE, FALSE is returned.
SCAuse	This choice provides the stop cause by returning one of the following values: <Enumerated set> NONE Ebit EBlock TSL. If accidental TCH synchronization loss caused the measurement to stop, TSL is returned.

:BERT:BTS:LOOPback:EDGE:MCS5[:DATA]

Supported E4438C with Option 300

:DATA:BERT:BTS:LOOPback:EDGE:MCS5[:DATA]? IEC|IEBC|DEFc|BCO|IER|IABer|ALL|TEC|TEBC|TDEFc|TBCO|TER|TABer|TALL|JUDGE|STOP|SCAuse

This data query returns the measurement result value for each variable.

IEC|IEBC|DEFc|BCO|IER|IABer are intermediate values, so during the measurement, these variables are updated as well as the display information. ALL returns all intermediate values at the same time.

At the end of the measurement, the final values are stored to: TEC|TEBC|TDEFc|TBCO|TER|TABer variables. These variables and JUDGE|STOP|SCAuse are not updated until the next BER measurement is completed.

For more information on the parameters, refer to [page 404](#).

:BERT:BTS:LOOPback:EDGE:MCS9[:DATA]

Supported E4438C with Option 300

```
:DATA:BERT:BTS:LOOPback:EDGE:MCS9[:DATA]? IEC|IEBC|DEFC|BCO|IER|IABer|  
ALL|TEC|TEBC|TDEFc|TBCO|TER|TABer|TALL|JUDGE|STOP|SCAuse
```

This data query returns the measurement result value for each variable.

IEC|IEBC|DEFC|BCO|IER|IABer are intermediate values, so during the measurement, these variables are updated as well as the display information. ALL returns all intermediate values at the same time.

At the end of the measurement, the final values are stored to: TEC|TEBC|TDEFc|TBCO|TER|TABer variables. These variables and JUDGE|STOP|SCAuse are not updated until the next BER measurement is completed.

For more information on the parameters, refer to [page 404](#).

:BERT:BTS:LOOPback:EDGE:UNCoded[:DATA]

Supported E4438C with Option 300

```
:DATA:BERT:BTS:LOOPback:EDGE:UNCoded[:DATA]? IEC|IEBC|DEFC|BCO|IER|  
IABer|ALL|TEC|TEBC|TDEFc|TBCO|TER|TABer|TALL|JUDGE|STOP|SCAuse
```

This data query returns the measurement result value for each variable.

IEC|IEBC|DEFC|BCO|IER|IABer are intermediate values, so during the measurement, these variables are updated as well as the display information. ALL returns all intermediate values at the same time.

At the end of the measurement, the final values are stored to: TEC|TEBC|TDEFc|TBCO|TER|TABer variables. These variables and JUDGE|STOP|SCAuse are not updated until the next BER measurement is completed.

For more information on the parameters, refer to [page 404](#).

:BERT:BTS:LOOPback:GSM[:DATA]

Supported E4438C with Option 300

```
:DATA:BERT:BTS:LOOPback:GSM[:DATA]? IBC|IIC|FEC|DFEC|FRC|  
IBBer|ALL|TEC|TEBC|TDEFc|TBCO|TER|TABer|TALL|JUDGE|STOP|SCAuse
```

This data query returns the measurement result value for each variable.

IBC|IIC|FEC|DFEC|FRC|IBBer|IIBer|FER are intermediate values, so during the measurement, these variables are updated as well as the display information. ALL returns intermediate values at the same time.

At the end of the measurement, the final values are stored to:

TIBC|TIIC|TFEC|TDEFc|TFRC|TIBBer|TIIBer|TFER variables. These variables and JUDGE|JCAuse|STOP|SCAuse are not updated until the next BER measurement is completed. TALL returns all of the total values at the same time.

IBC	This choice provides the intermediate class Ib error count with the following range: <Integer> 0 to 792000000.
IIC	This choice provides the intermediate class II error count with the following range: <Integer> 0 to 468000000.
FEC	This choice provides the intermediate frame erasure count with the following range: <Integer> 0 to 6000000.
DEFc	This choice provides the intermediate downlink error frame count with the following range: <Integer> 0 to 65535.
FRC	This choice provides the intermediate frame count with the following range: <Integer> 0 to 6000000.
IBBer	This choice provides the intermediate class Ib error ratio with the following range: <Real> 0 to 1 (0 to 100%).
IIBer	This choice provides the intermediate class II error ratio with the following range: <Real> 0 to 1 (0 to 100%).
FER	This choice provides the intermediate frame erasure ratio with the following range: <Real> 0 to 1 (0 to 100%).
ALL	This choice provides all intermediate values (IBC, IIC, FEC, DEFc, FRC, IBBer, IIBer, FER) at the same time.
TIBC	This choice provides the total class Ib bit error count with the following range: <Integer> 0 to 792000000.
TIIC	This choice provides the total class II bit error count with the following range: <Integer> 0 to 468000000.
TFEC	This choice provides the total frame erasure count with the following range: <Integer> 0 to 6000000.
TDEFc	This choice provides the total downlink error frame count with the following range: <Integer> 0 to 65535.
TFRC	This choice provides the total frame count with the following range: <Integer> 0 to 6000000.
TIBBer	This choice provides the total class Ib error ratio with the following range: <Real> 0 to 1 (0 to 100%).

Bit Error Rate Test (BERT) Commands

Data Subsystem—Option UN7 and 300 (:DATA)

TIIBer	This choice provides the total class II error ratio with the following range: <Real> 0 to 1 (0 to 100%).
TFER	This choice provides the total frame erasure ratio with the following range: <Real> 0 to 1 (0 to 100%).
TALL	This choice returns all total values (TIBC TIIC TFEC TDEFc TFRC TIBBer TIIBer TFER JUDGE JCAuse STOP SCAuse) at the same time. If accidental TCH synchronization loss caused the measurement to stop, TSLoss is returned.
JUDGE	This choice provides the comparator result (TEST OUT) with the following values: <Enumerated set> FAIL PASS NONE. If pass/fail criteria is NOLimit, NONE is returned
JCAuse	This choice provides which limit was met to cause the comparator result by returning one of the following values: <Enumerated set> NOLimit FER CIB CII
STOP	This choice checks to see if the stop threshold is met and returns one of the following values: <Enumerated set> TRUE FALSE. When threshold to stop criteria is NONE, FALSE is returned.
SCAuse	This choice provides the stop cause by returning one of the following values: <Enumerated set> NONE FE CIB CII TSLoss. If accidental TCH synchronization loss caused the measurement to stop, TSLoss is returned.

:BERT:BTS:LOOPback:GSM:CS1[:DATA]

Supported E4438C with Option 300

:DATA:BERT:BTS:LOOPback:GSM:CS1[:DATA]? IEC|IEBC|DEFc|BCO|IER|IABer|ALL|TEC|TEBC|TDEFc|TBCO|TER|TABer|TALL|JUDGE|STOP|SCAuse

This data query returns the measurement result value for each variable.

IEC|IEBC|DEFc|BCO|IER|IABer are intermediate values, so during the measurement, these variables are updated as well as the display information. ALL returns all intermediate values at the same time.

At the end of the measurement, the final values are stored to: TEC|TEBC|TDEFc|TBCO|TER|TABer variables. These variables and JUDGE|STOP|SCAuse are not updated until the next BER measurement is completed.

For more information on the parameters, refer to [page 404](#).

:BERT:BTS:LOOPback:GSM:CS4[:DATA]

Supported E4438C with Option 300

```
:DATA:BERT:BTS:LOOPback:GSM:CS4[:DATA]? IEC|IEBC|DEFC|BCO|IER|  
IABer|ALL|TEC|TEBC|TDEFc|TBCO|TER|TABer|TALL|JUDGe|STOP|SCAuse
```

This data query returns the measurement result value for each variable.

IEC|IEBC|DEFC|BCO|IER|IABer are intermediate values, so during the measurement, these variables are updated as well as the display information. ALL returns all intermediate values at the same time.

At the end of the measurement, the final values are stored to: TEC|TEBC|TDEFc|TBCO|TER|TABer variables. These variables and JUDGe|STOP|SCAuse are not updated until the next BER measurement is completed.

For more information on the parameters, refer to [page 404](#).

:BERT:BTS:LOOPback:GSM:MCS1[:DATA]

Supported E4438C with Option 300

```
:DATA:BERT:BTS:LOOPback:GSM:MCS1[:DATA]? IEC|IEBC|DEFC|BCO|IER|  
IABer|ALL|TEC|TEBC|TDEFc|TBCO|TER|TABer|TALL|JUDGe|STOP|SCAuse
```

This data query returns the measurement result value for each variable.

IEC|IEBC|DEFC|BCO|IER|IABer are intermediate values, so during the measurement, these variables are updated as well as the display information. ALL returns all intermediate values at the same time.

At the end of the measurement, the final values are stored to: TEC|TEBC|TDEFc|TBCO|TER|TABer variables. These variables and JUDGe|STOP|SCAuse are not updated until the next BER measurement is completed.

For more information on the parameters, refer to [page 404](#).

:BERT:AUXout

Supported E4438C with Option UN7

```
:DATA:BERT[:BASEband]:AUXout ERROR|REFerence|PN9  
:DATA:BERT[:BASEband]:AUXout?
```

This command selects a pre-defined output signal configuration for pins on the AUX I/O rear panel connector. Refer to [Table 7-1](#) for the output pin configuration and signal type.

ERRor This choice selects the bit error rate (BER) information output.

REFerence This choice selects the reference information output.

Bit Error Rate Test (BERT) Commands
Data Subsystem—Option UN7 and 300 (:DATA)

PN9 This choice selects a pseudo-random data output.

Table 7-1 AUX I/O pin configurations

Pin#	ERRor	REference	PN9
1	BER Meas End	BER Data Out	PN9 Data
4	BER Sync Loss	Sync Start	No signal
20	BER Test Out	BER Clock Out	PN9 Clock
21	BER Error Out	BER Error Out	BER Error Out
22	BER No Data	Reference Data	No signal

- BER Meas End A signal at this pin indicates the status of the bit error rate (BER) measurements. BER measurements are being executed when the signal is high.
- BER Sync loss A low signal at this pin indicates that the synchronization is lost. This signal is valid only when the signal at the BER Meas End pin is high.
- BER Test Out A signal at this pin indicates the test result of the bit error rate measurements. The result is guaranteed at the falling edge of the BER Meas End signal. The result is pass when the signal is low; the result is fail when the signal is high. The signal is also high when the pass/fail judgment is set to off.
- BER Error Out A signal at this pin indicates the number of the error bits. The output is normally low. One pulse signal (pulse width matches the input clock) indicates one error bit. Pulses for the error bits of one measurement cycle are not synchronized with the rear panel connector BER CLK IN signal and are output when the BER Meas End signal is high.
- BER No Data A low signal at this pin indicates the no data status. The no data status is reported when there has been no clock inputs for more than 3 seconds or there has been no data change for more than 200 bits. This signal is valid only when the signal of the BER Meas End output signal is high.
- BER Clock Out The BER Clock Out signal monitors the rear panel BER CLK IN signal after polarity control, delay control, and gate control (if applicable) have taken place.
- BER Data Out This is a data stream for the bit error rate measurements. The clock signal is used to trigger the reading of the data.
- Sync Start This signal indicates the timing when the PN generator starts to generate a PN sequence. This signal can also indicate if the hardware is triggering a PN synchronization or making a measurement when the signal is high.

PN9 Clock	This signal is the clock signal for the PN9 Data. The falling edge of the PN9 Clock indicates the center of PN9 Data. The PN9 Clock rate is 37.5Mbits per second.		
PN9 Data	This signal is PN9 data for the self-loopback test.		
Reference Data	This signal uses the pseudo-random bit stream as the reference signal.		
*RST	ERRor		
Key Entry	Error Out	Reference Out	PN9 Out

[:DATA]

Supported E4438C with Option UN7

:DATA [:DATA] ? BEC | BITC | BER | ALL | TBEC | TBIT | TBER | JUDGE

This query returns the data measurement for the selected variable.

BEC	This choice provides the intermediate bit error count result.
BITC	This choice provides the intermediate bit count result.
BER	This choice provides the intermediate bit error rate result.
ALL	This choice provides the values of the bit error count, bit error rate, and bit count in the following format: <bit count>, <error count>, <bit error rate>
TBEC	This choice provides the total bit error count at the end of each cycle.
TBIT	This choice provides the total bit count at the end of each cycle.
TBER	This choice provides the total bit error rate at the end of each cycle.
JUDGE	This choice provides the pass or fail string.

Input Subsystem—Option UN7 (:INPut:BERT[: BASEband])

:CGATe:DELay:CLOCK

Supported E4438C with Option UN7

:INPut :BERT [:BASEband] :CGATe:DELay:CLOCK <val>

:INPut :BERT [:BASEband] :CGATe:DELay:CLOCK?

This command sets the number of delay bits for the signal applied to the BER GATE IN rear panel connector.

One bit corresponds with one bit of delay for the input clock.

***RST** 1

Range 1–16384

Key Entry Gate Clk Delay

Remarks The gate delay mode must be set to CLOCk for this command to work. Refer to “:CGATe:DELay:MODE”. Also, the gate and gate delay must be enabled for this command to work. Refer to “:CGATe[:STATe]” on page 414 and “:CGATe:DELay[:STATe]” on page 413.

:CGATe:DELay:MODE

Supported E4438C with Option UN7

:INPut :BERT [:BASEband] :CGATe:DELay:MODE TIME | CLOCK

:INPut :BERT [:BASEband] :CGATe:DELay:MODE : ?

This command selects the operating mode of the gate delay.

TIME This choice selects the time mode which makes it possible to set the gate time delay in absolute time and the resolution.

CLOCK This choice selects the clock mode which enables you to set the gate delay by a set number of bits.

***RST** TIME

Key Entry Gate Mode Time Clk

Remarks The gate state and gate delay state must be enabled for this command to work. Refer to “:CGATe[:STATe]” on page 414 and “:CGATe:DELay[:STATe]” on page 413.

:CGATe:DELay:TIME

Supported E4438C with Option UN7

```
:INPut:BERT[:BASEband]:CGATe:DELay:TIME <val><unit>  
:INPut:BERT[:BASEband]:CGATe:DELay:TIME?
```

This command sets the delay time of the gate signal. The gate delay time must be the multiple of the minimum resolution value and if not, the delay resolution is automatically rounded to the nearest multiplied value of the gate time delay value.

The variable <val> is expressed in units of seconds (s), milliseconds (ms), microseconds (μ s), and nanoseconds (ns).

***RST** +2.67000000E-008

Range 2.67 ns–1.0 s

Key Entry Gate Time Delay

Remarks Gate Delay Off On must be set to **On** and Gate Mode Time Clk set to **Time** for this command to work. Refer to “:CGATe:DELay[:STATe]” on page 413 and “:CGATe:DELay:MODE” on page 412.

To set the resolution, refer to “:CLOCK:DELay:RESolution” on page 414.

:CGATe:DELay[:STATe]

Supported E4438C with Option UN7

```
:INPut:BERT[:BASEband]:CGATe:DELay[:STATe] ON|OFF|1|0  
:INPut:BERT[:BASEband]:CGATe:DELay[:STATe] ?
```

This command enables or disables the operating state of the gate delay.

ON This choice enables the gate delay adjustment function.

OFF This choice disables the gate delay adjustment function.

***RST** 0

Key Entry Gate Delay Off On

Remarks The gate must be enabled for this command to work. To enable the gate, refer to “:CGATe[:STATe]” on page 414.

:CGATe:POLarity

Supported E4438C with Option UN7

```
:INPut:BERT[:BASEband]:CGATe:POLarity POSitive|NEGative  
:INPut:BERT[:BASEband]:CGATe:POLarity?
```

This command sets the input polarity of the gate signal supplied to the BER GATE IN rear panel connector.

POS With this choice, the signal is valid when the gate signal is high.

NEG With this choice, the signal is valid when the gate signal is low.

***RST** POS

Key Entry Gate Polarity Neg Pos

:CGATe[:STATe]

Supported E4438C with Option UN7

```
:INPut:BERT[:BASEband]:CGATe[:STATe] ON|OFF|1|0  
:INPut:BERT[:BASEband]:CGATe[:STATe]?
```

This command sets the operating state of the clock gate function.

ON This choice enables the clock gate function.

OFF This choice disables the clock gate function.

***RST** 0

Key Entry Gate Off On

:CLOCK:DELAy:RESolution

Supported E4438C with Option UN7

```
:INPut:BERT[:BASEband]:CLOCK:DELAy:RESolution <val><unit>  
:INPut:BERT[:BASEband]:CLOCK:DELAy:RESolution?
```

This command sets the resolution of the clock delay. The minimum resolution is 13.3 ns and it corresponds to 1/75 MHz. The 75 MHz is the sampling clock for the BERT board. The input value

must be a multiple of the minimum resolution. If the set value is not a multiple value, the delay resolution is automatically rounded to the nearest multiple value with reference to the set value.

*RST	+1.33000000E-008
Range	13.3ns–80µs
Key Entry	Resolution
Remarks	The clock delay or the gate delay must be enabled for this command to work. Refer to “:CLOCK:DELAy[:STATe]” on page 415 and “:CGATe:DELAy[:STATe]” on page 413. A change in the resolution value can affect both the clock and the gate delay time automatically.

:CLOCK:DELAy:TIME

Supported	E4438C with Option UN7
	:INPut:BERT[:BASEband]:CLOCK:DELAy:TIME <val><unit>
	:INPut:BERT[:BASEband]:CLOCK:DELAy:TIME?

This command sets the clock signal delay time.

The variable <val> is expressed in units of seconds (s), milliseconds (ms), microseconds (µs), and nanoseconds (ns).

*RST	+2.67000000E-008
Range	26.7ns–999.9967600ms
Key Entry	Clock Time Delay
Remarks	The clock delay must be enabled for this command to work. Refer to “:CLOCK:DELAy[:STATe]” on page 415.

:CLOCK:DELAy[:STATe]

Supported	E4438C with Option UN7
	:INPut:BERT[:BASEband]:CLOCK:DELAy[:STATe] ON OFF 1 0
	:INPut:BERT[:BASEband]:CLOCK:DELAy[:STATe]?

This command sets the operating state of the clock delay function.

ON	This choice enables the clock delay adjustment.
OFF	This choice disables the clock delay adjustment.

*RST	0
Key Entry	Clock Delay Off On

:CLOCK:POLarity

Supported E4438C with Option UN7

```
:INPut:BERT[:BASEband]:CLOCK:POLarity POSitive|NEGative  
:INPut:BERT[:BASEband]:CLOCK:POLarity?
```

This command sets the input polarity of the clock signal supplied to the BER CLK IN rear panel connector.

POS With this choice, the signal is valid when the clock signal is high.

NEG With this choice, the signal is valid when the clock signal is low.

***RST** POS

Key Entry **Clock Polarity Neg Pos**

:DATA:POLarity

Supported E4438C with Option UN7

```
:INPut:BERT[:BASEband]:DATA:POLarity POSitive|NEGative  
:INPut:BERT[:BASEband]:DATA:POLarity?
```

This command sets the input polarity of the data signal supplied to the BER DATA IN rear panel connector.

POS With this choice, the signal is valid when the data signal is high.

NEG With this choice, the signal is valid when the data signal is low.

***RST** POS

Key Entry **Data Polarity Neg Pos**

:IMPedance

Supported E4438C with Option UN7

```
:INPut:BERT[:BASEband]:IMPedance OHM_75|HIGH  
:INPut:BERT[:BASEband]:IMPedance?
```

This command sets the input termination mode of the BER CLK IN, BER DATA IN, and BER GATE IN rear panel connectors.

***RST** HIGH

Key Entry **Impedance 75 Ohm High**

:THReshold

Supported E4438C with Option UN7

```
:INPut:BERT[:BASEband]:THReshold V0_7|V1_4|V1_65|V2_5  
:INPut:BERT[:BASEband]:THReshold?
```

This command sets the threshold voltage level of the BER CLK IN, BER DATA IN, and BER GATE IN rear panel connectors.

- | | |
|-------|---|
| V0_7 | This choice selects 0.7 volts (normal TTL) as the turn-on voltage for the input signal. |
| V1_4 | This choice selects 1.4 volts (Schmit TTL) as the turn-on voltage for the input signal. |
| V1_65 | This choice selects 1.65 volts (CMOS 3.3 volts is the maximum operating range) as the turn-on voltage for the input signal. |
| V2_5 | This choice selects 2.5 volts (CMOS 5 volts is the maximum operating range) as the turn-on voltage for the input signal. |

***RST** V1_4

Key Entry **0.7V** **1.4V** **1.65V** **2.5V**

Measure Subsystem—Option 300 (:MEASure[:SCALAR]:BERT:BTS:LOOPback)

:EDGE:MCS5[:SENSitivity]

Supported E4438C with Option 300

```
:MEASure[:SCALAR]:BERT:BTS:LOOPback:EDGE:MCS5[:SENSitivity]?  
<high amplitude><unit>,<low amplitude><unit>,<pass amplitude><unit>,  
<error sensitivity limit>,<block count>,<initial block count>
```

This query returns either PASS or FAIL and the result for the measured sensitivity level. When this command is executed before the signal generator is synchronized with the BTS, the message “Fail, -999.00” is displayed.

There are two other status errors that may be returned; SERR or DERR.

SERR This indicates that RF synchronization is lost during search and the search is aborted.

DERR This indicates that a downlink error occurred during search and the search is aborted.

When these errors are returned, the sensitivity search returns a value of -1.0.

This command can be used in both the BER% measurement or the sensitivity search mode. After this command is executed, the measurement mode is in the sensitivity search mode.

Remarks The trigger source must be set to IMMEDIATE to execute this command. If the trigger source selection is BUS, error “-214 Trigger deadlock” is generated and no data is returned.

:EDGE:MCS9[:SENSitivity]

Supported E4438C with Option 300

```
:MEASure[:SCALAR]:BERT:BTS:LOOPback:EDGE:MCS9[:SENSitivity]?  
<high amplitude><unit>,<low amplitude><unit>,<pass amplitude><unit>,  
<error sensitivity limit>,<block count>,<initial block count>
```

This query returns either PASS or FAIL and the result for the measured sensitivity level. When this command is executed before the signal generator is synchronized with the BTS, the message “Fail, -999.00” is displayed.

Measure Subsystem—Option 300 (:MEASure[:SCALar]:BERT:BTS:LOOPback)

There are two other status errors that may be returned; SERR or DERR.

SERR	This indicates that RF synchronization is lost during search and the search is aborted.
DERR	This indicates that a downlink error occurred during search and the search is aborted.

When these errors are returned, the sensitivity search returns a value of -1.0 .

This command can be used in both the BER% measurement or the sensitivity search mode. After this command is executed, the measurement mode is in the sensitivity search mode.

Remarks The trigger source must be set to IMMEDIATE to execute this command. If the trigger source selection is BUS, error “-214 Trigger deadlock” is generated and no data is returned.

:EDGE:UNCoded[:SENSitivity]

Supported E4438C with Option 300

```
:MEASure[:SCALAR]:BERT:BTS:LOOPback:EDGE:UNCoded[:SENSitivity]?
<high amplitude><unit>,<low amplitude><unit>,<pass amplitude><unit>,<error sensitivity limit>,<block count>,<initial block count>
```

This query returns either PASS or FAIL and the result for the measured sensitivity level. When this command is executed before the signal generator is synchronized with the BTS, the message “Fail, -999.00 ” is displayed.

There are two other status errors that may be returned; SERR or DERR.

SERR	This indicates that RF synchronization is lost during search and the search is aborted.
DERR	This indicates that a downlink error occurred during search and the search is aborted.

When these errors are returned, the sensitivity search returns a value of -1.0 .

This command can be used in both the BER% measurement or the sensitivity search mode. After this command is executed, the measurement mode is in the sensitivity search mode.

Remarks The trigger source must be set to IMMEDIATE to execute this command. If the trigger source selection is BUS, error “-214 Trigger deadlock” is generated and no data is returned.

:GSM[:SENSitivity]

Supported E4438C with Option 300

```
:MEASure[:SCALAR]:BERT:BTS:LOOPback:GSM[:SENSitivity]?  
<high amplitude><unit>,<low amplitude><unit>,<pass amplitude><unit>,  
<error sensitivity limit>,<block count>,<initial block count>
```

This query returns either PASS or FAIL and the result for the measured sensitivity level. When this command is executed before the signal generator is synchronized with the BTS, the message “Fail, -999.00” is displayed.

There are two other status errors that may be returned; SERR or DERR.

SERR This indicates that RF synchronization is lost during search and the search is aborted.

DERR This indicates that a downlink error occurred during search and the search is aborted.

When these errors are returned, the sensitivity search returns a value of -1.0.

This command can be used in both the BER% measurement or the sensitivity search mode. After this command is executed, the measurement mode is in the sensitivity search mode.

Remarks The trigger source must be set to IMMEDIATE to execute this command. If the trigger source selection is BUS, error “-214 Trigger deadlock” is generated and no data is returned.

Sense Subsystem–Options UN7 and 300 ([:SOURce]:SENSe:BERT)

:BTS:LOOPback:EDGE:ETCH:F43:BLOCK:COUNT

Supported E4438C with Option 300

:SENSe:BERT:BTS:LOOPback:EDGE:ETCH:F43:BLOCK:COUNT <val>

:SENSe:BERT:BTS:LOOPback:EDGE:ETCH:F43:BLOCK:COUNT?

This command specifies the total number of blocks to be measured.

***RST** +600

Range 1–1500000

Key Entry **Block Count**

:BTS:LOOPback:EDGE:ETCH:F43:CONTain

Supported E4438C with Option 300

:SENSe:BERT:BTS:LOOPback:EDGE:ETCH:F43:CONTain ON|OFF|1|0

:SENSe:BERT:BTS:LOOPback:EDGE:ETCH:F43:CONTain?

This command enables or disables the BER measurement for ETCH/F43 channels in addition to the BLER measurement.

ON With this choice, data bits of the specified number of blocks are measured.

OFF This choice disables the measurement.

***RST** 1

Key Entry **BER Mode Off On**

:BTS:LOOPback:EDGE:ETCH:F43:STOP:CRITeria:EBLock

Supported E4438C with Option 300

```
:SENSe:BERT:BTS:LOOPback:EDGE:ETCH:F43:STOP:CRITeria:EBLock <val>
:SENSe:BERT:BTS:LOOPback:EDGE:ETCH:F43:STOP:CRITeria:EBLock?
```

This command specifies the number of erased blocks that contain bit errors for the threshold limit to stop the measurement.

***RST** +60

Range 0–1500000

Key Entry **Block Erasure**

:BTS:LOOPback:EDGE:ETCH:F43:STOP:CRITeria[:SElect]

Supported E4438C with Option 300

```
:SENSe:BERT:BTS:LOOPback:EDGE:ETCH:F43:STOP:CRITeria[:SElect] EBlock|
NONE
:SENSe:BERT:BTS:LOOPback:EDGE:ETCH:F43:STOP:CRITeria[:SElect]?
```

This command determines which of the following threshold criteria is used to prematurely stop the measurement prior to the normal measurement end. In each case, the measurement will terminate no later than 200 ms after the threshold is exceeded.

EBlock This choice enables you to specify the number of erased blocks.

NONE This choice disables the stop measurement threshold criteria function.

***RST** NONE

Key Entry **Block Erasure No Thresholds**

:BTS:LOOPback:EDGE:FTRigger:EXternal:DELay

Supported E4438C with Option 300

:SENSe:BERT:BTS:LOOPback:EDGE:FTRigger:EXternal:DELay <val>

:SENSe:BERT:BTS:LOOPback:EDGE:FTRigger:EXternal:DELay?

This command specifies the delay time of the external frame trigger. This delay is the offset from the beginning of timeslot 0.

The variable <val> is expressed in symbols with a resolution of 0.25.

***RST** +0.00000000E+000

Range -1250 to 1250

Key Entry **Ext Frame Trigger Delay**

Remarks Refer to the *E4428C/38C ESG Signal Generators User's Guide* for information on how to calculate the delay value.

:BTS:LOOPback:EDGE:FTRigger:EXternal:POLarity

Supported E4438C with Option 300

:SENSe:BERT:BTS:LOOPback:EDGE:FTRigger:EXternal:POLarity POSitive|
NEGative

:SENSe:BERT:BTS:LOOPback:EDGE:FTRigger:EXternal:POLarity?

This command specifies the external frame trigger polarity.

POS This selects the reference edge to be the rising edge of the pulse.

NEG This selects the reference edge to be the falling edge of the pulse.

***RST** POS

Key Entry **External Frame Trigger Polarity Neg Pos**

:BTS:LOOPback:EDGE:FTRigger[SElect]

Supported E4438C with Option 300

:SENSE:BERT:BTS:LOOPback:EDGE:FTRigger[:SElect] INTernal|EXTernal

:SENSE:BERT:BTS:LOOPback:EDGE:FTRigger[:SElect]?

This command specifies the frame trigger source to be used by the baseband generator.

INTernal This choice enables internal triggering.

EXTernal This choice enables the triggering by an externally applied signal at the rear panel connector.

***RST** INT

Key Entry Frame Trigger Source Int Ext

Remarks To enable this command, the frame trigger synchronization source must be PDCH. Refer to “:BTS:LOOPback:EDGE:SYNC[:SOURCE]” on page 434.

:BTS:LOOPback:EDGE:MCS5:BLOCK:COUNT

Supported E4438C with Option 300

:SENSE:BERT:BTS:LOOPback:EDGE:MCS5:BLOCK:COUNT <value>

:SENSE:BERT:BTS:LOOPback:EDGE:MCS5:BLOCK:COUNT?

This command specifies the total number of blocks to be measured.

***RST** +600

Range 1–1500000

Key Entry **Block Count**

:BTS:LOOPback:EDGE:MCS5:CONTain

Supported E4438C with Option 300

```
:SENSE:BERT:BTS:LOOPback:EDGE:MCS5:CONTain ON|OFF|1|0  
:SENSE:BERT:BTS:LOOPback:EDGE:MCS5:CONTain?
```

This command enables or disables the BER measurement for MCS-5 channels in addition to the BLER measurement.

ON With this choice, data bits of the specified number of blocks are measured.

OFF This choice disables the measurement.

***RST** 1

Key Entry **BER Mode Off On**

:BTS:LOOPback:EDGE:MCS5:ESENSitivity

Supported E4438C with Option 300

```
:SENSE:BERT:BTS:LOOPback:EDGE:MCS5:ESENSitivity <val>  
:SENSE:BERT:BTS:LOOPback:EDGE:MCS5:ESENSitivity?
```

This command specifies the target error rate when performing a sensitivity search.

The variable <val> is a decimal notation representing a percentage value.

***RST** +1.00000000E-001

Range 1E-6 to 1

Key Entry **Target BER %**

:BTS:LOOPback:EDGE:MCS5:HAMPLitude

Supported E4438C with Option 300

```
:SENSE:BERT:BTS:LOOPback:EDGE:MCS5:HAMPLitude <val>  
:SENSE:BERT:BTS:LOOPback:EDGE:MCS5:HAMPLitude?
```

This command specifies the maximum amplitude level for performing a sensitivity search. The high amplitude value can not be lower than the low amplitude value.

The variable <val> is expressed in units of dBm.

***RST** -9.00000000E+001

Range -136 to 20

Key Entry **High Amplitude**

:BTS:LOOPback:EDGE:MCS5:LAMplitude

Supported E4438C with Option 300

:SENSe:BERT:BTS:LOOPback:EDGE:MCS5:LAMplitude <val>

:SENSe:BERT:BTS:LOOPback:EDGE:MCS5:LAMplitude?

This command specifies the minimum amplitude level for performing a sensitivity search. The low amplitude value can not be higher than the high amplitude value.

The variable <val> is expressed in units of dBm.

***RST** -1.1000000E+002

Range -136.0 to 20

Key Entry **Low Amplitude**

:BTS:LOOPback:EDGE:MCS5:PAMplitude

Supported E4438C with Option 300

:SENSe:BERT:BTS:LOOPback:EDGE:MCS5:PAMplitude <val>

:SENSe:BERT:BTS:LOOPback:EDGE:MCS5:PAMplitude?

This command specifies the threshold amplitude for pass/fail comparator results when performing a sensitivity search.

The variable <val> is expressed in units of dBm.

***RST** -1.0100000E+002

Range -136.0 to 20

Key Entry **Pass Amplitude**

:BTS:LOOPback:EDGE:MCS5:SBlock:COUNT

Supported E4438C with Option 300

:SENSe:BERT:BTS:LOOPback:EDGE:MCS5:SBlock:COUNT <val>

:SENSe:BERT:BTS:LOOPback:EDGE:MCS5:SBlock:COUNT?

This command specifies the total number of blocks for each measurement during the sensitivity search.

***RST** +1200

Range 1–1500000

Key Entry **Block Count**

:BTS:LOOPback:EDGE:MCS5:SBlock:INITial

Supported E4438C with Option 300

```
:SENSE:BERT:BTS:LOOPback:EDGE:MCS5:SBlock:INITial <val>  
:SENSE:BERT:BTS:LOOPback:EDGE:MCS5:SBlock:INITial?
```

This command specifies the total number of blocks to be measured at the beginning of each measurement during the sensitivity search.

***RST** +600

Range 1–1500000

Key Entry Initial Block Count

:BTS:LOOPback:EDGE:MCS5:STOP:CRITeria:EBLock

Supported E4438C with Option 300

```
:SENSE:BERT:BTS:LOOPback:EDGE:MCS5:STOP:CRITeria:EBLock <val>  
:SENSE:BERT:BTS:LOOPback:EDGE:MCS5:STOP:CRITeria:EBLock?
```

This command specifies the number of erased blocks that contain bit errors for the threshold limit to stop the measurement.

***RST** +60

Range 0–1500000

Key Entry Block Erasure

:BTS:LOOPback:EDGE:MCS5:STOP:CRITeria[:SElect]

Supported E4438C with Option 300

```
:SENSE:BERT:BTS:LOOPback:EDGE:MCS5:STOP:CRITeria[:SElect] EBlock|NONE  
:SENSE:BERT:BTS:LOOPback:EDGE:MCS5:STOP:CRITeria[:SElect]?
```

This command determines which of the following threshold criteria is used to prematurely stop the measurement prior to the normal measurement end. In each case, the measurement will terminate no later than 200 ms after the threshold is exceeded.

EBlock This choice enables you to specify the number of erased blocks or bit errors.

NONE This choice disables the stop measurement threshold criteria function.

Key Entry Block Erasure No Thresholds

:BTS:LOOPback:EDGE:MCS9:BLOCK:COUNT

Supported E4438C with Option 300

:SENSE:BERT:BTS:LOOPback:EDGE:MCS9:BLOCK:COUNT <val>

:SENSE:BERT:BTS:LOOPback:EDGE:MCS9:BLOCK:COUNT?

This command specifies the total number of blocks to be measured.

Only even values can be entered. If odd numbers are entered, the value increments by one to make it an even value.

***RST** +600

Range 2–1500000

Key Entry **Block Count**

:BTS:LOOPback:EDGE:MCS9:CONTain

Supported E4438C with Option 300

:SENSE:BERT:BTS:LOOPback:EDGE:MCS9:CONTain ON|OFF|1|0

:SENSE:BERT:BTS:LOOPback:EDGE:MCS9:CONTain?

This command enables or disables the BER measurement for MCS-9 channels in addition to the BLER measurement.

ON With this choice, data bits of the specified number of blocks are measured.

OFF This choice disables the measurement.

***RST** 1

Key Entry **BER Mode Off On**

:BTS:LOOPback:EDGE:MCS9:ESENSitivity

Supported E4438C with Option 300

:SENSE:BERT:BTS:LOOPback:EDGE:MCS9:ESENSitivity <val>

:SENSE:BERT:BTS:LOOPback:EDGE:MCS9:ESENSitivity?

The variable <val> is a decimal notation representing a percentage value.

***RST** +1.00000000E-001

Range 1E–6 to 1

Key Entry **Target BER %**

:BTS:LOOPback:EDGE:MCS9:HAMplitude

Supported E4438C with Option 300

```
:SENSe:BERT:BTS:LOOPback:EDGE:MCS9:HAMplitude <val>  
:SENSe:BERT:BTS:LOOPback:EDGE:MCS9:HAMplitude?
```

This command specifies the maximum amplitude level for performing a sensitivity search. The high amplitude value can not be lower than the low amplitude value.

The variable <val> is expressed in units of dBm.

***RST** -8.00000000E+001

Range -136.0 to 20

Key Entry **High Amplitude**

:BTS:LOOPback:EDGE:MCS9:LAMplitude

Supported E4438C with Option 300

```
:SENSe:BERT:BTS:LOOPback:EDGE:MCS9:LAMplitude <val>  
:SENSe:BERT:BTS:LOOPback:EDGE:MCS9:LAMplitude?
```

This command specifies the minimum amplitude level for performing a sensitivity search. The low amplitude value can not be higher than the high amplitude value.

The variable <val> is expressed in units of dBm.

***RST** -1.00000000E+002

Range -136.0 to 20

Key Entry **Low Amplitude**

:BTS:LOOPback:EDGE:MCS9:PAMplitude

Supported E4438C with Option 300

:SENSe:BERT:BTS:LOOPback:EDGE:MCS9:PAMplitude <val>

:SENSe:BERT:BTS:LOOPback:EDGE:MCS9:PAMplitude?

This command specifies the threshold amplitude for pass/fail comparator results when performing a sensitivity search.

The variable <val> is expressed in units of dBm.

***RST** -9.1500000E+001

Range -136.0 to 20

Key Entry Pass Amplitude

:BTS:LOOPback:EDGE:MCS9:SBlock:COUNT

Supported E4438C with Option 300

:SENSe:BERT:BTS:LOOPback:EDGE:MCS9:SBlock:COUNT <val>

:SENSe:BERT:BTS:LOOPback:EDGE:MCS9:SBlock:COUNT?

This command specifies the total number of blocks to be measured at each measurement during the sensitivity search.

Only even values can be entered. If odd numbers are entered, the value increments by one to make it an even value.

***RST** +1200

Range 2–1500000

Key Entry Block Count

:BTS:LOOPback:EDGE:MCS9:SBlock:INITial

Supported E4438C with Option 300

:SENSe:BERT:BTS:LOOPback:EDGE:MCS9:SBlock:INITial <val>

:SENSe:BERT:BTS:LOOPback:EDGE:MCS9:SBlock:INITial?

This command specifies the total number of blocks to be measured at the beginning of each measurement during the sensitivity search.

Only even values can be entered. If odd numbers are entered, the value increments by one to make it an even value.

***RST** +600
Range 2–1500000
Key Entry **Initial Block Count**

:BTS:LOOPback:EDGE:MCS9:STOP:CRITeria:EBLock

Supported E4438C with Option 300
:SENSE:BERT:BTS:LOOPback:EDGE:MCS9:STOP:CRITeria:EBLock <val>
:SENSE:BERT:BTS:LOOPback:EDGE:MCS9:STOP:CRITeria:EBLock?

This command specifies the number of erased blocks that contain bit errors for the threshold limit to stop the measurement.

***RST** +60
Range 0–1500000
Key Entry **Block Erasure**

:BTS:LOOPback:EDGE:MCS9:STOP:CRITeria[:SElect]

Supported E4438C with Option 300
:SENSE:BERT:BTS:LOOPback:EDGE:MCS9:STOP:CRITeria[:SElect] EBlock|NONE
:SENSE:BERT:BTS:LOOPback:EDGE:MCS9:STOP:CRITeria[:SElect]?

This command determines which of the following threshold criteria is used to prematurely stop the measurement prior to the normal measurement end. In each case, the measurement will terminate no later than 200 ms after the threshold is exceeded.

EBlock This choice enables you to specify the number of non-erased blocks that contain bit errors.
NONE This choice disables the stop measurement threshold criteria function.
***RST** NONE
Key Entry **Block Erasure No Thresholds**

:BTS:LOOPback:EDGE:MEASurement:STOP

Supported E4438C with Option 300

:SENSE:BERT:BTS:LOOPback:EDGE:MEASurement:STOP

This command immediately stops any current measurement and releases the PRBS synchronization. After the synchronization is released, a new PRBS synchronization is attempted.

Key Entry Stop Measurement

:BTS:LOOPback:EDGE:MEASurement:TSLot

Supported E4438C with Option 300

:SENSE:BERT:BTS:LOOPback:EDGE:MEASurement:TSLot 0|1|2|3|4|5|6|7
:SENSE:BERT:BTS:LOOPback:EDGE:MEASurement:TSLot?

This command specifies the timeslot number in which the measurement is to be performed.

The following EDGE timeslot configuration conditions will generate error message “-221 Settings Conflict”:

- If the specified timeslot does not have one of the BLER/BER measurable channel types, which are uncoded, E-TCH/43.2NT, MCS-9, and MCS-5.
- If the specified timeslot type is not set to “NORMAL.”

***RST** +0

Key Entry Timeslot

Remarks This command couples the selected timeslot number with the EDGE configuration.

Changing the timeslot configuration with EDGE on will not generate an error message if EDGE BERT is off and the timeslot is off.

:BTS:LOOPback:EDGE:MEASurement[:MODE]

Supported E4438C with Option 300

:SENSE:BERT:BTS:LOOPback:EDGE:MEASurement[:MODE] BLER|SSEarch
:SENSE:BERT:BTS:LOOPback:EDGE:MEASurement[:MODE]?

This command specifies the measurement mode.

BLER This choice specifies BLER% as the measurement mode.

SSEarch	This choice specifies sensitivity search as the measurement mode.
*RST	BLER
Key Entry	Measurement Mode BLER% Search
Remarks	If the BLER% measurement is already running, this command will abort the BLER% measurement.

:BTS:LOOPback:EDGE:SINVert

Supported E4438C with Option 300

```
:SENSE:BERT:BTS:LOOPback:EDGE:SINVert ON|OFF|1|0
:SENSE:BERT:BTS:LOOPback:EDGE:SINVert?
```

This command sets the operating state of the spectrum inverting function.

ON This choice specifies that the EDGE demodulator invert the spectrum of the received RF signal.

OFF This choice leaves the spectrum of the received RF signal unaffected.

*RST 1

Key Entry **Spectrum Invert Off On**

:BTS:LOOPback:EDGE:SYNC:AGAIin

Supported E4438C with Option 300

```
:SENSE:BERT:BTS:LOOPback:EDGE:SYNC:AGAIin
```

This command adjusts the input signal level of the internal demodulator. Use this adjustment when switching from BCH synchronization to PDCH synchronization.

Key Entry **Adjust Gain**

Remarks This command is ignored unless the status displays "Waiting for PDCH."

:BTS:LOOPback:EDGE:SYNC:RF

Supported E4438C with Option 300

```
:SENSE:BERT:BTS:LOOPback:EDGE:SYNC:RF
```

This command releases the current synchronization with the BTS and immediately starts to try to synchronize to either a BCH or PDCH signal as selected with the SYNC[:SOURCE] command. This command will also stop the current measurement.

Key Entry **Synchronize to BCH/PDCH**

:BTS:LOOPback:EDGE:SYNC[:SOURCE]

Supported E4438C with Option 300

:SENSe:BERT:BTS:LOOPback:EDGE:SYNC[:SOURCE] BCH|PDCH
 :SENSe:BERT:BTS:LOOPback:EDGE:SYNC[:SOURCE] ?

This command specifies the synchronization source from the BTS under test.

- BCH This choice specifies the traffic channel as the synchronization source.
- PDCH This choice specifies the packet data channel as the synchronization source.
- *RST BCH

Key Entry Sync Source BCH PDCH

:BTS:LOOPback:EDGE:TRIGger[:SOURCE]

Supported E4438C with Option 300

:SENSe:BERT:BTS:LOOPback:EDGE:TRIGger[:SOURCE] IMMEDIATE|KEY|EXT|BUS
 :SENSe:BERT:BTS:LOOPback:EDGE:TRIGger[:SOURCE] ?

This command determines the trigger source for the EDGE loopback bit error rate measurement.

- IMMEDIATE This choice begins the measurement directly after synchronization has been achieved.
- KEY This choice begins the measurement when the front panel **Trigger** key is pressed, provided that synchronization has been achieved. If synchronization has not occurred, the trigger is ignored.
- EXT This choice begins the measurement as soon as a trigger signal is applied to the rear panel connector provided that synchronization has been achieved. If synchronization has not occurred, the trigger is ignored.
- BUS This choice enables GPIB triggering using the *TRG or GET command or LAN and RS-232 triggering using the *TRG command.

*RST KEY

Key Entry Immediate Trigger Key Ext Bus

Remarks An inherent variable delay will always exist when starting a measurement because the measurement must await the start of the next speech frame after the trigger. The delay can vary between 0 and 23 ms (5 frames) depending on where the trigger falls within the TDMA multiframe.

A trigger is ignored unless the EDGE loopback operating state is turned on.

:BTS:LOOPback:EDGE:ULINK:OFFSet

Supported E4438C with Option 300

:SENSE:BERT:BTS:LOOPback:EDGE:ULINK:OFFSet <val>

:SENSE:BERT:BTS:LOOPback:EDGE:ULINK:OFFSet?

This command specifies, in symbols, the amount of compensation for the insertion of equipment such as fading simulators into the uplink RF path.

***RST** +0

Range -500 to 10000

Key Entry Uplink Timing Advance

:BTS:LOOPback:EDGE:UNCoded:BIT:COUNT

Supported E4438C with Option 300

:SENSE:BERT:BTS:LOOPback:EDGE:UNCoded:BIT:COUNT <value>

:SENSE:BERT:BTS:LOOPback:EDGE:UNCoded:BIT:COUNT?

This command specifies the total number of bits to be measured for the uncoded channel.

***RST** +139200

Range 1392-2147483647

Key Entry Bit Count

:BTS:LOOPback:EDGE:UNCoded:ESENSitivity

Supported E4438C with Option 300

:SENSE:BERT:BTS:LOOPback:EDGE:UNCoded:ESENSitivity <val>

:SENSE:BERT:BTS:LOOPback:EDGE:UNCoded:ESENSitivity?

This command specifies the target error rate when performing a sensitivity search.

***RST** +2.00000000E-002

Range 1E-6 to 1

Key Entry Target BER %

:BTS:LOOPback:EDGE:UNCoded:HAMPlitude

Supported E4438C with Option 300

:SENSE:BERT:BTS:LOOPback:EDGE:UNCoded:HAMPlitude <val>

:SENSE:BERT:BTS:LOOPback:EDGE:UNCoded:HAMPlitude?

This command specifies the maximum amplitude level for performing a sensitivity search. The high amplitude value can not be lower than the low amplitude value.

The variable <val> is expressed in units of dBm.

***RST** -8.50000000E+001

Range -136.0 to 20

Key Entry High Amplitude

:BTS:LOOPback:EDGE:UNCoded:LAMPlitude

Supported E4438C with Option 300

:SENSE:BERT:BTS:LOOPback:EDGE:UNCoded:LAMPlitude <val>

:SENSE:BERT:BTS:LOOPback:EDGE:UNCoded:LAMPlitude?

This command specifies the minimum amplitude level for performing a sensitivity search. The low amplitude value can not be higher than the high amplitude value.

The variable <val> is expressed in units of dBm.

***RST** -1.05000000E+002

Range -136.0 to 20

Key Entry Low Amplitude

:BTS:LOOPback:EDGE:UNCoded:PAMPlitude

Supported E4438C with Option 300

:SENSE:BERT:BTS:LOOPback:EDGE:UNCoded:PAMPlitude <val>
:SENSE:BERT:BTS:LOOPback:EDGE:UNCoded:PAMPlitude?

This command specifies the threshold amplitude for pass/fail comparator results when performing a sensitivity search.

The variable <val> is expressed in units of dBm.

***RST** -9.50000000E+001

Range -136.0 to 20

Key Entry **Pass Amplitude**

:BTS:LOOPback:EDGE:UNCoded:SBIT:COUNT

Supported E4438C with Option 300

:SENSE:BERT:BTS:LOOPback:EDGE:UNCoded:SBIT:COUNT <val>
:SENSE:BERT:BTS:LOOPback:EDGE:UNCoded:SBIT:COUNT?

This command specifies the total number of bits to be measured during a sensitivity search for the uncoded channel.

***RST** +139200

Range 1392–2147483647

Key Entry **Bit Count**

:BTS:LOOPback:EDGE:UNCoded:SBIT:INITIAL

Supported E4438C with Option 300

:SENSE:BERT:BTS:LOOPback:EDGE:UNCoded:SBIT:INITIAL <val>
:SENSE:BERT:BTS:LOOPback:EDGE:UNCoded:SBIT:INITIAL?

This command specifies the total number of bits to be measured at the beginning of the sensitivity search for the uncoded channel.

***RST** +13920

Range 1392–2147483647

Key Entry **Initial Bit Count**

:BTS:LOOPback:EDGE:UNCoded:STOP:CRITeria:EBIT

Supported E4438C with Option 300

```
:SENSE:BERT:BTS:LOOPback:EDGE:UNCoded:STOP:CRITeria:EBIT <val>
:SENSE:BERT:BTS:LOOPback:EDGE:UNCoded:STOP:CRITeria:EBIT?
```

This command specifies the number of block erasures or bit errors, depending on the measurement channel type, for the threshold limit to stop the measurement.

***RST** +2784

Range 0–2147483647

Key Entry **Error Count**

:BTS:LOOPback:EDGE:UNCoded:STOP:CRITeria[:SElect]

Supported E4438C with Option 300

```
:SENSE:BERT:BTS:LOOPback:EDGE:UNCoded:STOP:CRITeria[:SElect] EBIT|NONE
:SENSE:BERT:BTS:LOOPback:EDGE:UNCoded:STOP:CRITeria[:SElect]?
```

This command determines which of the following threshold criteria is used to prematurely stop the measurement prior to the normal measurement end. In each case, the measurement will terminate no later than 200 ms after the threshold is exceeded.

EBIT This choice enables you to specify the number of bit errors.

NONE This choice disables the stop measurement threshold criteria function.

***RST** NONE

Key Entry **Error Count No Thresholds**

:BTS:LOOPback:EDGE[:STATe]

Supported E4438C with Option 300

```
:SENSE:BERT:BTS:LOOPback:EDGE[:STATe] ON|OFF|1|0
:SENSE:BERT:BTS:LOOPback:EDGE[:STATe]?
```

This command sets the operating state of the EDGE loopback bit error rate (BER) function.

ON This choice enables the EDGE loopback BER function.

OFF This choice disables the EDGE loopback BER function.

***RST** 0

Key Entry **EDGE BERT Off On**

Remarks Although you can configure the measurement parameters while the operating state is off, any command triggers sent will be ignored until the operating state is turned on.

:BTS:LOOPback:GSM:CS1:BLOCK:COUNT

Supported E4438C with Option 300

```
:SENSE:BERT:BTS:LOOPback:GSM:CS1:BLOCK:COUNT <val>  
:SENSE:BERT:BTS:LOOPback:GSM:CS1:BLOCK:COUNT?
```

This command specifies the total number of blocks to be measured.

***RST** +600

Range 1–1500000

Key Entry **Block Count**

:BTS:LOOPback:GSM:CS1:CONTain

Supported E4438C with Option 300

```
:SENSE:BERT:BTS:LOOPback:GSM:CS1:CONTain ON|OFF|1|0  
:SENSE:BERT:BTS:LOOPback:GSM:CS1:CONTain?
```

This command enables or disables the BER measurement for CS-1 channels in addition to the BLER measurement.

ON With this choice, data bits of the specified number of blocks are measured.

OFF This choice disables the BER measurement.

***RST** 1

Key Entry **BER Mode Off On**

:BTS:LOOPback:GSM:CS1:STOP:CRITeria:EBLock

Supported E4438C with Option 300

```
:SENSE:BERT:BTS:LOOPback:GSM:CS1:STOP:CRITeria:EBLock <val>
:SENSE:BERT:BTS:LOOPback:GSM:CS1:STOP:CRITeria:EBLock?
```

This command specifies the number of erased blocks that contain bit errors for the threshold limit to stop the measurement.

***RST** +60

Range 0–1500000

Key Entry **Block Erasure**

:BTS:LOOPback:GSM:CS1:STOP:CRITeria[:SElect]

Supported E4438C with Option 300

```
:SENSE:BERT:BTS:LOOPback:GSM:CS1:STOP:CRITeria[:SElect] EBlock|NONE
:SENSE:BERT:BTS:LOOPback:GSM:CS1:STOP:CRITeria[:SElect]?
```

This command determines which of the following threshold criteria is used to prematurely stop the measurement prior to the normal measurement end. In each case, the measurement will terminate no later than 200 ms after the threshold is exceeded.

EBlock This choice enables you to specify the number of erased blocks.

NONE This choice disables the stop measurement threshold criteria function.

***RST** NONE

Key Entry **Block Erasure No Thresholds**

:BTS:LOOPback:GSM:CS4:BLOCK:COUNT

Supported E4438C with Option 300

```
:SENSE:BERT:BTS:LOOPback:GSM:CS4:BLOCK:COUNT <value>
:SENSE:BERT:BTS:LOOPback:GSM:CS4:BLOCK:COUNT?
```

This command specifies the total number of blocks to be measured.

***RST** +600

Range 1 to 1500000

Key Entry **Block Count**

:BTS:LOOPback:GSM:CS4:CONTain

Supported E4438C with Option 300

:SENSE:BERT:BTS:LOOPback:GSM:CS4:CONTain ON|OFF|1|0

:SENSE:BERT:BTS:LOOPback:GSM:CS4:CONTain?

This command enables or disables the BER measurement for CS-4 channels in addition to the BLER measurement.

ON With this choice, data bits of the specified number of blocks are measured.

OFF This choice disables the BER measurement.

***RST** 1

Key Entry **BER Mode Off On**

:BTS:LOOPback:GSM:CS4:STOP:CRITeria:EBLock

Supported E4438C with Option 300

:SENSE:BERT:BTS:LOOPback:GSM:CS4:STOP:CRITeria:EBLock <val>

:SENSE:BERT:BTS:LOOPback:GSM:CS4:STOP:CRITeria:EBLock?

This command specifies the threshold limit to stop the measurement which is the number of erased blocks that contain bit errors.

***RST** +60

Range 0–1500000

Key Entry **Block Erasure**

:BTS:LOOPback:GSM:CS4:STOP:CRITeria[:SElect]

Supported E4438C with Option 300

```
:SENSE:BERT:BTS:LOOPback:GSM:CS4:STOP:CRITeria[:SElect] EBLock|NONE  
:SENSE:BERT:BTS:LOOPback:GSM:CS4:STOP:CRITeria[:SElect]?
```

This command determines which of the following threshold criteria is used to prematurely stop the measurement prior to the normal measurement end. In each case, the measurement will terminate no later than 200 ms after the threshold is exceeded.

EBLock This choice enables you to specify the number of erased blocks.

NONE This choice disables the stop measurement threshold criteria function.

***RST** NONE

Key Entry **Block Erasure** **No Thresholds**

:BTS:LOOPback:GSM:ESENSitivity

Supported E4438C with Option 300

```
:SENSE:BERT:BTS:LOOPback:GSM:ESENSitivity <val>  
:SENSE:BERT:BTS:LOOPback:GSM:ESENSitivity?
```

This command specifies the target error rate when performing a sensitivity search.

***RST** +2.00000000E-002

Range 1E-6 to 1

Key Entry **Target BER%**

:BTS:LOOPback:GSM:FRAMe:CIB

Supported E4438C with Option 300

```
:SENSE:BERT:BTS:LOOPback:GSM:FRAMe:CIB?
```

This query returns the total number of Class Ib bits to be measured which are calculated from the total number of frames specified to be measured.

:BTS:LOOPback:GSM:FRAMe:CII

Supported E4438C with Option 300

```
:SENSE:BERT:BTS:LOOPback:GSM:FRAMe:CII?
```

This query returns the total number of Class II bits to be measured which are calculated from the total number of frames specified to be measured.

:BTS:LOOPback:GSM:FRAME:COUNT

Supported E4438C with Option 300

:SENSE:BERT:BTS:LOOPback:GSM:FRAME:COUNT <val>

:SENSE:BERT:BTS:LOOPback:GSM:FRAME:COUNT?

This command determines the length of the measurement specified by the total number of frames included in one measurement.

***RST** +100

Range 1–6000000

Key Entry **Frame Count**

:BTS:LOOPback:GSM:HAMPLitude

Supported E4438C with Option 300

:SENSE:BERT:BTS:LOOPback:GSM:HAMPLitude <val>

:SENSE:BERT:BTS:LOOPback:GSM:HAMPLitude?

This command specifies the maximum amplitude level for performing a sensitivity search.

The variable <val> is expressed in units of dBm.

***RST** –9.00000000E+001

Range –136.0 to 20

Key Entry **High Amplitude**

:BTS:LOOPback:GSM:LAMPLitude

Supported E4438C with Option 300

:SENSE:BERT:BTS:LOOPback:GSM:LAMPLitude <val>

:SENSE:BERT:BTS:LOOPback:GSM:LAMPLitude?

This command specifies the minimum amplitude level for performing a sensitivity search.

The variable <val> is expressed in units of dBm.

***RST** –1.15000000E+002

Range –136.0 to 20

Key Entry **Low Amplitude**

:BTS:LOOPback:GSM:MCS1:BLOCK:COUNT

Supported E4438C with Option 300

:SENSE:BERT:BTS:LOOPback:GSM:MCS1:BLOCK:COUNT <val>

:SENSE:BERT:BTS:LOOPback:GSM:MCS1:BLOCK:COUNT?

This command specifies the total number of blocks to be measured.

***RST** +600

Range 1–1500000

Key Entry **Block Count**

:BTS:LOOPback:GSM:MCS1:CONTain

Supported E4438C with Option 300

:SENSE:BERT:BTS:LOOPback:GSM:MCS1:CONTain ON|OFF|1|0

:SENSE:BERT:BTS:LOOPback:GSM:MCS1:CONTain?

This command enables or disables the BER measurement for MCS-1 channels in addition to the BLER measurement.

ON With this choice, data bits of the specified number of blocks are measured.

OFF This choice disables the BER measurement.

***RST** 1

Key Entry **BER Mode Off On**

:BTS:LOOPback:GSM:MCS1:STOP:CRITeria:EBLock

Supported E4438C with Option 300

:SENSE:BERT:BTS:LOOPback:GSM:MCS1:STOP:CRITeria:EBLock <val>

:SENSE:BERT:BTS:LOOPback:GSM:MCS1:STOP:CRITeria:EBLock?

This command specifies the number of erased blocks that contain bit errors for the threshold limit to stop the measurement.

***RST** +60

Range 0–1500000

Key Entry **Block Erasure**

:BTS:LOOPback:GSM:MCS1:STOP:CRITeria[:SElect]

Supported E4438C with Option 300

```
:SENSE:BERT:BTS:LOOPback:GSM:MCS1:STOP:CRITeria[:SElect] EBLock|NONE  
:SENSE:BERT:BTS:LOOPback:GSM:MCS1:STOP:CRITeria[:SElect]?
```

This command determines which of the following threshold criteria is used to prematurely stop the measurement prior to the normal measurement end. In each case, the measurement will terminate no later than 200 ms after the threshold is exceeded.

EBLock This choice enables you to specify the number of erased blocks.

NONE This choice disables the stop measurement threshold criteria function.

***RST** NONE

Key Entry **Block Erasure No Thresholds**

:BTS:LOOPback:GSM:MEASurement:STOP

Supported E4438C with Option 300

```
:SENSE:BERT:BTS:LOOPback:GSM:MEASurement:STOP
```

This command stops any current measurement and releases the current PRBS synchronization. After the synchronization is released, a new PRBS synchronization is attempted.

Key Entry **Stop Measurement**

:BTS:LOOPback:GSM:MEASurement:TSLot

Supported E4438C with Option 300

```
:SENSE:BERT:BTS:LOOPback:GSM:MEASurement:TSLot 0|1|2|3|4|5|6|7
:SENSE:BERT:BTS:LOOPback:GSM:MEASurement:TSLot?
```

This command specifies the timeslot number in which the measurement is to be performed. This command couples the selected timeslot number with the GSM configuration.

The following GSM timeslot configuration conditions will generate error message “-221 Settings Conflict”:

- If the specified timeslot E field fails to designate either MPN9 or MPN15.
- If the specified timeslot is not set to “Normal.”

***RST** +0

Key Entry Timeslot

Remarks Changing the timeslot configuration with GSM on will not generate error messages if GSM BERT is off and the timeslot is off.

:BTS:LOOPback:GSM:MEASurement[:MODE]

Supported E4438C with Option 300

```
:SENSE:BERT:BTS:LOOPback:GSM:MEASurement[:MODE] BER|SSEarch
:SENSE:BERT:BTS:LOOPback:GSM:MEASurement[:MODE]?
```

This command specifies the measurement mode.

BER This choice specifies BER% as the measurement mode.

SSEarch This choice specifies sensitivity search as the measurement mode.

***RST** BER

Key Entry Measurement Mode BER% Search

Remarks If the BER% measurement is already running, this command will abort the BER% measurement.

:BTS:LOOPback:GSM:PAMplitude

Supported E4438C with Option 300

```
:SENSE:BERT:BTS:LOOPback:GSM:PAMplitude <val>  
:SENSE:BERT:BTS:LOOPback:GSM:PAMplitude?
```

This command specifies the threshold amplitude for pass/fail comparator results when performing a sensitivity search.

The variable <val> is expressed in units of dBm.

***RST** -1.04000000E+002

Range -136.0 to 20

Key Entry Pass Amplitude

:BTS:LOOPback:GSM:SFRame:COUNT

Supported E4438C with Option 300

```
:SENSE:BERT:BTS:LOOPback:GSM:SFRame:COUNT <val>  
:SENSE:BERT:BTS:LOOPback:GSM:SFRame:COUNT?
```

This command specifies the total number of frames to be measured for the final measurements during the sensitivity search.

***RST** +100

Range 1–6000000

Key Entry Frame Count

:BTS:LOOPback:GSM:SFRame:INITial

Supported E4438C with Option 300

```
:SENSE:BERT:BTS:LOOPback:GSM:SFRame:INITial <val>  
:SENSE:BERT:BTS:LOOPback:GSM:SFRame:INITial?
```

This command specifies the number of frames to be measured while sensitivity search is running rough searching to gain search speed. It is the first phase of sensitivity search.

***RST** +26

Range 1–6000000

Key Entry Initial Frame Count

:BTS:LOOPback:GSM:SINVert

Supported E4438C with Option 300

:SENSe:BERT:BTS:LOOPback:GSM:SINVert ON|OFF|1|0

:SENSe:BERT:BTS:LOOPback:GSM:SINVert?

This command sets the operating state of the spectrum inverting function.

ON This choice specifies that the GSM demodulator invert the spectrum of the received RF signal.

OFF This choice leaves the spectrum of the received RF signal unaffected.

***RST** 1

Key Entry **Spectrum Invert Off On**

:BTS:LOOPback:GSM:STOP:CRITeria:CIB

Supported E4438C with Option 300

:SENSe:BERT:BTS:LOOPback:GSM:STOP:CRITeria:CIB <val>

:SENSe:BERT:BTS:LOOPback:GSM:STOP:CRITeria:CIB?

This command specifies the threshold number of Class Ib errors to stop the measurement.

***RST** 300

Range 0–1000000

Key Entry **Class Ib Bit Error**

Remarks Refer to “:BTS:LOOPback:GSM:STOP:CRITeria[:SElect]” on page 449 for information on the use of the file variables.

:BTS:LOOPback:GSM:STOP:CRITeria:CII

Supported E4438C with Option 300

:SENSe:BERT:BTS:LOOPback:GSM:STOP:CRITeria:CII <val>

:SENSe:BERT:BTS:LOOPback:GSM:STOP:CRITeria:CII?

This command specifies the threshold number of Class II errors to stop the measurement.

***RST** 300

Range 0–1000000

Key Entry **Class II Bit Error**

Remarks Refer to “:BTS:LOOPback:GSM:STOP:CRITeria[:SElect]” on page 449 for information on the use of the file variables.

:BTS:LOOPback:GSM:STOP:CRITeria:FERasure

Supported E4438C with Option 300

:SENSe:BERT:BTS:LOOPback:GSM:STOP:CRITeria:FERasure <val>

:SENSe:BERT:BTS:LOOPback:GSM:STOP:CRITeria:FERasure?

This command specifies the threshold number of erased frames to stop the measurement.

***RST** 120

Range 0–1000000

Key Entry **Frame Erasure**

Remarks Refer to “:BTS:LOOPback:GSM:STOP:CRITeria[:SElect]” for information on the use of the file variables.

:BTS:LOOPback:GSM:STOP:CRITeria[:SElect]

Supported E4438C with Option 300

:SENSe:BERT:BTS:LOOPback:GSM:STOP:CRITeria[:SElect] FERasure|CIB|CII|
ANY|NONE

:SENSe:BERT:BTS:LOOPback:GSM:STOP:CRITeria[:SElect]?

This command sets the threshold criteria used to prematurely stop the measurement prior to the normal measurement end. In each case, the measurement will terminate no later than 200 ms after the threshold is exceeded.

FERasure This selection ends the measurement when the number of erased frames exceeds the specified threshold.

Bit Error Rate Test (BERT) Commands

Sense Subsystem—Options UN7 and 300 ([:SOURCE]:SENSE:BERT)

CIB	This selection ends the measurement when the number of Class Ib errors detected exceeds the specified threshold.		
CII	This selection ends the measurement when the number of Class II errors detected exceeds the specified threshold.		
ANY	This selection ends the measurement when any of the above stop measurement threshold criteria is exceeded.		
NONE	This selection disables the stop measurement threshold criteria function, so that the measurement runs for the specified number of speech frames.		
*RST	NONE		
Key Entry	Frame Erasure	Class Ib Bit Error	Class II Bit Error
	Exceeds Any Thresholds	No Thresholds	

:BTS:LOOPback:GSM:SYNC:RF

Supported E4438C with Option 300

:SENSE:BERT:BTS:LOOPback:GSM:SYNC:RF

This command releases the current synchronization with the BTS and immediately starts to try to synchronize to either a BCH or TCH signal as selected with the SYNC[:SOURCE] command. This command will also stop the current measurement.

Key Entry **Synchronize to BCH/TCH**

Remarks The test equipment can use a BCH signal from the BTS to determine the required transmit timeslot, frame and multiframe timing. The BCH signal is always transmitted in timeslot 0 and contains multiframe information. Use BCH when a BCH subset is present which contains SCH bursts with a properly coded T2 parameter.

Use TCH when providing a TCH/FS training sequence from the BTS. However, only one timeslot from the BTS can be active at a time and you must specify to the receiver which timeslot is being received since it has no absolute reference (unlike a BCH signal, which is always transmitted in timeslot 0).

:BTS:LOOPback:GSM:SYNC[:SOURCE]

Supported E4438C with Option 300

:SENSe:BERT:BTS:LOOPback:GSM:SYNC[:SOURCE] BCH|TCH
:SENSe:BERT:BTS:LOOPback:GSM:SYNC[:SOURCE] ?

This command specifies the synchronization source from the BTS under test.

BCH This choice specifies the broadcast channel as the synchronization source.

TCH This choice specifies the traffic channel as the synchronization source.

***RST** BCH

Key Entry **Sync Source BCH TCH**

:BTS:LOOPback:GSM:TRIGger[:SOURCE]

Supported E4438C with Option 300

:SENSe:BERT:BTS:LOOPback:GSM:TRIGger[:SOURCE] IMMEDIATE|KEY|EXT|BUS
:SENSe:BERT:BTS:LOOPback:GSM:TRIGger[:SOURCE] ?

This command determines the trigger source for the GSM loopback bit error rate measurement.

IMMEDIATE This choice begins the measurement directly after synchronization has been achieved.

KEY This choice begins the measurement when the front panel **Trigger** key is pressed, provided that synchronization has been achieved. If synchronization has not occurred, the trigger is ignored.

EXT This choice begins the measurement as soon as a trigger signal is applied to the rear panel connector provided that synchronization has been achieved. If synchronization has not occurred, the trigger is ignored.

BUS This choice enables GPIB triggering using the *TRG or GET command or LAN and RS-232 triggering using the *TRG command.

***RST** KEY

Key Entry **Immediate Trigger Key Ext Bus Aux**

Remarks An inherent variable delay will always exist when starting a measurement because the measurement must await the start of the next speech frame after the trigger. The delay can vary between 0 and 23 ms (5 frames) depending on where the trigger falls within the TDMA multiframe.

A trigger is ignored unless the GSM loopback operating state is turned on.

:BTS:LOOPback:GSM:ULINK:OFFSet

Supported E4438C with Option 300

:SENSE:BERT:BTS:LOOPback:GSM:ULINK:OFFSet <value>

:SENSE:BERT:BTS:LOOPback:GSM:ULINK:OFFSet?

This command specifies the amount of compensation for the insertion of equipment such as fading simulators into the uplink RF path.

***RST** +0

Range -500 to 10000

Key Entry Uplink Timing Advance

:BTS:LOOPback:GSM[:STATe]

Supported E4438C with Option 300

:SENSE:BERT:BTS:LOOPback:GSM[:STATe] ON|OFF|1|0

:SENSE:BERT:BTS:LOOPback:GSM[:STATe]?

This command turns on and off the operating state of the GSM loopback bit error rate function. Although you can configure the measurement parameters while the operating state is off, any command triggers sent will be ignored until the operating state is turned on.

***RST** 0

Key Entry GSM BERT Off On

[:BASEband]:PRBS:FUNcTion:SPIgnore:DATA

Supported E4438C with Option UN7

:SENSE:BERT[:BASEband]:PRBS:FUNcTion:SPIgnore:DATA ALL_0|ALL_1

:SENSE:BERT[:BASEband]:PRBS:FUNcTion:SPIgnore:DATA?

This command selects the bit parameter of the special pattern ignore function.

ALL_0 This choice ignores more than 160 bits of 0's when they are detected.

ALL_1 This choice ignores more than 160 bits of 1's when they are detected.

***RST** ALL_0

Key Entry Spcl Pattern 0's 1's

Remarks This command is valid only when the special pattern ignore function is on. Refer to “[:BASEband]:PRBS:FUNcTion:SPIgnore[:STATe]” on page 453.

[:BASEband]:PRBS:FUNCTION:SPIgnore[:STATE]

Supported E4438C with Option UN7

```
:SENSE:BERT[:BASEband]:PRBS:FUNCTION:SPIgnore[:STATE] ON|OFF|1|0  
:SENSE:BERT[:BASEband]:PRBS:FUNCTION:SPIgnore[:STATE] ?
```

This command enables or disables the special pattern ignore function.

ON This choice detects more than 160 bits of 0's or 1's in the incoming bit stream and ignores these bits when making BER measurements. To select 0's or 1's refer to "[\[:BASEband\]:PRBS:FUNCTION:SPIgnore:DATA](#)" on page 452

OFF This choice disables the special pattern ignore mode for the BER measurement.

***RST** 0

Key Entry **Spcl Pattern Ignore Off On**

[:BASEband]:PRBS[:DATA]

Supported E4438C with Option 300

```
:SENSE:BERT[:BASEband]:PRBS[:DATA] PN9|PN11|PN15|PN20|PN23  
:SENSE:BERT[:BASEband]:PRBS[:DATA] ?
```

This command selects the incoming data pattern for making BER measurements.

PN9–PN23 These choices select an internally generated pseudo-random pattern for BER measurements.

***RST** PN9

Key Entry **PN9 PN11 PN15 PN20 PN23**

[[:BASEband]:RSYNc:THReshold]

Supported E4438C with Option UN7

:SENSE:BERT[:BASEband]:RSYNc:THReshold <val>

:SENSE:BERT[:BASEband]:RSYNc:THReshold?

This command specifies the threshold level for the resynchronizing function.

***RST** 0.40

Range 0.05–0.40

Key Entry **Resync Limits**

Remarks This command is valid only when the BERT resynchronizing function is on. Refer to “[[:BASEband]:RSYNc[:STATe]]” on page 454.

[[:BASEband]:RSYNc[:STATe]]

Supported E4438C with Option UN7

:SENSE:BERT[:BASEband]:RSYNc[:STATe] ON|OFF|1|0

:SENSE:BERT[:BASEband]:RSYNc[:STATe]?

This command sets the operating state of the resynchronization function.

ON This choice enables the resynchronization function.

OFF This choice disables the resynchronization function.

***RST** 1

Key Entry **BERT Resync Off On**

[[:BASEband]:STATe]

Supported E4438C with Option UN7

:SENSE:BERT[:BASEband]:STATe ON|OFF|1|0

:SENSE:BERT[:BASEband]:STATe?

This command sets the operating state of the bit error rate test (BERT) measurement.

ON This choice enables the BERT measurement.

OFF This choice disables the BERT measurement.

***RST** 0

Key Entry **BERT Off On**

[:BASEband]:STOP:CRITeria:EBIT

Supported E4438C with Option UN7

:SENSE:BERT[:BASEband]:STOP:CRITeria:EBIT <val>

:SENSE:BERT[:BASEband]:STOP:CRITeria:EBIT?

This command specifies the threshold limit to stop the measurement.

***RST** 100

Range 0–1000000000

Key Entry **Error Count**

Remarks When the stop mode criteria is set to EBIT, the signal generator monitors the error bits and when it exceeds the set value, the signal generator stops the current BER measurement and waits for the next trigger.

EBIT must be the selection for this command to work. To select EBIT refer to “[:BASEband]:STOP:CRITeria[:SElect]”.

[:BASEband]:STOP:CRITeria[:SElect]

Supported E4438C with Option UN7

:SENSE:BERT[:BASEband]:STOP:CRITeria[:SElect] EBIT|NONE

:SENSE:BERT[:BASEband]:STOP:CRITeria[:SElect]?

This command determines which threshold criteria is used to prematurely stop the measurement.

EBIT This choice enables a specified number of bit errors to prematurely stop the measurement.

NONE This choice disables the stop measurement threshold criteria function.

***RST** NONE

Key Entry **Error Count** **No Thresholds**

Remarks The measurement will terminate no later than 200 ms after the threshold is exceeded.

[:BASEband]:TBITs

Supported E4438C with Option UN7

:SENSE:BERT[:BASEband]:TBITs <val>

:SENSE:BERT[:BASEband]:TBITs?

This command specifies the total bit count to be measured in one measurement cycle.

***RST** +10000

Range 100–4294967295

Key Entry **Total Bits**

[:BASEband]:TRIGger:BDElay

Supported E4438C with Option UN7

:SENSE:BERT[:BASEband]:TRIGger:BDElay <val>

:SENSE:BERT[:BASEband]:TRIGger:BDElay?

This command specifies the number of bits to delay the trigger signal.

***RST** 0

Range 0–65535

Key Entry **Delay Bits**

Remarks This command is valid only when the trigger bit delay function is on. Refer to “[:BASEband]:TRIGger:BDElay:STATE”.

[:BASEband]:TRIGger:BDElay:STATE

Supported E4438C with Option UN7

:SENSE:BERT[:BASEband]:TRIGger:BDElay:STATE ON|OFF|1|0

:SENSE:BERT[:BASEband]:TRIGger:BDElay:STATE?

This command sets the operating state of the trigger delay function.

ON This choice enables the trigger delay function.

OFF This choice disables the trigger delay function.

***RST** 0

Key Entry **Bit Delay Off On**

Remarks This command needs to be set to ON before the number of bits for the trigger delay can be set. Refer to “[:BASEband]:TRIGger:BDElay”.

[:BASEband]:TRIGger:COUNT

Supported E4438C with Option UN7

:SENSE:BERT[:BASEband]:TRIGger:COUNT <val>

:SENSE:BERT[:BASEband]:TRIGger:COUNT?

This command sets the number of times the bit error rate test (BERT) measurements will repeat.

***RST** 1

Range 0–65535

Key Entry **Cycle Count**

Remarks With 0 set, the BER measurements are repeated until you set the BERT operating state is set to off. Refer to “[:BASEband]:STATE” on page 454.

[:BASEband]:TRIGger:POLarity

Supported E4438C with Option UN7

:SENSE:BERT[:BASEband]:TRIGger:POLarity POSitive|NEGative

:SENSE:BERT[:BASEband]:TRIGger:POLarity?

This command selects the polarity of the trigger signal.

POSitive This choice triggers on the rising edge of the input data signal.

NEGative This choice triggers on the falling edge of the input data signal.

***RST** POS

Key Entry **Aux I/O Trigger Polarity Pos Neg**

Key Entry **Aux I/O Trigger Polarity Pos Neg**

[:BASEband]:TRIGger[:SOURCE]

Supported E4438C with Option UN7

:SENSE:BERT[:BASEband]:TRIGger[:SOURCE] IMMEDIATE|KEY|EXT|BUS|AUX

:SENSE:BERT[:BASEband]:TRIGger[:SOURCE]?

This command selects the triggering type for starting the bit error rate test (BERT) measurements.

IMMEDIATE This choice begins the measurement directly after synchronization has been achieved.

Bit Error Rate Test (BERT) Commands

Sense Subsystem—Options UN7 and 300 ([:SOURce]:SENSe:BERT)

KEY	This choice begins the measurement when the front panel Trigger key is pressed, provided that synchronization has been achieved. If synchronization has not occurred, the trigger is ignored.
EXT	This choice begins the measurement as soon as a trigger signal is applied to the rear panel connector provided that synchronization has been achieved. If synchronization has not occurred, the trigger is ignored.
BUS	This choice enables GPIB triggering using the *TRG or GET command or LAN and RS-232 triggering using the *TRG command.
AUX	This choice triggers an event using the rear panel AUX I/O connector pin #22. Refer to the <i>E4428C/38C ESG Signal Generators User's Guide</i> .

***RST**

KEY

Key Entry

Immediate

Trigger Key

Ext

Bus

Aux I/O

8 Receiver Test Digital Commands

This chapter provides SCPI descriptions for commands dedicated to digital real-time testing using the E4438C ESG Vector Signal Generator. This chapter contains the following sections:

- “All Subsystem–Option 001/601or 002/602 ([:SOURce])” on page 460
- “AWGN Real-Time Subsystem–Option 403 ([:SOURce]:RADio:AWGN:RT)” on page 461
- “Bluetooth Subsystem–Option 406 ([:SOURce]:RADio:BLUEtooth:ARB)” on page 462
- “CDMA2000 BBG Subsystem–Option 401 ([:SOURce]:RADio:CDMA2000[:BBG])” on page 477
- “Custom Subsystem–Option 001/601or 002/602 ([:SOURce]:RADio:CUSTom)” on page 548
- “DECT Subsystem–Option 402 ([:SOURce]:RADio:DECT)” on page 571
- “EDGE Subsystem–Option 402 ([:SOURce]:RADio:EDGE)” on page 623

All Subsystem–Option 001/601or 002/602 ([:SOURce])

:RADio:ALL:OFF

Supported E4438C with Option 001/601or 002/602

[:SOURce] :RADio:ALL:OFF

This command disables all digital modulation personalities on a particular baseband.

Remarks This command does not affect analog modulation.

AWGN Real-Time Subsystem—Option 403 (:SOURce):RADio:AWGN:RT)

:BWIDth

Supported E4438C with Option 403

[:SOURce] :RADio:AWGN:RT:BWIDth <val>

[:SOURce] :RADio:AWGN:RT:BWIDth?

This command adjusts the real-time AWGN bandwidth value.

The variable <val> is expressed in units of Hertz (Hz–MHz).

***RST** +1.00000000E+006

Range 5E4–8E7

Key Entry **Bandwidth**

[:STATe]

Supported E4438C with Option 403

[:SOURce] :RADio:AWGN:RT [:STATe] ON|OFF|1|0

[:SOURce] :RADio:AWGN:RT [:STATe] ?

This command enables or disables the operating state of real-time AWGN.

***RST** 0

Key Entry **Real-time AWGN Off On**

Bluetooth Subsystem—Option 406 ([:SOURCE]:RADio:BLUEtooth:ARB)

:AMADdr

Supported E4438C with Option 406406

```
[:SOURCE]:RADio:BLUEtooth:ARB:AMADdr <val>
```

```
[:SOURCE]:RADio:BLUEtooth:ARB:AMADdr?
```

This command sets the 3-bit active member address (AM_ADDR).

***RST** +1

Range 0–7

Key Entry **AM_ADDR**

Remarks In a piconet, one or more slaves are connected to a single master; a temporary 3-bit address (AM_ADDR) is used to identify each active slave.

:BDADdr

Supported E4438C with Option 406

```
[:SOURCE]:RADio:BLUEtooth:ARB:BDADdr <val>
```

```
[:SOURCE]:RADio:BLUEtooth:ARB:BDADdr?
```

This command sets the unique hexadecimal Bluetooth device address (BD_ADDR) with up to 48 bits.

***RST** #H0000000000008

Range #H0–#HFFFFFFFFFFFF

Key Entry **BD_ADDR**

Remarks The address is derived from the IEEE802 standard.

:BURSt[:STATe]

Supported E4438C with Option 406

```
[:SOURCE]:RADio:BLUEtooth:ARB:BURSt[:STATe] ON|OFF|1|0
```

```
[:SOURCE]:RADio:BLUEtooth:ARB:BURSt[:STATe]?
```

This command enables or disables the burst function.

ON(1) This choice will ramp up the signal power prior to transmitting the packet and ramp it down after the end of the packet transmission.

OFF(0)	This choice provides a linked series of packet transmissions with no power ramping.
*RST	1
Key Entry	Burst Off On

:CGDelay

Supported E4438C with Option 406

```
[ :SOURCE ] :RADIO:BLUETOOTH:ARB:CGDelay <val>
[ :SOURCE ] :RADIO:BLUETOOTH:ARB:CGDelay?
```

This command sets the number of symbols to shift the output symbol clock (EVENT 1 rear panel connector) and gate (EVENT 2 rear panel connector) signals relative to the Bluetooth signal. The shifting of these signals is used to compensate for any packet delay through the DUT during BER tests.

*RST +0.00000000E+000

Range 0.0–24999.9

Key Entry **Clock/Gate Delay**

Remarks This command is only effective with a continuous PN9 (CPN9) payload data and is intended for bit error rate testing (BERT, Option UN7). Refer to “:DATA” on [page 463](#) for selecting the CPN9 data choice.

When the clock and gate delay is set to zero (0), the rising edge of the symbol clock lines up with the middle of each symbol and the gate is high during the user payload field (PN9 data).

:DATA

Supported E4438C with Option 406

```
[ :SOURCE ] :RADIO:BLUETOOTH:ARB:DATA TPN9 | CPN9 | <val>
[ :SOURCE ] :RADIO:BLUETOOTH:ARB:DATA?
```

This command sets the user payload data type; user payload data is the voice or data information (less the payload header) that is carried in a packet.

TPN9 This choice places a truncated PN9 sequence consisting of 216 bits into a single packet.

CPN9 This choice places 8 continuous PN9 sequences into 19 packets, followed by one packet with no user payload. This ensures that the SEQN bit is properly alternated which is a requirement to filter out packet re-transmission at the destination.

Bluetooth Subsystem—Option 406 ([:SOURCE]:RADIO:BLUETOOTH:ARB)

<val>	This variable lets you set your own 8 bit data pattern for a single packet. A change in the user payload data type resets the eight bit pattern to a value of 00000000.		
*RST	TPN9		
Range	<val>: #B0–#B11111111 or 0–255		
Key Entry	Truncated PN9	Continuous PN9	8 Bit Pattern
Remarks	The PN9 sequence (511 bits) is standard based. The sequence begins with the first one of nine consecutive ones.		

:IQ:EXTERNAL:FILTER

Supported E4438C with Option 406

```
[ :SOURCE ] :RADIO:BLUETOOTH:ARB:IQ:EXTERNAL:FILTER 40e6 | THROugh
[ :SOURCE ] :RADIO:BLUETOOTH:ARB:IQ:EXTERNAL:FILTER?
```

This command selects the filter or through path for I/Q signals routed to the rear panel I and Q outputs. Selecting a filter with this command will automatically set “:IQ:EXTERNAL:FILTER:AUTO” on [page 464](#) to OFF(0) mode.

40e6	This choice applies a 40 MHz baseband filter.
THROugh	This choice bypasses filtering.
*RST	THR
Key Entry	40.000 MHz Through

:IQ:EXTERNAL:FILTER:AUTO

Supported E4438C with Option 406

```
[ :SOURCE ] :RADIO:BLUETOOTH:ARB:IQ:EXTERNAL:FILTER:AUTO ON | OFF | 1 | 0
[ :SOURCE ] :RADIO:BLUETOOTH:ARB:IQ:EXTERNAL:FILTER:AUTO?
```

This command enables or disables the automatic selection of the filters for I/Q signals routed to the rear panel I/Q outputs.

ON(1)	This choice will automatically select a digital modulation filter optimized for the current signal generator settings.
OFF(0)	This choice disables the auto feature which lets you select a digital modulation filter or through path. Refer to “:IQ:EXTERNAL:FILTER” on page 464 for selecting a filter or through path.
*RST	1
Key Entry	I/Q Output Filter Manual Auto

:HEADer:CLEAr

Supported E4438C with Option 406

[:SOURCE] :RADIo:BLUETOOTH:ARB:HEADer:CLEAr

This command clears the header information from the header file used by this format.

Key Entry **Clear Header**

Remarks The **Bluetooth Off On** softkey must be set to On for this command to function.

:HEADer:SAVE

Supported E4438C with Option 406

[:SOURCE] :RADIo:BLUETOOTH:ARB:HEADer:SAVE

This command saves the header information to the header file used by this format.

Key Entry **Save Setup To Header**

Remarks The **Bluetooth Off On** must be set to On for this command to function.

:IMPairments

Supported E4438C with Option 406

[:SOURCE] :RADIo:BLUETOOTH:ARB:IMPairments ON|OFF|1|0
[:SOURCE] :RADIo:BLUETOOTH:ARB:IMPairments?

This command enables or disables the Bluetooth signal impairment function.

ON(1) This choice enables the current impairment settings.

OFF(0) This choice disables the impairments.

***RST** 0

Key Entry **Impairments Off On**

:IMPAIRMENTS:AWGN

Supported E4438C with Option 406

```
[ :SOURCE ] :RADIo:BLUETOOTH:ARB:IMPAIRMENTS:AWGN ON|OFF|1|0
```

```
[ :SOURCE ] :RADIo:BLUETOOTH:ARB:IMPAIRMENTS:AWGN?
```

This choice enables or disables the additive white gaussian noise (AWGN) impairment.

***RST** 0

Key Entry **AWGN Off On**

Remarks The AWGN impairment is not added to the signal until the Bluetooth signal impairment function is enabled. Refer to “[:IMPAIRMENTS](#)” for enabling the impairments.

:IMPAIRMENTS:AWGN:CNR

Supported E4438C with Option 406

```
[ :SOURCE ] :RADIo:BLUETOOTH:ARB:IMPAIRMENTS:AWGN:CNR <val>
```

```
[ :SOURCE ] :RADIo:BLUETOOTH:ARB:IMPAIRMENTS:AWGN:CNR?
```

This command sets the carrier to noise ratio expressed in a 1 MHz bandwidth for the additive white gaussian noise (AWGN) impairment.

The variable <val> is expressed in units of decibels (dB).

***RST** +21

Range 10–40

Key Entry **C/N[1MHz]**

Remarks The value set by this command does not affect the Bluetooth signal until both the AWGN impairment and the Bluetooth signal impairment function are enabled. Refer to “[:IMPAIRMENTS:AWGN](#)” on page 466 for more information.

:IMPairments:AWGN:NSEed

Supported E4438C with Option 406

[:SOURCE] :RADio:BLUetooth:ARB:IMPairments:AWGN:NSEed <val>

[:SOURCE] :RADio:BLUetooth:ARB:IMPairments:AWGN:NSEed?

This command sets the noise seed value for the additive white gaussian noise (AWGN) impairment.

***RST** +1

Range 1–65535

Key Entry **Noise Seed**

Remarks A change in the seed value changes the noise pattern.

The value set by this command does not affect the Bluetooth signal until both the AWGN impairment and the Bluetooth signal impairment function are enabled. Refer to “:IMPairments:AWGN” on page 466 for more information.

:IMPairments:DDEVIation

Supported E4438C with Option 406

[:SOURCE] :RADio:BLUetooth:ARB:IMPairments:DDEVIation <val>

[:SOURCE] :RADio:BLUetooth:ARB:IMPairments:DDEVIation?

This command sets the maximum linear or sinusoidal carrier frequency drift deviation during the Bluetooth packet transmission.

The variable <val> is expressed in units of kilohertz (–kHz to kHz) with a minimum resolution of 1 kHz.

***RST** +0.00000000E+000

Range –1E5 to –1E3, 0, 1E3 to 1E5

Key Entry **Drift Deviation**

Remarks Refer to “:IMPairments:FDType” on page 468 for selecting either a linear or sinusoidal frequency drift.

The value set by this command does not affect the Bluetooth signal until the Bluetooth signal impairment function is enabled. Refer to “:IMPairments” on page 465 for more information.

:IMPairments:FDType

Supported E4438C with Option 406

```
[ :SOURCE ] :RADIO:BLUETOOTH:ARB:IMPairments:FDType LINear | SINE
```

```
[ :SOURCE ] :RADIO:BLUETOOTH:ARB:IMPairments:FDType?
```

This command sets the carrier frequency drift impairment type that will occur during the length of the Bluetooth packet transmission.

LINear This choice enables the carrier frequency to drift linearly from the signal generator carrier frequency setting to the value entered for the frequency drift.

SINE This choice enables the carrier frequency to drift sinusoidally above and below the signal generator carrier frequency setting. For example, if the carrier signal generator setting is 2.4 GHz and the drift value was 100 kHz, the carrier frequency would sinusoidally drift to 2.4001 GHz, back to 2.4 GHz and continue drifting to frequency values less than 2.4 GHz until the packet transmission ends. With a negative drift value, the carrier frequency deviation would begin drifting toward 2.3999 GHz at the beginning of the drift cycle.

***RST** SINE

Key Entry **Freq Drift Type Linear Sine**

Remarks To set a drift value, refer to [“:IMPairments:DDEViation” on page 467](#).

The value set by this command does not affect the Bluetooth signal until the Bluetooth signal impairment function is enabled. Refer to [“:IMPairments” on page 465](#) for more information.

The carrier frequency value on the signal generator display does not change during the drift impairment.

:IMPairments:FOffset

Supported E4438C with Option 406

```
[ :SOURCE ] :RADio:BLUetooth:ARB:IMPairments:FOffset <val>
[ :SOURCE ] :RADio:BLUetooth:ARB:IMPairments:FOffset?
```

This command sets a carrier frequency offset impairment value as part of a Bluetooth setup.

The variable <val> is expressed in units of kilohertz (–kHz to kHz) with a minimum resolution of 1 kHz.

***RST** +0.00000000E+000

Range –1E5 to –1E3, 0, 1E3 to 1E5

Key Entry **Freq Offset**

Remarks The value set by this command does not affect the Bluetooth signal until the Bluetooth signal impairment function is enabled. Refer to “:IMPairments” on [page 465](#) for more information.

The carrier frequency value on the signal generator display does not change during the offset impairment.

:IMPairments:MINdex

Supported E4438C with Option 406

```
[ :SOURCE ] :RADio:BLUetooth:ARB:IMPairments:MINdex <val>
[ :SOURCE ] :RADio:BLUetooth:ARB:IMPairments:MINdex?
```

This command sets the modulation index impairment value for the Bluetooth waveform.

***RST** +3.15000000E–001

Range 2.5E–1 to 4E–1

Key Entry **Mod Index**

Remarks The value set by this command does not affect the Bluetooth signal until the Bluetooth signal impairment function is enabled. Refer to “:IMPairments” on [page 465](#) for more information.

Only the peak-to-peak frequency deviation is changed by this command; the bit rate (1 MHz) remains constant. The modulation index is derived from the following formula:

$$\text{Mod Index} = \frac{\text{Peak-to-Peak Frequency Deviation}}{\text{Bit Rate}}$$

:IMPairments:STError

Supported E4438C with Option 406

```
[ :SOURCE ] :RADio:BLUetooth:ARB:IMPairments:STError <val>
```

```
[ :SOURCE ] :RADio:BLUetooth:ARB:IMPairments:STError?
```

This command sets the symbol timing error impairment value for the Bluetooth waveform.

The variable <val> is expressed in units of parts per million (ppm) and in units of hertz (Hz). A 20 ppm timing error corresponds to a 20 Hz shift in the symbol rate. The range value indicated below applies to both units of measurement.

***RST** +0

Range -50 to 50

Key Entry **Symbol Timing Err**

Remarks The value set by this command does not affect the Bluetooth signal until the Bluetooth signal impairment function is enabled. Refer to “:IMPairments” on page 465 for more information.

:IQ:MODulation:ATTen

Supported E4438C with Option 406

```
[ :SOURCE ] :RADio:BLUetooth:ARB:IQ:MODulation:ATTen <val>
```

```
[ :SOURCE ] :RADio:BLUetooth:ARB:IQ:MODulation:ATTen?
```

This command attenuates the I/Q signals being modulated through the signal generator RF path.

The variable <val> is expressed in units of decibels (dB).

ON (1) This choice enables the attenuation auto mode which optimizes the modulator attenuation for the current conditions.

OFF (0) This choice holds the attenuator at its current setting or at a selected value. Refer to “:IQ:MODulation:ATTen” on page 470 for setting the attenuation value.

***RST** +2.00000000E+000

Range 0–40

Key Entry **Modulator Atten Manual Auto**

:IQ:MODulation:ATTen:AUTO

Supported E4438C with Option 406

```
[ :SOURce ] :RADio:BLUetooth:ARB:IQ:MODulation:ATTen:AUTO ON|OFF|1|0  
[ :SOURce ] :RADio:BLUetooth:ARB:IQ:MODulation:ATTen:AUTO?
```

This command enables or disables the I/Q attenuation auto mode.

***RST** 1

Key Entry **Modulator Atten Manual Auto**

:IQ:MODulation:FILTer

Supported E4438C with Option 406

```
[ :SOURce ] :RADio:BLUetooth:ARB:IQ:MODulation:FILTer 2.1e6|40e6|THROUGH  
[ :SOURce ] :RADio:BLUetooth:ARB:IQ:MODulation:FILTer?
```

This command enables you to select a filter or through path for I/Q signals modulated onto the RF carrier. Selecting a filter with this command will set “:IQ:MODulation:ATTen:AUTO” on page 471 to OFF(0) mode.

2.1E6 This choice applies a 2.1 MHz baseband filter to the I/Q signals.

40E6 This choice applies a 40 MHz baseband filter to the I/Q signals.

THROUGH This choice bypasses filtering.

***RST** THR

Key Entry **2.100 MHz 40.000 MHz Through**

:IQ:MODulation:FILTer:AUTO**Supported** E4438C with Option 406

```
[:SOURCE]:RADio:BLUEtooth:ARB:IQ:MODulation:FILTer:AUTO ON|OFF|1|0
[:SOURCE]:RADio:BLUEtooth:ARB:IQ:MODulation:FILTer:AUTO?
```

This command enables or disables the automatic selection of the filters for I/Q signals modulated onto the RF carrier.

ON(1) This choice will automatically select a digital modulation filter.

OFF(0) This choice disables the auto feature which lets you select a digital modulation filter or through path. Refer to “[:IQ:MODulation:FILTer](#)” on page 471 for selecting a filter or through path.

***RST** 1

Key Entry I/Q Mod Filter Manual Auto

:MDEStination:PULSe**Supported** E4438C with Option 406

```
[:SOURCE]:RADio:BLUEtooth:ARB:MDEStination:PULSe NONE|M1|M2|M3|M4
[:SOURCE]:RADio:BLUEtooth:ARB:MDEStination:PULSe?
```

This command routes the selected marker to the Pulse/RF Blanking function. The NONE parameter clears the marker for the Pulse/RF Blanking function.

***RST** NONE

Key Entry None Marker 1 Marker 2 Marker 3 Marker 4

:MDEStination:AAMPlitude**Supported** E4438C with Option 406

```
[:SOURCE]:RADio:BLUEtooth:ARB:MDEStination:AAMPlitude NONE|M1|M2|M3|M4
[:SOURCE]:RADio:BLUEtooth:ARB:MDEStination:AAMPlitude?
```

This command routes the selected marker to the Alternate Amplitude function. The NONE parameter clears the marker for the Alternate Amplitude function.

***RST** NONE

Key Entry None Marker 1 Marker 2 Marker 3 Marker 4

:MDEStination:ALCHold

Supported E4438C with Option 406

```
[ :SOURCE ] :RADio:BLUetooth:ARB:MDEStination:ALCHold NONE | M1 | M2 | M3 | M4  
[ :SOURCE ] :RADio:BLUetooth:ARB:MDEStination:ALCHold?
```

This command routes the selected marker to the ALC Hold function. The NONE parameter clears the marker for the ALC Hold function.

***RST** NONE

Key Entry **None** **Marker 1** **Marker 2** **Marker 3** **Marker 4**

:MPOLarity:MARKer1

Supported E4438C with Option 406

```
[ :SOURCE ] :RADio:BLUetooth:ARB:MPOLarity:MARKer1 NEGative | POSitive  
[ :SOURCE ] :RADio:BLUetooth:ARB:MPOLarity:MARKer1?
```

This command sets the polarity for marker 1.

***RST** POS

Key Entry **Marker 1 Polarity Neg Pos**

:MPOLarity:MARKer2

Supported E4438C with Option 406

```
[ :SOURCE ] :RADio:BLUetooth:ARB:MPOLarity:MARKer2 NEGative | POSitive  
[ :SOURCE ] :RADio:BLUetooth:ARB:MPOLarity:MARKer2?
```

This command sets the polarity for marker 2.

***RST** POS

Key Entry **Marker 2 Polarity Neg Pos**

:MPOLarity:MARKer3

Supported E4438C with Option 406

```
[ :SOURCE ] :RADIO:BLUETOOTH:ARB:MPOLarity:MARKer3 NEGative|POSitive
[ :SOURCE ] :RADIO:BLUETOOTH:ARB:MPOLarity:MARKer3?
```

This command sets the polarity for marker 3.

***RST** POS

Key Entry **Marker 3 Polarity Neg Pos**

:MPOLarity:MARKer4

Supported E4438C with Option 406

```
[ :SOURCE ] :RADIO:BLUETOOTH:ARB:MPOLarity:MARKer4 NEGative|POSitive
[ :SOURCE ] :RADIO:BLUETOOTH:ARB:MPOLarity:MARKer4?
```

This command sets the polarity for marker 4.

***RST** POS

Key Entry **Marker 4 Polarity Neg Pos**

:PACKet

Supported E4438C with Option 406

```
[ :SOURCE ] :RADIO:BLUETOOTH:ARB:PACKet DH1
[ :SOURCE ] :RADIO:BLUETOOTH:ARB:PACKet?
```

This command selects a DH1 packet.

***RST** DH1

Choices DH1

Key Entry **Packet (DH1)**

Remarks A DH1 packet covers a single timeslot.

:REFernce:EXTernal:FREQuency

Supported E4438C with Option 406

```
[ :SOURCE ] :RADio:BLUetooth:ARB:REFernce:EXTernal:FREQuency <val>  
[ :SOURCE ] :RADio:BLUetooth:ARB:REFernce:EXTernal:FREQuency?
```

This command sets the lock frequency of the internal ARB waveform clock to match the externally applied ARB waveform clock reference at the BASEBAND GEN REF IN connector.

The variable <val> is expressed in units of hertz (Hz–MHz).

***RST** +1.00000000+007

Range 2.5E5–1E8

Key Entry **Reference Freq**

Remarks Use this command when EXTERNAL is the ARB waveform clock reference source. Refer to “[:REFernce\[:SOURCE\]](#)” on page 475 for selecting either the internal or an external source.

:REFernce[:SOURCE]

Supported E4438C with Option 406

```
[ :SOURCE ] :RADio:BLUetooth:ARB:REFernce [ :SOURCE ] INTernal | EXTernal  
[ :SOURCE ] :RADio:BLUetooth:ARB:REFernce [ :SOURCE ] ?
```

This command selects either an internal or external reference for the ARB waveform clock.

***RST** INT

Key Entry **ARB Reference Ext Int**

Remarks If the EXTERNAL choice is selected, the frequency of the external reference must be entered into the signal generator and the signal must be applied to the BASEBAND GEN REF IN connector. Refer to “[:REFernce:EXTernal:FREQuency](#)” on page 475 for entering the frequency value.

:RSYMBOLS**Supported** E4438C with Option 406

[:SOURCE]:RADIO:BLUETOOTH:ARB:RSYMBOLS <val>

[:SOURCE]:RADIO:BLUETOOTH:ARB:RSYMBOLS?

This command controls how long it takes the RF burst to ramp up at the beginning of the packet transmission and down at the end.

The variable <val> is expressed in symbols (1 symbol interval equals 1 μ s).

RST** +6**Range** 1–10**Key Entry** **Burst Power Ramp*:SCLOCK:RATE****Supported** E4438C with Option 406

[:SOURCE]:RADIO:BLUETOOTH:ARB:SCLOCK:RATE <val>

[:SOURCE]:RADIO:BLUETOOTH:ARB:SCLOCK:RATE?

This command sets the sample clock rate for the Bluetooth modulation format.

The variable <val> is expressed in units of hertz.

RST** +1.00000000E+008**Range** 1–1E8**Key Entry** **ARB Sample Clock*[:STATE]****Supported** E4438C with Option 406

[:SOURCE]:RADIO:BLUETOOTH:ARB[:STATE] ON|OFF|1|0

[:SOURCE]:RADIO:BLUETOOTH:ARB[:STATE]?

This command enables or disables the Bluetooth waveform generator.

***RST** 0**Key Entry** **Bluetooth Off On**

CDMA2000 BBG Subsystem–Option 401 ([:SOURce]:RADio:CDMA2000[:BBG])

:LMODE

Supported E4438C with Option 401

```
[:SOURce]:RADio:CDMA2000[:BBG]:LMODE FORWard|RT12|RA12|RT34|RE34|RC34
[:SOURce]:RADio:CDMA2000[:BBG]:LMODE?
```

This command selects either forward or reverse link Real Time CDMA2000.

FORWard This choice selects the forward link mode.

RT12 This choice selects the reverse traffic channel for radio configurations one and two.

RA12 This choice selects the reverse access channel for radio configurations one and two.

RT34 This choice selects the reverse traffic channel for radio configurations three and four.

RE34 This choice selects the reverse enhanced access channel for radio configurations three and four.

RC34 This choice selects the reverse common control channel for radio configurations three and four.

***RST** FORW

Key Entry	Link Forward Reverse	RadioConfig 1/2 Traffic	RadioConfig 1/2 Access
	RadioConfig 3/4 Traffic	RadioConfig 3/4 Enhanced Access	
	RadioConfig 3/4 Common Control		

[[:FORWARD]:BBCLock

Supported E4438C with Option 401

```
[:SOURce]:RADio:CDMA2000[:BBG][:FORWARD]:BBCLock INT [1] | EXT [1]
[:SOURce]:RADio:CDMA2000[:BBG][:FORWARD]:BBCLock?
```

This command selects the baseband data clock source for the forward link.

***RST** INT

Field Entry BBG Data Clock

Remarks If the EXT choice is selected, the external frequency must be entered and the signal must be applied to the BASEBAND GEN REF IN rear panel connector.

[[:FORWARD]:CHIPrate

Supported E4438C with Option 401

```
[:SOURce]:RADio:CDMA2000[:BBG][:FORWARD]:CHIPrate <val>
[:SOURce]:RADio:CDMA2000[:BBG][:FORWARD]:CHIPrate?
```

This command adjusts the chip rate value.

The variable <val> is expressed in units of chips per second (cps–Mcps).

***RST** +1.22880000E+006

Range 1E3–1.3E6

Field Entry Chip Rate

Remarks The default value (1.228800 Mcps) is in accordance with the IS-2000 specification.

[:FORWARD]:ESDelay

Supported E4438C with Option 401

```
[:SOURCE]:RADio:CDMA2000[:BBG][:FORWARD]:ESDelay <val>
[:SOURCE]:RADio:CDMA2000[:BBG][:FORWARD]:ESDelay?
```

This command modifies the even second clock pulse.

***RST** +2.00000000E+001

Range 0.5–128.0

Field Entry Even Second Delay

Remarks The even second clock pulse sets the delay to align the RF with the trigger.

When the noise function is set to ON, this value will increase. Refer to “[:FORWARD]:NOISE[:STATE]” on page 505 for more information.

[:FORWARD]:FILTer

Supported E4438C with Option 401

```
[:SOURCE]:RADio:CDMA2000[:BBG][:FORWARD]:FILTer RNYQuist|NYQuist|
GAUSSian|RECTangle|IS95|IS95_EQ|IS95_MOD|IS95_MOD_EQ|AC4Fm|UGGaussian|
"<user FIR>"|
[:SOURCE]:RADio:CDMA2000[:BBG][:FORWARD]:FILTer?
```

This command specifies the filter type.

IS95 This choice selects a filter that meets the criteria of the IS-95 standard.

IS95_EQ This choice selects a filter which is a combination of the IS-95 filter (above) and the equalizer filter described in the IS-95 standard. This filter is only used for IS-95 baseband filtering.

IS95_MOD This choice selects a filter that meets the criteria of the IS-95 error function (for improved adjacent channel performance) with lower passband rejection than the filter specified in the IS-95 standard.

IS95_MOD_EQ This choice selects a filter which is a combination of the equalizer filter described in the IS-95 standard and a filter that meets the criteria of the IS-95 error function (for improved adjacent channel performance), with lower passband rejection.

CDMA2000 BBG Subsystem–Option 401 ([:SOURce]:RADio:CDMA2000[:BBG])

AC4Fm	This choice selects a predefined Association of Public Safety Communications Officials (APCO) specified compatible 4-level frequency modulation (C4FM) filter.																		
UGGaussian	This choice selects a backwards compatible GSM Gaussian filter (Gaussian filter with a fixed BbT value of 0.300) for the ESG E44xxB Option UN3 or UN4.																		
"<user FIR>"	This variable is any filter file that you have stored into memory.																		
*RST	IS95_EQ																		
Key Entry	<table> <tr> <td>Root Nyquist</td> <td>Nyquist</td> <td>Gaussian</td> <td>Rectangle</td> <td>IS-95</td> <td>IS-95 w/EQ</td> </tr> <tr> <td>IS-95 Mod</td> <td>IS-95 MOD w/EQ</td> <td>APCO 25 C4FM</td> <td>UN3/4 GSM Gaussian</td> <td></td> <td></td> </tr> <tr> <td>User FIR</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </table>	Root Nyquist	Nyquist	Gaussian	Rectangle	IS-95	IS-95 w/EQ	IS-95 Mod	IS-95 MOD w/EQ	APCO 25 C4FM	UN3/4 GSM Gaussian			User FIR					
Root Nyquist	Nyquist	Gaussian	Rectangle	IS-95	IS-95 w/EQ														
IS-95 Mod	IS-95 MOD w/EQ	APCO 25 C4FM	UN3/4 GSM Gaussian																
User FIR																			
Remarks	Refer to “File Name Variables” on page 13 for information on the file name syntax.																		

[:FORWARD]:FILTER:ALPHA

Supported E4438C with Option 401

```
[:SOURce]:RADio:CDMA2000[:BBG][:FORWARD]:FILTer:ALPHA <val>
[:SOURce]:RADio:CDMA2000[:BBG][:FORWARD]:FILTer:ALPHA?
```

This command changes the Nyquist or root Nyquist filter’s alpha value.

The filter alpha value can be set to the minimum level (0), the maximum level (1), or in between by using fractional numeric values (0.001–0.999).

***RST** +2.20000000E–001

Range 0.000–1.000

Key Entry **Filter Alpha**

Remarks To change the current filter type, refer to [“\[:FORWARD\]:FILTer” on page 479](#).

[:FORWARD]:FILTer:BBT

Supported E4438C with Option 401

```
[:SOURCE]:RADio:CDMA2000[:BBG] [:FORWARD]:FILTer:BBT <val>
[:SOURCE]:RADio:CDMA2000[:BBG] [:FORWARD]:FILTer:BBT?
```

This command changes the bandwidth-multiplied-by-bit-time filter value.

The filter BbT value can be set to the minimum level (0), the maximum level (1), or in between by using fractional numeric values (0.001–0.999).

***RST** +5.00000000E–001

Range 0.000–1.000

Key Entry **Filter BbT**

Remarks This command is effective only after choosing a Gaussian filter. It does not have an effect on other types of filters.

To change the current filter type, refer to “[:FORWARD]:FILTer” on page 479.

[:FORWARD]:FILTer:CHANnel

Supported E4438C with Option 401

```
[:SOURCE]:RADio:CDMA2000[:BBG] [:FORWARD]:FILTer:CHANnel EVM|ACP
[:SOURCE]:RADio:CDMA2000[:BBG] [:FORWARD]:FILTer:CHANnel?
```

This command optimizes the Nyquist and root Nyquist filters to minimize error vector magnitude (EVM) or to minimize adjacent channel power (ACP).

EVM This choice provides the most ideal passband.

ACP This choice improves stopband rejection.

***RST** EVM

Key Entry **Optimize FIR For EVM ACP**

Remarks To change the current filter type, refer to “[:FORWARD]:FILTer” on page 479.

[:FORWARD]:LCState

Supported E4438C with Option 401

```
[:SOURce]:RADio:CDMA2000[:BBG][:FORWARD]:LCState <val>
```

```
[:SOURce]:RADio:CDMA2000[:BBG][:FORWARD]:LCState?
```

This command sets the long code seed used to generate the long code for the forward link.

***RST** #H00000000000

Range #H0–#H3FFFFFFFF

Field Entry Long Code State

Remarks The storage register for the long code state allows a 42-bit binary number to be entered.

[:FORWARD]:FFCH:DATA

Supported E4438C with Option 401

```
[:SOURce]:RADio:CDMA2000[:BBG][:FORWARD]:FFCH:DATA PN9|PN15|FIX4|
```

```
"<file name>"|EXT
```

```
[:SOURce]:RADio:CDMA2000[:BBG][:FORWARD]:FFCH:DATA?
```

This command configures the data field for the forward fundamental channel.

***RST** PN9

Key Entry **PN9** **PN15** **FIX4** **User File** **Ext**

Remarks Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

[:FORWARD]:FFCH:DATA:FIX4

Supported E4438C with Option 401

```
[:SOURce]:RADio:CDMA2000[:BBG][:FORWARD]:FFCH:DATA:FIX4 <val>
```

```
[:SOURce]:RADio:CDMA2000[:BBG][:FORWARD]:FFCH:DATA:FIX4?
```

This command selects a fixed 4-bit data pattern to be repeated as necessary to fill the selected data area.

***RST** #B0000

Range #B0000–#B1111 or 0–15

Key Entry **FIX4**

[:FORWARD]:FFCH:EBNO**Supported** E4438C with Options 401 and 403

[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:FFCH:EBNO <val>

[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:FFCH:EBNO?

This command sets the ratio of energy per bit to noise power spectral density (expressed in dB) for the forward fundamental channel.

***RST** +0.00000000E+000

Range min EbNo: $10\log_{10}\left[\frac{\text{Chip Rate}}{1000(\text{Bit Rate})}\right] + \text{Normalized Power} + \text{RCFactor}$

max EbNo: $10\log_{10}\left[\frac{1000(\text{Chip Rate})}{\text{Bit Rate}}\right] + \text{Normalized Power} + \text{RCFactor}$

Normalized Power is the channel amplitude after adjusting the code power to 0 dB. Refer to “[:FORWARD]:PADJust” on page 507 for adjusting the code domain power.

RCFactor is dependent on the selected radio configuration. The following table shows the RCFactor by radio configuration.

RC	RCFactor
1	$10\log_{10}\left[\frac{1}{2}\left(\frac{11}{11 + \frac{9600}{\text{Bit Rate}}}\right)\right]$
2	$10\log_{10}\left[\frac{1}{2}\left(\frac{23}{23 + \frac{14400}{\text{Bit Rate}}}\right)\right]$
3, 4	$10\log_{10}\left[\frac{11}{11 + \frac{9600}{\text{Bit Rate}}}\right]$
5	$10\log_{10}\left[\frac{11}{11 + \frac{14400}{\text{Bit Rate}}}\right]$

Field Entry EbNo

Remarks Changes to the EbNo values also change the EcNo values for all other channels in the current link (forward or reverse).

Queries of this command are only valid for the current operating state.

[[:FORWARD]:FFCH:FOFFset

Supported E4438C with Option 401

```
[:SOURCE]:RADio:CDMA2000[:BBG][:FORWARD]:FFCH:FOFFset <val>
[:SOURCE]:RADio:CDMA2000[:BBG][:FORWARD]:FFCH:FOFFset?
```

This command sets the frame offset value for the forward fundamental channel.

***RST** +0

Range 0–15

Field Entry Frame Offset

Remarks Changing this value also changes the frame offset value for the forward supplemental channels (FSCH1 and FSCH2).

[[:FORWARD]:FFCH:LCMask

Supported E4438C with Option 401

```
[:SOURCE]:RADio:CDMA2000[:BBG][:FORWARD]:FFCH:LCMask?
[:SOURCE]:RADio:CDMA2000[:BBG][:FORWARD]:FFCH:LCMask?
```

This command outputs the contents of the long code mask field for the forward fundamental channel.

***RST** #H3180000000

Remarks This value is shared by the forward supplemental channels (FSCH1 and FSCH2).

[[:FORWARD]:FFCH:LCMask:ESN

Supported E4438C with Option 401

```
[:SOURCE]:RADio:CDMA2000[:BBG][:FORWARD]:FFCH:LCMask:ESN <val>
[:SOURCE]:RADio:CDMA2000[:BBG][:FORWARD]:FFCH:LCMask:ESN?
```

This command sets the permuted electronic serial number (ESN) for the long code mask, which is used to identify a particular mobile.

***RST** #H00000000

Range #H0–#HFFFFFFF

Field Entry Permuted ESN

Remarks Changing this value also changes the permuted ESN for the long code mask in the forward supplemental channels (FSCH1 and FSCH2).

[:FORWARD]:FFCH:LCMask:HEADer**Supported** E4438C with Option 401

```
[:SOURCE]:RADio:CDMA2000[:BBG][:FORWARD]:FFCH:LCMask:HEADer <val>
[:SOURCE]:RADio:CDMA2000[:BBG][:FORWARD]:FFCH:LCMask:HEADer?
```

This command sets the header for the long code mask, which is used to identify a particular mobile.

RST** #H318**Range** 000–3FF**Field Entry** Header**Remarks** Changing this value also changes the header for the long code mask in the forward supplemental channels (FSCH1 and FSCH2).**[:FORWARD]:FFCH:POWer*Supported** E4438C with Option 401

```
[:SOURCE]:RADio:CDMA2000[:BBG][:FORWARD]:FFCH:POWer <val>
[:SOURCE]:RADio:CDMA2000[:BBG][:FORWARD]:FFCH:POWer?
```

This command sets the power for the forward fundamental channel.

The variable <val> is expressed in units of decibels (dB).

RST** +0.00000000E+000**Range** –40 to 0**Field Entry** Power**[:FORWARD]:FFCH:PRAMp*Supported** E4438C with Option 401

```
[:SOURCE]:RADio:CDMA2000[:BBG][:FORWARD]:FFCH:PRAMp ON|OFF|1|0
[:SOURCE]:RADio:CDMA2000[:BBG][:FORWARD]:FFCH:PRAMp?
```

This command sets the power puncturing operating state for the forward fundamental channel.

***RST** 1**Field Entry** Ramp

[:FORWARD]:FFCH:PRTIME

Supported E4438C with Option 401

```
[:SOURce]:RADio:CDMA2000[:BBG][:FORWARD]:FFCH:PRTIME <val>
```

```
[:SOURce]:RADio:CDMA2000[:BBG][:FORWARD]:FFCH:PRTIME?
```

This command sets the power ramp time indicator values for the forward fundamental channel.

Power frame indicators are used to command the mobile (increasing or decreasing power). For example, if 4 is the selected value, it will cause the mobile to respond with 4 sequential power increases, then 4 power decreases. This pattern will continue indefinitely.

The variable <val> is expressed in

***RST** +1

Range 1–80

Field Entry Ramp Time

[:FORWARD]:FFCH:QOF

Supported E4438C with Option 401

```
[:SOURce]:RADio:CDMA2000[:BBG][:FORWARD]:FFCH:QOF <val>
```

```
[:SOURce]:RADio:CDMA2000[:BBG][:FORWARD]:FFCH:QOF?
```

This command sets the quasi-orthogonal function channel value.

***RST** +0

Range 0–3

Field Entry QOF

[:FORWARD]:FFCH:RATE**Supported** E4438C with Option 401

```
[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:FFCH:RATE 1.2kbps|1.5kbps|
1.8kbps|2.4kbps|2.7kbps|3.6kbps|4.8kbps|7.2kbps|9.6kbps|14.4kbps
[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:FFCH:RATE?
```

This command sets the data rate for the forward paging channel.

The variable <val> is expressed in units of bits per second (bps–Mbps).

RST** +9.60000000E+003**Range** 1.2E3–1.44E4**Field Entry** Bit Rate**[:FORWARD]:FFCH:RCONfig*Supported** E4438C with Option 401

```
[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:FFCH:RCONfig <val>
[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:FFCH:RCONfig?
```

This command sets the radio configuration value for the forward fundamental channel.

RST** +3**Range** 1–5**Field Entry** Radio Config**[:FORWARD]:FFCH:WALSh*Supported** E4438C with Option 401

```
[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:FFCH:WALSh <val>
[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:FFCH:WALSh?
```

Execute this command to set the Walsh code for the forward fundamental channel.

***RST** +10**Range** RC1,2,3, & 5: 0–63 RC4: 0–127**Field Entry** Walsh

[[:FORWARD]:FFCH[:STATE]]**Supported** E4438C with Option 401

```
[:SOURce]:RADio:CDMA2000[:BBG][:FORWARD]:FFCH[:STATE] ON|OFF|1|0
[:SOURce]:RADio:CDMA2000[:BBG][:FORWARD]:FFCH[:STATE]?
```

This command enables or disables the operating state of the forward fundamental channel.

RST** 0**Field Entry** State**[[:FORWARD]:FPCH:DATA]*Supported** E4438C with Option 401

```
[:SOURce]:RADio:CDMA2000[:BBG][:FORWARD]:FPCH:DATA DEFault|"<file name>"
[:SOURce]:RADio:CDMA2000[:BBG][:FORWARD]:FPCH:DATA?
```

This command configures the data field for the forward paging channel.

RST** DEFAULT**Key Entry** **Default** **User File*Remarks** A user-defined file can have a maximum length of 512 bytes.

Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

[[:FORWARD]:FPCH:EBNO]**Supported** E4438C with Options 401 and 403

```
[:SOURce]:RADio:CDMA2000[:BBG][:FORWARD]:FPCH:EBNO <val>
[:SOURce]:RADio:CDMA2000[:BBG][:FORWARD]:FPCH:EBNO?
```

This command sets the ratio of energy per bit to noise power spectral density (expressed in dB) for the forward paging channel.

***RST** +0.00000000E+000

Range

$$\min EbNo: 10\log_{10} \left[\frac{\text{Chip Rate}}{1000(\text{Bit Rate})} \right] + \text{Normalized Power}$$

$$\max EbNo: 10\log_{10} \left[\frac{1000(\text{Chip Rate})}{\text{Bit Rate}} \right] + \text{Normalized Power}$$

CDMA2000 BBG Subsystem–Option 401 ([:SOURCE]:RADIO:CDMA2000[:BBG])

Normalized Power is the channel amplitude after adjusting the code power to 0 dB. Refer to “[:FORWARD]:PADJust” on page 507 for adjusting the code domain power.

Field Entry	EbNo
Remarks	Changes to the EbNo values also change the EcNo values for all other channels in the current link (forward or reverse). Queries of this command are only valid for the current operating state.

[:FORWARD]:FPCH:LCMask

Supported E4438C with Option 401

```
[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:FPCH:LCMask?
```

This command outputs the contents of the long code mask field for the forward paging channel.

***RST** +0.00000000E+000

[:FORWARD]:FPCH:LCMask:F1

Supported E4438C with Option 401

```
[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:FPCH:LCMask:F1 <val>
[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:FPCH:LCMask:F1?
```

This command sets the value of field one for the forward paging channel long code mask.

***RST** #H18CD

Range #H0–#H1FFF

Field Entry Field 1

[:FORWARD]:FPCH:LCMask:F2

Supported E4438C with Option 401

```
[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:FPCH:LCMask:F2 <val>
[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:FPCH:LCMask:F2?
```

This command sets the value of field two for the forward paging channel long code mask.

***RST** #H00

Range #H00–#H1F

Field Entry Field 2

[:FORWARD]:FPCH:LCMask:F3

Supported E4438C with Option 401

```
[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:FPCH:LCMask:F3 <val>
[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:FPCH:LCMask:F3?
```

This command sets the value of field three for the forward paging channel long code mask.

***RST** #H000

Range #H0–#HFFF

Field Entry Field 3

[:FORWARD]:FPCH:MESSAge

Supported E4438C with Option 401

```
[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:FPCH:MESSAge <bit_count>,
<datablock>
```

This command sends a bit count and a data block (to queue up messaging), generated as a one-time paging message (asynchronous paging message), to the paging channel.

After a one-time paging message is generated, the signal generator reverts to synchronous paging file messages.

[:FORWARD]:FPCH:POWer

Supported E4438C with Option 401

```
[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:FPCH:POWer <val>
[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:FPCH:POWer?
```

Execute this command to set the power for the forward paging channel.

The variable <val> is expressed in units of decibels (dB).

***RST** +0.00000000E+000

Range –40 to 0

Field Entry Power

[:FORWARD]:FPCH:RATE**Supported** E4438C with Option 401

```
[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:FPCH:RATE 4.8kbps|9.6kbps
[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:FPCH:RATE?
```

This command sets the data rate for the forward paging channel.

The variable <val> is expressed in units of bits per second (bps–Mbps).

RST** +9.60000000E+003**Field Entry** Bit Rate**[:FORWARD]:FPCH:WALSh*Supported** E4438C with Option 401

```
[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:FPCH:WALSh <val>
[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:FPCH:WALSh?
```

This command sets the Walsh code for the forward paging channel.

RST** +1**Range** 0–63**Field Entry** Walsh**[:FORWARD]:FPCH[:STATe]*Supported** E4438C with Option 401

```
[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:FPCH[:STATe] ON|OFF|1|0
[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:FPCH[:STATe] ?
```

Execute this command to set the operating state for the forward paging channel.

***RST** 0**Field Entry** State

[:FORWARD]:FPICH:ECNO

Supported E4438C with Options 401 and 403

```
[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:FPICH:ECNO <val>
```

```
[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:FPICH:ECNO?
```

This command sets the ratio of energy per chip to the noise power spectral density (expressed in dB) for the forward pilot channel.

***RST** +0.00000000E+000

Range min EcNo: -30 + Normalized Power

max EcNo: 30 + Normalized Power

Normalized Power is the channel amplitude after adjusting the code power to 0 dB. Refer to “[:FORWARD]:PADJUST” on page 507 for adjusting the code domain power.

Field Entry EcNo

Remarks Changes to the EcNo values also change the EbNo values for all other channels in the current link (forward or reverse).

Queries of this command are only valid for the current operating state.

[:FORWARD]:FPICH:POWER

Supported E4438C with Option 401

```
[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:FPICH:POWER <val>
```

```
[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:FPICH:POWER?
```

This command sets the power for the forward pilot channel.

The variable <val> is expressed in units of decibels (dB).

***RST** +0.00000000E+000

Range -40 to 0

Field Entry Power

[:FORWARD]:FPICh[:STATe]**Supported** E4438C with Option 401

```
[:SOURCE]:RADio:CDMA2000[:BBG] [:FORWARD]:FPICh[:STATe] ON|OFF|1|0
[:SOURCE]:RADio:CDMA2000[:BBG] [:FORWARD]:FPICh[:STATe] ?
```

This command enables or disables the operating state of the forward pilot channel.

RST** 1**Field Entry** State**[:FORWARD]:FSCH[1]|2:DATA*Supported** E4438C with Option 401

```
[:SOURCE]:RADio:CDMA2000[:BBG] [:FORWARD]:FSCH[1]|2:DATA PN9|PN15|FIX4|
"<file name>"|EXT
[:SOURCE]:RADio:CDMA2000[:BBG] [:FORWARD]:FSCH[1]|2:DATA?
```

This command configures the data field for the forward supplemental traffic channels.

RST** PN9**Key Entry** PN9 PN15 FIX4 User File EXT**[:FORWARD]:FSCH[1]|2:DATA:FIX4*Supported** E4438C with Option 401

```
[:SOURCE]:RADio:CDMA2000[:BBG] [:FORWARD]:FSCH[1]|2:DATA:FIX4 <val>
[:SOURCE]:RADio:CDMA2000[:BBG] [:FORWARD]:FSCH[1]|2:DATA:FIX4?
```

This command selects a fixed 4-bit data pattern that repeats as necessary to fill the selected data area.

***RST** #B0000**Range** #B0000–#B1111 or 0–15**Key Entry** FIX4

[:FORWARD]:FSCH[1] | 2:EBNO

Supported E4438C with Options 401 and 403

```
[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:FSCH[1]|2:EBNO <val>
[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:FSCH[1]|2:EBNO?
```

This command sets the ratio of energy per bit to noise power spectral density (expressed in dB) for the reverse access channel.

***RST** +0.00000000E+000

Range

$$\text{min EbNo: } 10\log_{10} \left[\frac{\text{Chip Rate}}{1000(\text{Bit Rate})} \right] + \text{Normalized Power}$$

$$\text{max EbNo: } 10\log_{10} \left[\frac{1000(\text{Chip Rate})}{\text{Bit Rate}} \right] + \text{Normalized Power}$$

Normalized Power is the channel amplitude after adjusting the code power to 0 dB. Refer to “[:FORWARD]:PADJust” on page 507 for adjusting the code domain power.

Field Entry EbNo

Remarks Changes to the EbNo values also change the EcNo values for all other channels in the current link (forward or reverse).

Queries of this command are only valid for the current operating state.

[:FORWARD]:FSCH[1] | 2:FOFFset

Supported E4438C with Option 401

```
[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:FSCH[1]|2:FOFFset <val>
[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:FSCH[1]|2:FOFFset?
```

This command sets the frame offset value for the forward supplemental traffic channels.

***RST** +0

Range 0–15

Field Entry Frame Offset

Remarks Changing this value also changes the frame offset value for the forward fundamental channel (FFCH).

[:FORWARD]:FSCH[1] | 2:LCMask**Supported** E4438C with Option 401

[:SOURCE]:RADIO:CDMA2000[:BBG] [:FORWARD]:FSCH[1] | 2:LCMask?

This query outputs the contents of the long code mask field for the forward supplemental traffic channels.

RST** 0**Remarks** This value is shared with the forward fundamental channel (FFCH).**[:FORWARD]:FSCH[1] | 2:LCMask:ESN*Supported** E4438C with Option 401

[:SOURCE]:RADIO:CDMA2000[:BBG] [:FORWARD]:FSCH[1] | 2:LCMask:ESN <val>

[:SOURCE]:RADIO:CDMA2000[:BBG] [:FORWARD]:FSCH[1] | 2:LCMask:ESN?

This command defines the permuted electronic serial number (ESN) for the long code mask, which is used to identify a particular mobile.

RST** #H00000000**Range** #H0–#HFFFFFFF**Field Entry** Permuted ESN**Remarks** Changing this value also changes the permuted ESN for the long code mask in the forward fundamental channel (FFCH).**[:FORWARD]:FSCH[1] | 2:LCMask:HEADer*Supported** E4438C with Option 401

[:SOURCE]:RADIO:CDMA2000[:BBG] [:FORWARD]:FSCH[1] | 2:LCMask:HEADer <val>

[:SOURCE]:RADIO:CDMA2000[:BBG] [:FORWARD]:FSCH[1] | 2:LCMask:HEADer?

This command sets the header for the long code mask, which is used to identify a particular mobile.

***RST** #H318**Range** 000–3FF**Field Entry** Header**Remarks** Changing this value also changes the header for the long code mask in the forward fundamental channel (FFCH).

[[:FORWARD]:FSCH[1] | 2:POWER**Supported** E4438C with Option 401

```
[:SOURce]:RADio:CDMA2000[:BBG][:FORWARD]:FSCH[1]|2:POWER <val>
[:SOURce]:RADio:CDMA2000[:BBG][:FORWARD]:FSCH[1]|2:POWER?
```

This command sets the power for the forward supplemental traffic channels.

The variable <val> is expressed in units of decibels (dB).

RST** +0.00000000E+000**Range** -40 to 0**Field Entry** Power**[[:FORWARD]:FSCH[1] | 2:QOF*Supported** E4438C with Option 401

```
[:SOURce]:RADio:CDMA2000[:BBG][:FORWARD]:FSCH[1]|2:QOF <val>
[:SOURce]:RADio:CDMA2000[:BBG][:FORWARD]:FSCH[1]|2:QOF?
```

This command sets the quasi-orthogonal function value for the forward supplemental traffic channels.

RST** +0**Range** 0–3**Field Entry** QOF**[[:FORWARD]:FSCH[1] | 2:RATE*Supported** E4438C with Option 401

```
[:SOURce]:RADio:CDMA2000[:BBG][:FORWARD]:FSCH[1]|2:RATE 19.2kbps |
28.8kbps | 38.4kbps | 57.6kbps | 76.8kbps | 115.2kbps | 153.6kbps | 230.4kbps |
307.2kbps
[:SOURce]:RADio:CDMA2000[:BBG][:FORWARD]:FSCH[1]|2:RATE?
```

This command sets the data rate for the forward supplemental traffic channels.

***RST** +1.92000000E+004**Field Entry** Bit Rate**Remarks** Values preceded by an asterisk indicate data rate values that are eligible for turbo coding.

[[:FORWARD]:FSCH[1]|2:RCONfig**Supported** E4438C with Option 401

```
[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:FSCH[1]|2:RCONfig 3|4|5
[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:FSCH[1]|2:RCONfig?
```

This command sets the radio configuration value for the forward supplemental channels.

RST** +3**Field Entry** Radio Config**[[:FORWARD]:FSCH[1]|2:TCODE*Supported** E4438C with Option 401

```
[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:FSCH[1]|2:TCODE ON|OFF|1|0
[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:FSCH[1]|2:TCODE?
```

This command enables or disables the turbo coding operating state for the forward supplemental traffic channels.

***RST** 0**Field Entry** Turbo Coding**Remarks** Turbo coding is available for all data rates, excluding the following radio configurations (highest data rate of each radio configuration):

RC3: 153.6

RC4: 307.2

RC5: 230.4

To change the data rate for the forward supplemental traffic channel, refer to “[:FORWARD]:FSCH[1]|2:RATE” on page 496.

[[:FORWARD]:FSCH[1]|2:WALSh**Supported** E4438C with Option 401

```
[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:FSCH[1]|2:WALSh <val>
[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:FSCH[1]|2:WALSh?
```

This command sets the Walsh code for the forward supplemental traffic channels.

RST** FSCH1: 12 FSCH2: 14**Range*RC3**

Data Rate=19.2: 0–31

Data Rate=38.4: 0–15

RC4

Data Rate=19.2: 0–63

Data Rate=38.4: 0–31

RC5

Data Rate=28.8: 0–31

Data Rate=57.6: 0–15

CDMA2000 BBG Subsystem–Option 401 ([:SOURce]:RADio:CDMA2000[:BBG])

Range	RC3	RC4	RC5
	Data Rate=76.8: 0–7	Data Rate=76.8: 0–15	Data Rate=115.2: 0–7
	Data Rate=307.2: 0–3	Data Rate=153.6: 0–7	Data Rate=230.4: 0–3
		Data Rate=307.2: 0–3	
Field Entry	Walsh		

[:FORWard]:FSCH[1] | 2[:STATe]

Supported E4438C with Option 401

```
[:SOURce]:RADio:CDMA2000[:BBG][:FORWard]:FSCH[1]|2[:STATe] ON|OFF|1|0
[:SOURce]:RADio:CDMA2000[:BBG][:FORWard]:FSCH[1]|2[:STATe]?
```

This command enables or disables the operating state of the forward supplemental traffic channel.

***RST** 0

Field Entry State

[:FORWard]:FSYNc:CFRequency

Supported E4438C with Option 401

```
[:SOURce]:RADio:CDMA2000[:BBG][:FORWard]:FSYNc:CFRequency <val>
[:SOURce]:RADio:CDMA2000[:BBG][:FORWard]:FSYNc:CFRequency?
```

This command directs the mobile station to a CDMA channel having a primary paging channel.

***RST** +50

Range 0–2047

Field Entry CDMA Freq

[:FORWard]:FSYNc:DAYLt

Supported E4438C with Option 401

```
[:SOURce]:RADio:CDMA2000[:BBG][:FORWard]:FSYNc:DAYLt 1|0
[:SOURce]:RADio:CDMA2000[:BBG][:FORWard]:FSYNc:DAYLt?
```

This command sets the daylight savings time offset for the forward synchronization channel, where 1 = on and 0 = off.

***RST** +0

Field Entry DAYLT

[:FORWARD]:FSYNc:EBNO

Supported E4438C with Options 401 and 403

[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:FSYNc:EBNO <val>

[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:FSYNc:EBNO?

This command sets the ratio of energy per bit to noise power spectral density (expressed in dB) for the quick paging channel.

***RST** +0.00000000E+000

Range $\min EbNo: 10\log_{10} \left[\frac{\text{Chip Rate}}{1000(\text{Bit Rate})} \right] + \text{Normalized Power}$

$\max EbNo: 10\log_{10} \left[\frac{1000(\text{Chip Rate})}{\text{Bit Rate}} \right] + \text{Normalized Power}$

Normalized Power is the channel amplitude after adjusting the code power to 0 dB. Refer to “[:FORWARD]:PADJust” on page 507 for adjusting the code domain power.

Field Entry EbNo

Remarks Changes to the EbNo values also change the EcNo values for all other channels in the current link (forward or reverse).

Queries of this command are only valid for the current operating state.

[:FORWARD]:FSYNc:ECFRequency

Supported E4438C with Option 401

[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:FSYNc:ECFRequency <val>

[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:FSYNc:ECFRequency?

This command direct the mobile station to a CDMA channel having a primary paging channel. The mobile tunes to the Ext CDMA Freq field when it has a protocol revision level of 6 or greater, and it supports either the quick paging channel or radio configurations greater than 2. Otherwise, the mobile tunes to the CDMA Freq field for the CDMA channel.

This command sets the extended CDMA frequency for the forward synchronization channel.

***RST** +0

Range 0–2047

Field Entry Ext CDMA Freq

[[:FORWARD]:FSYNc:LPSec**Supported** E4438C with Option 401

[:SOURCE]:RADio:CDMA2000[:BBG] [:FORWARD]:FSYNc:LPSec <val>

[:SOURCE]:RADio:CDMA2000[:BBG] [:FORWARD]:FSYNc:LPSec?

This command sets the leap seconds value for the forward synchronization channel.

RST** +0**Range** 0–255**Field Entry** Leap Seconds**[[:FORWARD]:FSYNc:LTMoff*Supported** E4438C with Option 401

[:SOURCE]:RADio:CDMA2000[:BBG] [:FORWARD]:FSYNc:LTMoff <val>

[:SOURCE]:RADio:CDMA2000[:BBG] [:FORWARD]:FSYNc:LTMoff?

This command sets the current local time offset from the basestation for the forward synchronization channel, where 1= 30 minutes, 2= 60 minutes, 3= 90 minutes, and so on.

RST** +0**Range** 0–63**Field Entry** LTM OFF**[[:FORWARD]:FSYNc:MPREv*Supported** E4438C with Option 401

[:SOURCE]:RADio:CDMA2000[:BBG] [:FORWARD]:FSYNc:MPREv <val>

[:SOURCE]:RADio:CDMA2000[:BBG] [:FORWARD]:FSYNc:MPREv?

This command sets the minimum protocol revision level for the forward synchronization channel.

***RST** +1**Range** 0–255**Field Entry** P Rev Min

[[:FORWARD]:FSYNc:MSGType**Supported** E4438C with Option 401

```
[:SOURCE]:RADio:CDMA2000[:BBG][:FORWARD]:FSYNc:MSGType <val>
[:SOURCE]:RADio:CDMA2000[:BBG][:FORWARD]:FSYNc:MSGType?
```

This command sets the message type value for the forward synchronization channel.

RST** +1**Range** 0–255**Field Entry** Message Type**[[:FORWARD]:FSYNc:NID*Supported** E4438C with Option 401

```
[:SOURCE]:RADio:CDMA2000[:BBG][:FORWARD]:FSYNc:NID <val>
[:SOURCE]:RADio:CDMA2000[:BBG][:FORWARD]:FSYNc:NID?
```

This command sets the network identification value for the forward synchronization channel.

RST** +1**Range** 0–65535**Key Entry** Network ID**[[:FORWARD]:FSYNc:POWER*Supported** E4438C with Option 401

```
[:SOURCE]:RADio:CDMA2000[:BBG][:FORWARD]:FSYNc:POWER <val>
[:SOURCE]:RADio:CDMA2000[:BBG][:FORWARD]:FSYNc:POWER?
```

This command sets the power for the forward synchronization channel.

The variable <val> is expressed in units of decibels (dB).

***RST** +0.00000000E+000**Range** –40 to 0**Field Entry** Power

[:FORWard]:FSYNc:PRATe**Supported** E4438C with Option 401

```
[:SOURce]:RADio:CDMA2000[:BBG][:FORWard]:FSYNc:PRATe <val>
[:SOURce]:RADio:CDMA2000[:BBG][:FORWard]:FSYNc:PRATe?
```

This command sets the base station paging rate for the forward supplemental channel.

RST** +0**Range** 0–3**Field Entry** PRAT**[:FORWard]:FSYNc:PREV*Supported** E4438C with Option 401

```
[:SOURce]:RADio:CDMA2000[:BBG][:FORWard]:FSYNc:PREV <val>
[:SOURce]:RADio:CDMA2000[:BBG][:FORWard]:FSYNc:PREV?
```

This command sets the protocol revision level for the forward synchronization channel.

RST** +1**Range** 0–255**Field Entry** P Rev**[:FORWard]:FSYNc:RESErved*Supported** E4438C with Option 401

```
[:SOURce]:RADio:CDMA2000[:BBG][:FORWard]:FSYNc:RESErved <val>
[:SOURce]:RADio:CDMA2000[:BBG][:FORWard]:FSYNc:RESErved?
```

This command sets the reserved field value for the forward synchronization channel.

***RST** +0**Range** 0–7**Key Entry** **Reserved**

Remarks Currently, base stations and mobiles ignore reserved bits, so the reserved field should be set to “0” with the query returning the same value.

[[:FORWARD]:FSYNc:SID**Supported** E4438C with Option 401

```
[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:FSYNc:SID <val>
[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:FSYNc:SID?
```

This command sets the system identification for the forward synchronization channel.

RST** +7**Range** 0–32767**Field Entry** System ID**[[:FORWARD]:FSYNc:STYPe*Supported** E4438C with Option 401

```
[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:FSYNc:STYPe IS95|JSTD8|IS2000
[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:FSYNc:STYPe?
```

This command selects the forward synchronization channel type.

IS95 This choice selects a channel type that is compatible with the IS95 CDMA standard.

JSTD8 This choice selects a channel type that is compatible with PCS CDMA standard personal station requirements for 1.9 to 2.0 GHz.

IS2000 This choice selects a channel type that is compatible with the IS2000 CDMA standard.

RST** JSTD8**Key Entry** **IS95 JSTD8 IS2000*[[:FORWARD]:FSYNc:SYSTime****Supported** E4438C with Option 401

```
[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:FSYNc:SYSTime <val>
[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:FSYNc:SYSTime?
```

This command sets the system time value for the forward synchronization channel.

***RST** #H000000000**Range** #H0–#HFFFFFFF**Field Entry** Time

[:FORWARD]:FSYNc:WALSh**Supported** E4438C with Option 401

```
[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:FSYNc:WALSh <val>
[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:FSYNc:WALSh?
```

This command sets the Walsh code for the forward synchronization channel.

RST** +32**Range** 0–63**Field Entry** walsh**[:FORWARD]:FSYNc[:STATe]*Supported** E4438C with Option 401

```
[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:FSYNc[:STATe] ON|OFF|1|0
[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:FSYNc[:STATe]?
```

This command enables or disables the operating state for the forward synchronization channel.

RST** 0**Field Entry** State**[:FORWARD]:NOISe:CN*Supported** E4438C with Options 401 and 403

```
[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:NOISe:CN <val>
[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:NOISe:CN?
```

This command sets the carrier to noise ratio for the forward link.

The variable <val> is expressed in units of decibels (dB).

***RST** +0.00000000E+000**Range** –30 to 30**Key Entry** C/N**Remarks** The carrier to noise ratio is the ratio of the carrier power to in-channel noise power.

A change to the carrier to noise ratio will change all EbNo/EcNo field values.

[:FORWARD]:NOISE[:STATE]

Supported E4438C with Options 401 and 403

```
[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:NOISE[:STATE] ON|OFF|1|0
[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:NOISE[:STATE]?
```

This command enables or disables the noise function for the CDMA2000 baseband forward link.

NOTE When this command is enabled, an immediate increase in the Even Second Delay value will occur. The Even Second Delay value will increase by an increment of 11.5 chips. The chip increase will be seen in the appropriate fields on the display.

Changes to Even Second Delay and Trigger Advance will not affect synchronization; automatic compensation is performed internally.

***RST** 0

Key Entry **Noise Off On**

Remarks Both the carrier and noise power value will be adjusted to match the specified carrier to noise ratio. Refer to “[:FORWARD]:NOISE:CN” on page 504 to change the carrier to noise ratio.

The noise function can only be turned on with Option 403 installed.

[:FORWARD]:OCNS:EBNO

Supported E4438C with Options 401 and 403

```
[:SOURCE]:RADIO[1]|2|3|4:CDMA2000[:BBG][:FORWARD]:OCNS:EBNO <val>
[:SOURCE]:RADIO[1]|2|3|4:CDMA2000[:BBG][:FORWARD]:OCNS:EBNO?
```

This command sets the energy per bit to noise power (EbNo) density ratio for the forward link orthogonal channel noise simulator (OCNS).

The variable <val> is expressed in units of decibels (dB).

Range min EbNo: $10\log_{10}\left(\frac{\text{Chip Rate}}{1000(\text{Bit Rate})}\right) + \text{Normalized Power}$

max EbNo: $10\log_{10}\left(\frac{1000(\text{Chip Rate})}{\text{Bit Rate}}\right) + \text{Normalized Power}$

The OCNS bit rate is fixed at 19.2 kilo-bits per second.

CDMA2000 BBG Subsystem–Option 401 ([:SOURce]:RADio:CDMA2000[:BBG])

The Normalized Power is the channel amplitude after adjusting the code domain power to 0 dB. Refer “[:FORWARD]:PADJust” on page 507.

Range min EbNo: $10\log_{10} \left(\frac{\text{Chip Rate}}{1000(\text{Bit Rate})} \right) + \text{Normalized Power}$

max EbNo: $10\log_{10} \left(\frac{1000(\text{Chip Rate})}{\text{Bit Rate}} \right) + \text{Normalized Power}$

The OCNS bit rate is fixed at 19.2 kilo-bits per second.

The Normalized Power is the channel amplitude after adjusting the code domain power to 0 dB. Refer “[:FORWARD]:PADJust” on page 507.

Field Entry EbNo

Remarks EbNo is available for all channels except the pilot channel.

The noise function must be turned on for this setting to work. Refer to “[:FORWARD]:NOISe[:STATE]” on page 505 for turning on the noise.

[:FORWARD]:OCNS:POWer

Supported E4438C with Option 401

```
[:SOURce]:RADio:CDMA2000[:BBG][:FORWARD]:OCNS:POWer <val>
[:SOURce]:RADio:CDMA2000[:BBG][:FORWARD]:OCNS:POWer?
```

This command sets the power level for the orthogonal channel noise simulator.

The variable <val> is expressed in units of decibels (dB).

***RST** +0.00000000E+000

Range -40 to 0

Field Entry Power

[:FORWARD]:OCNS:WALSh**Supported** E4438C with Option 401

```
[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:OCNS:WALSh <val>
[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:OCNS:WALSh?
```

This command sets the Walsh code for the orthogonal channel noise simulator.

RST** +61**Range** 0–63**Field Entry** Walsh**[:FORWARD]:OCNS[:STATe]*Supported** E4438C with Option 401

```
[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:OCNS[:STATe] ON|OFF|1|0
[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:OCNS[:STATe]?
```

This command turns the orthogonal channel noise simulator on or off.

RST** 0**Field Entry** State**[:FORWARD]:PADJust*Supported** E4438C with Option 401

```
[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:PADJust EQUal|SCALE
```

This command sets the code domain power (the relative power in each of the channels).

EQUal Sets all channels to equal power, and the total power to 0 dB.

SCALE Scales all of the current channel powers so that the total power equals 0 dB, keeping the previous power ratios between the individual channels.

Key Entry **Equal Powers** **Scale To 0dB**

[:FORWARD]:POLarity**Supported** E4438C with Option 401

```
[:SOURce]:RADio:CDMA2000[:BBG][:FORWARD]:POLarity NORMAL|INVERTed
[:SOURce]:RADio:CDMA2000[:BBG][:FORWARD]:POLarity?
```

This command sets the rotation direction for the phase modulation vector.

NORMAL This choice selects normal phase polarity.

INVERTed This choice inverts the internal Q signal.

***RST** NORM

Field Entry Phase Polarity

[:FORWARD]:QPCH:CCI**Supported** E4438C with Option 401

```
[:SOURce]:RADio:CDMA2000[:BBG][:FORWARD]:QPCH:CCI <val>
[:SOURce]:RADio:CDMA2000[:BBG][:FORWARD]:QPCH:CCI?
```

This command selects the configuration change indicator for the quick paging channel.

***RST** +3

Range 0–3

Field Entry Change

[:FORWARD]:QPCH:EBNO**Supported** E4438C with Options 401 and 403

```
[:SOURce]:RADio:CDMA2000[:BBG][:FORWARD]:QPCH:EBNO <val>
[:SOURce]:RADio:CDMA2000[:BBG][:FORWARD]:QPCH:EBNO?
```

This command sets the ratio of energy per bit to noise power spectral density (expressed in dB) for the quick paging channel.

***RST** +0.00000000E+000

Range

$$\min EbNo: 10\log_{10} \left[\frac{\text{Chip Rate}}{1000(\text{Bit Rate})} \right] + \text{Normalized Power}$$

$$\max EbNo: 10\log_{10} \left[\frac{1000(\text{Chip Rate})}{\text{Bit Rate}} \right] + \text{Normalized Power}$$

Normalized Power is the channel amplitude after adjusting the code power to

0 dB. Refer to “[:FORWARD]:PADJUST” on page 507 for adjusting the code domain power.

Field Entry

EbNo

Remarks

Changes to the EbNo values also change the EcNo values for all other channels in the current link (forward or reverse).

Queries of this command are only valid for the current operating state.

[:FORWARD]:QPCH:PI**Supported**

E4438C with Option 401

```
[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:QPCH:PI <val>
```

```
[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:QPCH:PI?
```

This command selects the paging slots for the quick paging channel.

***RST**

+0

Field Entry

Paging Indicator

Remarks

When the bit rate is 2400, a value of 191 turns all paging slots on.

When the bit rate is 4800, a value of 383 turns all paging slots on.

When the bit rate is either 2400 or 4800, a value of –1 turns all paging slots off.

To change the bit rate value, refer to “[:FORWARD]:QPCH:RATE” on page 510.

[:FORWARD]:QPCH:POWER**Supported**

E4438C with Option 401

```
[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:QPCH:POWER <val>
```

```
[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:QPCH:POWER?
```

This command sets the power value for the quick paging channel.

The variable <val> is expressed in units of decibels (dB).

***RST**

+0.00000000E+000

Range

–40 to 0

Field Entry

Power

[:FORWARD]:QPCH:RATE**Supported** E4438C with Option 401

```
[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:QPCH:RATE 2.4kbps|4.8kbps
[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:QPCH:RATE?
```

This command sets the bit rate for the quick paging channel.

RST** +4.80000000E+003**Field Entry** Bit Rate**[:FORWARD]:QPCH:WALSh*Supported** E4438C with Option 401

```
[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:QPCH:WALSh <val>
[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:QPCH:WALSh?
```

This command sets the Walsh code for the quick paging channel.

RST** +80**Range** 0–127**Field Entry** Walsh**[:FORWARD]:QPCH[:STATE]*Supported** E4438C with Option 401

```
[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:QPCH[:STATE] ON|OFF|1|0
[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:QPCH[:STATE]?
```

This command enables or disables the operating state of the quick paging channel.

RST** 0**Field Entry** State**[:FORWARD]:SRATe*Supported** E4438C with Option 401

```
[:SOURCE]:RADIO:CDMA2000[:BBG][:FORWARD]:SRATe?
```

This command returns the value of the current spreading rate.

***RST** +1

:PNOffset

Supported E4438C with Option 401

```
[ :SOURCE ] :RADIO:CDMA2000 [ :BBG ] :PNOffset <val>
```

```
[ :SOURCE ] :RADIO:CDMA2000 [ :BBG ] :PNOffset?
```

This command sets the current pseudorandom number (PN) offset value.

***RST** +1

Range 0–511

Field Entry PN Offset

Remarks The PN offset value is the time offset in the short code assigned to each basestation, allotting a unique identity for each.

:REVERSE:BBCLock

Supported E4438C with Option 401

```
[ :SOURCE ] :RADIO:CDMA2000 [ :BBG ] :REVERSE:BBCLock INT [1] | EXT [1]
```

```
[ :SOURCE ] :RADIO:CDMA2000 [ :BBG ] :REVERSE:BBCLock?
```

This command selects the data clock source.

***RST** INT

Key Entry **Internal** **External**

Remarks If the EXT choice is selected, the REFERENCE selection will automatically be set to internal. The external data clock source must be connected to the DATA CLOCK front panel BNC input connector, and its frequency must match the specified chip rate.

:REVerse:CHIPrate

Supported E4438C with Option 401

```
[ :SOURce ] :RADio:CDMA2000 [ :BBG ] :REVerse:CHIPrate <val>
```

```
[ :SOURce ] :RADio:CDMA2000 [ :BBG ] :REVerse:CHIPrate?
```

Execute this command to adjust the chip rate.

The variable <val> is expressed in units of chips per second (cps–Mcps).

***RST** +1.22880000E+006

Range 1E3–1.3E6

Field Entry Chip Rate

Remarks The default value (1.228800 Mcps) is in accordance with the IS-2000 specification.

:REVerse:ESDelay

Supported E4438C with Option 401

```
[ :SOURce ] :RADio:CDMA2000 [ :BBG ] :REVerse:ESDelay <val>
```

```
[ :SOURce ] :RADio:CDMA2000 [ :BBG ] :REVerse:ESDelay?
```

This command modifies the even second clock pulse.

***RST** +2.75000000E+001

Range 0.5–128.0

Field Entry Even Second Delay

Remarks The even second clock pulse sets the delay to align the RF with the trigger.

When the noise function is set to ON, this value will increase. Refer to [“:REVerse:NOISe\[:STATE\]” on page 517](#) for more information.

:REVerse:FILTer

Supported E4438C with Option 401

```
[:SOURCE]:RADIO:CDMA2000[:BBG]:REVerse:FILTer RNYQuist|NYQuist|GAUSSian|
RECTangle|IS95|IS95_EQ|IS95_MOD|IS95_MOD_EQ|AC4Fm|UGGaussian|
"<user FIR>"
[:SOURCE]:RADIO:CDMA2000[:BBG]:REVerse:FILTer?
```

This command specifies the filter type for the reverse link.

IS95 This choice selects a filter that meets the criteria of the IS-95 standard.

IS95_EQ This choice selects a filter which is a combination of the IS-95 filter (above) and the equalizer filter described in the IS-95 standard. This filter is only used for IS-95 baseband filtering.

IS95_MOD This choice selects a filter that meets the criteria of the IS-95 error function (for improved adjacent channel performance) with lower passband rejection than the filter specified in the IS-95 standard.

IS95_MOD_EQ This choice selects a filter which is a combination of the equalizer filter described in the IS-95 standard and a filter that meets the criteria of the IS-95 error function (for improved adjacent channel performance), with lower passband rejection.

AC4Fm This choice selects a predefined Association of Public Safety Communications Officials (APCO) specified compatible 4-level frequency modulation (C4FM) filter.

UGGaussian This choice selects a backwards compatible GSM Gaussian filter (Gaussian filter with a fixed BbT value of 0.300) for the ESG E44xxB Option UN3 or UN4.

"<user FIR>" This variable is any filter file that you have stored into memory.

***RST** IS95

Key Entry

Root Nyquist	Nyquist	Gaussian	Rectangle	IS-95	IS-95 w/EQ
IS-95 Mod	IS-95 MOD w/EQ	APCO 25 C4FM	UN3/4 GSM Gaussian		
User FIR					

Remarks Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:REVERSE:FILTER:ALPHA

Supported E4438C with Option 401

```
[ :SOURCE ] :RADIO:CDMA2000 [ :BBG ] :REVERSE:FILTER:ALPHA <val>
[ :SOURCE ] :RADIO:CDMA2000 [ :BBG ] :REVERSE:FILTER:ALPHA?
```

This command changes the alpha value on the Nyquist or root Nyquist filter.

The filter alpha value can be set to the minimum level (0), the maximum level (1), or in between by using fractional numeric values (0.001–0.999).

***RST** +2.20000000E-001

Range 0.000–1.000

Key Entry **Filter Alpha**

Remarks This command is effective only after choosing the root Nyquist or Nyquist filter. It does not effect other types of filters.

To change the current filter type, refer to “[:REVERSE:FILTER](#)” on page 513.

:REVERSE:FILTER:BBT

Supported E4438C with Option 401

```
[ :SOURCE ] :RADIO:CDMA2000 [ :BBG ] :REVERSE:FILTER:BBT <val>
[ :SOURCE ] :RADIO:CDMA2000 [ :BBG ] :REVERSE:FILTER:BBT?
```

This command changes the bandwidth-multiplied-by-bit-time filter value.

The filter BbT value can be set to the minimum level (0), the maximum level (1), or in between by using fractional numeric values (0.001–0.999).

***RST** +5.00000000E-001

Range 0.500–1.000

Key Entry **Filter BbT**

Remarks This command is effective only after choosing the Gaussian filter. It does not effect other types of filters.

To change the current filter type, refer to “[:REVERSE:FILTER](#)” on page 513.

:REVerse:FILTer:CHANnel

Supported E4438C with Option 401

```
[ :SOURce] :RADio:CDMA2000 [:BBG] :REVerse:FILTer:CHANnel EVM|ACP
[:SOURce] :RADio:CDMA2000 [:BBG] :REVerse:FILTer:CHANnel?
```

This command optimizes the Nyquist and root Nyquist filters to minimize error vector magnitude (EVM) or to minimize adjacent channel power (ACP).

EVM This choice provides the most ideal passband.

ACP This choice improves stopband rejection.

***RST** EVM

Key Entry **Optimize FIR For EVM ACP**

Remarks To change the current filter type, refer to “[:REVerse:FILTer](#)” on page 513.

:REVerse:LCMask

Supported E4438C with Option 401

```
[ :SOURce] :RADio:CDMA2000 [:BBG] :REVerse:LCMask <val>
[:SOURce] :RADio:CDMA2000 [:BBG] :REVerse:LCMask?
```

This command specifies a unique serial number code to identify a mobile station.

***RST** #H00000000000

Range #H0–#H3FFFFFFFF

Field Entry Long Code Mask

:REVerse:LCState

Supported E4438C with Option 401

```
[ :SOURce] :RADio:CDMA2000 [:BBG] :REVerse:LCState <val>
[:SOURce] :RADio:CDMA2000 [:BBG] :REVerse:LCState?
```

This command sets a unique code to address a mobile station.

***RST** #H00000000000

Range #H0–#H3FFFFFFFF

Field Entry Long Code State

Remarks The storage register for the long code state allows a 42-bit binary number to be entered.

:REVerse:PADJust

Supported E4438C with Option 401

```
[:SOURce]:RADio:CDMA2000[:BBG]:REVerse:PADJust EQUal|SCALE
```

Execute this command to set the code domain power.

EQUal Sets all channels to equal power, and the total power to 0 dB.

SCALE Scales all of the current channel powers so that the total power equals 0 dB, keeping the previous power ratios between the individual channels.

Key Entry **Equal Powers** **Scale To 0dB**

:REVerse:POLarity[:ALL]

Supported E4438C with Option 401

```
[:SOURce]:RADio:CDMA2000[:BBG]:REVerse:POLarity[:ALL] NORMal|INVerted
[:SOURce]:RADio:CDMA2000[:BBG]:REVerse:POLarity[:ALL]?
```

This command sets the phase polarity to either normal or inverted.

NORMal This choice selects normal phase polarity.

INVerted This choice inverts the internal Q signal.

***RST** NORM

Key Entry **Normal** **Inverted**

:REVerse:NOISe:CN

Supported E4438C with Options 401 and 403

```
[:SOURce]:RADio:CDMA2000[:BBG]:REVerse:NOISe:CN <val>
[:SOURce]:RADio:CDMA2000[:BBG]:REVerse:NOISe:CN?
```

This command sets the carrier to noise ratio for the reverse link.

The variable <val> is expressed in units of decibels (dB).

***RST** +0.00000000E+000

Range -30 to 30

Key Entry C/N

Remarks The carrier to noise ratio is the ratio of the carrier power to in-channel noise power, expressed in decibels (dB).

A change to the carrier to noise ratio will only align the EbNo/EcNo field values in the active operating mode.

:REVerse:NOISe[:STATe]

Supported E4438C with Option 401

```
[:SOURCE]:RADIO:CDMA2000[:BBG]:REVerse:NOISe[:STATe] ON|OFF|1|0
[:SOURCE]:RADIO:CDMA2000[:BBG]:REVerse:NOISe[:STATe]?
```

This command enables or disables the noise function for the baseband reverse link.

NOTE When this command is enabled, an immediate increase in the Even Second Delay and Trigger Advance values will occur. The Even Second Delay value will increase by an increment of 11.5 chips and the Trigger Advance value will increase by an increment of 12 chips. The chip increase will be seen in the appropriate field on the display.

Changes to Even Second Delay and Trigger Advance will not affect synchronization; automatic compensation is performed internally.

***RST** 0

Key Entry **Noise Off On**

Remarks Both the carrier and noise power value will be adjusted to match the specified carrier to noise ratio. Refer to “[:REVerse:NOISe:CN](#)” on page 516 to change the carrier to noise ratio.

The noise function can only be turned on with Option 403 installed.

:REVerse:RC12:ACCess:RACH:DATA

Supported E4438C with Option 401

```
[:SOURCE]:RADIO:CDMA2000[:BBG]:REVerse:RC12:ACCess:RACH:DATA PN9|PN15|
FIX4|"<file name>"
[:SOURCE]:RADIO:CDMA2000[:BBG]:REVerse:RC12:ACCess:RACH:DATA?
```

Execute this command to configure the data field for the reverse access channel.

***RST** PN9

Key Entry **PN9 PN15 FIX4 User File**

Remarks Refer to “[File Name Variables](#)” on page 13 for information on the file name syntax.

:REVERSE:RC12:ACCESS:RACH:DATA:FIX4**Supported** E4438C with Option 401

```
[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC12:ACCESS:RACH:DATA:FIX4 <val>
[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC12:ACCESS:RACH:DATA:FIX4?
```

This command selects a fixed 4-bit data pattern to be repeated as necessary to fill the selected data area.

RST** #B0000**Range** #B0000–#B1111 or 0–15**Key Entry** FIX4**:REVERSE:RC12:ACCESS:RACH:EBNO*Supported** E4438C with Options 401 and 403

```
[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC12:ACCESS:RACH:EBNO <val>
[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC12:ACCESS:RACH:EBNO?
```

This command sets the ratio of energy per bit to noise power spectral density (expressed in dB) for the reverse access channel.

***RST** +0.00000000E+000

Range

$$\min EbNo: 10\log_{10} \left[\frac{\text{Chip Rate}}{1000(\text{Bit Rate})} \right] + \text{Normalized Power}$$

$$\max EbNo: 10\log_{10} \left[\frac{1000(\text{Chip Rate})}{\text{Bit Rate}} \right] + \text{Normalized Power}$$

Normalized Power is the channel amplitude after adjusting the code power to 0 dB. Refer to “:REVERSE:PADJUST” on page 516 for adjusting the code domain power.

Field Entry EbNo

Remarks Changes to the EbNo values also change the EcNo values for all other channels in the current link (forward or reverse).

Queries of this command are only valid for the current operating state.

:REVERSE:RC12:ACCESS:RACH:FLENGTH**Supported** E4438C with Option 401

[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC12:ACCESS:RACH:FLENGTH?

This command queries the frame length for the reverse access channel.

The frame length is expressed as seconds (ms).

RST** +20**Field Entry** Frame Length**:REVERSE:RC12:ACCESS:RACH:FOFFSET*Supported** E4438C with Option 401

[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC12:ACCESS:RACH:FOFFSET <val>

[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC12:ACCESS:RACH:FOFFSET?

This command sets the frame offset value for the reverse access channel.

RST** +0**Range** 0–15**Field Entry** Frame Offset**:REVERSE:RC12:ACCESS:RACH:POWER*Supported** E4438C with Option 401

[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC12:ACCESS:RACH:POWER <val>

[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC12:ACCESS:RACH:POWER?

This command sets the power for the reverse access channel.

The variable <val> is expressed in units of decibels (dB).

***RST** +0.00000000E+000**Range** –40 to 0**Field Entry** Power

:REVerse:RC12:ACCess:RACH:RCONfig**Supported** E4438C with Option 401[:SOURce]:RADio:CDMA2000[:BBG]:REVerse:RC12:ACCess:RACH:RCONfig 1|2
[:SOURce]:RADio:CDMA2000[:BBG]:REVerse:RC12:ACCess:RACH:RCONfig?

This command select the radio configuration value for the reverse access channel.

RST** +1**Field Entry** Radio Config**:REVerse:RC12:ACCess:RACH:RATE*Supported** E4438C with Option 401

[:SOURce]:RADio:CDMA2000[:BBG]:REVerse:RC12:ACCess:RACH:RATE?

This command queries the data rate for the reverse access channel.

RST** +4.80000000E+003**Field Entry** Bit Rate**:REVerse:RC12:ACCess:RACH[:STATe]*Supported** E4438C with Option 401[:SOURce]:RADio:CDMA2000[:BBG]:REVerse:RC12:ACCess:RACH[:STATe] ON|OFF|
1|0
[:SOURce]:RADio:CDMA2000[:BBG]:REVerse:RC12:ACCess:RACH[:STATe]?

This command enables or disables the operating state for the reverse access channel.

***RST** +1**Field Entry** State

:REVERSE:RC12:TRAFFIC:RSCH:DATA

Supported E4438C with Option 401

```
[ :SOURCE ] :RADIO:CDMA2000 [ :BBG ] :REVERSE:RC12:TRAFFIC:RSCH:DATA PN9 | PN15 |
FIX4 | "<file name>"
[ :SOURCE ] :RADIO:CDMA2000 [ :BBG ] :REVERSE:RC12:TRAFFIC:RSCH:DATA?
```

This command configures the data field for the reverse supplemental traffic channel.

***RST** PN9

Key Entry **PN9** **PN15** **FIX4** **User File**

Remarks Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:REVERSE:RC12:TRAFFIC:RSCH:DATA:FIX4

Supported E4438C with Option 401

```
[ :SOURCE ] :RADIO:CDMA2000 [ :BBG ] :REVERSE:RC12:TRAFFIC:RSCH:DATA:FIX4 <val>
[ :SOURCE ] :RADIO:CDMA2000 [ :BBG ] :REVERSE:RC12:TRAFFIC:RSCH:DATA:FIX4?
```

This command sets a fixed 4-bit data pattern that repeats as necessary to fill the selected data area.

***RST** #B0000

Range #B0000–#B1111 or 0–15

Key Entry **FIX4**

:REVERSE:RC12:TRAFFIC:RSCH:FLENGTH

Supported E4438C with Option 401

```
[ :SOURCE ] :RADIO:CDMA2000 [ :BBG ] :REVERSE:RC12:TRAFFIC:RSCH:FLENGTH?
```

This command queries the frame length value for the reverse supplemental traffic channel.

***RST** +20

:REVERSE:RC12:TRAFFIC:RSCH:FOFFset**Supported** E4438C with Option 401

```
[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC12:TRAFFIC:RSCH:FOFFset <val>
[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC12:TRAFFIC:RSCH:FOFFset?
```

This command sets the frame offset value for the reverse supplemental traffic channel.

RST** +0**Range** 0–15**Field Entry** Frame Offset**:REVERSE:RC12:TRAFFIC:RSCH:POWER*Supported** E4438C with Option 401

```
[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC12:TRAFFIC:RSCH:POWER <val>
[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC12:TRAFFIC:RSCH:POWER?
```

This command sets the power for the reverse supplemental traffic channel.

The variable <val> is expressed in units of decibels (dB).

RST** +0.00000000E+000**Range** –40 to 0**Field Entry** Power**:REVERSE:RC12:TRAFFIC:RSCH:RATE*Supported** E4438C with Option 401

```
[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC12:TRAFFIC:RSCH:RATE 1.2kbps |
1.8kbps | 2.4kbps | 3.6kbps | 4.8kbps | 7.2kbps | 9.6kbps | 14.4kbps
[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC12:TRAFFIC:RSCH:RATE?
```

This command sets the data rate for the reverse supplemental traffic channel.

***RST** +9.60000000E+003**Field Entry** Bit Rate

:REVERSE:RC12:TRAFFIC:RSCH:RCONfig**Supported** E4438C with Option 401

```
[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC12:TRAFFIC:RSCH:RCONfig 1|2
[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC12:TRAFFIC:RSCH:RCONfig?
```

This command sets the data rate for the reverse supplemental traffic channel.

RST** +1**Field Entry** Radio Config**:REVERSE:RC12:TRAFFIC:RSCH[:STATe]*Supported** E4438C with Option 401

```
[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC12:TRAFFIC:RSCH[:STATe] ON|OFF|
1|0
[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC12:TRAFFIC:RSCH[:STATe]?
```

This command sets the operating state for the reverse supplemental traffic channel.

RST** 0**Field Entry** State**:REVERSE:RC34:CCONtrol:RCCCh:DATA*Supported** E4438C with Option 401

```
[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC34:CCONtrol:RCCCh:DATA PN9|
PN15|FIX4|"<file name>"
[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC34:CCONtrol:RCCCh:DATA?
```

This command configures the data field for the reverse common control channel.

***RST** PN9**Key Entry** **PN9** **PN15** **FIX4** **User File**

Remarks Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:REVERSE:RC34:CControl:RCCCh:DATA:FIX4**Supported** E4438C with Option 401

[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC34:CControl:RCCCh:DATA:FIX4 <val>

[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC34:CControl:RCCCh:DATA:FIX4?

This command selects a fixed 4-bit data pattern to be repeated as necessary to fill the selected data area.

RST** #B0000**Range** #B0000–#B1111 or 0–15**Key Entry** **FIX4*:REVERSE:RC34:CControl:RCCCh:EBNO****Supported** E4438C with Options 401 and 403

[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC34:CControl:RCCCh:EBNO <val>

[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC34:CControl:RCCCh:EBNO?

This command sets the ratio of energy per bit to noise power spectral density (expressed in dB) for the reverse common control channel.

***RST** +0.00000000E+000

Range $\min EbNo: 10\log_{10} \left[\frac{\text{Chip Rate}}{1000(\text{Bit Rate})} \right] + \text{Normalized Power}$

$\max EbNo: 10\log_{10} \left[\frac{1000(\text{Chip Rate})}{\text{Bit Rate}} \right] + \text{Normalized Power}$

Normalized Power is the channel amplitude after adjusting the code power to 0 dB. Refer to “:REVERSE:PADJust” on page 516 for adjusting the code domain power.

Field Entry EbNo

Remarks Changes to the EbNo values also change the EcNo values for all other channels in the current link (forward or reverse).

Queries of this command are only valid for the current operating state.

:REverse:RC34:CCONtrol:RCCCh:FLENgth**Supported** E4438C with Option 401

[:SOURCE]:RADIO:CDMA2000[:BBG]:REverse:RC34:CCONtrol:RCCCh:FLENgth 5|10|20

[:SOURCE]:RADIO:CDMA2000[:BBG]:REverse:RC34:CCONtrol:RCCCh:FLENgth?

This command sets the frame length value for the reverse common control channel.

The frame length is expressed as seconds (ms).

RST** +20**Field Entry** Frame Length**:REverse:RC34:CCONtrol:RCCCh:FOFFset*Supported** E4438C with Option 401

[:SOURCE]:RADIO:CDMA2000[:BBG]:REverse:RC34:CCONtrol:RCCCh:FOFFset <val>

[:SOURCE]:RADIO:CDMA2000[:BBG]:REverse:RC34:CCONtrol:RCCCh:FOFFset?

This command sets the frame offset value for the reverse common control channel.

The frame offset value is expressed as seconds (ms).

***RST** +0**Range** Frame Length=5: 0–3

Frame Length=10: 0–7

Frame Length=20: 0–20

Field Entry Frame Offset**:REverse:RC34:CCONtrol:RCCCh:POWer****Supported** E4438C with Option 401

[:SOURCE]:RADIO:CDMA2000[:BBG]:REverse:RC34:CCONtrol:RCCCh:POWer <val>

[:SOURCE]:RADIO:CDMA2000[:BBG]:REverse:RC34:CCONtrol:RCCCh:POWer?

This command sets the power for the reverse common control channel.

The variable <val> is expressed in units of decibels (dB).

***RST** +0.00000000E+000**Range** –40 to 0**Field Entry** Power

:REVERSE:RC34:CCONTROL:RCCCh:RCONfig**Supported** E4438C with Option 401[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC34:CCONTROL:RCCCh:RCONfig 3|4
[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC34:CCONTROL:RCCCh:RCONfig?

This command selects the radio configuration value for the reverse common control channel.

RST** +3**Field Entry** Radio Config**:REVERSE:RC34:CCONTROL:RCCCh:RATE*Supported** E4438C with Option 401[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC34:CCONTROL:RCCCh:RATE 9.6kbps|
19.2kbps|38.4kbps
[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC34:CCONTROL:RCCCh:RATE?

This command adjusts the data rate value for the reverse common control channel.

RST** +9.60000000E+003**Field Entry** Bit Rate**:REVERSE:RC34:CCONTROL:RCCCh:WALSh*Supported** E4438C with Option 401

[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC34:CCONTROL:RCCCh:WALSh?

This command queries the Walsh code for the reverse common control channel.

***RST** +2**Field Entry** Walsh

:REVERSE:RC34:CCONTROL:RCCCh[:STATe]**Supported** E4438C with Option 401

[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC34:CCONTROL:RCCCh[:STATe] ON|OFF|1|0

[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC34:CCONTROL:RCCCh[:STATe] ?

This command sets the operating state for the reverse common control channel.

RST** 0**Field Entry** State**:REVERSE:RC34:CCONTROL:RPICh:ECNO*Supported** E4438C with Options 401 and 403

[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC34:CCONTROL:RPICh:ECNO <val>

[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC34:CCONTROL:RPICh:ECNO?

This command sets the ratio of energy per chip to the noise power spectral density (expressed in dB) for the reverse common control pilot channel.

***RST** +0.00000000E+000**Range** min EcNo: -30 + Normalized Power

max EcNo: 30 + Normalized Power

Normalized Power is the channel amplitude after adjusting the code power to 0 dB. Refer to “:REVERSE:PADJust” on page 516 for adjusting the code domain power.

Field Entry EcNo**Remarks** Changes to the EcNo values also change the EbNo values for all other channels in the current link (forward or reverse).

Queries of this command are only valid for the current operating state.

:REVerse:RC34:CCONtrol:RPICh:GRATe**Supported** E4438C with Option 401

```
[:SOURCE]:RADio:CDMA2000[:BBG]:REVerse:RC34:CCONtrol:RPICh:GRATe FULL|
HALF|QUARter
[:SOURCE]:RADio:CDMA2000[:BBG]:REVerse:RC34:CCONtrol:RPICh:GRATe?
```

This command configures the gating data field for the reverse common control pilot channel.

FULL This choice transmits all sixteen power control bits.

HALF This choice transmits eight power control bits.

QUARter This choice transmits four power control bits.

***RST** FULL

Key Entry Full Half Quarter

:REVerse:RC34:CCONtrol:RPICh:POWER**Supported** E4438C with Option 401

```
[:SOURCE]:RADio:CDMA2000[:BBG]:REVerse:RC34:CCONtrol:RPICh:POWER <val>
[:SOURCE]:RADio:CDMA2000[:BBG]:REVerse:RC34:CCONtrol:RPICh:POWER?
```

This command sets the power for the reverse common control pilot channel.

The variable <val> is expressed in units of decibels (dB).

***RST** +0.00000000E+000

Range -40 to 0

Field Entry Power

:REVerse:RC34:CCONtrol:RPICh:WALSh**Supported** E4438C with Option 401

```
[:SOURCE]:RADio:CDMA2000[:BBG]:REVerse:RC34:CCONtrol:RPICh:WALSh?
```

This command queries the Walsh code for the reverse common control pilot channel.

***RST** +0

Field Entry Walsh

:REverse:RC34:CCONtrol:RPICh[:STATe]**Supported** E4438C with Option 401

[:SOURCE]:RADIO:CDMA2000[:BBG]:REverse:RC34:CCONtrol:RPICh[:STATe] ON|OFF|1|0

[:SOURCE]:RADIO:CDMA2000[:BBG]:REverse:RC34:CCONtrol:RPICh[:STATe] ?

This command sets the operating state for the reverse common control pilot channel.

RST** 1**Field Entry** State**:REverse:RC34:EACCess:REACH:DATA*Supported** E4438C with Option 401

[:SOURCE]:RADIO:CDMA2000[:BBG]:REverse:RC34:EACCess:REACH:DATA PN9|PN15|FIX4|"<file name>"

[:SOURCE]:RADIO:CDMA2000[:BBG]:REverse:RC34:EACCess:REACH:DATA?

This command configures the data field for the reverse enhanced access channel.

RST** PN9**Key Entry** **PN9** **PN15** **FIX4** **User File*Remarks** Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.**:REverse:RC34:EACCess:REACH:DATA:FIX4****Supported** E4438C with Option 401

[:SOURCE]:RADIO:CDMA2000[:BBG]:REverse:RC34:EACCess:REACH:DATA:FIX4 <val>

[:SOURCE]:RADIO:CDMA2000[:BBG]:REverse:RC34:EACCess:REACH:DATA:FIX4?

This command selects a fixed 4-bit data pattern to be repeated as necessary to fill the selected data area.

***RST** #B0000**Range** #B0000–#B1111 or 0–15**Key Entry** **FIX4**

:REVerse:RC34:EACCess:REACH:EBNO

Supported E4438C with Options 401 and 403

[:SOURce]:RADio:CDMA2000[:BBG]:REVerse:RC34:EACCess:REACH:EBNO <val>

[:SOURce]:RADio:CDMA2000[:BBG]:REVerse:RC34:EACCess:REACH:EBNO?

This command sets the ratio of energy per bit to noise power spectral density (expressed in dB) for the reverse enhanced access channel.

***RST** +0.00000000E+000

Range $\min EbNo: 10\log_{10} \left[\frac{\text{Chip Rate}}{1000(\text{Bit Rate})} \right] + \text{Normalized Power}$

$\max EbNo: 10\log_{10} \left[\frac{1000(\text{Chip Rate})}{\text{Bit Rate}} \right] + \text{Normalized Power}$

Normalized Power is the channel amplitude after adjusting the code power to 0 dB. Refer to “:REVerse:PADJust” on page 516 for adjusting the code domain power.

Field Entry EbNo

Remarks Changes to the EbNo values also change the EcNo values for all other channels in the current link (forward or reverse).

Queries of this command are only valid for the current operating state.

:REVerse:RC34:EACCess:REACH:FOFFset

Supported E4438C with Option 401

[:SOURce]:RADio:CDMA2000[:BBG]:REVerse:RC34:EACCess:REACH:FOFFset <val>

[:SOURce]:RADio:CDMA2000[:BBG]:REVerse:RC34:EACCess:REACH:FOFFset?

This command sets the frame offset value for the reverse enhanced access channel.

***RST** +0

Range Frame Length=5: 0–3 Frame Length=10: 0–7

Frame Length=20: 0–15

Field Entry Frame Offset

:REVERSE:RC34:EACCESS:REACH:POWER**Supported** E4438C with Option 401

```
[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC34:EACCESS:REACH:POWER <val>
[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC34:EACCESS:REACH:POWER?
```

This command sets the power level for the reverse enhanced access channel.

The variable <val> is expressed in units of decibels (dB).

RST** +0.00000000E+000**Range** -40 to 0**Field Entry** Power**:REVERSE:RC34:EACCESS:REACH:RCONFIG*Supported** E4438C with Option 401

```
[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC34:EACCESS:REACH:RCONFIG 3|4
[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC34:EACCESS:REACH:RCONFIG?
```

This command sets the radio configuration for the reverse enhanced access channel.

RST** +3**Field Entry** Radio Config**:REVERSE:RC34:EACCESS:REACH:RATE*Supported** E4438C with Option 401

```
[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC34:EACCESS:REACH:RATE 9.6kbps |
19.2kbps | 38.4kbps
[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC34:EACCESS:REACH:RATE?
```

This command adjusts the data rate value for the reverse enhanced access channel.

***RST** +9.60000000E+003**Field Entry** Bit Rate

:REVerse:RC34:EACCess:REACH:WALSh**Supported** E4438C with Option 401

[:SOURce]:RADio:CDMA2000[:BBG]:REVerse:RC34:EACCess:REACH:WALSh?

This command queries the Walsh code for the reverse enhanced access channel.

RST** +2**Field Entry** walsh**:REVerse:RC34:EACCess:REACH[:STATe]*Supported** E4438C with Option 401

[:SOURce]:RADio:CDMA2000[:BBG]:REVerse:RC34:EACCess:REACH[:STATe] ON|OFF|1|0

[:SOURce]:RADio:CDMA2000[:BBG]:REVerse:RC34:EACCess:REACH[:STATe]?

This command sets the operating state for the reverse enhanced access channel.

RST** 0**Field Entry** State**:REVerse:RC34:EACCess:RPICh:ECNO*Supported** E4438C with Options 401 and 403

[:SOURce]:RADio:CDMA2000[:BBG]:REVerse:RC34:EACCess:RPICh:ECNO <val>

[:SOURce]:RADio:CDMA2000[:BBG]:REVerse:RC34:EACCess:RPICh:ECNO?

This command sets the ratio of energy per chip to the noise power spectral density (expressed in dB) for the reverse enhanced access pilot channel.

***RST** +0.00000000E+000**Range** min EcNo: -30 + Normalized Power

max EcNo: 30 + Normalized Power

Normalized Power is the channel amplitude after adjusting the code power to 0 dB. Refer to “:REVerse:PADJust” on page 516 for adjusting the code domain power.

Field Entry EcNo**Remarks** Changes to the EcNo values also change the EbNo values for all other channels in the current link (forward or reverse).

Queries of this command are only valid for the current operating state.

:REVerse:RC34:EACCess:RPICh:GRATe**Supported** E4438C with Option 401

```
[:SOURCE]:RADio:CDMA2000[:BBG]:REVerse:RC34:EACCess:RPICh:GRATe FULL|
HALF|QUARter
[:SOURCE]:RADio:CDMA2000[:BBG]:REVerse:RC34:EACCess:RPICh:GRATe?
```

This command configures the gating data field for the reverse enhanced access pilot channel.

FULL This choice transmits all sixteen power control bits.

HALF This choice transmits eight power control bits.

QUARter This choice transmits four power control bits.

***RST** FULL

Key Entry Full Half Quarter

:REVerse:RC34:EACCess:RPICh:POWer**Supported** E4438C with Option 401

```
[:SOURCE]:RADio:CDMA2000[:BBG]:REVerse:RC34:EACCess:RPICh:POWer <val>
[:SOURCE]:RADio:CDMA2000[:BBG]:REVerse:RC34:EACCess:RPICh:POWer?
```

This command sets the power for the reverse enhanced access pilot channel.

The variable <val> is expressed in unit of decibels (dB).

***RST** +0.00000000E+000

Range -40 to 0

Field Entry Power

:REVerse:RC34:EACCess:RPICh:WALSh**Supported** E4438C with Option 401

```
[:SOURCE]:RADio:CDMA2000[:BBG]:REVerse:RC34:EACCess:RPICh:WALSh?
```

This command queries the Walsh code for the reverse enhanced access pilot channel.

***RST** +0

Field Entry Walsh

:REVERSE:RC34:EACCESS:RPICH[:STATE]**Supported** E4438C with Option 401

[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC34:EACCESS:RPICH[:STATE] ON|OFF|1|0

[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC34:EACCESS:RPICH[:STATE]?

This command sets the operating state for the reverse enhanced access pilot channel.

RST** 1**Field Entry** State**:REVERSE:RC34:TRAFFIC:RDCCH:DATA*Supported** E4438C with Option 401

[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC34:TRAFFIC:RDCCH:DATA PN9|PN15|FIX4|"<file name>"

[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC34:TRAFFIC:RDCCH:DATA?

This command configures the data field for the reverse traffic dedicated control channel.

RST** PN9**Key Entry** **PN9 PN15 FIX4 User File*Remarks** Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.**:REVERSE:RC34:TRAFFIC:RDCCH:DATA:FIX4****Supported** E4438C with Option 401

[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC34:TRAFFIC:RDCCH:DATA:FIX4 <val>

[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC34:TRAFFIC:RDCCH:DATA:FIX4?

This command selects a fixed 4-bit data pattern to be repeated as necessary to fill the selected data area.

RST** #B0000**Range** #B0000–#B1111 or 0–15**Key Entry** **FIX4*:REVERSE:RC34:TRAFFIC:RDCCH:EBNO****Supported** E4438C with Options 401 and 403

CDMA2000 BBG Subsystem–Option 401 ([:SOURCE]:RADIO:CDMA2000[:BBG])

```
[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC34:TRAFFIC:RDCCh:EBNO <val>
[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC34:TRAFFIC:RDCCh:EBNO?
```

This command sets the ratio of energy per bit, per the noise power spectral density (expressed in dB) for the reverse traffic dedicated control channel.

***RST** +0.00000000E+000

Range

$$\text{min EbNo: } 10\log_{10} \left[\frac{\text{Chip Rate}}{1000(\text{Bit Rate})} \right] + \text{Normalized Power}$$

$$\text{max EbNo: } 10\log_{10} \left[\frac{1000(\text{Chip Rate})}{\text{Bit Rate}} \right] + \text{Normalized Power}$$

Normalized Power is the channel amplitude after adjusting the code power to 0 dB. Refer to “:REVERSE:PADJUST” on page 516 for adjusting the code domain power.

Field Entry EbNo

Remarks Changes to the EbNo values also change the EcNo values for all other channels in the current link (forward or reverse).

Queries of this command are only valid for the current operating state.

:REVERSE:RC34:TRAFFIC:RDCCh:FLENGth

Supported E4438C with Option 401

```
[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC34:TRAFFIC:RDCCh:FLENGth 5|20
[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC34:TRAFFIC:RDCCh:FLENGth?
```

This command sets the frame length value for the reverse traffic dedicated control channel.

The frame length is expressed as seconds (ms).

***RST** +20

Field Entry Frame Length

:REVerse:RC34:TRAFfic:RDCCh:FOFFset**Supported** E4438C with Option 401

[:SOURce]:RADio:CDMA2000[:BBG]:REVerse:RC34:TRAFfic:RDCCh:FOFFset <val>

[:SOURce]:RADio:CDMA2000[:BBG]:REVerse:RC34:TRAFfic:RDCCh:FOFFset?

This command sets the frame offset value for the reverse traffic dedicated control channel.

RST** +0**Range** Frame Length=5: 0–3 Frame Length=20: 0–7**Field Entry** Frame Offset**:REVerse:RC34:TRAFfic:RDCCh:POWer*Supported** E4438C with Option 401

[:SOURce]:RADio:CDMA2000[:BBG]:REVerse:RC34:TRAFfic:RDCCh:POWer <val>

[:SOURce]:RADio:CDMA2000[:BBG]:REVerse:RC34:TRAFfic:RDCCh:POWer?

This command sets the power for the reverse traffic dedicated control channel.

The variable <val> is expressed in units of decibels (dB).

RST** +0**Range** –40 to 0**Field Entry** Power**:REVerse:RC34:TRAFfic:RDCCh:RATE*Supported** E4438C with Option 401

[:SOURce]:RADio:CDMA2000[:BBG]:REVerse:RC34:TRAFfic:RDCCh:RATE?

This command queries the data rate for the reverse traffic dedicated control channel.

***RST** Frame Length=5: RC3/4= +9.60000000E+003

Frame Length=10: RC3= +9.60000000E+003

Frame Length=20: RC3= +1.44000000E+004

Field Entry Bit Rate

:REverse:RC34:TRAFfic:RDDCh:RCONfig**Supported** E4438C with Option 401

[:SOURCE]:RADIO:CDMA2000[:BBG]:REverse:RC34:TRAFfic:RDDCh:RCONfig 3|4

[:SOURCE]:RADIO:CDMA2000[:BBG]:REverse:RC34:TRAFfic:RDDCh:RCONfig?

This command selects the radio configuration value for the reverse traffic dedicated control channel.

RST** +3**Field Entry** Radio Config**:REverse:RC34:TRAFfic:RDCCh:WALSh*Supported** E4438C with Option 401

[:SOURCE]:RADIO:CDMA2000[:BBG]:REverse:RC34:TRAFfic:RDCCh:WALSh?

This command queries the Walsh code for the reverse traffic dedicated control channel.

RST** +8**Range** 0–15**Field Entry** Walsh**:REverse:RC34:TRAFfic:RDCCh[:STATe]*Supported** E4438C with Option 401

[:SOURCE]:RADIO:CDMA2000[:BBG]:REverse:RC34:TRAFfic:RDCCh[:STATe] ON|OFF|1|0

[:SOURCE]:RADIO:CDMA2000[:BBG]:REverse:RC34:TRAFfic:RDCCh[:STATe] ?

This command sets the operating state for the reverse traffic dedicated control channel.

***RST** 0**Field Entry** State

:REVERSE:RC34:TRAFFIC:RFCH:DATA**Supported** E4438C with Option 401

[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC34:TRAFFIC:RFCH:DATA PN9|PN15|FIX4|"<file name>"

[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC34:TRAFFIC:RFCH:DATA?

This command configures the data field for the reverse fundamental traffic channel.

RST** PN9**Key Entry** **PN9** **PN15** **FIX4** **User File*Remarks** Refer to “File Name Variables” on page 13 for information on the file name syntax.**:REVERSE:RC34:TRAFFIC:RFCH:DATA:FIX4****Supported** E4438C with Option 401

[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC34:TRAFFIC:RFCH:DATA:FIX4 <val>

[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC34:TRAFFIC:RFCH:DATA:FIX4?

This command selects a fixed 4-bit data pattern to be repeated as necessary to fill the selected data area.

RST** #B0000**Range** #B0000–#B1111 or 0–15**Key Entry** **FIX4*:REVERSE:RC34:TRAFFIC:RFCH:EBNO****Supported** E4438C with Options 401 and 403

[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC34:TRAFFIC:RFCH:EBNO <val>

[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC34:TRAFFIC:RFCH:EBNO?

This command sets the ratio of energy per bit, per the noise power spectral density (expressed in dB) for the reverse fundamental traffic channel.

***RST** +0.00000000E+000

Range $\min EbNo: 10\log_{10} \left[\frac{\text{Chip Rate}}{1000(\text{Bit Rate})} \right] + \text{Normalized Power}$

$\max EbNo: 10\log_{10} \left[\frac{1000(\text{Chip Rate})}{\text{Bit Rate}} \right] + \text{Normalized Power}$

Normalized Power is the channel amplitude after adjusting the code power to 0 dB. Refer to “:REVERSE:PADJUST” on page 516 for adjusting the code domain power.

Field Entry	EbNo
Remarks	Changes to the EbNo values also change the EcNo values for all other channels in the current link (forward or reverse). Queries of this command are only valid for the current operating state.

:REVERSE:RC34:TRAFFIC:RFCH:FLENGTH

Supported E4438C with Option 401

```
[ :SOURCE ] :RADIO:CDMA2000 [ :BBG ] :REVERSE:RC34:TRAFFIC:RFCH:FLENGTH 5 | 20
[ :SOURCE ] :RADIO:CDMA2000 [ :BBG ] :REVERSE:RC34:TRAFFIC:RFCH:FLENGTH?
```

This command sets the frame length value for the reverse fundamental traffic channel.

The frame length is expressed as seconds (ms).

***RST** +20

Field Entry Frame Length

:REVERSE:RC34:TRAFFIC:RFCH:FOFFSET

Supported E4438C with Option 401

```
[ :SOURCE ] :RADIO:CDMA2000 [ :BBG ] :REVERSE:RC34:TRAFFIC:RFCH:FOFFSET <val>
[ :SOURCE ] :RADIO:CDMA2000 [ :BBG ] :REVERSE:RC34:TRAFFIC:RFCH:FOFFSET?
```

This command sets the frame offset value for the reverse fundamental traffic channel.

***RST** +0

Range Frame Length=5: 0–3
Frame Length=20: 0–15

Field Entry Frame Offset

:REVerse:RC34:TRAFfic:RFCH:POWer**Supported** E4438C with Option 401

```
[:SOURce]:RADio:CDMA2000[:BBG]:REVerse:RC34:TRAFfic:RFCH:POWer <val>
[:SOURce]:RADio:CDMA2000[:BBG]:REVerse:RC34:TRAFfic:RFCH:POWer?
```

This command sets the power for the reverse fundamental traffic channel.

The variable <val> is expressed in units of decibels (dB).

RST** +0.00000000E+000**Range** -40 to 0**Field Entry** Power**:REVerse:RC34:TRAFfic:RFCH:RCONfig*Supported** E4438C with Option 401

```
[:SOURce]:RADio:CDMA2000[:BBG]:REVerse:RC34:TRAFfic:RFCH:RCONfig 3|4
[:SOURce]:RADio:CDMA2000[:BBG]:REVerse:RC34:TRAFfic:RFCH:RCONfig?
```

This command sets the radio configuration value for the reverse fundamental traffic channel.

RST** +3**Field Entry** Radio Config**:REVerse:RC34:TRAFfic:RFCH:RATE*Supported** E4438C with Option 401

```
[:SOURce]:RADio:CDMA2000[:BBG]:REVerse:RC34:TRAFfic:RFCH:RATE 1.2kbps |
1.5kbps | 1.8kbps | 2.7kbps | 3.6kbps | 4.8kbps | 7.2kbps | 9.6kbps | 14.4kbps
[:SOURce]:RADio:CDMA2000[:BBG]:REVerse:RC34:TRAFfic:RFCH:RATE?
```

This command sets the data rate value for the reverse fundamental traffic channel.

***RST** +9.60000000E+003**Field Entry** Bit Rate

:REVERSE:RC34:TRAFFIC:RFCH:WALSH**Supported** E4438C with Option 401

[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC34:TRAFFIC:RFCH:WALSH?

This command queries the Walsh code for the reverse fundamental traffic channel.

RST** +4**Field Entry** Walsh**:REVERSE:RC34:TRAFFIC:RFCH[:STATE]*Supported** E4438C with Option 401

[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC34:TRAFFIC:RFCH[:STATE] ON|OFF|1|0

[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC34:TRAFFIC:RFCH[:STATE]?

This command sets the operating state for the reverse fundamental traffic channel.

RST** 0**Field Entry** State**:REVERSE:RC34:TRAFFIC:RSCH[1]|2:DATA*Supported** E4438C with Option 401

[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC34:TRAFFIC:RSCH[1]|2:DATA PN9|PN15|FIX4|"<file name>"

[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC34:TRAFFIC:RSCH[1]|2:DATA?

This command configures the data field for the reverse supplemental channels.

RST** PN9**Key Entry** **PN9** **PN15** **FIX4** **User File*Remarks** Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:REVERSE:RC34:TRAFFIC:RSCH[1] | 2:DATA:FIX4**Supported** E4438C with Option 401

[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC34:TRAFFIC:RSCH[1] | 2:DATA:FIX4 <val>

[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC34:TRAFFIC:RSCH[1] | 2:DATA:FIX4?

This command sets a fixed 4-bit data pattern that repeats as necessary to fill the selected data area.

RST** #B0000**Range** #B0000–#B1111 or 0–15**Key Entry** **FIX4*:REVERSE:RC34:TRAFFIC:RSCH[1] | 2:DATA:EBNO****Supported** E4438C with Options 401 and 403

[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC34:TRAFFIC:RSCH[1] | 2:EBNO <val>

[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC34:TRAFFIC:RSCH[1] | 2:EBNO?

This command sets the ratio of energy per bit to noise power spectral density (expressed in dB) for the reverse supplemental traffic channels.

***RST** +0.00000000E+000

Range $\min EbNo: 10\log_{10} \left[\frac{\text{Chip Rate}}{1000(\text{Bit Rate})} \right] + \text{Normalized Power}$

$\max EbNo: 10\log_{10} \left[\frac{1000(\text{Chip Rate})}{\text{Bit Rate}} \right] + \text{Normalized Power}$

Normalized Power is the channel amplitude after adjusting the code power to 0 dB. Refer to “:REVERSE:PADJUST” on page 516 for adjusting the code domain power.

Field Entry EbNo**Remarks** Changes to the EbNo values also change the EcNo values for all other channels in the current link (forward or reverse).

Queries of this command are only valid for the current operating state.

:REverse:RC34:TRAFfic:RSCH[1] | 2:FLENgth**Supported** E4438C with Option 401[:SOURCE]:RADIO:CDMA2000[:BBG]:REverse:RC34:TRAFfic:RSCH[1] | 2:
FLENgth 20 | 40 | 80

[:SOURCE]:RADIO:CDMA2000[:BBG]:REverse:RC34:TRAFfic:RSCH[1] | 2:FLENgth?

This command sets the frame length value for the reverse supplemental channels.

RST** +20**Field Entry** Frame Length**:REverse:RC34:TRAFfic:RSCH[1] | 2:FOFFset*Supported** E4438C with Option 401[:SOURCE]:RADIO:CDMA2000[:BBG]:REverse:RC34:TRAFfic:RSCH[1] | 2:
FOFFset <val>

[:SOURCE]:RADIO:CDMA2000[:BBG]:REverse:RC34:TRAFfic:RSCH[1] | 2:FOFFset?

This command sets the frame offset value for the reverse supplemental channels.

***RST** +0**Range** 0–63**Range** Frame Length=20: 0–15 Frame Length=40: 0–31
Frame Length=80: 0–63**Field Entry** Frame Offset**:REverse:RC34:TRAFfic:RSCH[1] | 2:POWer****Supported** E4438C with Option 401[:SOURCE]:RADIO:CDMA2000[:BBG]:REverse:RC34:TRAFfic:RSCH[1] | 2:
POWer <val>

[:SOURCE]:RADIO:CDMA2000[:BBG]:REverse:RC34:TRAFfic:RSCH[1] | 2:POWer?

This command sets the power level for the reverse supplemental channels.

The variable <val> is expressed in units of decibels (dB).

***RST** +0.00000000E+000**Range** –40 to 0**Field Entry** Power

:REVerse:RC34:TRAFfic:RSCH[1] | 2:RCONfig**Supported** E4438C with Option 401

```
[:SOURce]:RADio:CDMA2000[:BBG]:REVerse:RC34:TRAFfic:RSCH[1] | 2:RCONfig 3 |
4
[:SOURce]:RADio:CDMA2000[:BBG]:REVerse:RC34:TRAFfic:RSCH[1] | 2:RCONfig?
```

This command selects the radio configuration value for the reverse supplemental channels.

RST** +3**Field Entry** Radio Config**:REVerse:RC34:TRAFfic:RSCH[1] | 2:RATE*Supported** E4438C with Option 401

```
[:SOURce]:RADio:CDMA2000[:BBG]:REVerse:RC34:TRAFfic:RSCH[1] | 2:
RATE 1.2kbps | 1.350kbps | 1.5kbps | 1.8kbps | 2.4kbps | 2.7kbps | 3.6kbps | 4.8kbps |
7.2kbps | 9.6kbps | 14.4kbps
[:SOURce]:RADio:CDMA2000[:BBG]:REVerse:RC34:TRAFfic:RSCH[1] | 2:RATE?
```

Execute this command to set the data rate for the reverse supplemental channels.

***RST** +9.60000000E+003**Field Entry** Bit Rate

Remarks To change the frame length value, refer to
[“:REVerse:RC34:TRAFfic:RSCH\[1\]|2:FLENgth”](#) on page 543

:REVerse:RC34:TRAFfic:RSCH[1] | 2:TCODE**Supported** E4438C with Option 401

```
[:SOURce]:RADio:CDMA2000[:BBG]:REVerse:RC34:TRAFfic:RSCH[1] | 2:TCODE ON |
OFF | 1 | 0
[:SOURce]:RADio:CDMA2000[:BBG]:REVerse:RC34:TRAFfic:RSCH[1] | 2:TCODE?
```

This command enables or disables the operating state of the turbo coding function for the reverse supplemental channels.

***RST** 0**Field Entry** Turbo Coding

Remarks To ensure that this function is being executed with the correct data rate, refer to
[“:REVerse:RC34:TRAFfic:RSCH\[1\]|2:RATE”](#) on page 544.

:REVERSE:RC34:TRAFFIC:RSCH[1] | 2:WALSH**Supported** E4438C with Option 401

```
[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC34:TRAFFIC:RSCH1:WALSH <1 | 2>
[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC34:TRAFFIC:RSCH2:WALSH <2 | 6>
[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC34:TRAFFIC:RSCH[1] | 2:WALSH?
```

This command sets the Walsh code value for the reverse supplemental channels.

RST** Channel 1: +1 Channel 2: +2**Field Entry** Walsh**:REVERSE:RC34:TRAFFIC:RSCH[1] | 2[:STATE]*Supported** E4438C with Option 401

```
[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC34:TRAFFIC:RSCH[1] |
2[:STATE] ON|OFF | 1 | 0
[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:RC34:TRAFFIC:RSCH[1] | 2[:STATE] ?
```

This command enables or disables the operating state of the reverse supplemental channels.

RST** 0**Field Entry** State**:REVERSE:REFERENCE:EXTERNAL:FREQUENCY*Supported** E4438C with Option 401

```
[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:REFERENCE:EXTERNAL:
FREQUENCY <val><unit>
[:SOURCE]:RADIO:CDMA2000[:BBG]:REVERSE:REFERENCE:EXTERNAL:FREQUENCY?
```

This command sets the expected frequency of the external reference signal.

***RST** +1.96608000E+007**Range** 1–100 MHz**Field Entry** Ext BBG Ref Freq**Remarks** This setting must match the frequency of the signal that is supplied to the BASEBAND GEN REF IN rear panel BNC connector.

:REVerse:REFerence[:SOURce]**Supported** E4438C with Option 401

[:SOURce]:RADio:CDMA2000[:BBG]:REVerse:REFerence[:SOURce] INTernal | EXTernal

[:SOURce]:RADio:CDMA2000[:BBG]:REVerse:REFerence[:SOURce] ?

This command selects the reference clock source.

EXTernal This choice sets the instrument to use an external reference signal. The external reference frequency must be entered and the signal must be applied to the BASEBAND GEN REF IN rear panel connector.

INTernal This choice sets the instrument to use the internal reference.

RST** INT**Field Entry** BBG Reference**Remarks** If the EXT choice is selected, the BBClock selection will automatically be set to internal.**:REVerse:TADVance*Supported** E4438C with Option 401

[:SOURce]:RADio:CDMA2000[:BBG]:REVerse:TADVance <val>

[:SOURce]:RADio:CDMA2000[:BBG]:REVerse:TADVance?

This command selects the number of chips to advance the trigger time slot for the reverse link.

RST** +28**Range** 0–2457599**Field Entry** Trigger Advance**Remarks** When the noise function is set to ON, this value will increase. Refer to “:REVerse:NOISe[:STATe]” on page 517 for more information.**:REVerse:TEDGE*Supported** E4438C with Option 401

[:SOURce]:RADio:CDMA2000[:BBG]:REVerse:TEDGE RISING|FALLING

[:SOURce]:RADio:CDMA2000[:BBG]:REVerse:TEDGE?

This command selects a falling or rising trigger edge state for the reverse link.

CDMA2000 BBG Subsystem–Option 401 ([:SOURCE]:RADIO:CDMA2000[:BBG])

RISing	This choice selects a trigger on the rising edge of the signal applied to the PATT TRIG IN rear panel connector.	
FALLing	This choice selects a trigger on the falling edge of the signal applied to the PATT TRIG IN rear panel connector.	
*RST	FALL	
Key Entry	Rising	Falling

:REVerse:SRATe

Supported E4438C with Option 401

[:SOURCE] :RADIO:CDMA2000 [:BBG] :REVerse:SRATe?

This command returns the value of the current spreading rate for the reverse channel.

***RST** +1

[:STATe]

Supported E4438C with Option 401

[:SOURCE] :RADIO:CDMA2000 [:BBG] [:STATe] ON | OFF | 1 | 0

[:SOURCE] :RADIO:CDMA2000 [:BBG] [:STATe] ?

This command enables or disables the CDMA2000 baseband generator modulation format.

***RST** 0

Key Entry CDMA2000 Off On

Custom Subsystem—Option 001/601or 002/602 ([:SOURce]:RADio:CUSTom)

:ALPha

Supported E4438C with Option 001/601or 002/602

[:SOURce]:RADio:CUSTom:ALPha <val>

[:SOURce]:RADio:CUSTom:ALPha?

This command changes the Nyquist or root Nyquist filter's alpha value.

The filter alpha value can be set to a minimum level (0), a maximum level (1), or in between by using fractional numeric values (0.001–0.999).

***RST** +3.50000000E-001

Range 0.000–1.000

Key Entry **Filter Alpha**

Remarks To change the current filter type, refer to “:FILTer” on page 560.

:BBCLock

Supported E4438C with Option 001/601or 002/602

[:SOURce]:RADio:CUSTom:BBCLock INT [1] |EXT [1]

[:SOURce]:RADio:CUSTom:BBCLock?

This command toggles the data (bit) clock input to the baseband generator board to either internal or external. This command is independent in each mode and works for both non-burst (continuous) and burst modes. This allows for a matrix of selections between burst/non-burst, internal/external data generation, internal/external data clock, and external bit/symbol data clock.

INT[1] This choice selects the signal generator internal data clock.

EXT[1] This choice selects an external data clock input.

***RST** INT

Key Entry **BBG Data Clock Ext Int**

Remarks A data clock or continuous symbol sync input must be supplied when external mode is used.

This will be ignored if the external reference is set to EXTERNAL. To change the external reference type, refer to “:EREFerence” on page 559.

:BBT**Supported** E4438C with Option 001/601or 002/602

[:SOURCE]:RADio:CUSTom:BBT <val>

[:SOURCE]:RADio:CUSTom:BBT?

This command changes the bandwidth-multiplied-by-bit-time (BbT) filter parameter.

The filter BbT value can be set to the maximum level (1) or in between the minimum level (0.100) and maximum level by using fractional numeric values (0.101–0.999).

***RST** +5.00000000E–001**Range** 0.100–1.000**Key Entry** **Filter BbT**

Remarks This command is effective only after choosing a Gaussian filter. It does not have an effect on other types of filters.

To change the current filter type, refer to “:FILTer” on page 560.

:BRATe**Supported** E4438C with Option 001/601or 002/602

[:SOURCE]:RADio:CUSTom:BRATe <val>

[:SOURCE]:RADio:CUSTom:BRATe?

This command sets the bit rate.

The variable <val> is expressed in units of bits per second (bps–Mbps) and the maximum range value is dependent upon the source of data (internal or external), the modulation type, and filter.

***RST** +4.86000000E+004

Range	Modulation Type	Bits per Symbol	Internal Data	External Serial Data
	BPSK	1	1–50 Mbps	1–50 Mbps
	FSK2			
	MSK			

Range

<i>Modulation Type</i>	<i>Bits per Symbol</i>	<i>Internal Data</i>	<i>External Serial Data</i>
C4FM	2	2–100 Mbps	2–50 Mbps
FSK4			
OQPSK			
OQPSK195			
P4QPPSK			
QAM4			
QPSK			
QPSKIS95			
QPSKISAT			
D8PSK	3	3–100 Mbps	3–50 Mbps
EDGE			
FSK8			
PSK8			
FSK16	4	4–100 Mbps	4–50 Mbps
PSK16			
QAM16			
QAM32	5	5–100 Mbps	5–50 Mbps
QAM64	6	6–100 Mbps	6–50 Mbps
QAM256	7	8–100 Mbps	8–50 Mbps

Field Entry

SymRate

Remarks

When user-defined filters are selected using the command in section “:FILTer” on page 560, the upper bit rate will be restricted in line with the following symbol rate restriction:

- FIR filter length > 32 symbols: upper limit is 12.5 Msps
- FIR filter length > 16 symbols: upper limit is 25 Msps

When internal FIR filters are used, the limits of the above table always apply. For higher symbol rates, the FIR filter length will be truncated and will impact the relative timing of the modulated data, as well as the actual filter response (see “:SRATe” on page 564).

A change in the bit rate value will affect the symbol rate value; refer to “:SRATe” on page 564 for a list of the minimum and maximum symbol rate values.

To change the modulation type, refer to “:MODulation[:TYPE]” on page 563.

:BURSt:SHAPe:FALL:DELay

Supported E4438C with Option 001/601 or 002/602

[:SOURce] :RADio:CUSTom: BURSt : SHAPe : FALL : DELay <val>

[:SOURce] :RADio:CUSTom: BURSt : SHAPe : FALL : DELay?

This command sets the burst shape fall delay.

The variable <val> is expressed in bits.

***RST** +0.00000000E+000

Range -22.3750 to 99

Key Entry **Fall Delay**

Remarks To change the modulation type, refer to “:MODulation[:TYPE]” on page 563. Refer to “:SRATE” on page 564 for a list of the minimum and maximum symbol rate values.

“:BURSt:SHAPe:FDELay” on page 552 performs the same function; in compliance with the SCPI standard, both commands are listed.

For concept information on burst shaping, refer to the *E4428C/38C ESG Signal Generators User’s Guide*.

:BURSt:SHAPe:FALL:TIME

Supported E4438C with Option 001/601 or 002/602

[:SOURce] :RADio:CUSTom: BURSt : SHAPe : FALL : TIME <val>

[:SOURce] :RADio:CUSTom: BURSt : SHAPe : FALL : TIME?

This command sets the burst shape fall time.

The variable <val> is expressed in bits.

***RST** +1.00000000E+001

Range 0.1250–255.8750

Key Entry **Fall Time**

Remarks To change the modulation type, refer to “:MODulation[:TYPE]” on page 563. Refer to “:SRATE” on page 564 for a list of the minimum and maximum symbol rate values.

“:BURSt:SHAPe:FTIME” on page 552 performs the same function; in compliance with the SCPI standard, both commands are listed.

For concept information on burst shaping, refer to the *E4428C/38C ESG Signal Generators User's Guide*.

:BURSt:SHAPe:FDElay

Supported E4438C with Option 001/601or 002/602

[:SOURCE] :RADio:CUSTom:BURSt:SHAPe:FDElay <val>

[:SOURCE] :RADio:CUSTom:BURSt:SHAPe:FDElay?

This command sets the burst shape fall delay.

The variable <val> is expressed in bits.

***RST** +0.00000000E+000

Range -22.3750 to 99

Key Entry **Fall Delay**

Remarks To change the modulation type, refer to “:MODulation[:TYPE]” on page 563. Refer to “:SRATe” on page 564 for a list of the minimum and maximum symbol rate values.

“:BURSt:SHAPe:FALL:DElay” on page 551 performs the same function; in compliance with the SCPI standard, both commands are listed.

For concept information on burst shaping, refer to the *E4428C/38C ESG Signal Generators User's Guide*.

:BURSt:SHAPe:FTIME

Supported E4438C with Option 001/601or 002/602

[:SOURCE] :RADio:CUSTom:BURSt:SHAPe:FTIME <val>

[:SOURCE] :RADio:CUSTom:BURSt:SHAPe:FTIME?

This command sets the burst shape fall time.

The variable <val> is expressed in bits.

***RST** +0.00000000E+000

Range 0.1250–255.8750

Key Entry **Fall Time**

Remarks To change the modulation type, refer to “:MODulation[:TYPE]” on page 563. Refer to “:SRATe” on page 564 for a list of the minimum and maximum symbol rate values.

“:BURSt:SHAPe:FALL:TIME” on page 551 performs the same function; in compliance with the SCPI standard, both commands are listed.

For concept information on burst shaping, refer to the *E4428C/38C ESG Signal Generators User’s Guide*.

:BURSt:SHAPe:RDELay

Supported E4438C with Option 001/601 or 002/602

[:SOURce] :RADio :CUSTom :BURSt :SHAPe :RDELay <val>

[:SOURce] :RADio :CUSTom :BURSt :SHAPe :RDELay?

This command sets the burst shape rise delay.

The variable <val> is expressed in bits.

***RST** +0.00000000E+000

Range –17.3750 to 99

Key Entry **Rise Delay**

Remarks To change the modulation type, refer to “:MODulation[:TYPE]” on page 563. Refer to “:SRATe” on page 564 for a list of the minimum and maximum symbol rate values.

“:BURSt:SHAPe:RISE:DELay” on page 554 performs the same function; in compliance with the SCPI standard, both commands are listed.

For concept information on burst shaping, refer to the *E4428C/38C ESG Signal Generators User’s Guide*.

:BURSt:SHAPe:RISE:DELay

Supported E4438C with Option 001/601or 002/602

[:SOURce] :RADio:CUSTom: BURSt :SHAPe:RISE:DELay <val>

[:SOURce] :RADio:CUSTom: BURSt :SHAPe:RISE:DELay?

This command sets the burst shape rise delay.

The variable <val> is expressed in bits.

***RST** +0.00000000E+000

Range -17.3750 to 99

Key Entry **Rise Delay**

Remarks To change the modulation type, refer to “:MODulation[:TYPE]” on page 563. Refer to “:SRATE” on page 564 for a list of the minimum and maximum symbol rate values.

“:BURSt:SHAPe:RDELay” on page 553 performs the same function; in compliance with the SCPI standard, both commands are listed.

For concept information on burst shaping, refer to the *E4428C/38C ESG Signal Generators User’s Guide*.

:BURSt:SHAPe:RISE:TIME

Supported E4438C with Option 001/601or 002/602

[:SOURce] :RADio:CUSTom: BURSt :SHAPe:RISE:TIME <val>

[:SOURce] :RADio:CUSTom: BURSt :SHAPe:RISE:TIME?

This command sets the burst shape rise time.

The variable <val> is expressed in bits.

***RST** +1.00000000E+001

Range 0.1250–121.5000

Key Entry **Rise Time**

Remarks To change the modulation type, refer to “:MODulation[:TYPE]” on page 563. Refer to “:SRATE” on page 564 for a list of the minimum and maximum symbol rate values.

“:BURSt:SHAPe:RTIME” on page 555 performs the same function; in compliance with the SCPI standard, both commands are listed.

For concept information on burst shaping, refer to the *E4428C/38C ESG Signal Generators User's Guide*.

:BURSt:SHAPe:RTIME

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURce ] :RADio:CUSTom: BURSt: SHAPe: RTIME <val>
```

```
[ :SOURce ] :RADio:CUSTom: BURSt: SHAPe: RTIME?
```

This command sets the burst shape rise time.

The variable <val> is expressed in bits.

***RST** +1.00000000E+001

Range 0.1250–121.5000

Key Entry **Rise Time**

Remarks To change the modulation type, refer to “:MODulation[:TYPE]” on page 563. Refer to “:SRATE” on page 564 for a list of the minimum and maximum symbol rate values.

“:BURSt:SHAPe:RISE:TIME” on page 554 performs the same function; in compliance with the SCPI standard, both commands are listed.

For concept information on burst shaping, refer to the *E4428C/38C ESG Signal Generators User's Guide*.

:BURSt:SHAPe[:TYPE]

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURce ] :RADio:CUSTom: BURSt: SHAPe [ :TYPE ] SINE | "<file name>"
```

```
[ :SOURce ] :RADio:CUSTom: BURSt: SHAPe [ :TYPE ] ?
```

This command specifies the burst shape ("<file name>").

SINE This choice selects a state that is defined by the burst rise and fall *RST values, as the default burst shape type.

"<file name>" This choice selects a user designated file from signal generator memory (non-volatile).

***RST** SINE

Key Entry **Sine** **User File**

:CHANnel

Supported E4438C with Option 001/601or 002/602

[:SOURCE] :RADio:CUSTom:CHANnel EVM|ACP

[:SOURCE] :RADio:CUSTom:CHANnel?

This command optimizes the Nyquist and root Nyquist filters to minimize error vector magnitude (EVM) or to minimize adjacent channel power (ACP).

EVM This choice provides the most ideal passband.

ACP This choice improves stopband rejection.

***RST** ACP

Key Entry **Optimize FIR For EVM ACP**

Remarks To change the current filter type, refer to “:FILTer” on page 560.

:DATA

Supported E4438C with Option 001/601or 002/602

[:SOURCE] :RADio:CUSTom:DATA PN9|PN11|PN15|PN20|PN23|FIX4| "<file name>" |
EXT|P4|P8|P16|P32|P64|PRAM

[:SOURCE] :RADio:CUSTom:DATA?

This command sets the data pattern for unframed transmission.

***RST** PN23

Key Entry	PN9	PN11	PN15	PN20	PN23	FIX4	User File	Ext
	4 1's & 4 0's	8 1's & 8 0's	16 1's & 16 0's	32 1's & 32 0's				
	64 1's & 64 0's	PRAM File						

Remarks Refer to “File Name Variables” on page 13 for information on the file name syntax.

:DATA:FIX4

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURce] :RADio:CUSTom:DATA:FIX4 <val>
```

```
[ :SOURce] :RADio:CUSTom:DATA:FIX4?
```

This command sets the binary, 4-bit repeating sequence data pattern for unframed transmission according to the modulation type, symbol rate, filter, and burst shape selected for the custom modulation format.

***RST** #B0000

Range #B0000–#B1111 or 0–15

Key Entry **FIX4**

Remarks FIX4 must be already be defined as the data type.

:DATA:PRAM

Supported E4438C with Option 001/601 or 002/602 001/601 or 002/602

```
[ :SOURce] :RADio:CUSTom:DATA:PRAM "<file_name>"
```

```
[ :SOURce] :RADio:CUSTom:DATA:PRAM?
```

This command selects a pattern RAM (PRAM) file as the pattern data type for a custom communications format.

"<file_name>" This variable designates the PRAM file in WFM1. Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

Key Entry **PRAM File**

Remarks Selecting this data source forces the burst source to INTERNAL to allow framing control.

The PRAM file must reside in the signal generator’s volatile memory (WFM1) in order to be accessed by this command. For more information on PRAM files, refer to [“:DATA:PRAM:FILE:BLOCK” on page 111](#).

:DENCode

Supported E4438C with Option 001/601or 002/602

[:SOURCE] :RADio:CUSTom:DENCode ON | OFF | 1 | 0

[:SOURCE] :RADio:CUSTom:DENCode?

This command enables or disables the differential data encoding function.

***RST** 0

Key Entry **Diff Data Encode Off On**

Remarks Executing this command encodes the data bits prior to modulation; each modulated bit is 1 if the data bit is different from the previous one, or 0 if the data bit is the same as the previous one.

:EDATa:DElAy

Supported E4438C with Option 001/601or 002/602

[:SOURCE] :RADio:CUSTom:EDATa:DElAy?

This query returns the amount of delay (in symbols) from the external data input to the beginning of the symbol on the I OUT and Q OUT rear panel connectors and the front panel RF OUTPUT connector.

Remarks When the format is turned off, the delay value is unchanged; the query will return the same delay value if the format is on or off.

:EDCLock

Supported E4438C with Option 001/601or 002/602

[:SOURCE] :RADio:CUSTom:EDCLock SYMBol | NORMal

[:SOURCE] :RADio:CUSTom:EDCLock?

This command sets the external data clock use.

SYMBol This choice specifies that a continuous symbol clock signal must be provided to the SYMBOL SYNC input connector.

NORMal This choice specifies that the DATA CLOCK input connector requires a bit clock. The SYMBOL SYNC input connector requires a (one-shot or continuous) symbol sync signal.

***RST** NORM

Key Entry **Ext Data Clock Normal Symbol**

Remarks Both choices have no effect in internal clock mode. Refer to “:BBCLock” on page 548 to select EXT as the data clock type.

:EREFerence

Supported E4438C with Option 001/601or 002/602

```
[ :SOURCE ] :RADio:CUSTom:EREFerence INTernal | EXTernal
[ :SOURCE ] :RADio:CUSTom:EREFerence?
```

This command selects either an internal or external bit-clock reference for the data generator.

***RST** INT

Key Entry **BBG Ref Ext Int**

Remarks If the EXTernal choice is selected, the external frequency value must be applied to the BASEBAND GEN REF IN rear panel connector.

Refer to “:EREFerence:VALue” on page 559 to enter the external reference frequency.

:EREFerence:VALue

Supported E4438C with Option 001/601or 002/602

```
[ :SOURCE ] :RADio:CUSTom:EREFerence:VALue <val>
[ :SOURCE ] :RADio:CUSTom:EREFerence:VALue?
```

This command conveys the expected reference frequency value of an externally applied reference to the signal generator.

The variable <val> is expressed in units of Hertz (Hz–MHz).

***RST** +1.30000000E+007

Range 2.5E5–1E8

Key Entry **Ext BBG Ref Freq**

Remarks The value specified by this command is effective only when you are using an external ARB reference applied to the BASEBAND GEN REF IN rear panel connector.

Refer to “:EREFerence” on page 559 to select EXTernal as the reference for the bit clock reference of the data generator.

:FILTer

Supported E4438C with Option 001/601or 002/602

```
[ :SOURCE ] :RADIO:CUSTOM:FILTer RNYQuist | NYQuist | GAUSSian | RECTangle | IS95 |
IS95_EQ | IS95_MOD | IS95_MOD_EQ | AC4Fm | UGGaussian | "<user FIR>"
[ :SOURCE ] :RADIO:CUSTOM:FILTer?
```

This command selects the pre-modulation filter type.

IS95 This choice selects a filter that meets the criteria of the IS-95 standard.

IS95_EQ This choice selects a filter which is a combination of the IS-95 filter (above) and the equalizer filter described in the IS-95 standard. This filter is only used for IS-95 baseband filtering.

IS95_MOD This choice selects a filter that meets the criteria of the IS-95 error function (for improved adjacent channel performance) with lower passband rejection than the filter specified in the IS-95 standard.

IS95_MOD_EQ This choice selects a filter which is a combination of the equalizer filter described in the IS-95 standard and a filter that meets the criteria of the IS-95 error function (for improved adjacent channel performance), with lower passband rejection.

AC4Fm This choice selects a predefined Association of Public Safety Communications Officials (APCO) specified compatible 4-level frequency modulation (C4FM) filter.

UGGaussian This choice selects a backwards compatible GSM Gaussian filter (Gaussian filter with a fixed BbT value of 0.300) for the ESG E44xxB Option UN3 or UN4.

"<user FIR>" This variable is any filter file that you have stored into memory.

***RST** RNYQ

Key Entry

Root Nyquist	Nyquist	Gaussian	Rectangle	IS-95	IS-95 w/EQ
IS-95 Mod	IS-95 Mod w/EQ	APCO 25 C4FM	UN3/4 GSM Gaussian		
User FIR					

Remarks Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:IQ:SCALe

Supported E4438C with Option 001/601or 002/602

[:SOURCE] :RADio:CUSTom:IQ:SCALe <val>

[:SOURCE] :RADio:CUSTom:IQ:SCALe?

This command sets the amplitude of the I/Q outputs for better adjacent channel power (ACP); lower scaling values equate to better ACP.

The variable <val> is expressed in units of percent.

***RST** +70

Range 1–200

Key Entry **I/Q Scaling**

Remarks This command has no effect with MSK or FSK modulation.

:MODulation:FSK[:DEVIation]

Supported E4438C with Option 001/601or 002/602

[:SOURCE] :RADio:CUSTom:MODulation:FSK[:DEVIation] <val>

[:SOURCE] :RADio:CUSTom:MODulation:FSK[:DEVIation]?

This command sets the symmetric FSK frequency deviation value.

The variable <val> is expressed in units of Hertz and the maximum range value equals the current symbol rate value multiplied by four, limited to 20 MHz.

***RST** +4.00000000E+002

Range 0–2E7

Key Entry **Freq Dev**

Remarks To change the modulation type, refer to “:MODulation[:TYPE]” on page 563.

Refer to “:SRATe” on page 564 for a list of the minimum and maximum symbol rate values.

To set an asymmetric FSK deviation value, refer to the *E4428C/38C ESG Signal Generators User’s Guide* for more information.

:MODulation:MSK[:PHASe]

Supported E4438C with Option 001/601or 002/602

```
[ :SOURCE ] :RADio:CUSTom:MODulation:MSK[:PHASe] <val>
[ :SOURCE ] :RADio:CUSTom:MODulation:MSK[:PHASe] ?
```

This command sets the MSK phase deviation value.

The variable <val> is expressed in units of degrees.

***RST** +9.00000000E+001

Range 0–100

Key Entry **Phase Dev**

:MODulation:UFSK

Supported E4438C with Option 001/601or 002/602

```
[ :SOURCE ] :RADio:CUSTom:MODulation:UFSK "<file name>"
[ :SOURCE ] :RADio:CUSTom:MODulation:UFSK ?
```

This command selects a user-defined FSK file from the signal generator memory.

Key Entry **User FSK**

Remarks The user-defined FSK file is held in signal generator memory until the command that selects user FSK as the modulation type is sent. Refer to [“:MODulation\[:TYPE\]” on page 563](#) to change the current modulation type.

Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:MODulation:UIQ

Supported E4438C with Option 001/601or 002/602

```
[ :SOURCE ] :RADio:CUSTom:MODulation:UIQ "<file name>"
[ :SOURCE ] :RADio:CUSTom:MODulation:UIQ ?
```

This command selects a user-defined I/Q file from the signal generator memory.

Key Entry **User I/Q**

Remarks The user-defined I/Q file is held in signal generator memory until the command that selects user I/Q as the modulation type is sent. Refer to [“:MODulation\[:TYPE\]” on page 563](#) to change the current modulation type.

Refer to “File Name Variables” on page 13 for information on the file name syntax.

:MODulation[:TYPE]

Supported E4438C with Option 001/601 or 002/602

```
[:SOURCE]:RADio:CUSTom:MODulation[:TYPE] BPSK|QPSK|IS95QPSK|GRAYQPSK|
OQPSK|IS95OQPSK|P4DQPSK|PSK8|PSK16|D8PSK|MSK|FSK2|FSK4|FSK8|FSK16|C4FM|
QAM4|QAM16|QAM32|QAM64|QAM128|QAM256|UIQ|UFSK
[:SOURCE]:RADio:CUSTom:MODulation[:TYPE] ?
```

This command sets the modulation type for the Custom personality.

***RST** P4DQPSK

Key Entry	BPSK	QPSK	IS-95 QPSK	Gray Coded QPSK	OQPSK			
	IS-95 OQPSK	$\pi/4$ DQPSK	8PSK	16PSK	D8PSK	MSK	2-Lvl FSK	
	4-Lvl FSK	8-Lvl FSK	16-Lvl FSK	C4FM	4QAM	16QAM	32QAM	
	64QAM	128QAM	256QAM	User I/Q	User FSK			

:POLarity[:ALL]

Supported E4438C with Option 001/601 or 002/602

```
[:SOURCE]:RADio:CUSTom:POLarity[:ALL] NORMal|INVerted
[:SOURCE]:RADio:CUSTom:POLarity[:ALL] ?
```

This command sets the rotation direction of the phase modulation vector.

NORMal This choice selects normal phase polarity.

INVerted This choice inverts the internal Q signal.

***RST** NORM

Key Entry **Phase Polarity Normal Invert**

:SRATe**Supported** E4438C with Option 001/601or 002/602

[:SOURCE]:RADIO:CUSTOM:SRATe <val>

[:SOURCE]:RADIO:CUSTOM:SRATe?

This command sets the transmission symbol rate.

The variable <val> is expressed in units of bits per second (bps–Mbps) and the maximum range value is dependent upon the source of data (internal or external), the modulation type, and filter.

***RST** +2.4300000E+004**Range**

<i>Modulation Type</i>	<i>Bits per Symbol</i>	<i>Internal Data</i>	<i>External Serial Data</i>
BPSK	1	1–50 Msps	1–50 Msps
FSK2			
MSK			
C4FM	2	1–50 Msps	1–25 Msps
FSK4			
OQPSK			
OQPSK195			
P4QPPSK			
QAM4			
QPSK			
QPSKIS95			
QPSKISAT			
D8PSK	3	1–50 Msps	1–16.67 Msps
EDGE			
FSK8			
PSK8			
FSK16	4	1–50 Msps	1–12.5 Msps
PSK16			
QAM16			
QAM32	5	1–50 Msps	1–10 Msps
QAM64	6	1–50 Msps	1–8.33 Msps
QAM256	8	1–50 Msps	1–6.25 Msps

Key Entry**Symbol Rate****Remarks**

When user-defined filters are selected using the command in section “:FILTER” on page 560, the upper bit rate will be restricted in line with the following symbol rate restriction:

- FIR filter length > 32 symbols: upper limit is 12.5 Msps

- FIR filter length > 16 symbols: upper limit is 25 Msps

When internal FIR filters are used, the limits of the above table always apply. For higher symbol rates, the FIR filter length will be truncated as follows:

- Above 12.5 Msps, the FIR length will be truncated to 32 symbols
- Above 25 Msps, the FIR length will be truncated to 16 symbols

This will impact the relative timing of the modulated data, as well as the actual filter response (see “:BRATe” on page 549).

A change in the symbol rate value will affect the bit rate value; refer to “:BRATe” on page 549 for a list of the minimum and maximum symbol rate values.

To change the modulation type, refer to “:MODulation[:TYPE]” on page 563.

:STANdard:SElect

Supported E4438C with Option 001/601 or 002/602

```
[:SOURCE]:RADio:CUSTom:STANdard:SElect NONE|AC4Fm|ACQPsk|BLUEtooth|CDPD
[:SOURCE]:RADio:CUSTom:STANdard:SElect?
```

This command selects a predefined setup for Custom (with the appropriate defaults) and/or clears the selection.

NONE	This choice clears the current predefined Custom format.
AC4Fm	This choice sets up an Association of Public Safety Communications Officials (APCO) compliant, compatible 4-level frequency modulation (C4FM) format.
ACQPsk	This choice sets up an Association of Public Safety Communications Officials (APCO) compliant, compatible quadrature phase shift keying (CQPSK) format.
BLUEtooth	This choice sets up a Bluetooth (2-level frequency shift keying) format.
CDPD	This choice sets up a minimum shift keying Cellular Digital Packet Data (CDPD) format.
*RST	NONE
Key Entry	None APCO 25w/C4FM APCO 25 w/CQPSK Bluetooth CDPD

:TRIGger:TYPE

Supported E4438C with Option 001/601or 002/602

```
[ :SOURCE ] :RADio:CUSTom:TRIGger:TYPE CONTInuous | SINGLE | GATE
[ :SOURCE ] :RADio:CUSTom:TRIGger:TYPE?
```

This command sets the trigger type.

CONTInuous The framed data sequence repeats continuously; the sequence restarts every time the previous playback is completed. To customize continuous triggering, refer to “[:TRIGger:TYPE:CONTInuous\[:TYPE\]](#)” on page 566.

SINGLE The framed data sequence plays once for every trigger received.

GATE An external trigger signal interrupts the playback while the gating signal is in the inactive state. Playback resumes when the external control signal returns to the active state. The active state can be set to high or low.

***RST** CONT

Key Entry **Continuous** **Single** **Gated**

:TRIGger:TYPE:CONTInuous[:TYPE]

Supported E4438C with Option 001/601or 002/602

```
[ :SOURCE ] :RADio:CUSTom:TRIGger:TYPE:CONTInuous [ :TYPE ] FREE | TRIGger | RESet
[ :SOURCE ] :RADio:CUSTom:TRIGger:TYPE:CONTInuous [ :TYPE ] ?
```

This commands selects the waveform’s response to a trigger signal while using the continuous trigger mode.

For more information on triggering and to select the continuous trigger mode, see “[:TRIGger:TYPE](#)” on page 566.

The following list describes the waveform’s response to each of the command choices:

FREE Turning the ARB format on immediately triggers the waveform. The waveform repeats until you turn the format off, select another trigger, or choose another waveform file.

TRIGger The waveform waits for a trigger before play begins. When the waveform receives the trigger, it plays continuously until you turn the format off, select another trigger, or choose another waveform file.

RESet The waveform waits for a trigger before play begins. When the waveform receives the trigger, it plays continuously. Subsequent triggers reset the waveform

to the beginning. For a waveform sequence, this means to the beginning of the first segment in the sequence.

*RST	FREE		
Key Entry	Free Run	Trigger & Run	Reset & Run

:TRIGger:TYPE:GATE:ACTive

Supported E4438C with Option 001/601or 002/602

```
[:SOURCE]:RADio:CUSTom:TRIGger:TYPE:GATE:ACTive LOW|HIGH
[:SOURCE]:RADio:CUSTom:TRIGger:TYPE:GATE:ACTive?
```

This command selects the active state (gate polarity) of the gate while using the gating trigger mode.

The LOW and HIGH selections correspond to the low and high states of an external trigger signal. For example, when you select HIGH, the active state occurs during the high of the trigger signal. When the active state occurs, the ESG stops the waveform playback at the last played sample point, then restarts the playback at the next sample point when the inactive state occurs. For more information on triggering and to select gating as the trigger mode, see “:TRIGger:TYPE” on page 566.

The following list describes the ESG’s gating behavior for the polarity selections:

LOW The waveform playback stops when the trigger signal goes low (active state) and restarts when the trigger signal goes high (inactive state).

HIGH The waveform playback stops when the trigger signal goes high (active state) and restarts when the trigger signal goes low (inactive state).

***RST** HIGH

Key Entry **Gate Active Low High**

:TRIGger[:SOURCE]

Supported E4438C with Option 001/601or 002/602

```
[:SOURCE]:RADio:CUSTom:TRIGger[:SOURCE] KEY|EXT|BUS
[:SOURCE]:RADio:CUSTom:TRIGger[:SOURCE]?
```

This command sets the trigger source.

For more information on triggering, see “:TRIGger:TYPE” on page 566. The following list describes the command choices:

KEY This choice enables manual triggering by pressing the front-panel **Trigger** hardkey.

EXT An externally applied signal triggers the waveform. This is the only choice that works with gating. The following conditions affect an external trigger:

Custom Subsystem—Option 001/601or 002/602 ([:SOURce]:RADio:CUSTom)

- The input connector selected for the trigger signal. You have a choice between the rear-panel PATTERN TRIG IN connector or the PATT TRIG IN 2 pin on the rear-panel AUXILIARY I/O connector. To make the connector selection, see “:TRIGger[:SOURce]:EXTErnal[:SOURce]” on page 570.

For more information on the connectors and on connecting the cables, see the *ESG User’s Guide*.

- The trigger signal polarity:
 - gating mode, see “:TRIGger:TYPE:GATE:ACTive” on page 567
 - continuous and single modes, see “:TRIGger[:SOURce]:EXTErnal:SLOPe” on page 569
- The time delay between when the ESG receives a trigger and when the waveform responds to the trigger. There are two parts to setting the delay:
 - setting the amount of delay, see “:TRIGger[:SOURce]:EXTErnal:DELay” on page 568
 - turning the delay on, see “:TRIGger[:SOURce]:EXTErnal:DELay:STATe” on page 569

BUS This choice enables triggering over the GPIB or LAN using the *TRG or GET commands or the AUXILIARY INTERFACE (RS-232) using the *TRG command.

***RST** KEY

Key Entry	Trigger Key	Ext	Bus
------------------	--------------------	------------	------------

:TRIGger[:SOURce]:EXTErnal:DELay

Supported E4438C with Option 001/601or 002/602

```
[ :SOURce ] :RADio:CUSTom:TRIGger [ :SOURce ] :EXTErnal:DELay <val>
[ :SOURce ] :RADio:CUSTom:TRIGger [ :SOURce ] :EXTErnal:DELay?
```

This command sets the number of bits to delay the ESG’s response to an external trigger.

The bit delay is a delay between when the ESG receives the trigger and when it responds to the trigger. The delay uses the clocks of the bit-clock to time the delay. After the ESG receives the trigger and the set number of delay bits (clocks) occurs, the ESG transmits the data pattern.

The delay occurs after you enable the state. See “:TRIGger[:SOURce]:EXTErnal:DELay:STATe” on page 569. You can set the number of bits either before or after enabling the state.

For more information on configuring an external trigger source and to select external as the trigger source, see “:TRIGger[:SOURCE]” on page 567.

***RST** +0
Range 0–1048575
Key Entry **Ext Delay Bits**

:TRIGger[:SOURCE]:EXTErnal:DELAy:STATe

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURCE ] :RADio:CUSTom:TRIGger [ :SOURCE ] :EXTErnal:DELAy:STATe ON|OFF|1|0
[ :SOURCE ] :RADio:CUSTom:TRIGger [ :SOURCE ] :EXTErnal:DELAy:STATe?
```

This command enables or disables the operating state of the external trigger delay function.

For setting the delay time, see “:TRIGger[:SOURCE]:EXTErnal:DELAy” on page 568, and for more information on configuring an external source, see “:TRIGger[:SOURCE]” on page 567.

***RST** 0
Key Entry **Ext Delay Off On**

:TRIGger[:SOURCE]:EXTErnal:SLOPE

Supported E4438C with Option 001/601 or 002/602

```
[ :SOURCE ] :RADio:CUSTom:TRIGger [ :SOURCE ] :EXTErnal:SLOPE POSitive|NEGative
[ :SOURCE ] :RADio:CUSTom:TRIGger [ :SOURCE ] :EXTErnal:SLOPE?
```

This command sets the polarity for an external trigger signal while using the continuous, single triggering mode. To set the polarity for gating, see “:TRIGger:TYPE:GATE:ACTive” on page 567.

The POSitive and NEGative selections correspond to the high (positive) and low (negative) states of the external trigger signal. For example, when you select POSitive, the waveform responds (plays) during the high state of the trigger signal. When the ESG receives multiple trigger occurrences when only one is required, the signal generator uses the first trigger and ignores the rest.

For more information on configuring an external trigger source and to select external as the trigger source, see “:TRIGger[:SOURCE]” on page 567.

***RST** NEG
Key Entry **Ext Polarity Neg Pos**

:TRIGger[:SOURCE]:EXTeRnal[:SOURCE]

Supported E4438C with Option 001/601or 002/602

```
[:SOURCE]:RADio:CUSTom:TRIGger[:SOURCE]:EXTeRnal[:SOURCE] EPT1|EPT2|
EPTRIGGER1|EPTRIGGER2
[:SOURCE]:RADio:CUSTom:TRIGger[:SOURCE]:EXTeRnal[:SOURCE] ?
```

This command selects which PATTERN TRIG IN connection the ESG uses to accept an externally applied trigger signal when external is the trigger source selection.

For more information on configuring an external trigger source and to select external as the trigger source, see “:TRIGger[:SOURCE]” on page 567. For more information on the rear-panel connectors, see the *E4428C/38C ESG Signal Generators User’s Guide*.

The following list describes the command choices:

EPT1 This choice is synonymous with EPTRIGGER1 and selects the PATTERN TRIG IN rear-panel connector.

EPT2 This choice is synonymous with EPTRIGGER2 and selects the PATT TRIG IN 2 pin on the rear-panel AUXILIARY I/O connector.

EPTRIGGER1 This choice is synonymous with EPT1 and selects the PATTERN TRIG IN rear-panel connector.

EPTRIGGER2 This choice is synonymous with EPT2 and selects the PATT TRIG IN 2 pin on the rear-panel AUXILIARY I/O connector.

***RST** EPT1

Key Entry **Patt Trig In 1** **Patt Trig In 2**

[:STATe]

Supported E4438C with Option 001/601or 002/602

```
[:SOURCE]:RADio:CUSTom[:STATe] ON|OFF|1|0
[:SOURCE]:RADio:CUSTom[:STATe] ?
```

This command enables or disables the Custom modulation.

***RST** 0

Key Entry Custom Off On

Remarks Although the Custom modulation is enabled with this command, the RF carrier is not modulated unless you also activate the front panel **Mod On/Off** hardkey.

DECT Subsystem—Option 402 ([:SOURce]:RADio:DECT)

:ALPha

Supported E4438C with Option 402

```
[:SOURce]:RADio:DECT:ALPha <val>
[:SOURce]:RADio:DECT:ALPha?
```

This command changes the Nyquist or root Nyquist filter's alpha value.

The filter alpha value can be set to the minimum level (0), the maximum level (1), or in between by using fractional numeric values (0.001–0.999).

***RST** +5.00000000E-001

Range 0.000–1.000

Key Entry **Filter Alpha**

Remarks To change the current filter type, refer to “:FILTer” on page 584.

:BBCLock

Supported E4438C with Option 402

```
[:SOURce]:RADio:DECT:BBCLock INT[1] |EXT[1]
[:SOURce]:RADio:DECT:BBCLock?
```

This command toggles the data (bit) clock input to the baseband generator board to either internal or external. This command is independent in each mode and works for both non-burst (continuous) and burst modes. This allows for a matrix of selections between burst/non-burst, internal/external data generation, internal/external data clock, and external bit/symbol data clock.

INT[1] This choice selects the signal generator internal data clock.

EXT[1] This choice selects an external data clock input.

***RST** INT

Key Entry **BBG Data Clock Ext Int**

Remarks A data clock or continuous symbol sync input must be supplied when external mode is used.

:BBT**Supported** E4438C with Option 402

[:SOURCE]:RADIO:DECT:BBT <val>

[:SOURCE]:RADIO:DECT:BBT?

This command changes the bandwidth-multiplied-by-bit-time (BbT) filter parameter.

The filter BbT value can be set to the maximum level (1) or in between the minimum level (0.100) and maximum level by using fractional numeric values (0.101–0.999).

***RST** +5.00000000E–001**Range** 0.100–1.000**Key Entry** **Filter BbT**

Remarks This command is effective only after choosing a Gaussian filter. It does not have an effect on other types of filters.

To change the current filter type, refer to “:FILTER” on page 584.

:BRATe**Supported** E4438C with Option 402

[:SOURCE]:RADIO:DECT:BRATe <val>

[:SOURCE]:RADIO:DECT:BRATe?

This command sets the bit rate.

The variable <val> is expressed in units of bits per second (bps–Mbps) and the maximum range value is dependent upon the source of data (internal or external), the modulation type, and filter.

***RST** +1.15200000E+006

Range	Modulation Type	Bits per Symbol	Internal Data	External Serial Data
	BPSK	1	1–50 Mbps	1–50 Mbps
	FSK2			
	MSK			
	C4FM	2	2–100 Mbps	2–50 Mbps
	FSK4			
	OQPSK			
	OQPSK195			
	P4QPPSK			
	QAM4			

Range

<i>Modulation Type</i>	<i>Bits per Symbol</i>	<i>Internal Data</i>	<i>External Serial Data</i>
QPSK	2	2–100 Mbps	2–50 Mbps
QPSKIS95			
QPSKISAT			
D8PSK	3	3–100 Mbps	3–50 Mbps
EDGE			
FSK8			
PSK8			
FSK16	4	4–100 Mbps	4–50 Mbps
PSK16			
QAM16			
QAM32	5	5–100 Mbps	5–50 Mbps
QAM64	6	6–100 Mbps	6–50 Mbps
QAM256	7	8–100 Mbps	8–50 Mbps

Key Entry

Symbol Rate

Remarks

When user-defined filters are selected using the command in section “:FILTer” on page 584, the upper bit rate will be restricted in line with the following symbol rate restriction:

- FIR filter length > 32 symbols: upper limit is 12.5 Msps
- FIR filter length > 16 symbols: upper limit is 25 Msps

When internal FIR filters are used, the limits of the above table always apply. For higher symbol rates, the FIR filter length will be truncated and will impact the relative timing of the modulated data, as well as the actual filter response (see “:SRATe” on page 616).

A change in the bit rate value will affect the symbol rate value; refer to “:SRATe” on page 616 for a list of the minimum and maximum symbol rate values.

To change the modulation type, refer to “:MODulation[:TYPE]” on page 587.

DECT Subsystem—Option 402 ([:SOURCE]:RADIO:DECT)**:BURSt:PN9**

Supported E4438C with Option 402

[:SOURCE] :RADIO:DECT:BURSt:PN9 NORMAl |QUICK

[:SOURCE] :RADIO:DECT:BURSt:PN9?

This command controls the software PN9 generation.

NORMAL This choice produces a maximum length PN9 sequence.

QUICK This choice produces a truncated PN9 sequence.

***RST** NORM

Key Entry **PN9 Mode Normal Quick**

Remarks Use Normal mode for bit-error-rate tests where a maximum length PN9 sequence is required.

:BURSt:SHAPE:FALL:DELay

Supported E4438C with Option 402

[:SOURCE] :RADIO:DECT:BURSt:SHAPE:FALL:DELay <val>

[:SOURCE] :RADIO:DECT:BURSt:SHAPE:FALL:DELay?

This command sets the burst shape fall delay.

The variable <val> is expressed in bits.

***RST** +0.00000000E+000

Range -10.5625 to 99

Key Entry **Fall Delay**

Remarks To change the modulation type, refer to “:MODulation[:TYPE]” on page 587. Refer to “:SRATE” on page 616 for a list of the minimum and maximum symbol rate values.

“:BURSt:SHAPE:FDELay” on page 575 performs the same function; in compliance with the SCPI standard, both commands are listed.

For concept information on burst shaping, refer to the *E4428C/38C ESG Signal Generators User’s Guide*.

:BURSt:SHAPe:FALL:TIME

Supported E4438C with Option 402

[:SOURCE] :RADio:DECT:BURSt:SHAPe:FALL:TIME <val>

[:SOURCE] :RADio:DECT:BURSt:SHAPe:FALL:TIME?

This command sets the burst shape fall time.

The variable <val> is expressed in bits.

***RST** +1.00000000E+001

Range 0.0625–127.9375

Key Entry **Fall Time**

Remarks To change the modulation type, refer to “:MODulation[:TYPE]” on page 587. Refer to “:SRATE” on page 616 for a list of the minimum and maximum symbol rate values.

“:BURSt:SHAPe:FTIME” on page 576 performs the same function; in compliance with the SCPI standard, both commands are listed.

For concept information on burst shaping, refer to the *E4428C/38C ESG Signal Generators User’s Guide*.

:BURSt:SHAPe:FDElay

Supported E4438C with Option 402

[:SOURCE] :RADio:DECT:BURSt:SHAPe:FDElay <val>

[:SOURCE] :RADio:DECT:BURSt:SHAPe:FDElay?

This command sets the burst shape fall delay.

The variable <val> is expressed in bits.

***RST** +0.00000000E+000

Range –10.5625 to 99

Key Entry **Fall Delay**

Remarks To change the modulation type, refer to “:MODulation[:TYPE]” on page 587. Refer to “:SRATE” on page 616 for a list of the minimum and maximum symbol rate values.

“:BURSt:SHAPe:FALL:DElay” on page 574 performs the same function; in compliance with the SCPI standard, both commands are listed.

DECT Subsystem—Option 402 (:SOURCE):RADIO:DECT)

For concept information on burst shaping, refer to the *E4428C/38C ESG Signal Generators User's Guide*.

:BURSt:SHAPe:FTIME

Supported E4438C with Option 402

[:SOURCE] :RADIO:DECT:BURSt:SHAPe:FTIME <val>

[:SOURCE] :RADIO:DECT:BURSt:SHAPe:FTIME?

This command sets the burst shape fall time.

The variable <val> is expressed in bits.

***RST** +1.00000000E+001

Range 0.0625–127.9375

Key Entry **Fall Time**

Remarks To change the modulation type, refer to [“:MODulation\[:TYPE\]” on page 587](#). Refer to [“:SRATE” on page 616](#) for a list of the minimum and maximum symbol rate values.

[“:BURSt:SHAPe:FALL:TIME” on page 575](#) performs the same function; in compliance with the SCPI standard, both commands are listed.

For concept information on burst shaping, refer to the *E4428C/38C ESG Signal Generators User's Guide*.

:BURSt:SHAPe:RDELaY

Supported E4438C with Option 402

[:SOURCE] :RADIO:DECT:BURSt:SHAPe:RDELaY <val>

[:SOURCE] :RADIO:DECT:BURSt:SHAPe:RDELaY?

This command sets the burst shape rise delay.

The variable <val> is expressed in bits.

***RST** +0.00000000E+000

Range –0.5625 to 99

Key Entry **Rise Delay**

Remarks To change the modulation type, refer to [“:MODulation\[:TYPE\]” on page 587](#). Refer to [“:SRATE” on page 616](#) for a list of the minimum and maximum symbol rate values.

“:BURSt:SHAPe:RISE:DELay” on page 577 performs the same function; in compliance with the SCPI standard, both commands are listed.

For concept information on burst shaping, refer to the *E4428C/38C ESG Signal Generators User’s Guide*.

:BURSt:SHAPe:RISE:DELay

Supported E4438C with Option 402

```
[:SOURce]:RADio:DECT:BURSt:SHAPe:RISE:DELay <val>  
[:SOURce]:RADio:DECT:BURSt:SHAPe:RISE:DELay?
```

This command sets the burst shape rise delay.

The variable <val> is expressed in bits.

***RST** +0.00000000E+000

Range –0.5625 to 99

Key Entry **Rise Delay**

Remarks To change the modulation type, refer to “:MODulation[:TYPE]” on page 587. Refer to “:SRATe” on page 616 for a list of the minimum and maximum symbol rate values.

“:BURSt:SHAPe:RDELay” on page 576 performs the same function; in compliance with the SCPI standard, both commands are listed.

For concept information on burst shaping, refer to the *E4428C/38C ESG Signal Generators User’s Guide*.

:BURSt:SHAPe:RISE:TIME**Supported** E4438C with Option 402

[:SOURCE]:RADIO:DECT:BURSt:SHAPe:RISE:TIME <val>

[:SOURCE]:RADIO:DECT:BURSt:SHAPe:RISE:TIME?

This command sets the burst shape rise time.

The variable <val> is expressed in bits.

RST** +1.00000000E+001**Range** 0.0625–10.6250**Key Entry** **Rise Time*Remarks** To change the modulation type, refer to “:MODulation[:TYPE]” on page 587. Refer to “:SRATe” on page 616 for a list of the minimum and maximum symbol rate values.

“:BURSt:SHAPe:RTIME” on page 578 performs the same function; in compliance with the SCPI standard, both commands are listed.

For concept information on burst shaping, refer to the *E4428C/38C ESG Signal Generators User’s Guide*.**:BURSt:SHAPe:RTIME****Supported** E4438C with Option 402

[:SOURCE]:RADIO:DECT:BURSt:SHAPe:RTIME <val>

[:SOURCE]:RADIO:DECT:BURSt:SHAPe:RTIME?

This command sets the burst shape rise time.

The variable <val> is expressed in bits.

RST** +1.00000000E+001**Range** 0.0625–10.6250**Key Entry** **Rise Time*Remarks** To change the modulation type, refer to “:MODulation[:TYPE]” on page 587. Refer to “:SRATe” on page 616 for a list of the minimum and maximum symbol rate values.

“:BURSt:SHAPe:RISE:TIME” on page 578 performs the same function; in compliance with the SCPI standard, both commands are listed.

For concept information on burst shaping, refer to the *E4428C/38C ESG Signal Generators User's Guide*.

:BURSt:SHAPE[:TYPE]

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:DECT:BURSt:SHAPE[:TYPE] SINE | "<file name>"
[ :SOURce ] :RADio:DECT:BURSt:SHAPE[:TYPE] ?
```

This command specifies the burst shape as either SINE or a user-defined file ("*<file name>*").

SINE This choice selects a state that is defined by the burst rise and fall *RST values, as the default burst shape type.

"<file name>" This choice selects a user-defined file from signal generator memory (non-volatile).

***RST** SINE

Key Entry **Sine User File**

:BURSt[:STATe]

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:DECT:BURSt[:STATe] ON | OFF | 1 | 0
[ :SOURce ] :RADio:DECT:BURSt[:STATe] ?
```

This command enables or disables the burst function.

ON (1) This choice enables the transmission of framed data. If all timeslots which are switched on are up traffic channels or custom, you will be bursting the timeslots that are on; there will be no RF carrier during the off timeslots.

If you have switched on any timeslot that you have configured as a down traffic channel, the RF carrier is not switched off between any of the timeslots. The off timeslots are transmitted as a continuous series of ones for the time period of the off timeslots.

OFF (0) This choice enables the transmission of unframed data.

***RST** 0

Key Entry **Data Format Pattern Framed**

DECT Subsystem—Option 402 ([:SOURCE]:RADIO:DECT)**:CHANnel**

Supported E4438C with Option 402

[:SOURCE] :RADIO:DECT:CHANnel EVM|ACP

[:SOURCE] :RADIO:DECT:CHANnel?

This command optimizes the Nyquist and root Nyquist filters to minimize error vector magnitude (EVM) or to minimize adjacent channel power (ACP).

EVM This choice provides the most ideal passband.

ACP This choice improves stopband rejection.

***RST** EVM

Key Entry **Optimize FIR For EVM ACP**

Remarks To change the current filter type, refer to “:FILTer” on page 584.

:DATA

Supported E4438C with Option 402

[:SOURCE] :RADIO:DECT:DATA PN9 | PN11 | PN15 | PN20 | PN23 | FIX4 | "<file name>" | EXT | P4 | P8 | P16 | P32 | P64|PRAM

[:SOURCE] :RADIO:DECT:DATA?

This command sets the data pattern type (pseudo-random number sequence, 4-bit pattern, sequence of 1's and 0's, data from an external source, or a user file) for unframed data transmission.

***RST** PN23

Key Entry	PN9	PN11	PN15	PN20	PN23	FIX4	User File	Ext
	4 1's & 4 0's	8 1's & 8 0's	16 1's & 16 0's	16 1's & 16 0's	32 1's & 32 0's			
	64 1's & 64 0's	PRAM File						

Remarks Refer to “File Name Variables” on page 13 for information on the file name syntax.

:DATA:FIX4

Supported E4438C with Option 402

[:SOURCE]:RADio:DECT:DATA:FIX4 <val>

[:SOURCE]:RADio:DECT:DATA:FIX4?

This command sets the binary, 4-bit repeating sequence data pattern for unframed transmission according to the modulation type, symbol rate, filter, and burst shape selected for the DECT modulation format.

***RST** #B0000

Range #B0000–#B1111 or 0–15

Key Entry **FIX4**

Remarks FIX4 must already be defined as the data type. To change the data type, refer to [“:DATA” on page 580](#).

:DATA:PRAM

Supported E4438C with Option 402

[:SOURCE]:RADio:DECT:DATA:PRAM "<file_name>"

[:SOURCE]:RADio:DECT:DATA:PRAM?

This command selects a pattern RAM (PRAM) file as the pattern data type for the DECT (Digital Enhanced Cordless Telecommunications) format.

"<file_name>" This variable designates the PRAM file in WFM1. No directory path name is needed. Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

Key Entry **PRAM File**

Remarks Selecting this data source forces the burst source to INTernal to allow framing control.

The PRAM file must reside in the signal generator’s volatile memory (WFM1) in order to be accessed by this command. For more information on PRAM files, refer to [“:DATA:PRAM:FILE:BLOCK” on page 111](#).

DECT Subsystem—Option 402 ([:SOURCE]:RADIO:DECT)**:DEFAULT**

Supported E4438C with Option 402

[:SOURCE]:RADIO:DECT:DEFAULT

This command returns all of the DECT modulation format parameters to factory settings. It does not affect any other signal generator parameters.

Key Entry **Restore Dect Factory Default**

:EDATA:DELAY

Supported E4438C with Option 402

[:SOURCE]:RADIO:DECT:EDATA:DELAY?

This query returns the amount of delay (in symbols) from the external data input to the beginning of the symbol on the I OUT and Q OUT rear panel connectors and the front panel RF OUTPUT connector.

Remarks When the format is turned off, the delay value is unchanged; the query will return the same delay value if the format is on or off.

:EDCLOCK

Supported E4438C with Option 402

[:SOURCE]:RADIO:DECT:EDCLOCK SYMBOL|NORMAL

[:SOURCE]:RADIO:DECT:EDCLOCK?

This command sets the external data clock use.

SYMBOL This choice specifies that a continuous symbol clock signal must be provided to the SYMBOL SYNC input connector.

NORMAL This choice specifies that the DATA CLOCK input connector requires a bit clock. The SYMBOL SYNC input connector requires a (one-shot or continuous) symbol sync signal.

***RST** NORM

Key Entry **Ext Data Clock Normal Symbol**

Remarks Both choices have no effect in internal clock mode. Refer to [“:BBLOCK” on page 571](#) to select EXT as the data clock type.

:EREFerence

Supported E4438C with Option 402

[:SOURce] :RADio:DECT:EREFerence INT|EXT

[:SOURce] :RADio:DECT:EREFerence?

This command selects either an internal or external bit-clock reference for the data generator.

***RST** INT

Key Entry **BBG Ref Ext Int**

Remarks If the EXT choice is selected, the external source's frequency value must be applied to the BASEBAND GEN REF IN rear panel connector. The external reference and external data clock are not applicable at the same time. If both are selected, then the external reference takes precedence.

Refer to, “:EREFerence:VALue” on page 583 to enter the external reference frequency setting.

:EREFerence:VALue

Supported E4438C with Option 402

[:SOURce] :RADio:DECT:EREFerence:VALue <val>

[:SOURce] :RADio:DECT:EREFerence:VALue?

This command sets the expected bit-clock reference frequency value for an externally applied reference signal.

The variable <val> is expressed in units of hertz (Hz–MHz).

***RST** +1.30000000E+007

Range 2.5E5–1E8

Key Entry **Ext BBG Ref Freq**

Remarks The value specified by this command is effective only when you are using an external reference applied to the BASEBAND GEN REF IN rear panel connector.

Refer to “:EREFerence” on page 583 to select EXT (external source) as the reference for the bit-clock.

DECT Subsystem—Option 402 ([:SOURCE]:RADIO:DECT)**:FILTer**

Supported E4438C with Option 402

```
[:SOURCE]:RADIO:DECT:FILTer RNYQuist|NYQuist|GAUSSian|RECTangle|IS95|
IS95_EQ|IS95_MOD|IS95_MOD_EQ|AC4Fm|UGGaussian|"<user FIR>"
[:SOURCE]:RADIO:DECT:FILTer?
```

This command specifies the pre-modulation filter type.

IS95 This choice selects a filter that meets the criteria of the IS-95 standard.

IS95_EQ This choice selects a filter which is a combination of the IS-95 filter (above) and the equalizer filter described in the IS-95 standard. This filter is only used for IS-95 baseband filtering.

IS95_MOD This choice selects a filter that meets the criteria of the IS-95 error function (for improved adjacent channel performance) with lower passband rejection than the filter specified in the IS-95 standard.

IS95_MOD_EQ This choice selects a filter which is a combination of the equalizer filter described in the IS-95 standard and a filter that meets the criteria of the IS-95 error function (for improved adjacent channel performance), with lower passband rejection.

AC4Fm This choice selects a predefined Association of Public Safety Communications Officials (APCO) specified compatible 4-level frequency modulation (C4FM) filter.

UGGaussian This choice selects a backwards compatible GSM Gaussian filter (Gaussian filter with a fixed BbT value of 0.300) for the ESG E44xxB Option UN3 or UN4.

"<user FIR>" This variable is any filter file that you have stored into memory.

***RST** GAUS

Key Entry	Root Nyquist	Nyquist	Gaussian	Rectangle	IS-95	IS-95 w/EQ
	IS-95 Mod	IS-95 Mod w/EQ	UN3/4 GSM Gaussian	APCO 25 C4FM		
	User FIR					

Remarks Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:IQ:SCALe

Supported E4438C with Option 402

[:SOURce] :RADio:DECT:IQ:SCALe <val>

[:SOURce] :RADio:DECT:IQ:SCALe?

This command sets the amplitude of the I/Q outputs for better adjacent channel power (ACP); lower scaling values equate to better ACP.

The variable <val> is expressed in units of percent.

***RST** +100

Range 1–200

Key Entry **I/Q Scaling**

Remarks This command has no effect with MSK or FSK modulation.

:MODulation:FSK[:DEViation]

Supported E4438C with Option 402

[:SOURce] :RADio:DECT:MODulation:FSK[:DEViation] <val>

[:SOURce] :RADio:DECT:MODulation:FSK[:DEViation]?

This command sets the symmetric FSK frequency deviation value.

The variable <val> is expressed in units of Hertz and the maximum range value equals the current symbol rate value multiplied by four, limited to 20 MHz.

***RST** +2.88000000E+005

Range 0–2E7

Key Entry **Freq Dev**

Remarks To change the modulation type, refer to “:MODulation[:TYPE]” on page 587.

Refer to “:SRATe” on page 616 for a list of the minimum and maximum symbol rate values.

To set an asymmetric FSK deviation value, refer to the *E4428C/38C ESG Signal Generators User’s Guide* for more information.

:MODulation:MSK[:PHASe]

Supported E4438C with Option 402

```
[:SOURCE]:RADIO:DECT:MODulation:MSK[:PHASe] <val>
```

```
[:SOURCE]:RADIO:DECT:MODulation:MSK[:PHASe]?
```

This command sets the MSK phase deviation value.

The variable <val> is expressed in units of degrees.

***RST** +9.00000000E+001

Range 0–100

Key Entry **Phase Dev**

:MODulation:UFSK

Supported E4438C with Option 402

```
[:SOURCE]:RADIO:DECT:MODulation:UFSK "<file name>"
```

```
[:SOURCE]:RADIO:DECT:MODulation:UFSK?
```

This command selects a user-defined FSK file from the signal generator memory.

Key Entry **User FSK**

Remarks The user-defined FSK file is held in signal generator memory until the command that selects user FSK as the modulation type is sent. Refer to [“:MODulation\[:TYPE\]” on page 587](#) to change the current modulation type.

Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:MODulation:UIQ

Supported E4438C with Option 402

```
[:SOURCE]:RADIO:DECT:MODulation:UIQ "<file name>"
```

```
[:SOURCE]:RADIO:DECT:MODulation:UIQ?
```

This command selects a user-defined I/Q file from the signal generator memory.

Key Entry **User I/Q**

Remarks The user-defined I/Q file is held in signal generator memory until the command that selects user I/Q as the modulation type is sent. Refer to [“:MODulation\[:TYPE\]” on page 587](#) to change the current modulation type.

Refer to “File Name Variables” on page 13 for information on the file name syntax.

:MODulation[:TYPE]

Supported E4438C with Option 402

```
[:SOURce]:RADio:DECT:MODulation[:TYPE] BPSK|QPSK|IS95QPSK|GRAYQPSK|
OQPSK|IS95OQPSK|P4DQPSK|PSK8|PSK16|D8PSK|MSK|FSK2|FSK4|FSK8|FSK16|C4FM|
QAM4|QAM16|QAM32|QAM64|QAM128|QAM256|UIQ|UFSK
[:SOURce]:RADio:DECT:MODulation[:TYPE]?
```

This command sets the modulation type for the DECT personality.

***RST** FSK2

Key Entry	BPSK	QPSK	IS-95 QPSK	Gray Coded QPSK	OQPSK			
	IS-95 OQPSK	$\pi/4$ DQPSK	8PSK	16PSK	D8PSK	MSK	2-Lvl FSK	
	4-Lvl FSK	8-Lvl FSK	16-Lvl FSK	C4FM	4QAM	16QAM	32QAM	
	64QAM	128QAM	256QAM	User I/Q	User FSK			

:POLarity[:ALL]

Supported E4438C with Option 402

```
[:SOURce]:RADio:DECT:POLarity[:ALL] NORMal|INVerted
[:SOURce]:RADio:DECT:POLarity[:ALL]?
```

This command sets the rotation direction of the phase modulation vector.

NORMal This choice selects normal phase polarity.

INVerted This choice inverts the internal Q signal.

***RST** NORM

Key Entry **Phase Polarity Normal Invert**

DECT Subsystem—Option 402 (:SOURCE):RADIO:DECT)**:PPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11[:TYPE]****Supported** E4438C with Option 402

```
[ :SOURCE ] :RADIO [ 1 ] | 2 | 3 | 4 :DECT :PPart :SLOT0 | [ 1 ] | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 [
:TYPE ] CUSTom | TRAFFic | LcAPacity | ZTRAffic | ZLcAPacity
[ :SOURCE ] :RADIO [ 1 ] | 2 | 3 | 4 :DECT :PPart :SLOT0 | [ 1 ] | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 [
:TYPE ] ?
```

This command specifies the timeslot type for the selected timeslot in the portable part link.

***RST** Timeslot 0: TRAF Timeslots 1–4: CUST

Key Entry **Custom** **Traffic Bearer** **Low Capacity** **Traffic Bearer with Z field**
Low Capacity with Z field

:PPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:CUSTom**Supported** E4438C with Option 402

```
[ :SOURCE ] :RADIO :DECT :PPart :SLOT0 | [ 1 ] | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 :CUSTom PN9 |
PN11 | PN15 | PN20 | PN23 | FIX4 | "<file name>" | EXT | FDEV1_HS | FDEV1_FS | FDEV2_FS |
FACCuracy | DM1 | DM0 | P4 | P8 | P16 | P32 | P64
[ :SOURCE ] :RADIO :DECT :PPart :SLOT0 | [ 1 ] | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 :CUSTom?
```

This command customizes the selected custom timeslot for a portable part link.

***RST** PN9

Key Entry **PN9** **PN11** **PN15** **PN20** **PN23** **FIX4** **User File** **Ext** **FDEV1_HS**
FDEV1_FS **FDEV2_FS** **FACC** **DM1** **DM0** **4 1's & 4 0's**
8 1's & 8 0's **16 1's & 16 0's** **32 1's & 32 0's** **64 1's & 64 0's**

Remarks Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:PPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:CUSTom:FIX4

Supported E4438C with Option 402

[:SOURCE] :RADio:DECT:PPart:SLOT0 | [1] | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 :CUSTom:
FIX4 <val>

[:SOURCE] :RADio:DECT:PPart:SLOT0 | [1] | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 :CUSTom:FIX4?

This command sets the binary, 4-bit repeating sequence data pattern which is used in the portable part custom data field of the selected timeslot.

***RST** #B0000

Range #B0000–#B1111 or 0–15

Key Entry **FIX4**

Remarks FIX4 must already be defined as the data type. To change the data type, refer to “:PPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:CUSTom” on page 588.

:PPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:LCAPacity:A

Supported E4438C with Option 402

[:SOURCE] :RADio:DECT:PPart:SLOT0 | [1] | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 :LCAPacity:
A <val>

[:SOURCE] :RADio:DECT:PPart:SLOT0 | [1] | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 :LCAPacity:A?

This command customizes the A field for the selected low-capacity timeslot in the portable part link.

***RST** #H0000FFFF0000FFFF

Range #H0–#HFFFFFFFFFFFFFFFF

Key Entry **A field**

Remarks The A field carries signaling data (48 bits) and error correction (16 bits).

DECT Subsystem—Option 402 ([:SOURCE]:RADIO:DECT)**:PPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:LCAPacity:P****Supported** E4438C with Option 402

[:SOURCE]:RADIO:DECT:PPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:LCAPacity:

P <val>

[:SOURCE]:RADIO:DECT:PPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:LCAPacity:P?

This command customizes the preamble (P) field of the selected low-capacity timeslot in the portable part link.

RST** #H5555**Range** #H0–#HFFFF**Key Entry** P**:PPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:LCAPacity:S*Supported** E4438C with Option 402

[:SOURCE]:RADIO:DECT:PPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:LCAPacity:

S <val>

[:SOURCE]:RADIO:DECT:PPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:LCAPacity:S?

This command customizes the synchronization pattern of the selected low-capacity timeslot in the portable part link.

***RST** #H1675**Range** #H0–#HFFFF**Key Entry** S

:PPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:LCAPacity[:B]

Supported E4438C with Option 402

```
[:SOURCE]:RADio:DECT:PPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:
LCAPacity[:B] PN9|PN11|PN15|PN20|PN23|FIX4|"<file name>"|EXT|FDEV1_HS|
FDEV1_FS|FDEV2_FS|FACCuracy|DM1|DM0|P4|P8|P16|P32|P64
[:SOURCE]:RADio:DECT:PPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:
LCAPacity[:B]?
```

This command sets the data pattern type (pseudo-random number sequence, 4-bit pattern, sequence of 1's and 0's, data from an external source, or a user file) for the B field of the selected portable part low-capacity timeslot.

***RST** PN9

Key Entry	PN9	PN11	PN15	PN20	PN23	FIX4	User File	Ext	FDEV1_HS
	FDEV1_FS	FDEV2_FS	FACC	DM1	DM0	4 1's & 4 0's			
	8 1's & 8 0's	16 1's & 16 0's	32 1's & 32 0's	64 1's & 64 0's					

Remarks Refer to “File Name Variables” on page 13 for information on the file name syntax.

:PPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:LCAPacity[:B]:FIX4

Supported E4438C with Option 402

```
[:SOURCE]:RADio:DECT:PPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:
LCAPacity[:B]:FIX4 <val>
[:SOURCE]:RADio:DECT:PPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:
LCAPacity[:B]:FIX4?
```

This command sets the binary, 4-bit repeating sequence data pattern that is used in the selected portable part low-capacity timeslot B field.

***RST** #B0000

Range #B0000–#B1111 or 0–15

Key Entry **FIX4**

Remarks FIX4 must already be defined as the data type. Refer to “[:PPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:LCAPacity[:B]]” on page 591 to change the data type.

:PPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:LCAPacity:POWer**Supported** E4438C with Option 402[:SOURCE]:RADio:DECT:PPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:LCAPacity:
POWer MAIN|DELTA[:SOURCE]:RADio:DECT:PPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:LCAPacity:
POWer?

This command defines the RF output power level for the selected timeslot.

MAIN This choice specifies RF output as the main power level.

DELTA This choice specifies RF output as the alternative power level.

RST** MAIN**Key Entry** Timeslot Ampl Main Delta**:PPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:STATe*Supported** E4438C with Option 402[:SOURCE]:RADio:DECT:PPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:STATe ON|OFF|
1|0

[:SOURCE]:RADio:DECT:PPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:STATe?

This command enables or disables the operating state of the selected portable part timeslot.

RST** Timeslot 0: 1 Timeslots 1–11: 0**Key Entry** Timeslot Off On**:PPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:TRAFfic:A*Supported** E4438C with Option 402[:SOURCE]:RADio:DECT:PPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:TRAFfic:
A <val>

[:SOURCE]:RADio:DECT:PPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:TRAFfic:A?

This command customizes the A field for the selected traffic bearer timeslot in the portable part link.
The A field carries signaling data (48 bits) and error correction
(16 bits).***RST** #H0000FFFF0000FFFF**Range** #H0–#HFFFFFFFFFFFFFFFF**Key Entry** A field

:PPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:TRAFfic:P

Supported E4438C with Option 402

[:SOURCE] :RADio:DECT:PPart:SLOT0 | [1] | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 :TRAFfic:

P <val>

[:SOURCE] :RADio:DECT:PPart:SLOT0 | [1] | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 :TRAFfic:P?

This command customizes the preamble (P) field of the selected traffic bearer timeslot in the portable part link.

***RST** #H5555

Range #H0–#HFFFF

Key Entry P

:PPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:TRAFfic:S

Supported E4438C with Option 402

[:SOURCE] :RADio:DECT:PPart:SLOT0 | [1] | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 :TRAFfic:

S <val>

[:SOURCE] :RADio:DECT:PPart:SLOT0 | [1] | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 :TRAFfic:

S?

This command sets the synchronization pattern for the selected traffic bearer timeslot in the portable part link.

***RST** #H1675

Range #H0–#HFFFF

Key Entry S

DECT Subsystem—Option 402 (:SOURce):RADio:DECT)**:PPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:TRAFfic[:B]****Supported** E4438C with Option 402

```
[ :SOURce ] :RADio:DECT:PPart:SLOT0 | [1] | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 :
TRAFfic[:B] PN9|PN11|PN15|PN20|PN23|FIX4 | "<file name>" |EXT|FDEV1_HS|
FDEV1_FS|FDEV2_FS|FACCuracy|DM1|DM0|P4|P8|P16|P32|P64
[:SOURce]:RADio:DECT:PPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:TRAFfic[:B]?
```

This command sets the B field data pattern for the selected traffic bearer timeslot in the portable part link.

***RST** PN9

Key Entry	PN9	PN11	PN15	PN20	PN23	FIX4	User File	Ext	FDEV1_HS
	FDEV1_FS	FDEV2_FS	FACC	DM1	DM0	4 1's & 4 0's			
	8 1's & 8 0's	16 1's & 16 0's	32 1's & 32 0's	64 1's & 64 0's					

Remarks Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:PPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:TRAFfic[:B]:FIX4**Supported** E4438C with Option 402

```
[ :SOURce ] :RADio:DECT:PPart:SLOT0 | [1] | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 :TRAFfic[:B] :
FIX4 <val>
[:SOURce]:RADio:DECT:PPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:TRAFfic[:B] :
FIX4?
```

This command sets the binary, 4-bit repeating sequence data pattern that is used in the portable part traffic bearer B field of the selected timeslot.

RST** #B0000**Range** #B0000–#B1111 or 0–15**Key Entry** **FIX4*Remarks** FIX4 must already be defined as the data type.

:PPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:ZLCapacity:A

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:DECT:PPart:SLOT0 | [1] | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 :ZLCapacity:  
A <val>
```

```
[ :SOURce ] :RADio:DECT:PPart:SLOT0 | [1] | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 :ZLCapacity:A?
```

This command customizes the A field for the selected low-capacity with Z field timeslot in the portable part link.

The A field carries signaling data (48 bits) and error correction (16 bits).

***RST** #H0000FFFF0000FFFF

Range #H0–#HFFFFFFFFFFFFFFFF

Key Entry A

:PPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:ZLCapacity:P

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:DECT:PPart:SLOT0 | [1] | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 :ZLCapacity:  
P <val>
```

```
[ :SOURce ] :RADio:DECT:PPart:SLOT0 | [1] | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 :ZLCapacity:P?
```

This command customizes the preamble (P) field of the selected low-capacity with Z field timeslot in the portable part link.

***RST** #H5555

Range #H0–#HFFFF

Key Entry P

DECT Subsystem—Option 402 (:SOURce):RADio:DECT)**:PPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:ZLCapacity:A****Supported** E4438C with Option 402[:SOURce]:RADio:DECT:PPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:ZLCapacity:
S <val>

[:SOURce]:RADio:DECT:PPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:ZLCapacity:S?

This command customizes the synchronization pattern of the selected low-capacity with Z field timeslot in the portable part link.

RST** #H1675**Range** #H0–#HFFFF**Key Entry** S**:PPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:ZLCapacity[:B]*Supported** E4438C with Option 402[:SOURce]:RADio:DECT:PPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:
ZLCapacity[:B] PN9|PN11|PN15|PN20|PN23|FIX4|"<file name>"|EXT|FDEV1_HS|
FDEV1_FS|FDEV2_FS|FACCuracy|DM1|DM0|P4|P8|P16|P32|P64
[:SOURce]:RADio:DECT:PPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:
ZLCapacity[:B]?

This command sets the data pattern for the B field of the selected portable part low-capacity with Z field timeslot.

***RST** PN9

Key Entry	PN9	PN11	PN15	PN20	PN23	FIX4	User File	Ext	FDEV1_HS
	FDEV1_FS	FDEV2_FS	FACC	DM1	DM0	4 1's & 4 0's			
	8 1's & 8 0's		16 1's & 16 0's		32 1's & 32 0's		64 1's & 64 0's		

Remarks Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:PPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:ZLCapacity[:B]:FIX4

Supported E4438C with Option 402

```
[:SOURce]:RADio:DECT:PPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:  
ZLCapacity[:B]:FIX4 <val>  
[:SOURce]:RADio:DECT:PPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:  
ZLCapacity[:B]:FIX4?
```

This command sets the binary, 4-bit repeating sequence data pattern that is used in the portable part low-capacity with Z field B field of the selected timeslot.

***RST** #B0000

Range #B0000–#B1111 or 0–15

Key Entry **FIX4**

Remarks FIX4 must already be defined as the data type.

:PPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:ZTRaffic:A

Supported E4438C with Option 402

```
[:SOURce]:RADio:DECT:PPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:ZTRaffic:  
A <val>  
[:SOURce]:RADio:DECT:PPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:ZTRaffic:A?
```

This command customizes the A field for the selected traffic bearer with Z field timeslot in the portable part link. The A field carries signaling data (48 bits) and error correction (16 bits).

***RST** #H0000FFFF0000FFFF

Range #H0–#HFFFFFFFFFFFFFFFF

Key Entry **A field**

DECT Subsystem—Option 402 ([:SOURCE]:RADIO:DECT)**:PPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:ZTRaffic:P****Supported** E4438C with Option 402

[:SOURCE]:RADIO:DECT:PPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:ZTRaffic:

P <val>

[:SOURCE]:RADIO:DECT:PPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:ZTRaffic:P?

This command customizes the preamble (P) field of the selected traffic bearer with Z field timeslot in the portable part link.

RST** #H5555**Range** #H0-#HFFFF**Key Entry** P**:PPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:ZTRaffic:S*Supported** E4438C with Option 402

[:SOURCE]:RADIO:DECT:PPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:ZTRaffic:

S <val>

[:SOURCE]:RADIO:DECT:PPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:ZTRaffic:S?

This command sets the synchronization pattern for the selected traffic bearer with Z field timeslot in the portable part link.

***RST** #H1675**Range** #H0-#HFFFF**Key Entry** S

:PPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:ZTRaffic[:B]

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:DECT:PPart:SLOT0 | [1] | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 :
ZTRaffic [:B] PN9 | PN11 | PN15 | PN20 | PN23 | FIX4 | "<file name>" | EXT | FDEV1_HS |
FDEV1_FS | FDEV2_FS | FACCuracy | DM1 | DM0 | P4 | P8 | P16 | P32 | P64
[ :SOURce ] :RADio:DECT:PPart:SLOT0 | [1] | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 :ZTRaffic [:B] ?
```

This command sets the B field data pattern for the selected traffic bearer with Z field timeslot in the portable part link.

***RST** PN9

Key Entry	PN9	PN11	PN15	PN20	PN23	FIX4	User File	Ext	FDEV1_HS
	FDEV1_FS	FDEV2_FS	FACC	DM1	DM0	4 1's & 4 0's			
	8 1's & 8 0's	16 1's & 16 0's	32 1's & 32 0's	64 1's & 64 0's					

Remarks Refer to “File Name Variables” on page 13 for information on the file name syntax.

:PPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:ZTRaffic[:B]:FIX4

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:DECT:PPart:SLOT0 | [1] | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 :ZTRaffic [:B] :
FIX4 <val>
[ :SOURce ] :RADio:DECT:PPart:SLOT0 | [1] | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 :ZTRaffic [:B] :
FIX4 ?
```

This command sets the binary, 4-bit repeating sequence data pattern that is used in the portable part traffic bearer with Z field B field of the selected timeslot.

***RST** #B0000

Range #B0000–#B1111 or 0–15

Key Entry **FIX4**

Remarks FIX4 must already be defined as the data type. Refer to “:PPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:ZTRaffic[:B]” on page 599 to change the data type.

DECT Subsystem—Option 402 (:SOURCE):RADIO:DECT)**:RFPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11[:TYPE]****Supported** E4438C with Option 402

```
[ :SOURCE ] :RADIO:DECT:RFPart:SLOT0 | [1] | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 [ :TYPE ]
CUSTom | DUMM [1] | DUMM2 |
TRAFFic | LCAPacity | ZTRAffic | ZLCapacity
[ :SOURCE ] :RADIO:DECT:RFPart:SLOT0 | [1] | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 [ :TYPE ] ?
```

This command selects the timeslot type for the selected timeslot in the radio fixed part link.

***RST** Timeslot 0: TRAF Timeslots 1–4: CUST

Key Entry Custom Dummy Bearer 1 Dummy Bearer 2 Traffic Bearer
 Low Capacity Traffic Bearer with Z field Low Capacity with Z field

:RFPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:CUSTom**Supported** E4438C with Option 402

```
[ :SOURCE ] :RADIO:DECT:RFPart:SLOT0 | [1] | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 :CUSTom PN9 |
PN11 | PN15 | PN20 | PN23 | FIX4 | "<file name>" | EXT | FDEV1_HS | FDEV1_FS | FDEV2_FS |
FACCuracy | DM1 | DM0 | P4 | P8 | P16 | P32 | P64
[ :SOURCE ] :RADIO:DECT:RFPart:SLOT0 | [1] | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 :CUSTom?
```

This command sets the data pattern for the data field of the selected custom timeslot in the radio fixed part link.

***RST** PN9

Key Entry PN9 PN11 PN15 PN20 PN23 FIX4 User File Ext FDEV1_HS
 FDEV1_FS FDEV2_FS FACC DM1 DM0 4 1's & 4 0's
 8 1's & 8 0's 16 1's & 16 0's 32 1's & 32 0's 64 1's & 64 0's

Remarks Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:RFPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:CUSTom:FIX4

Supported E4438C with Option 402

```
[ :SOURCE ] :RADIO:DECT:RFPart:SLOT0 |[1]|2|3|4|5|6|7|8|9|10|11:CUSTom:  
FIX4 <val>
```

```
[ :SOURCE ] :RADIO:DECT:RFPart:SLOT0 |[1]|2|3|4|5|6|7|8|9|10|11:CUSTom:  
FIX4?
```

This command sets the binary, 4-bit repeating sequence data pattern that is used in the selected radio fixed part custom timeslot.

***RST** #B0000

Range #B0000–#B1111 or 0–15

Key Entry **FIX4**

Remarks FIX4 must already be defined as the data type. Refer to [“:RFPart:SLOT0|\[1\]|2|3|4|5|6|7|8|9|10|11:CUSTom” on page 600](#) to change the data type.

:RFPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:DUMM2:A

Supported E4438C with Option 402

```
[ :SOURCE ] :RADIO:DECT:RFPart:SLOT0 |[1]|2|3|4|5|6|7|8|9|10|11:DUMM2:  
A <val>
```

```
[ :SOURCE ] :RADIO:DECT:RFPart:SLOT0 |[1]|2|3|4|5|6|7|8|9|10|11:DUMM2:A?
```

This command customizes the A field for the selected dummy 2 timeslot in the radio fixed part link.

***RST** #H0000FFFF0000FFFF

Range #H0–#HFFFFFFFFFFFFFFFF

Key Entry **A field**

Remarks The A field carries signaling data (48 bits) and error correction (16 bits).

:RFPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:DUMM2:P**Supported** E4438C with Option 402

[:SOURCE]:RADIO:DECT:RFPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:DUMM2:

P <val>

[:SOURCE]:RADIO:DECT:RFPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:DUMM2:P?

This command customizes the preamble (P) field for the selected dummy 2 timeslot in the radio fixed part link.

RST** #HAAAA**Range** #H0-#HFFFF**Key Entry** P**:RFPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:DUMM2:S*Supported** E4438C with Option 402

[:SOURCE]:RADIO:DECT:RFPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:DUMM2:

S <val>

[:SOURCE]:RADIO:DECT:RFPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:DUMM2:S?

This command customizes the synchronization (S) field of the selected dummy 2 timeslot in the radio fixed part link.

RST** #HE98A**Range** #H0-#HFFFF**Key Entry** S**:RFPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:DUMM[1]:A*Supported** E4438C with Option 402

[:SOURCE]:RADIO:DECT:RFPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:DUMM[1]:

A <val>

[:SOURCE]:RADIO:DECT:RFPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:DUMM[1]:A?

This command customizes the A field for the selected dummy 1 timeslot in the radio fixed part link.

***RST** #H0000FFFF0000FFFF**Range** #H0-#HFFFFFFFFFFFFFFFFFFFF**Key Entry** A field

Remarks The 64-bit A field carries signaling data (48 bits) and error correction (16 bits).

:RFPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:DUMM[1]:P

Supported E4438C with Option 402

[:SOURce] :RADio:DECT:RFPart:SLOT0 | [1] | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 :DUMM [1] :

P <val>

[:SOURce] :RADio:DECT:RFPart:SLOT0 | [1] | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 :DUMM [1] :P?

This command customizes the preamble (P) field for the selected dummy 1 timeslot in the radio fixed part link.

***RST** #HAAAA

Range #H0–#HFFFF

Key Entry P

:RFPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:DUMM[1]:S

Supported E4438C with Option 402

[:SOURce] :RADio:DECT:RFPart:SLOT0 | [1] | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 :DUMM [1] :

S <val>

[:SOURce] :RADio:DECT:RFPart:SLOT0 | [1] | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 :DUMM [1] :S?

This command customizes the synchronization (S) field of the selected dummy 1 timeslot in the radio fixed part link.

***RST** #HE98A

Range #H0–#HFFFF

Key Entry S

:RFPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:LCAPacity:A

Supported E4438C with Option 402

[:SOURce] :RADio:DECT:RFPart:SLOT0 | [1] | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 :LCAPacity:

A <val>

[:SOURce] :RADio:DECT:RFPart:SLOT0 | [1] | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 :LCAPacity:A?

This command customizes the A field for the selected low-capacity timeslot in the radio fixed part link.

***RST** #H0000FFFF0000FFFF

Range #H0–#HFFFFFFFFFFFFFFFF

Key Entry A field

:RFPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:LCAPacity:P**Supported** E4438C with Option 402[:SOURCE]:RADIO:DECT:RFPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:LCAPacity:
P <val>

[:SOURCE]:RADIO:DECT:RFPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:LCAPacity:P?

This command customizes the preamble (P) field of the selected low-capacity timeslot in the portable part link.

RST** #HAAAA**Range** #H0–#H1111**Key Entry** P**:RFPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:LCAPacity:S*Supported** E4438C with Option 402[:SOURCE]:RADIO:DECT:RFPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:LCAPacity:
S <val>

[:SOURCE]:RADIO:DECT:RFPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:LCAPacity:S?

This command customizes the synchronization pattern of the selected low-capacity timeslot in the portable part link.

RST** #HE98A**Range** #H0–#H1111**Key Entry** S**:RFPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:LCAPacity[:B]*Supported** E4438C with Option 402[:SOURCE]:RADIO:DECT:RFPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:
LCAPacity[:B] PN9|PN11|PN15|PN20|PN23|FIX4|"<file name>"|EXT|FDEV1_HS|
FDEV1_FS|FDEV2_FS|FACCuracy|DM1|DM0|P4|P8|P16|P32|P64[:SOURCE]:RADIO:DECT:RFPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:
LCAPacity[:B]?

This command sets the data pattern for the B field of the selected portable part low-capacity timeslot.

***RST** PN9

Key Entry	PN9 PN11 PN15 PN20 PN23 FIX4 User File Ext FDEV1_HS
	FDEV1_FS FDEV2_FS FACC DM1 DM0 4 1's & 4 0's
	8 1's & 8 0's 16 1's & 16 0's 32 1's & 32 0's 64 1's & 64 0's
Remarks	Refer to “File Name Variables” on page 13 for information on the file name syntax.

:RFPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:LCAPacity[:B]:FIX4

Supported E4438C with Option 402

```
[:SOURCE]:RADio:DECT:RFPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:
LCAPacity[:B]:FIX4 <val>
[:SOURCE]:RADio:DECT:RFPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:
LCAPacity[:B]:FIX4?
```

This command sets the binary, 4-bit repeating sequence data pattern that is used in the selected radio fixed part low-capacity timeslot B field.

***RST** #B0000

Range #B0000–#B1111 or 0–15

Key Entry **FIX4**

Remarks FIX4 must already be defined as the data type.

:RFPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:LCAPacity:POWer

Supported E4438C with Option 402

```
[:SOURCE]:RADio:DECT:RFPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:POWer MAIN|
DELTA
[:SOURCE]:RADio:DECT:RFPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:POWer?
```

This command defines the RF output power level for the selected timeslot.

MAIN This choice specifies RF output as the main power level.

DELTA This choice specifies RF output as the alternative power level.

***RST** MAIN

Key Entry **Timeslot Ampl Main Delta**

DECT Subsystem—Option 402 ([:SOURCE]:RADIO:DECT)**:RFPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:STATe****Supported** E4438C with Option 402

[:SOURCE]:RADIO:DECT:RFPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:STATe ON|OFF|1|0

[:SOURCE]:RADIO:DECT:RFPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:STATe?

This command enables or disables the operating state of the selected timeslot in the radio fixed part.

RST** Timeslot 0: 1 Timeslots 1–11: 0**Key Entry** Timeslot Off On**:RFPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:TRAFfic:A*Supported** E4438C with Option 402

[:SOURCE]:RADIO:DECT:RFPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:TRAFfic:A <val>

[:SOURCE]:RADIO:DECT:RFPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:TRAFfic:A?

This command customizes the A field for the selected traffic bearer timeslot in the portable part link.

RST** #H0000FFFF0000FFFF**Range** #H0–#HFFFFFFF**Key Entry** A field**Remarks** The A field carries signaling data (48 bits) and error correction (16 bits).**:RFPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:TRAFfic:P*Supported** E4438C with Option 402

[:SOURCE]:RADIO:DECT:RFPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:TRAFfic:P <val>

[:SOURCE]:RADIO:DECT:RFPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:TRAFfic:P?

This command customizes the preamble (P) field of the selected traffic bearer timeslot in the radio fixed part link.

***RST** #HAAAA**Range** #H0–#HFFFF**Key Entry** P

:RFPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:TRAFfic:S

Supported E4438C with Option 402

[:SOURCE] :RADio:DECT:RFPart:SLOT0 |[1]|2|3|4|5|6|7|8|9|10|11:TRAFfic:

S <val>

[:SOURCE] :RADio:DECT:RFPart:SLOT0 |[1]|2|3|4|5|6|7|8|9|10|11:TRAFfic:S?

This command customizes the synchronization (S) field of the selected traffic bearer timeslot in the radio fixed part link.

***RST** #HE98A

Range #H0–#HFFFF

Key Entry **S**

:RFPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:TRAFfic[:B]

Supported E4438C with Option 402

[:SOURCE] :RADio:DECT:RFPart:SLOT0 |[1]|2|3|4|5|6|7|8|9|10|11:

TRAFfic[:B] PN9|PN11|PN15|PN20|PN23|FIX4|"<file name>"|EXT|FDEV1_HS|

FDEV1_FS|FDEV2_FS|FACCuracy|DM1|DM0|P4|P8|P16|P32|P64

[:SOURCE] :RADio:DECT:RFPart:SLOT0 |[1]|2|3|4|5|6|7|8|9|10|11:TRAFfic[:B]?

This command sets the B field's data pattern for the selected traffic bearer timeslot in the radio fixed part during framed data transmission.

***RST** PN9

Key Entry	PN9	PN11	PN15	PN20	PN23	FIX4	User File	Ext	FDEV1_HS
	FDEV1_FS	FDEV2_FS	FACC	DM1	DM0	4 1's & 4 0's			
	8 1's & 8 0's	16 1's & 16 0's	32 1's & 32 0's	64 1's & 64 0's					

Remarks Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

DECT Subsystem—Option 402 ([:SOURCE]:RADio:DECT)**:RFPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:TRAFfic[:B]:FIX4**

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:DECT:RFPart:SLOT0 | [1] | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 :TRAFfic [:B]
:FIX4 <val>
```

```
[ :SOURCE ] :RADio:DECT:RFPart:SLOT0 | [1] | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 :TRAFfic [:B] :
FIX4?
```

This command sets the binary, 4-bit repeating sequence data pattern that is used in the selected radio fixed part traffic bearer timeslot B field.

***RST** #B0000

Range #B0000–#B1111 or 0–15

Key Entry **FIX4**

Remarks FIX4 must already be defined as the data type, refer to
“:RFPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:TRAFfic[:B]” on page 607.

:RFPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:ZLCapacity:A

Supported E4438C with Option 402

```
[ :SOURCE ] :DECT:RFPart:SLOT0 | [1] | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 :ZLCapacity:
A <val>
```

```
[ :SOURCE ] :RADio:DECT:RFPart:SLOT0 | [1] | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 :ZLCapacity:
A?
```

This command customizes the A field for the selected low-capacity with Z field timeslot in the radio fixed part link. The A field carries signaling data (48 bits) and error correction (16 bits).

***RST** #H0000FFFF0000FFFF

Range #H0–#HFFFFFFFFFFFFFFFF

Key Entry **A field**

:RFPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:ZLCapacity:P

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:DECT:RFPart:SLOT0 |[1]|2|3|4|5|6|7|8|9|10|11:ZLCapacity:  
P <val>
```

```
[ :SOURCE ] :RADio:DECT:RFPart:SLOT0 |[1]|2|3|4|5|6|7|8|9|10|11:ZLCapacity:  
P?
```

This command customizes the preamble (P) field of the selected low-capacity with Z field timeslot in the radio fixed part link.

***RST** #HAAAA

Range #H0–#HFFFF

Key Entry P

:RFPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:ZLCapacity:S

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:DECT:RFPart:SLOT0 |[1]|2|3|4|5|6|7|8|9|10|11:ZLCapacity:  
S <val>
```

```
[ :SOURCE ] :RADio:DECT:RFPart:SLOT0 |[1]|2|3|4|5|6|7|8|9|10|11:ZLCapacity:  
S?
```

This command customizes the synchronization (S) field of the selected low-capacity with Z field timeslot in the radio fixed part link.

***RST** #HE98A

Range #H0–#HFFFF

Key Entry S

:RFPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:ZLCapacity[:B]**Supported** E4438C with Option 402

```
[:SOURCE]:RADIO:DECT:RFPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:
ZLCapacity[:B] PN9|PN11|PN15|PN20|PN23|FIX4|"<file name>"|EXT|FDEV1_HS|
FDEV1_FS|FDEV2_FS|FACCuracy|DM1|DM0|P4|P8|P16|P32|P64
[:SOURCE]:RADIO:DECT:RFPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:
ZLCapacity[:B]?
```

This command sets the B field's data pattern for the selected low-capacity with Z field timeslot in the radio fixed part during framed data transmission.

***RST** PN9

Key Entry	PN9	PN11	PN15	PN20	PN23	FIX4	User File	Ext	FDEV1_HS
	FDEV1_FS	FDEV2_FS	FACC	DM1	DM0	4 1's & 4 0's			
	8 1's & 8 0's	16 1's & 16 0's	32 1's & 32 0's	64 1's & 64 0's					

Remarks Refer to “File Name Variables” on page 13 for information on the file name syntax.

:RFPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:ZLCapacity[:B]:FIX4**Supported** E4438C with Option 402

```
[:SOURCE]:RADIO:DECT:RFPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:
ZLCapacity[:B]:FIX4 <val>
[:SOURCE]:RADIO:DECT:RFPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:
ZLCapacity[:B]:FIX4?
```

This command sets the binary, 4-bit repeating sequence data pattern that is used in the selected radio fixed part low-capacity with Z field timeslot B field.

RST** #B0000**Range** #B0000–#B1111 or 0–15**Key Entry** **FIX4*Remarks** FIX4 must already be defined as the data type.

:RFPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:ZTRaffic:A

Supported E4438C with Option 402

[:SOURce]:RADio:DECT:RFPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:ZTRaffic:
A <val>

[:SOURce]:RADio:DECT:RFPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:ZTRaffic:A?

This command customizes the A field for the selected traffic bearer timeslot in the radio fixed part link. The A field carries signaling data (48 bits) and error correction (16 bits).

***RST** #H0000FFFF0000FFFF

Range #H0-#HFFFFFFFFFFFFFFFF

Key Entry A field

:RFPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:ZTRaffic:P

Supported E4438C with Option 402

[:SOURce]:RADio:DECT:RFPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:ZTRaffic:
P <val>

[:SOURce]:RADio:DECT:RFPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:ZTRaffic:P?

This command customizes the preamble (P) field of the selected traffic bearer with Z field timeslot in the radio fixed part link.

***RST** #HAAAA

Range #H0-#HFFFF

Key Entry P

:RFPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:ZTRaffic:S

Supported E4438C with Option 402

[:SOURce]:RADio:DECT:RFPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:ZTRaffic:
S <val>

[:SOURce]:RADio:DECT:RFPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:ZTRaffic:S?

This command customizes the synchronization (S) field of the selected traffic bearer with Z field timeslot in the radio fixed part link.

***RST** #HE98A

Range #H0-#HFFFF

Key Entry S

DECT Subsystem—Option 402 ([:SOURCE]:RADIO:DECT)**:RFPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:ZTRaffic[:B]****Supported** E4438C with Option 402

```
[:SOURCE]:RADIO:DECT:RFPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:
ZTRaffic[:B] PN9|PN15|FIX4|"<file name>"|EXT|FDEV1_HS|FDEV1_FS|
FDEV2_FS|FACCuracy|DM1|DM0|P4|P8|P16|P32|P64
[:SOURCE]:RADIO:DECT:RFPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:
ZTRaffic[:B]?
```

This command sets the B field data pattern for the selected traffic bearer with Z field timeslot in the portable part link.

***RST** PN9

Key Entry	PN9	PN11	PN15	PN20	PN23	FIX4	User File	Ext	FDEV1_HS
	FDEV1_FS	FDEV2_FS	FACC	DM1	DM0	4 1's & 4 0's			
	8 1's & 8 0's	16 1's & 16 0's	32 1's & 32 0's	64 1's & 64 0's					

Remarks Refer to “[File Name Variables](#)” on [page 13](#) for information on the file name syntax.

:RFPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:ZTRaffic[:B]:FIX4**Supported** E4438C with Option 402

```
[:SOURCE]:RADIO:DECT:RFPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:
ZTRaffic[:B]:FIX4 <val>
[:SOURCE]:RADIO:DECT:RFPart:SLOT0|[1]|2|3|4|5|6|7|8|9|10|11:
ZTRaffic[:B]:FIX4?
```

This command sets the binary, 4-bit repeating sequence data pattern that is used in the selected radio fixed part traffic bearer with Z field timeslot B field.

RST** #B0000**Range** #B0000–#B1111 or 0–15**Key Entry** **FIX4*Remarks** FIX4 must already be defined as the data type.

:SECondary:RECall

Supported E4438C with Option 402

`[:SOURCE]:RADio:DECT:SECondary:RECall`

This command recalls the secondary frame configuration, overwriting the current state.

Key Entry **Recall Secondary Frame State**

Remarks To save a secondary frame state, refer to “[:SECondary:SAVE](#)” on page 613.

A secondary frame is not active until the secondary state is enabled. To activate a secondary frame, refer to “[:SECondary\[:STATe\]”](#) on page 614.

:SECondary:SAVE

Supported E4438C with Option 402

`[:SOURCE]:RADio:DECT:SECondary:SAVE`

This command saves the current frame configuration as the secondary frame with the filename `DECT_SECONDARY_FRAME`.

Key Entry **Save Secondary Frame State**

Remarks To recall the secondary frame (saved in non-volatile signal generator memory), refer to “[:SECondary:RECall](#)” on page 613.

:SECondary:TRIGger[:SOURCE]

Supported E4438C with Option 402

`[:SOURCE]:RADio:DECT:SECondary:TRIGger[:SOURCE] KEY|EXT|BUS`

`[:SOURCE]:RADio:DECT:SECondary:TRIGger[:SOURCE]?`

This command selects the type of triggering for the secondary frame.

KEY This choice enables triggering by pressing the front panel **Trigger** hardkey.

EXT This choice enables triggering using an externally applied signal at the PATT TRIG IN rear panel connector or the PATT TRIG IN 2 pin on the rear panel AUX I/O connector. To select the appropriate connector, refer to “[:TRIGger\[:SOURCE\]:EXTernal\[:SOURCE\]”](#) on page 621.

BUS This choice enables GPIB triggering using the *TRG or GET command or LAN and RS-232 triggering using the *TRG command.

Key Entry **Trigger Key Ext Bus**

:SECondary[:STATe]

Supported E4438C with Option 402

[:SOURCE] :RADio:DECT:SECondary [:STATe] ON | OFF | 1 | 0

[:SOURCE] :RADio:DECT:SECondary [:STATe] ?

This command enables or disables the ability to switch to the secondary frame.

***RST** 0

Key Entry **Secondary Frame Off On**

Remarks A frame must already be saved as the secondary frame in order to turn the secondary state function on.

To save a frame as the secondary frame, refer to “:SECondary:SAVE” on page 613.

:SOUT

Supported E4438C with Option 402

[:SOURCE] :RADio:DECT:SOUT FRAME | SLOT | ALL

[:SOURCE] :RADio:DECT:SOUT?

This command sets the synchronization location (within the pattern of data) and the type of output at the EVENT 1 rear panel connector.

FRAME This choice outputs a 1-bit signal, synchronized to the bit selected by the synchronization output offset command, for a framed data pattern.

SLOT This choice outputs a 1-bit signal, synchronized to the bit selected by the synchronization output offset command, for a selected timeslot.

ALL This choice outputs a 1-bit signal, synchronized to the bit selected by the synchronization output offset command, for all active timeslots.

***RST** FRAME

Key Entry **Begin Frame Begin Timeslot # All Timeslots**

:SOUT:OFFSet

Supported E4438C with Option 402

[:SOURCE] :RADio:DECT:SOUT:OFFSet <val>

[:SOURCE] :RADio:DECT:SOUT:OFFSet?

This command sets the offset value for the location of the output synchronization signal on the EVENT1 rear panel connector relative to the beginning of the framed data pattern or timeslot.

The variable <val> is expressed in bits.

***RST** +0

Range -479 to 479

Key Entry **Sync Out Offset**

Remarks Negative values move the synchronization output signal earlier; positive values move it later.

To change the output of the EVENT1 rear panel connector to SLOT, refer to [“:SOUT” on page 614](#).

:SOUT:SLOT

Supported E4438C with Option 402

[:SOURCE] :RADio:DECT:SOUT:SLOT <val>

[:SOURCE] :RADio:DECT:SOUT:SLOT?

This command selects the timeslot that will trigger a 1-bit signal at the EVENT 1 rear panel connector.

***RST** +1

Range Radio Fixed Part Link: 0–12 Portable Part Link: 1–11

Key Entry **Begin Timeslot #**

Remarks To change the output of the EVENT1 rear panel connector to SLOT, refer to [“:SOUT” on page 614](#).

:SRATe**Supported** E4438C with Option 402

[:SOURCE]:RADIO:DECT:SRATe <val>

[:SOURCE]:RADIO:DECT:SRATe?

This command sets the transmission symbol rate.

The variable <val> is expressed in units of bits per second (bps–Mbps) and the maximum range value is dependent upon the source of data (internal or external), the modulation type, and filter.

***RST** +1.15200000E+006**Range**

Modulation Type	Bits per Symbol	Internal Data	External Serial Data			
BPSK	1	1–50 Msps	1–50 Msps			
FSK2						
MSK						
C4FM	2	1–50 Msps	1–25 Msps			
FSK4						
OQPSK						
OQPSK195						
P4QPPSK						
QAM4						
QPSK						
QPSKIS95						
QPSKISAT						
D8PSK				3	1–33.33 Msps	1–16.67 Msps
EDGE						
FSK8						
PSK8						
FSK16	4	1–25 Msps	1–12.5 Msps			
PSK16						
QAM16						
QAM32	5	1–20 Msps	1–10 Msps			
QAM64	6	1–16.67 Msps	1–8.33 Msps			
QAM256	7	1–12.50 Msps	1–6.25 Msps			

Key Entry**Symbol Rate**

Remarks When user-defined filters are selected using the command in section “:FILTer” on page 584, the upper bit rate will be restricted in line with the following symbol rate restriction:

- FIR filter length > 32 symbols: upper limit is 12.5 Msps
- FIR filter length > 16 symbols: upper limit is 25 Msps

When internal FIR filters are used, the limits of the above table always apply. For higher symbol rates, the FIR filter length will be truncated as follows:

- Above 12.5 Msps, the FIR length will be truncated to 32 symbols
- Above 25 Msps, the FIR length will be truncated to 16 symbols

This will impact the relative timing of the modulated data, as well as the actual filter response (see “:BRATe” on page 572).

A change in the symbol rate value will affect the bit rate value; refer to “:BRATe” on page 572 for a list of the minimum and maximum symbol rate values.

To change the modulation type, refer to “:MODulation[:TYPE]” on page 587.

:TRIGger:TYPE

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:DECT:TRIGger:TYPE CONTinuous | SINGle | GATE
[ :SOURce ] :RADio:DECT:TRIGger:TYPE?
```

This command sets the trigger type.

CONTinuous The framed data sequence repeats continuously; the sequence restarts every time the previous playback is completed. To customize continuous triggering, refer to “:TRIGger:TYPE:CONTinuous[:TYPE]” on page 618.

SINGle The framed data sequence plays once for every trigger received.

GATE An external trigger signal interrupts the playback while the gating signal is in the inactive state. Playback resumes when the external control signal returns to the active state. The active state can be set to high or low.

***RST** CONT

Key Entry **Continuous** **Single** **Gated**

:TRIGger:TYPE:CONTInuous[:TYPE]

Supported E4438C with Option 402

```
[ :SOURCE ] :RADIo:DECT:TRIGger:TYPE:CONTInuous [ :TYPE ] FREE | TRIGger | RESet
[ :SOURCE ] :RADIo:DECT:TRIGger:TYPE:CONTInuous [ :TYPE ] ?
```

This command selects the waveform's response to a trigger signal while using the continuous trigger mode.

For more information on triggering and to select the continuous trigger mode, see “[:TRIGger:TYPE]” on page 617.

The following list describes the waveform's response to each of the command choices:

FREE	Turning the ARB format on immediately triggers the waveform. The waveform repeats until you turn the format off, select another trigger, or choose another waveform file.
TRIGger	The waveform waits for a trigger before play begins. When the waveform receives the trigger, it plays continuously until you turn the format off, select another trigger, or choose another waveform file.
RESet	The waveform waits for a trigger before play begins. When the waveform receives the trigger, it plays continuously. Subsequent triggers reset the waveform to the beginning. For a waveform sequence, this means to the beginning of the first segment in the sequence.
*RST	FREE
Key Entry	Free Run Trigger & Run Reset & Run

:TRIGger:TYPE:GATE:ACTive

Supported E4438C with Option 402

```
[ :SOURCE ] :RADIo:DECT:TRIGger:TYPE:GATE:ACTive LOW | HIGH
[ :SOURCE ] :RADIo:DECT:TRIGger:TYPE:GATE:ACTive ?
```

This command selects the active state (gate polarity) of the gate while using the gating trigger mode.

The LOW and HIGH selections correspond to the low and high states of an external trigger signal. For example, when you select HIGH, the active state occurs during the high of the trigger signal. When the active state occurs, the ESG stops the waveform playback at the last played sample point, then restarts

the playback at the next sample point when the inactive state occurs. For more information on triggering and to select gating as the trigger mode, see “:TRIGger:TYPE” on page 617.

The following list describes the ESG’s gating behavior for the polarity selections:

LOW	The waveform playback stops when the trigger signal goes low (active state) and restarts when the trigger signal goes high (inactive state).
HIGH	The waveform playback stops when the trigger signal goes high (active state) and restarts when the trigger signal goes low (inactive state).
*RST	HIGH
Key Entry	Gate Active Low High

:TRIGger[:SOURce]

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:DECT:TRIGger [ :SOURce ] KEY | EXT | BUS
[ :SOURce ] :RADio:DECT:TRIGger [ :SOURce ] ?
```

This command sets the trigger source.

For more information on triggering, see “:TRIGger:TYPE” on page 617. The following list describes the command choices:

KEY	This choice enables manual triggering by pressing the front-panel Trigger hardkey.
EXT	An externally applied signal triggers the waveform. This is the only choice that works with gating. The following conditions affect an external trigger:

- The input connector selected for the trigger signal. You have a choice between the rear-panel PATTERN TRIG IN connector or the PATT TRIG IN 2 pin on the rear-panel AUXILIARY I/O connector. To make the connector selection, see “:TRIGger[:SOURce]:EXTernal[:SOURce]” on page 621.

For more information on the connectors and on connecting the cables, see the *ESG User’s Guide*.

- The trigger signal polarity:
 - gating mode, see “:TRIGger:TYPE:GATE:ACTive” on page 618
 - continuous and single modes, see “:TRIGger[:SOURce]:EXTernal:SLOPe” on page 620
- The time delay between when the ESG receives a trigger and when the waveform responds to the trigger. There are two parts to setting the delay:

DECT Subsystem—Option 402 (:SOURce):RADio:DECT)

- setting the amount of delay, see “:TRIGger[:SOURce]:EXTErnal:DELay” on page 620
- turning the delay on, see “:TRIGger[:SOURce]:EXTErnal:DELay:STATe” on page 622

BUS This choice enables triggering over the GPIB or LAN using the *TRG or GET commands or the AUXILIARY INTERFACE (RS-232) using the *TRG command.

***RST** KEY

Key Entry **Trigger Key** **Ext** **Bus**

:TRIGger[:SOURce]:EXTErnal:DELay

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:DECT:TRIGger [ :SOURce ] :EXTErnal:DELay <val>
[ :SOURce ] :RADio:DECT:TRIGger [ :SOURce ] :EXTErnal:DELay?
```

This command sets the number of bits to delay the ESG’s response to an external trigger.

The bit delay is a delay between when the ESG receives the trigger and when it responds to the trigger. The delay uses the clocks of the bit-clock to time the delay. After the ESG receives the trigger and the set number of delay bits (clocks) occurs, the ESG transmits the data pattern.

The delay occurs after you enable the state. See “:TRIGger[:SOURce]:EXTErnal:DELay:STATe” on page 622. You can set the number of bits either before or after enabling the state.

For more information on configuring an external trigger source and to select external as the trigger source, see “:TRIGger[:SOURce]” on page 619.

***RST** +0

Range 0–1048575

Key Entry **Ext Delay Bits**

:TRIGger[:SOURce]:EXTErnal:SLOPe

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:DECT:TRIGger [ :SOURce ] :EXTErnal:SLOPe POSitive|NEGative
[ :SOURce ] :RADio:DECT:TRIGger [ :SOURce ] :EXTErnal:SLOPe?
```

This command sets the polarity for an external trigger signal while using the continuous, single triggering mode. To set the polarity for gating, see “:TRIGger:TYPE:GATE:ACTive” on page 618.

The POSitive and NEGative selections correspond to the high (positive) and low (negative) states of the external trigger signal. For example, when you select POSitive, the waveform responds (plays)

during the high state of the trigger signal. When the ESG receives multiple trigger occurrences when only one is required, the signal generator uses the first trigger and ignores the rest.

For more information on configuring an external trigger source and to select external as the trigger source, see “:TRIGger[:SOURce]” on page 619.

***RST** NEG
Key Entry **Ext Polarity Neg Pos**

:TRIGger[:SOURce]:EXTErnal[:SOURce]

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:DECT:TRIGger [ :SOURce ] :EXTErnal [ :SOURce ] EPT1 | EPT2 |
EPTRIGGER1 | EPTRIGGER2
[ :SOURce ] :RADio:DECT:TRIGger [ :SOURce ] :EXTErnal [ :SOURce ] ?
```

This command selects which PATTERN TRIG IN connection the ESG uses to accept an externally applied trigger signal when external is the trigger source selection.

For more information on configuring an external trigger source and to select external as the trigger source, see “:TRIGger[:SOURce]” on page 619. For more information on the rear-panel connectors, see the *E4428C/38C ESG Signal Generators User’s Guide*.

The following list describes the command choices:

EPT1	This choice is synonymous with EPTRIGGER1 and selects the PATTERN TRIG IN rear-panel connector.
EPT2	This choice is synonymous with EPTRIGGER2 and selects the PATT TRIG IN 2 pin on the rear-panel AUXILIARY I/O connector.
EPTRIGGER1	This choice is synonymous with EPT1 and selects the PATTERN TRIG IN rear-panel connector.
EPTRIGGER2	This choice is synonymous with EPT2 and selects the PATT TRIG IN 2 pin on the rear-panel AUXILIARY I/O connector.
*RST	EPT1
Key Entry	Patt Trig In 1 Patt Trig In 2

DECT Subsystem—Option 402 ([:SOURCE]:RADio:DECT)**:TRIGger[:SOURCE]:EXTErnal:DELay:STATe****Supported** E4438C with Option 402

```
[:SOURCE]:RADio:DECT:TRIGger[:SOURCE]:EXTErnal:DELay:STATe ON|OFF|1|0
[:SOURCE]:RADio:DECT:TRIGger[:SOURCE]:EXTErnal:DELay:STATe?
```

This command enables or disables the operating state of the external trigger delay function.

For setting the delay time, see “:TRIGger[:SOURCE]:EXTErnal:DELay” on page 620, and for more information on configuring an external source, see “:TRIGger[:SOURCE]” on page 619.

RST** 0**Key Entry** **Ext Delay Off On*[:STATe]****Supported** E4438C with Option 402

```
[:SOURCE]:RADio:DECT[:STATe] ON|OFF|1|0
[:SOURCE]:RADio:DECT[:STATe]?
```

This command enables or disables the DECT modulation format.

***RST** 0**Key Entry** **Dect Off On**

Remarks Although the DECT modulation is enabled with this command, the RF carrier is not modulated unless you enable the modulation by pressing the front panel **Mod On/Off** hardkey.

EDGE Subsystem—Option 402 ([:SOURce]:RADio:EDGE)

:ALPHa

Supported E4438C with Option 402

```
[:SOURce]:RADio:EDGE:ALPHa <val>
[:SOURce]:RADio:EDGE:ALPHa?
```

This command changes the Nyquist or root Nyquist filter’s alpha value.

The filter alpha value can be set to the minimum level (0), the maximum level (1), or in between by using fractional numeric values (0.001–0.999).

***RST** +5.00000000E–001

Range 0.000–1.000

Key Entry **Filter Alpha**

Remarks To change the current filter type, refer to “:FILTer” on page 635.

:BBCLock

Supported E4438C with Option 402

```
[:SOURce]:RADio:EDGE:BBCLock INT[1] |EXT[1]
[:SOURce]:RADio:EDGE:BBCLock?
```

This command toggles the data (bit) clock input to the baseband generator board to either internal or external. This command is independent in each mode and works for both non-burst (continuous) and burst modes. This allows for a matrix of selections between burst/non-burst, internal/external data generation, internal/external data clock, and external bit/symbol data clock.

INT[1] This choice selects the signal generator internal data clock.

EXT[1] This choice selects an external data clock input.

***RST** INT

Key Entry **Ext Data Clock Ext Int**

Remarks A data clock or continuous symbol sync input must be supplied when external mode is used.

This will be ignored if the external reference is set to EXTERNAL. To change the external reference type, refer to “:EREFerence” on page 634.

:BBT

Supported E4438C with Option 402

[:SOURCE] :RADIO:EDGE:BBT <val>

[:SOURCE] :RADIO:EDGE:BBT?

This command changes the bandwidth-multiplied-by-bit-time (BbT) filter parameter.

The filter BbT value can be set to the maximum level (1) or in between the minimum level (0.100) and maximum level by using fractional numeric values (0.101–0.999).

***RST** +3.00000000E–001

Range 0.100–1.000

Key Entry **Filter BbT**

Remarks This command is effective only after choosing a Gaussian filter. It does not have an effect on other types of filters.

To change the current filter type, refer to “:FILTER” on page 635.

:BURSt:SHAPe:FALL:DELay

Supported E4438C with Option 402

[:SOURCE] :RADIO:EDGE:BURSt:SHAPe:FALL:DELay <val>

[:SOURCE] :RADIO:EDGE:BURSt:SHAPe:FALL:DELay?

This command sets the period of time that the start of the burst fall is delayed.

The variable <val> is expressed in bits. The minimum and maximum values depend upon modulation type and symbol rate.

***RST** +0.00000000E+000

Range –16.2000 to 99

Key Entry **Fall Delay**

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

To change the modulation type, refer to “:MODulation[:TYPE]” on page 638.

Refer to “:SRATE” on page 660 for a list of minimum and maximum symbol rate values.

“:BURSt:SHAPe:FDELay” on page 625 performs the same function. In compliance with the SCPI standard, both commands are listed.

For concept information on burst shaping, refer to the *E4428C/38C ESG Signal Generators User's Guide*.

:BURSt:SHAPe:FDElay

Supported E4438C with Option 402

[:SOURce] :RADio:EDGE:BURSt:SHAPe:FDElay <val>

[:SOURce] :RADio:EDGE:BURSt:SHAPe:FDElay?

This command sets the period of time that the start of the burst fall is delayed.

The variable <val> is expressed in bits. The minimum and maximum values depend upon modulation type and symbol rate.

***RST** +0.00000000E+000

Range -16.2000 to 99

Key Entry **Fall Delay**

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

To change the modulation type, refer to “:MODulation[:TYPE]” on page 638. Refer to “:SRATE” on page 660 for a list of minimum and maximum symbol rate values.

“:BURSt:SHAPe:FALL:DElay” on page 624 performs the same function. In compliance with the SCPI standard, both commands are listed.

For concept information on burst shaping, refer to the *E4428C/38C ESG Signal Generators User's Guide*.

:BURSt:SHAPe:FALL:TIME

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:EDGE:BURSt:SHAPe:FALL:TIME <val>
```

```
[ :SOURCE ] :RADio:EDGE:BURSt:SHAPe:FALL:TIME?
```

This command sets the period of time where the burst decreases from full power to minimum power.

The variable <val> is expressed in bits. The minimum and maximum values depend upon modulation type and symbol rate.

***RST** +1.00000000E+001

Range 0.2000–409.2000

Key Entry **Fall Time**

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

To change the modulation type, refer to “:MODulation[:TYPE]” on page 638.

Refer to “:SRATe” on page 660 for a list of minimum and maximum symbol rate values.

“:BURSt:SHAPe:FTIME” on page 626 performs the same function. In compliance with the SCPI standard, both commands are listed.

For concept information on burst shaping, refer to the *E4428C/38C ESG Signal Generators User’s Guide*.

:BURSt:SHAPe:FTIME

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:EDGE:BURSt:SHAPe:FTIME <val>
```

```
[ :SOURCE ] :RADio:EDGE:BURSt:SHAPe:FTIME?
```

This command sets the period of time where the burst decreases from full power to minimum power.

The variable <val> is expressed in bits. The minimum and maximum values depend upon modulation type and symbol rate.

***RST** +0.00000000E+000

Range 0.2000–409.2000

Key Entry **Fall Time**

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

To change the modulation type, refer to “:MODulation[:TYPE]” on page 638. Refer to “:SRATe” on page 660 for a list of minimum and maximum symbol rate values.

“:BURSt:SHAPe:FALL:TIME” on page 626 performs the same function. In compliance with the SCPI standard, both commands are listed.

For concept information on burst shaping, refer to the *E4428C/38C ESG Signal Generators User’s Guide*.

:BURSt:SHAPe:RDElay

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:EDGE:BURSt:SHAPe:RDElay <val>  
[ :SOURCE ] :RADio:EDGE:BURSt:SHAPe:RDElay?
```

This command sets the period of time that the start of the burst rise is delayed.

The variable <val> is expressed in bits. The minimum and maximum values depend upon modulation type and symbol rate.

***RST** +0.00000000E+000

Range -7.2000 to 99

Key Entry **Rise Delay**

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

To change the modulation type, refer to “:MODulation[:TYPE]” on page 638. Refer to “:SRATe” on page 660 for a list of minimum and maximum symbol rate values.

“:BURSt:SHAPe:RISE:DElay” on page 628 performs the same function. In compliance with the SCPI standard, both commands are listed.

For concept information on burst shaping, refer to the *E4428C/38C ESG Signal Generators User’s Guide*.

:BURSt:SHAPE:RISE:DELay

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:EDGE:BURSt:SHAPE:RISE:DELay <val>
```

```
[ :SOURCE ] :RADio:EDGE:BURSt:SHAPE:RISE:DELay?
```

This command sets the period of time that the start of the burst rise is delayed.

The variable <val> is expressed in bits. The minimum and maximum values depend upon modulation type and symbol rate.

***RST** +0.00000000E+000

Range -7.2000 to 99

Key Entry **Rise Delay**

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

To change the modulation type, refer to “:MODulation[:TYPE]” on page 638.

Refer to “:SRATE” on page 660 for a list of minimum and maximum symbol rate values.

“:BURSt:SHAPE:RDELay” on page 627 performs the same function. In compliance with the SCPI standard, both commands are listed.

For concept information on burst shaping, refer to the *E4428C/38C ESG Signal Generators User’s Guide*.

:BURSt:SHAPE:RISE:TIME

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:EDGE:BURSt:SHAPE:RISE:TIME <val>
```

```
[ :SOURCE ] :RADio:EDGE:BURSt:SHAPE:RISE:TIME?
```

This command sets the period of time where the burst increases from a minimum power to full power.

The variable <val> is expressed in bits. The minimum and maximum values depend upon modulation type and symbol rate.

***RST** +1.00000000E+001

Range 0.2000–16.4000

Key Entry **Rise Time**

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

To change the modulation type, refer to “:MODulation[:TYPE]” on page 638. Refer to “:SRATe” on page 660 for a list of minimum and maximum symbol rate values.

“:BURSt:SHAPe:RTIME” on page 629 performs the same function. In compliance with the SCPI standard, both commands are listed.

For concept information on burst shaping, refer to the *E4428C/38C ESG Signal Generators User’s Guide*.

:BURSt:SHAPe:RTIME

Supported E4438C with Option 402

[:SOURCE] :RADIo:EDGE:BURSt:SHAPe:RTIME <val>

[:SOURCE] :RADIo:EDGE:BURSt:SHAPe:RTIME?

This command sets the period of time where the burst increases from a minimum power to full power.

The variable <val> is expressed in bits. The minimum and maximum values depend upon modulation type and symbol rate.

***RST** +1.00000000E+001

Range 0.2000–16.4000

Key Entry **Rise Time**

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

To change the modulation type, refer to “:MODulation[:TYPE]” on page 638. Refer to “:SRATe” on page 660 for a list of minimum and

maximum symbol rate values.

“:BURSt:SHAPe:RISE:TIME” on page 628 performs the same function. In compliance with the SCPI standard, both commands are listed.

For concept information on burst shaping, refer to the *E4428C/38C ESG Signal Generators User’s Guide*.

:BURSt:SHAPE[:TYPE]

Supported E4438C with Option 402

```
[:SOURCE]:RADIO:EDGE:BURSt:SHAPE[:TYPE] SINE | "<file name>"
[:SOURCE]:RADIO:EDGE:BURSt:SHAPE[:TYPE] ?
```

This command sets the burst shape type.

SINE This choice selects a burst shape defined by the burst rise and fall *RST values.

"<file name>" This choice selects a user-defined file from signal generator memory.

***RST** SINE

Key Entry **Sine** **User File**

Remarks Refer to “[File Name Variables](#)” on page 13 for information on the file name syntax.

:BURSt[:STATe]

Supported E4438C with Option 402

```
[:SOURCE]:RADIO:EDGE:BURSt[:STATe] ON|OFF|1|0
[:SOURCE]:RADIO:EDGE:BURSt[:STATe] ?
```

This command enables or disables the burst function.

ON (1) This choice enables the transmission of framed data. If all timeslots which are switched on are up traffic channels or custom, you will be bursting the timeslots that are on; there will be no RF carrier during the off timeslots.

If you have switched on any timeslot that you have configured as a down traffic channel, the RF carrier is not switched off between any of the timeslots. The off timeslots are transmitted as a continuous series of ones for the time period of the off timeslots.

OFF (0) This choice enables the transmission of unframed data.

***RST** 0

Key Entry **Data Format Pattern Framed**

:CHANnel

Supported E4438C with Option 402

```
[:SOURCE]:RADio:EDGE:CHANnel EVM|ACP
[:SOURCE]:RADio:EDGE:CHANnel?
```

This command optimizes the Nyquist and root Nyquist filters to minimize error vector magnitude (EVM) or to minimize adjacent channel power (ACP).

EVM This choice provides the most ideal passband.

ACP This choice improves stopband rejection.

***RST** ACP

Key Entry **Optimize FIR For EVM ACP**

Remarks To change the current filter type, refer to “:FILTer” on page 635.

:DATA

Supported E4438C with Option 402

```
[:SOURCE]:RADio:EDGE:DATA PN9|PN11|PN15|PN20|PN23|FIX4|"<file name>"|EXT|
P4|P8|P16|P32|P64|PRAM
[:SOURCE]:RADio:EDGE:DATA?
```

This command sets the data pattern type (pseudo-random number sequence, 4-bit pattern, sequence of 1’s and 0’s, data from an external source, or a user file) for unframed data transmission.

***RST** PN9

Key Entry	PN9	PN11	PN15	PN20	PN23	FIX4	User File	Ext
	4 1’s & 4 0’s		8 1’s & 8 0’s		16 1’s & 16 0’s		32 1’s & 32 0’s	
	64 1’s & 64 0’s	PRAM File						

Remarks Refer to “File Name Variables” on page 13 for information on the file name syntax.

:DATA:PRAM

Supported E4438C with Option 402

```
[:SOURCE]:RADIO:EDGE:DATA:PRAM "<file_name>"
```

```
[:SOURCE]:RADIO:EDGE:DATA:PRAM?
```

This command selects a pattern RAM (PRAM) file as the pattern data type for the EDGE (Enhanced Data GSM Environment) format.

"<file_name>" This variable designates the PRAM file in WFM1. Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

Key Entry **PRAM File**

Remarks Selecting this data source forces the burst source to INTERNAL to allow framing control.

The PRAM file must reside in the signal generator’s volatile memory (WFM1) in order to be accessed by this command. For more information on PRAM files, refer to [“:DATA:PRAM:FILE:BLOCK” on page 111](#)

:DATA:FIX4

Supported E4438C with Option 402

```
[:SOURCE]:RADIO:EDGE:DATA:FIX4 <val>
```

```
[:SOURCE]:RADIO:EDGE:DATA:FIX4?
```

This command sets the binary, 4-bit repeating sequence data pattern for unframed transmission according to the modulation type, symbol rate, filter, and burst shape selected for the EDGE modulation format.

***RST** #B0000

Range #B0000–#B1111 or 0–15

Key Entry **FIX4**

Remarks FIX4 must already be defined as the data type.

To change the data type, refer to [“:DATA” on page 631](#).

:DEFault

Supported E4438C with Option 402

`[:SOURce]:RADio:EDGE:DEFault`

This command returns all of the EDGE modulation format parameters to factory settings. It does not affect any other signal generator parameters.

Key Entry **Restore EDGE Factory Default**

:EDATa:DELay

Supported E4438C with Option 402

`[:SOURce]:RADio:EDGE:EDATa:DELay?`

This query returns the amount of delay (in symbols) from the external data input to the beginning of the symbol on the I OUT and Q OUT rear panel connectors and the front panel RF OUTPUT connector.

***RST** +0.00000000E+000

Remarks When the EDGE format is turned off, the delay value is unchanged; the query will return the same delay value if the format is on or off.

:EDCLock

Supported E4438C with Option 402

`[:SOURce]:RADio:EDGE:EDCLock SYMBol|NORMal`

`[:SOURce]:RADio:EDGE:EDCLock?`

This command sets the external data clock use.

SYMBol This choice specifies that a continuous symbol clock signal must be provided to the SYMBOL SYNC input connector.

NORMal This choice specifies that the DATA CLOCK input connector requires a bit clock. The SYMBOL SYNC input connector requires a (one-shot or continuous) symbol sync signal.

***RST** NORM

Key Entry **Ext Data Clock Normal Symbol**

Remarks Both choices have no effect in internal clock mode. Refer to “[BBCLock](#)” on [page 623](#) to select EXT as the data clock type.

:EREFerence**Supported** E4438C with Option 402

[:SOURCE]:RADio:EDGE:EREFerence INT|EXT

[:SOURCE]:RADio:EDGE:EREFerence?

This command selects either an internal or external bit-clock reference for the data generator.

***RST** INT**Key Entry** **BBG Ref Ext Int**

Remarks If the EXT choice is selected, the external source's frequency value must be applied to the BASEBAND GEN REF IN rear panel connector. The external reference and external data clock are not applicable at the same time. If both are selected, then the external reference takes precedence.

Refer to, “:EREFerence:VALue” on page 634 to enter the external reference frequency setting.

:EREFerence:VALue**Supported** E4438C with Option 402

[:SOURCE]:RADio:EDGE:EREFerence:VALue <val>

[:SOURCE]:RADio:EDGE:EREFerence:VALue?

This command sets the expected bit-clock reference frequency value for an externally applied reference signal.

The variable <val> is expressed in units of hertz (Hz–MHz).

***RST** +1.30000000E+007**Range** 2.5E5–1E8**Key Entry** **Ext BBG Ref Freq**

Remarks The value specified by this command is effective only when you are using an external reference applied to the BASEBAND GEN REF IN rear panel connector.

Refer to “:EREFerence” on page 634 to select EXT (external source) as the reference for the bit-clock.

:FILTer

Supported E4438C with Option 402

```
[:SOURCE]:RADIO:EDGE:FILTer RNYquist|NYquist|GAUSSian|RECTangle|IS95|
IS95_EQ|IS95_MOD|IS95_MOD_EQ|EDGE|AC4Fm|UGGaussian|"<user FIR>"
[:SOURCE]:RADIO:EDGE:FILTer?
```

This command selects the pre-modulation filter type.

IS95	This choice selects a filter that meets the criteria of the IS-95 standard.																		
IS95_EQ	This choice selects a filter which is a combination of the IS-95 filter (above) and the equalizer filter described in the IS-95 standard. This filter is only used for IS-95 baseband filtering.																		
IS95_MOD	This choice selects a filter that meets the criteria of the IS-95 error function (for improved adjacent channel performance) with lower passband rejection than the filter specified in the IS-95 standard.																		
IS95_MOD_EQ	This choice selects a filter which is a combination of the equalizer filter described in the IS-95 standard and a filter that meets the criteria of the IS-95 error function (for improved adjacent channel performance), with lower passband rejection.																		
EDGE	This choice selects Laurant's decomposition of a Gaussian filter with a 0.300 fixed BbT.																		
AC4Fm	This choice selects a predefined Association of Public Safety Communications Officials (APCO) specified compatible 4-level frequency modulation (C4FM) filter.																		
UGGaussian	This choice selects a backwards compatible GSM Gaussian filter (Gaussian filter with a fixed BbT value of 0.300) for the ESG E44xxB Option UN3 or UN4.																		
"<user FIR>"	This variable is any filter file that you have stored into memory.																		
*RST	EDGE																		
Key Entry	<table border="0" style="width: 100%;"> <tr> <td>Root Nyquist</td> <td>Nyquist</td> <td>Gaussian</td> <td>Rectangle</td> <td>IS-95</td> <td>IS-95 w/EQ</td> </tr> <tr> <td>IS-95 Mod</td> <td>IS-95 Mod w/EQ</td> <td>EDGE</td> <td>APCO 25 C4FM</td> <td></td> <td></td> </tr> <tr> <td>UN3/4 GSM Gaussian</td> <td>User FIR</td> <td></td> <td></td> <td></td> <td></td> </tr> </table>	Root Nyquist	Nyquist	Gaussian	Rectangle	IS-95	IS-95 w/EQ	IS-95 Mod	IS-95 Mod w/EQ	EDGE	APCO 25 C4FM			UN3/4 GSM Gaussian	User FIR				
Root Nyquist	Nyquist	Gaussian	Rectangle	IS-95	IS-95 w/EQ														
IS-95 Mod	IS-95 Mod w/EQ	EDGE	APCO 25 C4FM																
UN3/4 GSM Gaussian	User FIR																		
Remarks	Refer to “File Name Variables” on page 13 for information on the file name syntax.																		

:IQ:SCALE

Supported E4438C with Option 402

[:SOURCE] :RADIO:EDGE:IQ:SCALE <val>

[:SOURCE] :RADIO:EDGE:IQ:SCALE?

This command sets the amplitude of the I/Q outputs for better adjacent channel power (ACP); lower scaling values equate to better ACP.

The variable <val> is expressed in units of percent.

***RST** +113

Range 1–200

Key Entry **I/Q Scaling**

Remarks This command has no effect with MSK or FSK modulation.

:MODulation:FSK[:DEVIation]

Supported E4438C with Option 402

[:SOURCE] :RADIO:EDGE:MODulation:FSK[:DEVIation] <val>

[:SOURCE] :RADIO:EDGE:MODulation:FSK[:DEVIation]?

This command sets the symmetric FSK frequency deviation value.

The variable <val> is expressed in units of Hertz and the maximum range value equals the current symbol rate value multiplied by four, limited to 20 MHz.

***RST** +4.00000000E+002

Range 0–2E7

Key Entry **Freq Dev**

Remarks To change the modulation type, refer to “:MODulation[:TYPE]” on page 638.

Refer to “:SRATE” on page 660 for a list of minimum and maximum symbol rate values.

To set an asymmetric FSK deviation value, refer to the *E4428C/38C ESG Signal Generators User’s Guide* for more information.

:MODulation:MSK[:PHASe]

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:EDGE:MODulation:MSK[:PHASe] <val>  
[ :SOURce ] :RADio:EDGE:MODulation:MSK[:PHASe] ?
```

This command sets the MSK phase deviation value.

The variable <val> is expressed in units of degrees.

***RST** +9.00000000E+001

Range 0–100

Key Entry **Phase Dev**

:MODulation:UFSK

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:EDGE:MODulation:UFSK "<file name>"  
[ :SOURce ] :RADio:EDGE:MODulation:UFSK ?
```

This command selects a user-defined FSK file from the signal generator memory.

Key Entry **User FSK**

Remarks The user-defined FSK file is held in signal generator memory until the command that selects user FSK as the modulation type is sent. Refer to [“:MODulation\[:TYPE\]” on page 638](#) to change the current modulation type.

Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:MODulation:UIQ

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:EDGE:MODulation:UIQ "<file name>"  
[ :SOURce ] :RADio:EDGE:MODulation:UIQ ?
```

This command selects a user-defined I/Q file from the signal generator memory.

Key Entry **User I/Q**

Remarks The user-defined I/Q file is held in signal generator memory until the command that selects user I/Q as the modulation type is sent. Refer to [“:MODulation\[:TYPE\]” on page 638](#) to change the current modulation type.

EDGE Subsystem—Option 402 ([:SOURCE]:RADIO:EDGE)

Refer to “File Name Variables” on page 13 for information on the file name syntax.

:MODulation[:TYPE]

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:EDGE:MODulation[:TYPE] BPSK|QPSK|IS95QPSK|GRAYQPSK|
OQPSK|IS95OQPSK|P4DQPSK|PSK8|PSK16|D8PSK|MSK|FSK2|FSK4|FSK8|FSK16|C4FM|
QAM4|QAM16|QAM32|QAM64|QAM128|QAM256|EDGE|UIQ|UFSK
[:SOURCE]:RADio:EDGE:MODulation[:TYPE] ?
```

This command sets the modulation type for the EDGE personality.

***RST** EDGE

Key Entry	BPSK	QPSK	IS-95 QPSK	Gray Coded QPSK	OQPSK			
	IS-95 OQPSK	$\pi/4$ DQPSK	8PSK	16PSK	D8PSK	MSK	2-Lvl FSK	
	4-Lvl FSK	8-Lvl FSK	16-Lvl FSK	C4FM	4QAM	16QAM	32QAM	
	64QAM	128QAM	256QAM	EDGE	User I/Q	User FSK		

:POLarity[:ALL]

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:EDGE:POLarity[:ALL] NORMal|INVerted
[:SOURCE]:RADio:EDGE:POLarity[:ALL] ?
```

This command sets the rotation direction for the phase modulation vector.

NORMal This choice selects normal phase polarity.

INVerted This choice inverts the internal Q signal.

***RST** NORM

Key Entry **Phase Polarity Normal Invert**

:SECondary:RECall

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:EDGE:SECondary:RECall
```

This command recalls the secondary frame configuration, overwriting the current frame.

Key Entry **Recall Secondary Frame State**

Remarks To save a secondary frame state, refer to “:SECondary:SAVE” on page 639.

A secondary frame is not active until the secondary state is enabled. To activate a secondary frame, refer to “:SECondary[:STATe]” on page 640.

:SECondary:SAVE

Supported E4438C with Option 402

`[:SOURCE]:RADio:EDGE:SECondary:SAVE`

This command saves the current frame configuration as the secondary frame with the filename `EDGE_SECONDARY_FRAME`.

Key Entry **Save Secondary Frame State**

Remarks To recall the secondary frame (saved in non-volatile signal generator memory), refer to “:SECondary:RECall” on page 638.

:SECondary:TRIGger[:SOURCE]

Supported E4438C with Option 402

`[:SOURCE]:RADio:EDGE:SECondary:TRIGger[:SOURCE] KEY|EXT|BUS`
`[:SOURCE]:RADio:EDGE:SECondary:TRIGger[:SOURCE]?`

This command selects the type of triggering for the secondary frame.

KEY This choice enables triggering by pressing the front panel **Trigger** hardkey.

EXT This choice enables triggering using an externally applied signal at the PATT TRIG IN rear panel connector or the PATT TRIG IN 2 pin on the rear panel AUX I/O connector. To select the appropriate connection, refer to “:TRIGger[:SOURCE]:EXTernal[:SOURCE]” on page 666.

BUS This choice enables GPIB triggering using the *TRG or GET command or LAN and RS-232 triggering using the *TRG command.

Key Entry **Trigger Key Ext Bus**

:SECondary[:STATe]**Supported** E4438C with Option 402

[:SOURCE]:RADIO:EDGE:SECondary[:STATe] ON|OFF|1|0

[:SOURCE]:RADIO:EDGE:SECondary[:STATe] ?

This command enables or disables the ability to switch to the secondary frame.

RST** 0**Key Entry** **Secondary Frame Off On*Remarks** A frame must already be saved as the secondary frame in order to turn the secondary state function on.

To save a frame as the secondary frame, refer to “:SECondary:SAVE” on page 639.

:SLOT0|[1]|2|3|4|5|6|7:CUSTom**Supported** E4438C with Option 402

[:SOURCE]:RADIO:EDGE:SLOT0|[1]|2|3|4|5|6|7:CUSTom PN9|PN11|PN15|PN20|PN23|FIX4|"<file name>"|EXT|P4|P8|P16|P32|P64

[:SOURCE]:RADIO:EDGE:SLOT0|[1]|2|3|4|5|6|7:CUSTom?

This command sets the data pattern type (pseudo-random number sequence, 4-bit pattern, sequence of 1's and 0's, data from an external source, or a user file) for framed data transmission.

***RST** PN9**Key Entry** **PN9 PN15 FIX4 User File Ext 4 1's & 4 0's 8 1's & 8 0's**
16 1's & 16 0's 32 1's & 32 0's 64 1's & 64 0's**Remarks** Refer to “File Name Variables” on page 13 for information on the file name syntax.

Refer to “:SLOT0|[1]|2|3|4|5|6|7[:TYPE]” on page 658

:SLOT0|[1]|2|3|4|5|6|7:CUSTom:FIX4

Supported E4438C with Option 402

```
[:SOURCE]:RADio:EDGE:SLOT0|[1]|2|3|4|5|6|7:CUSTom:FIX4 <val>
[:SOURCE]:RADio:EDGE:SLOT0|[1]|2|3|4|5|6|7:CUSTom:FIX4?
```

This command sets the binary, 4-bit repeating sequence data pattern that is used in the selected custom timeslot.

***RST** #B0000

Range #B0000–#B1111 or 0–15

Key Entry **FIX4**

Remarks FIX4 must already be defined as the data type.

To change the data type, refer to “:SLOT0|[1]|2|3|4|5|6|7:CUSTom” on page 640.

:SLOT0|[1]|2|3|4|5|6|7:CUSTom:GUARd

Supported E4438C with Option 402

```
[:SOURCE]:RADio:EDGE:SLOT0|[1]|2|3|4|5|6|7:CUSTom:
GUARd <24 or 27 bit_pattern>
[:SOURCE]:RADio:EDGE:SLOT0|[1]|2|3|4|5|6|7:CUSTom:GUARd?
```

This command defines the hexadecimal value for the guard time field in the selected custom timeslot.

***RST** Timeslots 0 & 4: #H7FFFFFFF
 Timeslots: 1, 2, 3, 5, 6, &7: #H0FFFFFFF

Range Timeslots 0 & 4: #H0–#H7FFFFFFF
 Timeslots: 1, 2, 3, 5, 6, &7: #H0–#H0FFFFFFF

Key Entry **G**

Remarks The guard time field is always modulated (but not bursted), even when the timeslot is off.

If the guard time and T2 symbols of the current timeslot and the T1 symbols of the next timeslot do not match, the burst shape may not be smooth (even if the current timeslot is turned off).

To change the current timeslot type, refer to “:SLOT0|[1]|2|3|4|5|6|7[:TYPE]” on page 658.

:SLOT0|[1]|2|3|4|5|6|7:GMSK:ENCryption**Supported** E4438C with Option 402

```
[:SOURCE]:RADIO:EDGE:SLOT0|[1]|2|3|4|5|6|7:GMSK:ENCryption PN9|PN15|
FIX4|"<file name>"|P4|P8|P16|P32|P64|TCHFS|CS1|CS4|DMCS1|UMCS1
[:SOURCE]:RADIO:EDGE:SLOT0|[1]|2|3|4|5|6|7:GMSK:ENCryption?
```

This command selects the data pattern type or the multiframe channel (structure) for the selected GMSK timeslot.

There are two types of multiframe structures, a 26 and a 52 frame structure. The 26 frame structure has the following attributes:

- frame 12 contains the slow associated control channel (SACCH)
- frame 25 is idle and incorporates RF blanking

The 52 frame structure has the following attributes:

- frames 12 and 38 contain tail and control bits with the payload bits set to zero.
- Frames 25 and 51 are idle and incorporate RF blanking.

PN9, PN15 These choices are standard PN sequences. For bursted data, the PN sequences continuously repeat from one timeslot in a frame to the matching timeslot in the next frame.

FIX4 This choice selects a repeating 4-bit pattern.

"<file name>" This choice selects a user-defined data file from signal generator memory. The file must supply enough bits to fill the desired number of timeslots. In timeslots where there is not enough bits to fill the encryption fields, the ESG ignores the data.

P4 This choice selects a data pattern with four ones followed by four zeros. The pattern repeats as needed to fill the encryption fields.

P8 This choice selects a data pattern with eight ones followed by eight zeros. The pattern repeats as needed to fill the encryption fields.

P16 This choice selects a data pattern with 16 ones followed by 16 zeros. The pattern repeats as needed to fill the encryption fields.

P32 This choice selects a data pattern with 32 ones followed by 32 zeros. The pattern repeats as needed to fill the encryption fields.

P64 This choice selects a data pattern with 64 ones followed by 64 zeros. The pattern repeats as needed to fill the encryption fields.

TCHFS This multiframe choice selects a traffic channel with full rate speech (TCH/FS).

CS-1	This multiframe choice selects the packet data traffic channel that uses the packet data block type 1 coding scheme in accordance with the 3GPP standard GSM 05.03.																					
CS4	This multiframe choice selects the packet data traffic channel that uses the packet data block type 4 coding scheme in accordance with the 3GPP standard GSM 05.03.																					
DMCS1	This multiframe choice selects the downlink packet data traffic channel that uses the packet data block type 5 modulation and coding scheme in accordance with the 3GPP standard GSM 05.03.																					
UMCS1	This multiframe choice selects the uplink packet data traffic channel that uses the packet data block type 5 modulation and coding scheme in accordance with the 3GPP standard GSM 05.03.																					
*RST	PN9																					
Key Entry	<table border="0" style="width: 100%;"> <tr> <td>PN9</td> <td>PN15</td> <td>FIX4</td> <td>User File</td> <td>Ext</td> <td>4 1's & 4 0's</td> <td>8 1's & 8 0's</td> </tr> <tr> <td>16 1's & 16 0's</td> <td>32 1's & 32 0's</td> <td>64 1's & 64 0's</td> <td>TCH/FS</td> <td>CS-1</td> <td></td> <td></td> </tr> <tr> <td>CS-4</td> <td>Downlink MCS-1</td> <td>Uplink MCS-1</td> <td></td> <td></td> <td></td> <td></td> </tr> </table>	PN9	PN15	FIX4	User File	Ext	4 1's & 4 0's	8 1's & 8 0's	16 1's & 16 0's	32 1's & 32 0's	64 1's & 64 0's	TCH/FS	CS-1			CS-4	Downlink MCS-1	Uplink MCS-1				
PN9	PN15	FIX4	User File	Ext	4 1's & 4 0's	8 1's & 8 0's																
16 1's & 16 0's	32 1's & 32 0's	64 1's & 64 0's	TCH/FS	CS-1																		
CS-4	Downlink MCS-1	Uplink MCS-1																				

:SLOT0|[1]|2|3|4|5|6|7:GMSK:ENCryption:CS1:DATA

Supported	E4438C with Option 402
	[:SOURce]:RADio:EDGE:SLOT0 [1] 2 3 4 5 6 7:GMSK:ENCryption:CS1:DATA PN9 PN15
	[:SOURce]:RADio:EDGE:SLOT0 [1] 2 3 4 5 6 7:GMSK:ENCryption:CS1:DATA?
	This command selects the encryption field data for the selected GMSK timeslot that uses the packet data block type 1 coding scheme.
*RST	PN9
Key Entry	PN9 PN15
Remarks	Refer to “:SLOT0 [1] 2 3 4 5 6 7:GMSK:ENCryption” on page 642 for selecting the coding scheme.

:SLOT0|[1]|2|3|4|5|6|7:GMSK:ENCRyption:CS4:DATA**Supported** E4438C with Option 402

[:SOURCE]:RADIO:EDGE:SLOT0|[1]|2|3|4|5|6|7:GMSK:ENCRyption:CS4:DATA PN9|PN15

[:SOURCE]:RADIO:EDGE:SLOT0|[1]|2|3|4|5|6|7:GMSK:ENCRyption:CS4:DATA?

This command selects the encryption field data for the selected GMSK timeslot that uses the packet data block type 4 coding scheme.

***RST** PN9**Key Entry** **PN9 PN15**

Remarks Refer to “[:SLOT0|\[1\]|2|3|4|5|6|7:GMSK:ENCRyption](#)” on page 642 for selecting the coding scheme.

:SLOT0|[1]|2|3|4|5|6|7:GMSK:ENCRyption:DLINK:MCS1:DATA**Supported** E4438C with Option 402

[:SOURCE]:RADIO:EDGE:SLOT0|[1]|2|3|4|5|6|7:GMSK:ENCRyption:DLINK:MCS1:DATA PN9|PN15

[:SOURCE]:RADIO:EDGE:SLOT0|[1]|2|3|4|5|6|7:GMSK:ENCRyption:DLINK:MCS1:DATA?

This command selects the encryption field data for the selected GMSK timeslot that uses the downlink packet data block type 5 modulation and coding scheme.

***RST** PN9**Key Entry** **PN9 PN15**

Remarks Refer to “[:SLOT0|\[1\]|2|3|4|5|6|7:GMSK:ENCRyption](#)” on page 642 for selecting the coding scheme.

:SLOT0|[1]|2|3|4|5|6|7:GMSK:ENCRyption:FIX4**Supported** E4438C with Option 402

[:SOURCE]:RADIO:EDGE:SLOT0|[1]|2|3|4|5|6|7:GMSK:ENCRyption:FIX4 <val>

[:SOURCE]:RADIO:EDGE:SLOT0|[1]|2|3|4|5|6|7:GMSK:ENCRyption:FIX4?

This command sets the encryption field with a 4-bit binary repeating data pattern for the selected GMSK timeslot.

The variable <val> accepts values in binary, hexadecimal, or decimal format, however the query returns only binary values.

*RST	#B0000
Range	0–15
Key Entry	FIX4
Remarks	Refer to “:SLOT0 [1] 2 3 4 5 6 7:GMSK:ENCrypTion” on page 642 for selecting the data type.

:SLOT0|[1]|2|3|4|5|6|7:GMSK:ENCrypTion:TCH:FS:DATA

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:EDGE:SLOT0 | [1] | 2 | 3 | 4 | 5 | 6 | 7 :GMSK:ENCrypTion:TCH:FS:
DATA PN9 | PN15
```

```
[ :SOURCE ] :RADio:EDGE:SLOT0 | [1] | 2 | 3 | 4 | 5 | 6 | 7 :GMSK:ENCrypTion:TCH:FS:DATA?
```

This command sets the encryption field data for the selected GMSK timeslot configured as the traffic channel with full speech (TCH/FS).

*RST	PN9
Key Entry	PN9 PN15
Remarks	Refer to “:SLOT0 [1] 2 3 4 5 6 7:GMSK:ENCrypTion” on page 642 for selecting the TCH/FS.

:SLOT0|[1]|2|3|4|5|6|7:GMSK:ENCrypTion:ULINK:MCS1:DATA

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:EDGE:SLOT0 | [1] | 2 | 3 | 4 | 5 | 6 | 7 :GMSK:ENCrypTion:ULINK:MCS1:
DATA { PN9 } | PN15
```

```
[ :SOURCE ] :RADio:EDGE:SLOT0 | [1] | 2 | 3 | 4 | 5 | 6 | 7 :GMSK:ENCrypTion:ULINK:MCS1:
DATA?
```

This command selects the encryption field data for the selected GMSK timeslot that uses the uplink packet data block type 5 modulation and coding scheme.

*RST	PN9
Key Entry	PN9 PN15
Remarks	Refer to “:SLOT0 [1] 2 3 4 5 6 7:GMSK:ENCrypTion” on page 642 for selecting the coding scheme.

:SLOT0|[1]|2|3|4|5|6|7:GMSK:STeal**Supported** E4438C with Option 402

```
[:SOURCE]:RADIO:EDGE:SLOT0|[1]|2|3|4|5|6|7:GMSK:STeal 0|1
[:SOURCE]:RADIO:EDGE:SLOT0|[1]|2|3|4|5|6|7:GMSK:STeal?
```

This command specifies the stealing bit (1-bit S field) for the selected GMSK timeslot. The single bit defines the value for both stealing (S) fields.

The stealing flag field accepts values in binary, hexadecimal, or decimal format, however the query returns only hexadecimal values.

RST** #H0**Key Entry** **S*:SLOT0|[1]|2|3|4|5|6|7:GMSK:TSEquence****Supported** E4438C with Option 402

```
[:SOURCE]:RADIO:EDGE:SLOT0|[1]|2|3|4|5|6|7:GMSK:TSEquence TSC0|TSC1|
TSC2|TSC3|TSC4|TSC5|TSC6|TSC7|<26-bit pattern>
[:SOURCE]:RADIO:EDGE:SLOT0|[1]|2|3|4|5|6|7:GMSK:TSEquence?
```

This command changes the 26-bit training sequence (TS) for the selected GMSK timeslot.

The query returns the current training sequence hexadecimal value. Use the following table to match the hexadecimal values to the training sequences of TSC0–TSC7.

Training Sequence	Hexadecimal Value
TSC0	0970897
TSC1	0B778B7
TSC2	10EE90E
TSC3	11ED11E
TSC4	06B906B
TSC5	13AC13A

Training Sequence	Hexadecimal Value
TSC6	29F629F
TSC7	3BC4BBC

***RST** #H0970897

Range <26-bit pattern>: #H0–#H3FFFFFF

Key Entry **TSC0 TSC1 TSC2 TSC3 TSC4 TSC5 TSC6 TSC7**
Custom TS

:SLOT0|[1]|2|3|4|5|6|7:MULTIslot

Supported E4438C with Option 402

```
[:SOURce]:RADio:EDGE:SLOT0|[1]|2|3|4|5|6|7:MULTIslot ON|OFF|1|0
[:SOURce]:RADio:EDGE:SLOT0|[1]|2|3|4|5|6|7:MULTIslot?
```

This command turns bursting (ramping) on or off between the selected timeslot and the next higher numbered adjacent timeslot.

ON (1) This choice turns ramping off between timeslots.

OFF (0) This choice turns ramping on between timeslots.

***RST** 0

Key Entry **Multislot Off On**

Remarks Turning multislot on between an EDGE and GMSK timeslot may produce undesired spectral content. The undesired spectral content is a byproduct of the transition between two different modulation types without ramping.

:SLOT0|[1]|2|3|4|5|6|7:NORMal:ENCRyption

Supported E4438C with Options 402 or 416

```
[ :SOURCE ] :RADio:EDGE:SLOT0 | [1] | 2 | 3 | 4 | 5 | 6 | 7 :NORMal:ENCRyption PN9 | PN11 |
PN15 | PN20 | PN23 | FIX4 | "<filename>" | EXT | P4 | P8 | P16 | P32 | P64 | DMCS9 | UMCS9 | DMCS5
| UMCS5 | ETCHF43 | UNCOded | EBCH1 | EBCH2
[ :SOURCE ] :RADio:EDGE:SLOT0 | [1] | 2 | 3 | 4 | 5 | 6 | 7 :NORMal:ENCRyption?
```

This command selects the data pattern type or the multiframe channel (structure) for the selected normal timeslot.

There are two types of multiframe structures, a 26 and a 52 frame structure. The 26 frame structure has the following attributes:

- frame 12 contains the slow associated control channel (SACCH)
- frame 25 is idle and incorporates RF blanking

The 52 frame structure has the following attributes:

- frames 12 and 38 contain tail and control bits with the payload bits set to zero.
- Frames 25 and 51 are idle and incorporate RF blanking.

PN9–23 These choices are standard PN sequences. For bursted data, the PN sequences continuously repeat from one timeslot in a frame to the matching timeslot in the next frame.

FIX4 This choice selects a repeating 4-bit binary pattern.

"<filename>" This choice selects a user-defined data file from signal generator memory. The file must supply enough bits to fill the desired number of timeslots. In timeslots where there are not enough bits to fill the encryption fields, the ESG ignores the data.

EXT This choice selects an external user signal as the modulating data stream. Connect the externally supplied serial data signal to the front panel DATA BNC connector.

NOTE The EXT selection is not available when configuring both GMSK and EDGE normal timeslots for the same signal.

P4 This choice selects a data pattern with four ones followed by four zeros. The pattern repeats as needed to fill the encryption fields.

P8 This choice selects a data pattern with eight ones followed by eight zeros. The pattern repeats as needed to fill the encryption fields.

P16	This choice selects a data pattern with 16 ones followed by 16 zeros. The pattern repeats as needed to fill the encryption fields.
P32	This choice selects a data pattern with 32 ones followed by 32 zeros. The pattern repeats as needed to fill the encryption fields.
P64	This choice selects a data pattern with 64 ones followed by 64 zeros. The pattern repeats as needed to fill the encryption fields.
DMCS9	This multiframe choice selects the downlink packet data traffic channel that uses the packet data block type 13 modulation and coding scheme in accordance with the 3GPP standard GSM 05.03.
UMCS9	This multiframe choice selects the uplink packet data traffic channel that uses the packet data block type 13 modulation and coding scheme in accordance with the 3GPP standard GSM 05.03.
DMCS5	This multiframe choice selects the downlink packet data traffic channel that uses the packet data block type 9 modulation and coding scheme in accordance with the 3GPP standard GSM 05.03.
UMCS5	This multiframe choice selects the uplink packet data traffic channel that uses the packet data block type 9 modulation and coding scheme in accordance with the 3GPP standard GSM 05.03.
ETCH43	This multiframe choice selects an enhanced circuit switched full rate traffic channel with a user data rate of 43.2k-bits per second
Uncoded	This choice selects an uncoded channel.
EBCH1	This multiframe choice selects a <i>non-combined</i> broadcast channel for timeslot zero. Use this selection when timeslot zero is the only multiframe timeslot within the frame (timeslots 0–7). Trying to use a multiframe choice for another timeslot (timeslots 1–7) when timeslot zero is configured as a BCH, will create a settings conflict error.
EBCH2	This multiframe choice selects a <i>combined</i> broadcast channel for timeslot zero. Use this selection when timeslot zero is the only multiframe timeslot within the frame (timeslots 0–7). Trying to use a multiframe choice for another timeslot (timeslots 1–7) when timeslot zero is configured as a BCH, will create a settings conflict error.
*RST	PN9

EDGE Subsystem–Option 402 ([:SOURCE]:RADIO:EDGE)

Key Entry	PN9	PN11	PN15	PN20	PN23	FIX4	User File	EXT
	4 1's & 4 0's		8 1's & 8 0's		16 1's & 16 0's		32 1's & 32 0's	
	64 1's & 64 0's		Downlink MCS-9		Uplink MCS-9		Downlink MCS-5	
	Uplink MCS-5		E-TCH/F43.2		Uncoded			
Remarks	Refer to “ File Name Variables ” on page 13 for information on the file name syntax.							
	To change the current timeslot type, refer to “ :SLOT0 [1] 2 3 4 5 6 7[:TYPE] ” on page 658.							

:SLOT0:NORMAL:ENCRyption:BCH:BCC

Supported E4438C with Option 416416

[:SOURCE] :RADIO:EDGE:SLOT0:NORMAL:ENCRyption:BCH:BCC <val>

[:SOURCE] :RADIO:EDGE:SLOT0:NORMAL:ENCRyption:BCH:BCC?

This command sets the broadcast control code (BCC) which is used to indicate what training sequence is being used by the basestation in the forward channels. This code will allow the mobile station to decode the other channels in the broadcast channel.

***RST** 0

Range 0–7

:SLOT0:NORMAL:ENCRyption:BCH:CELLid

Supported E4438C with Option 416

[:SOURCE] :RADIO:EDGE:SLOT0:NORMAL:ENCRyption:BCH:CELLid <val>

[:SOURCE] :RADIO:EDGE:SLOT0:NORMAL:ENCRyption:BCH:CELLid?

This command sets the cell identification. The purpose of the cell identity information element is to identify a cell within a location area.

***RST** 0

Range 0–65535

:SLOT0:NORMAL:ENCRyption:BCH:LAC

Supported E4438C with Option 416

```
[ :SOURCE ] :RADIo:EDGE:SLOT0:NORMAl:ENCRyption:BCH:LAC <val>  
[ :SOURCE ] :RADIo:EDGE:SLOT0:NORMAl:ENCRyption:BCH:LAC?
```

This command sets the location area code (LAC). The location area code provides 16 bits to allow the administrator to define a location.

***RST** 0

Range 0–65535

:SLOT0:NORMAL:ENCRyption:BCH:MCC

Supported E4438C with Option 416

```
[ :SOURCE ] :RADIo:EDGE:SLOT0:NORMAl:ENCRyption:BCH:MCC <val>  
[ :SOURCE ] :RADIo:EDGE:SLOT0:NORMAl:ENCRyption:BCH:MCC?
```

This command sets the mobile country code (MCC). The mobile country code is a 12 bit number used to represent the country where the basestation is located.

***RST** 0

Range 0–4095

:SLOT0:NORMAL:ENCRyption:BCH:MNC

Supported E4438C with Option 416

```
[ :SOURCE ] :RADIo:EDGE:SLOT0:NORMAl:ENCRyption:BCH:MNC <val>  
[ :SOURCE ] :RADIo:EDGE:SLOT0:NORMAl:ENCRyption:BCH:MNC?
```

This command sets the mobile network code (MNC). The mobile network code is the individual number a network will be assigned.

***RST** 0

Range 0–255

Remarks Federal regulation mandates that a 3-digit MNC will be used. For the ESG implementation the upper four bits are set to 1111.

:SLOT0:NORMAL:ENCRyption:BCH:PLMN**Supported** E4438C with Option 416

[:SOURCE]:RADIO:EDGE:SLOT0:NORMAL:ENCRyption:BCH:PLMN <val>

[:SOURCE]:RADIO:EDGE:SLOT0:NORMAL:ENCRyption:BCH:PLMN?

This command is used to set the Public Land Mobile Network (PLMN) which is used to indicate the country the phone is in. PLMN is also referred to as the National Country Code (NCC).

RST** 0**Range** 0–7**:SLOT0|[1]|2|3|4|5|6|7:NORMAL:ENCRyption:DLINK:MCS5:DATA*Supported** E4438C with Option 402

[:SOURCE]:RADIO:EDGE:SLOT0|[1]|2|3|4|5|6|7:NORMAL:ENCRyption:DLINK:MCS5:DATA PN9|PN15

[:SOURCE]:RADIO:EDGE:SLOT0|[1]|2|3|4|5|6|7:NORMAL:ENCRyption:DLINK:MCS5:DATA?

This command sets the data type (pseudo-random number sequence) for the enhanced general packet radio service (EGPRS) modulation and coding scheme 5 (MCS-5) downlink channel.

***RST** PN9**Key Entry** **PN9 PN15**

Remarks To select downlink MCS-5 as the multiframe channel type, refer to “:SLOT0|[1]|2|3|4|5|6|7:NORMAL:ENCRyption” on page 648.

:SLOT0|[1]|2|3|4|5|6|7:NORMAL:ENCRyption:DLINK:MCS9:DATA

Supported E4438C with Option 402

```
[ :SOURCE ] :RADIO:EDGE:SLOT0 | [1] | 2 | 3 | 4 | 5 | 6 | 7 :NORMAL:ENCRyption:DLINK:MCS9 :  
DATA PN9 | PN15
```

```
[ :SOURCE ] :RADIO:EDGE:SLOT0 | [1] | 2 | 3 | 4 | 5 | 6 | 7 :NORMAL:ENCRyption:DLINK:MCS9 :  
DATA?
```

This command sets the data type (pseudo-random number sequence) for the enhanced general packet radio service (EGPRS) modulation and coding scheme 9 (MCS-9) downlink channel.

***RST** PN9

Key Entry **PN9 PN15**

Remarks To select downlink MCS-9 as the multiframe channel type, refer to
[“:SLOT0|\[1\]|2|3|4|5|6|7:NORMAL:ENCRyption”](#) on page 648.

:SLOT0|[1]|2|3|4|5|6|7:NORMAL:ENCRyption:ETCH:F43:DATA

Supported E4438C with Option 402

```
[ :SOURCE ] :RADIO:EDGE:SLOT0 | [1] | 2 | 3 | 4 | 5 | 6 | 7 :NORMAL:ENCRyption:ETCH:F43 :  
DATA PN9 | PN15
```

```
[ :SOURCE ] :RADIO:EDGE:SLOT0 | [1] | 2 | 3 | 4 | 5 | 6 | 7 :NORMAL:ENCRyption:ETCH:F43 :  
DATA?
```

This command sets the data type (pseudo-random number sequence) for the enhanced, circuit switched, full-rate traffic channel with 43.2k-bits per second of user data (E-TCH/F43.2).

***RST** PN9

Key Entry **PN9 PN15**

Remarks To select E-TCH/F43.2 as the multiframe channel type, refer to
[“:SLOT0|\[1\]|2|3|4|5|6|7:NORMAL:ENCRyption”](#) on page 648.

:SLOT0|[1]|2|3|4|5|6|7:NORMAL:ENCRyption:FIX4**Supported** E4438C with Option 402

```
[:SOURCE]:RADIO:EDGE:SLOT0|[1]|2|3|4|5|6|7:NORMAL:ENCRyption:FIX4 <val>
[:SOURCE]:RADIO:EDGE:SLOT0|[1]|2|3|4|5|6|7:NORMAL:ENCRyption:FIX4?
```

This command sets the binary, 4-bit repeating sequence data pattern for framed transmission according to the modulation type, symbol rate, filter, and burst shape selected for the EDGE modulation format.

RST** #B0000**Range** #B0000–#B1111 or 0–15**Key Entry** **FIX4*Remarks** FIX4 must already be selected as the data type.

To select FIX4 as the data type, refer to
[“:SLOT0|\[1\]|2|3|4|5|6|7:NORMAL:ENCRyption” on page 648.](#)

:SLOT0|[1]|2|3|4|5|6|7:NORMAL:ENCRyption:ULINK:MCS5:DATA**Supported** E4438C with Option 402

```
[:SOURCE]:RADIO:EDGE:SLOT0|[1]|2|3|4|5|6|7:NORMAL:ENCRyption:ULINK:MCS5:
DATA PN9|PN15
[:SOURCE]:RADIO:EDGE:SLOT0|[1]|2|3|4|5|6|7:NORMAL:ENCRyption:ULINK:MCS5:
DATA?
```

This command sets the data type (pseudo-random number sequence) for the enhanced general packet radio service (EGPRS) modulation and coding scheme 5 (MCS-5) uplink channel.

***RST** PN9**Key Entry** **PN9 PN15**

Remarks To select uplink MCS-5 as the multiframe channel type, refer to
[“:SLOT0|\[1\]|2|3|4|5|6|7:NORMAL:ENCRyption” on page 648.](#)

:SLOT0|[1]|2|3|4|5|6|7:NORMAL:ENCRyption:ULINK:MCS9:DATA

Supported E4438C with Option 402

[:SOURCE] :RADIO:EDGE:SLOT0 | [1] | 2 | 3 | 4 | 5 | 6 | 7 :NORMAL:ENCRyption:ULINK:MCS9:DATA PN9 | PN15

[:SOURCE] :RADIO:EDGE:SLOT0 | [1] | 2 | 3 | 4 | 5 | 6 | 7 :NORMAL:ENCRyption:ULINK:MCS9:DATA?

This command sets the data type (pseudo-random number sequence) for the enhanced general packet radio service (EGPRS) modulation and coding scheme 9 (MCS-9) uplink channel.

***RST** PN9

Key Entry PN9 PN15

Remarks To select uplink MCS-9 as the multiframe channel type, refer to “:SLOT0|[1]|2|3|4|5|6|7:NORMAL:ENCRyption” on page 648.

:SLOT0|[1]|2|3|4|5|6|7:NORMAL:ENCRyption:UNCoded

Supported E4438C with Option 402

[:SOURCE] :RADIO:EDGE:SLOT0 | [1] | 2 | 3 | 4 | 5 | 6 | 7 :NORMAL:ENCRyption:UNCoded PN9 | PN15

[:SOURCE] :RADIO:EDGE:SLOT0 | [1] | 2 | 3 | 4 | 5 | 6 | 7 :NORMAL:ENCRyption:UNCoded?

This command sets the data type (pseudo-random number sequence) for an uncoded channel.

***RST** PN9

Key Entry PN9 PN15

Remarks To select uncoded as the multiframe channel type, refer to “:SLOT0|[1]|2|3|4|5|6|7:NORMAL:ENCRyption” on page 648.

:SLOT0|[1]|2|3|4|5|6|7:NORMAL:GUARD**Supported** E4438C with Option 402

[:SOURCE]:RADIO:EDGE:SLOT0|[1]|2|3|4|5|6|7:NORMAL:

GUARD <24 or 27 bit_pattern>

[:SOURCE]:RADIO:EDGE:SLOT0|[1]|2|3|4|5|6|7:NORMAL:GUARD?

This command sets the hexadecimal value for the guard time field in the selected normal timeslot.

***RST** Timeslots 0 & 4: #H7FFFFFF
 Timeslots: 1, 2, 3, 5, 6, &7: #H0FFFFFF

Range Timeslots 0 & 4: #H0–#H7FFFFFF
 Timeslots: 1, 2, 3, 5, 6, &7: #H0–#H0FFFFFF

Key Entry **G**

Remarks The guard time field is always modulated (but not bursted), even when the timeslot is off.

If the guard time and T2 symbols of the current timeslot and the T1 symbols of the next timeslot do not match, the burst shape may not be smooth (even if the current timeslot is turned off).

To change the current timeslot type, refer to “[:SLOT0|\[1\]|2|3|4|5|6|7\[:TYPE\]](#)” on [page 658](#).

:SLOT0|[1]|2|3|4|5|6|7:NORMAL:T1**Supported** E4438C with Option 402

[:SOURCE]:RADIO:EDGE:SLOT0|[1]|2|3|4|5|6|7:NORMAL:T1 <9 bit_pattern>

[:SOURCE]:RADIO:EDGE:SLOT0|[1]|2|3|4|5|6|7:NORMAL:T1?

This command sets the hexadecimal value for the leading 9-bit tail field in the selected normal timeslot.

***RST** #H1FF**Range** #H0–#H1FF**Key Entry** **T1**

:SLOT0|[1]|2|3|4|5|6|7:NORMAl:T2

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:EDGE:SLOT0 | [1] | 2 | 3 | 4 | 5 | 6 | 7 :NORMAl:T2 <9 bit_pattern>
[ :SOURce ] :RADio:EDGE:SLOT0 | [1] | 2 | 3 | 4 | 5 | 6 | 7 :NORMAl:T2?
```

This command sets the hexadecimal value for the trailing 9-bit tail field in the selected normal timeslot.

***RST** #H1FF
Range #H0–#H1FF
Key Entry T2

:SLOT0|[1]|2|3|4|5|6|7:NORMAl:TSEQUence

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:EDGE:SLOT0 | [1] | 2 | 3 | 4 | 5 | 6 | 7 :NORMAl:TSEQUence TSC0|TSC1|
TSC2|TSC3|TSC4|TSC5|TSC6|TSC7|<78 bit_pattern>
[ :SOURce ] :RADio:EDGE:SLOT0 | [1] | 2 | 3 | 4 | 5 | 6 | 7 :NORMAl:TSEQUence?
```

This command sets the 78-bit training sequence code for a normal timeslot to one of eight values or to create a custom value.

***RST** #H3F3F9E49FFF3FF3F9E49
Range <78 bit_pattern>: #H0–#H3FFFFFFFFFFFFFFFFFFFFF
Key Entry TSC0 TSC1 TSC2 TSC3 TSC4 TSC5 TSC6 TSC7
Custom TS

:SLOT0|[1]|2|3|4|5|6|7:LCAPacity:POWer

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:EDGE:SLOT0 | [1] | 2 | 3 | 4 | 5 | 6 | 7 :POWer MAIN|DELTA
[ :SOURce ] :RADio:EDGE:SLOT0 | [1] | 2 | 3 | 4 | 5 | 6 | 7 :POWer?
```

This command toggles the RF output power level function for the selected timeslot.

MAIN This choice specifies RF output as the main power level.
DELTA This choice specifies RF output as the alternative power level.
***RST** MAIN
Key Entry Timeslot Ampl Main Delta

:SLOT0|[1]|2|3|4|5|6|7:STATe**Supported** E4438C with Option 402

```
[:SOURCE]:RADIO:EDGE:SLOT0 [1] | 2 | 3 | 4 | 5 | 6 | 7:STATe ON|OFF|1|0
[:SOURCE]:RADIO:EDGE:SLOT0 [1] | 2 | 3 | 4 | 5 | 6 | 7:STATe?
```

This command enables or disables the operating state of the selected timeslot.

***RST** Timeslot 0: 1 Timeslots 1–7: 0

Key Entry Timeslot Off On

:SLOT0|[1]|2|3|4|5|6|7[:TYPE]**Supported** E4438C with Option 402

```
[:SOURCE]:RADIO:EDGE:SLOT0 [1] | 2 | 3 | 4 | 5 | 6 | 7[:TYPE] CUSTom|NORMAl|GMSK|
NORMAL_ALL
[:SOURCE]:RADIO:EDGE:SLOT0 [1] | 2 | 3 | 4 | 5 | 6 | 7[:TYPE]?
```

This command sets the timeslot type for the selected timeslot.

CUSTom This choice selects a generic, non-standard timeslot configuration that consists of a data field and a guard field.

NORMAl This choice selects a normal timeslot configuration for an EDGE signal.

GMSK This choice selects a normal GSM timeslot (GMSK modulation). Selecting a different EDGE modulation type does not change the GMSK modulation for a GMSK configured timeslot.

NORMAL_ALL This choice sets all timeslots to a normal timeslot configuration for an EDGE signal, regardless of the timeslot number selected.

***RST** NORM

Key Entry Custom Normal GMSK Normal All

:SOUT:**Supported** E4438C with Option 402

```
[:SOURCE]:RADIO:EDGE:SOUT FRAME|SLOT|ALL
[:SOURCE]:RADIO:EDGE:SOUT?
```

This command sets the synchronization location (within the pattern of data) and the type of output at the EVENT 1 rear panel connector.

FRAME	This choice outputs a 1-bit signal, synchronized to the bit selected by the synchronization output offset command, for a framed data pattern.
SLOT	This choice outputs a 1-bit signal, synchronized to the bit selected by the synchronization output offset command, for a selected timeslot.
ALL	This choice outputs a 1-bit signal, synchronized to the bit selected by the synchronization output offset command, for all active timeslots.
*RST	FRAME
Key Entry	Begin Frame Begin Timeslot # All Timeslots
Remarks	To change the synchronization output offset value, refer to “[:SOUT:OFFSet]” on page 659.

:SOUT:OFFSet

Supported E4438C with Option 402

```
[:SOURce]:RADio:EDGE:SOUT:OFFSet <val>
[:SOURce]:RADio:EDGE:SOUT:OFFSet?
```

This command sets the offset value for the location of the output synchronization signal on the EVENT1 rear panel connector relative to the beginning of the framed data pattern or timeslot.

The variable <val> is expressed in bits.

***RST** +0

Range –155 to 155

Key Entry **Sync Out Offset**

Remarks Negative values move the synchronization output signal earlier; positive values move it later.

To change the output of the EVENT1 rear panel connector to SLOT, refer to “[:SOUT:]” on page 658.

:SOUT:SLOT**Supported** E4438C with Option 402

[:SOURCE]:RADio:EDGE:SOUT:SLOT <val>

[:SOURCE]:RADio:EDGE:SOUT:SLOT?

This command selects the timeslot that will trigger a 1-bit output signal at the EVENT 1 rear panel connector.

***RST** +0**Range** 0–7**Key Entry** **Begin Timeslot #**

Remarks To change the output of the EVENT1 rear panel connector to SLOT, refer to “:SOUT:” on page 658.

:SRATe**Supported** E4438C with Option 402

[:SOURCE]:RADio:EDGE:SRATe <val>

[:SOURCE]:RADio:EDGE:SRATe?

This command sets the transmission symbol rate.

The variable <val> is expressed in units of bits per second (bps–Mbps) and the maximum range value is dependent upon the source of data (internal or external), the modulation type, and filter.

***RST** +2.70833333E+005**Range**

Modulation Type	Bits per Symbol	Internal Data	External Serial Data
BPSK	1	1–50 Msps	1–50 Msps
FSK2			
MSK			
C4FM	2	1–50 Msps	1–25 Msps
FSK4			
OQPSK			
OQPSK195			
P4QPPSK			
QAM4			
QPSK			
QPSKIS95			
QPSKISAT			

Range

Modulation Type	Bits per Symbol	Internal Data	External Serial Data
D8PSK	3	1–33.33 Msps	1–16.67 Msps
EDGE			
FSK8			
PSK8			
FSK16	4	1–25 Msps	1–12.5 Msps
PSK16			
QAM16			
QAM32	5	1–20 Msps	1–10 Msps
QAM64	6	1–16.67 Msps	1–8.33 Msps
QAM256	7	1–12.50 Msps	1–6.25 Msps

Key Entry

Symbol Rate

Remarks

When user-defined filters are selected using the command in section “:FILTer” on page 635, the upper bit rate will be restricted in line with the following symbol rate restriction:

- FIR filter length > 32 symbols: upper limit is 12.5 Msps
- FIR filter length > 16 symbols: upper limit is 25 Msps

When internal FIR filters are used, the limits of the above table always apply. For higher symbol rates, the FIR filter length will be truncated as follows:

- Above 12.5 Msps, the FIR length will be truncated to 32 symbols
- Above 25 Msps, the FIR length will be truncated to 16 symbols

This will impact the relative timing of the modulated data, as well as the actual filter response.

To change the modulation type, refer to “:MODulation[:TYPE]” on page 638.

:TRIGger:TYPE

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:EDGE:TRIGger:TYPE CONTInuous | SINGLE | GATE
[ :SOURCE ] :RADio:EDGE:TRIGger:TYPE?
```

This command sets the trigger type.

CONTInuous The framed data sequence repeats continuously; the sequence restarts every time the previous playback is completed. To customize continuous triggering, refer to [“:TRIGger:TYPE:CONTInuous\[:TYPE\]” on page 662](#).

SINGLE The framed data sequence plays once for every trigger received.

GATE An external trigger signal interrupts the playback while the gating signal is in the inactive state. Playback resumes when the external control signal returns to the active state. The active state can be set to high or low.

***RST** CONT

Key Entry **Continuous** **Single** **Gated**

:TRIGger:TYPE:CONTInuous[:TYPE]

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:EDGE:TRIGger:TYPE:CONTInuous [ :TYPE ] FREE | TRIGger | RESet
[ :SOURCE ] :RADio:EDGE:TRIGger:TYPE:CONTInuous [ :TYPE ] ?
```

This commands selects the waveform’s response to a trigger signal while using the continuous trigger mode.

For more information on triggering and to select the continuous trigger mode, see [“:TRIGger:TYPE” on page 662](#).

The following list describes the waveform’s response to each of the command choices:

FREE Turning the ARB format on immediately triggers the waveform. The waveform repeats until you turn the format off, select another trigger, or choose another waveform file.

TRIGger The waveform waits for a trigger before play begins. When the waveform receives the trigger, it plays continuously until you turn the format off, select another trigger, or choose another waveform file.

RESet	The waveform waits for a trigger before play begins. When the waveform receives the trigger, it plays continuously. Subsequent triggers reset the waveform to the beginning. For a waveform sequence, this means to the beginning of the first segment in the sequence.		
*RST	FREE		
Key Entry	Free Run	Trigger & Run	Reset & Run

:TRIGger:TYPE:GATE:ACTive

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:EDGE:TRIGger:TYPE:GATE:ACTive LOW|HIGH
[ :SOURce ] :RADio:EDGE:TRIGger:TYPE:GATE:ACTive?
```

This command selects the active state (gate polarity) of the gate while using the gating trigger mode.

The LOW and HIGH selections correspond to the low and high states of an external trigger signal. For example, when you select HIGH, the active state occurs during the high of the trigger signal. When the active state occurs, the ESG stops the waveform playback at the last played sample point, then restarts the playback at the next sample point when the inactive state occurs. For more information on triggering and to select gating as the trigger mode, see “:TRIGger:TYPE” on page 662.

The following list describes the ESG’s gating behavior for the polarity selections:

LOW	The waveform playback stops when the trigger signal goes low (active state) and restarts when the trigger signal goes high (inactive state).
HIGH	The waveform playback stops when the trigger signal goes high (active state) and restarts when the trigger signal goes low (inactive state).
*RST	HIGH
Key Entry	Gate Active Low High

:TRIGger[:SOURce]

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:EDGE:TRIGger [ :SOURce ] KEY|EXT|BUS
[ :SOURce ] :RADio:EDGE:TRIGger [ :SOURce ] ?
```

This command sets the trigger source.

For more information on triggering, see “:TRIGger:TYPE” on page 662. The following list describes the command choices:

KEY	This choice enables manual triggering by pressing the front-panel Trigger hardkey.
-----	---

EDGE Subsystem—Option 402 (:SOURCE]:RADio:EDGE)

- EXT** An externally applied signal triggers the waveform. This is the only choice that works with gating. The following conditions affect an external trigger:
- The input connector selected for the trigger signal. You have a choice between the rear-panel PATTERN TRIG IN connector or the PATT TRIG IN 2 pin on the rear-panel AUXILIARY I/O connector. To make the connector selection, see “:TRIGger[:SOURCE]:EXTErnal[:SOURCE]” on page 666.
For more information on the connectors and on connecting the cables, see the *ESG User’s Guide*.
 - The trigger signal polarity:
 - gating mode, see “:TRIGger:TYPE:GATE:ACTive” on page 663
 - continuous and single modes, see “:TRIGger[:SOURCE]:EXTErnal:SLOPe” on page 666
 - The time delay between when the ESG receives a trigger and when the waveform responds to the trigger. There are two parts to setting the delay:
 - setting the amount of delay, see “:TRIGger[:SOURCE]:EXTErnal:DELay” on page 664
 - turning the delay on, see “:TRIGger[:SOURCE]:EXTErnal:DELay:STATe” on page 666
- BUS** This choice enables triggering over the GPIB or LAN using the *TRG or GET commands or the AUXILIARY INTERFACE (RS-232) using the *TRG command.

***RST** KEY

Key Entry	Trigger Key	Ext	Bus
-----------	-------------	-----	-----

:TRIGger[:SOURCE]:EXTErnal:DELay

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:EDGE:TRIGger [ :SOURCE ] :EXTErnal:DELay <val>
[ :SOURCE ] :RADio:EDGE:TRIGger [ :SOURCE ] :EXTErnal:DELay?
```

This command sets the number of bits to delay the ESG’s response to an external trigger.

The bit delay is a delay between when the ESG receives the trigger and when it responds to the trigger. The delay uses the clocks of the bit-clock to time the delay. After the ESG receives the trigger and the set number of delay bits (clocks) occurs, the ESG transmits the data pattern.

The delay occurs after you enable the state. See “:TRIGger[:SOURCE]:EXTErnal:DELay:STATe” on page 666. You can set the number of bits either before or after enabling the state.

For more information on configuring an external trigger source and to select external as the trigger source, see “:TRIGGER[:SOURCE]” on page 663.

Example

```
:RAD:CUST:TRIG:EXT:DElay 200000
```

The preceding example sets the delay for an external trigger for 200K bits.

***RST** +0

Range 0–1048575

Key Entry **Ext Delay Bits**

Remarks For most TDMA formats, there is one bit per symbol. However, there are 3 bits per symbol for the EDGE format. If the selected number of delay bits is not a multiple of the number of bits per symbol, the entered value is rounded down to the next whole symbol value.

:TRIGGER[:SOURCE]:EXTERNAL:DELAY:FINE

Supported E4438C with Option 416

```
[ :SOURCE ] :RADIO:EDGE:TRIGGER [ :SOURCE ] :EXTERNAL:DELAY:FINE <val>  

[ :SOURCE ] :RADIO:EDGE:TRIGGER [ :SOURCE ] :EXTERNAL:DELAY:FINE?
```

This command sets the fine trigger delay for synchronizing the ESG.

The fine delay value is added to the coarse delay setting (see “:TRIGGER[:SOURCE]:EXTERNAL:DELAY” on page 664).

The variable <val> is expressed as a fraction of one symbol. For the EDGE format, there are 3 bits per symbol.

***RST** +0.00000000E+000

Range 0–1

:TRIGger[:SOURCE]:EXTErnal:DELay:STATe**Supported** E4438C with Option 402

```
[ :SOURCE ] :RADio:EDGE:TRIGger [ :SOURCE ] :EXTErnal:DELay:STATe ON|OFF|1|0
[ :SOURCE ] :RADio:EDGE:TRIGger [ :SOURCE ] :EXTErnal:DELay:STATe?
```

This command enables or disables the operating state of the external trigger delay function.

For setting the delay time, see “:TRIGger[:SOURCE]:EXTErnal:DELay” on page 664, and for more information on configuring an external source, see “:TRIGger[:SOURCE]” on page 663.

RST** 0**Key Entry** Ext Delay Off On**:TRIGger[:SOURCE]:EXTErnal:SLOPe*Supported** E4438C with Option 402

```
[ :SOURCE ] :RADio:EDGE:TRIGger [ :SOURCE ] :EXTErnal:SLOPe POSitive|NEGative
[ :SOURCE ] :RADio:EDGE:TRIGger [ :SOURCE ] :EXTErnal:SLOPe?
```

This command sets the polarity for an external trigger signal while using the continuous, single triggering mode. To set the polarity for gating, see “:TRIGger:TYPE:GATE:ACTive” on page 663.

The POSitive and NEGative selections correspond to the high (positive) and low (negative) states of the external trigger signal. For example, when you select POSitive, the waveform responds (plays) during the high state of the trigger signal. When the ESG receives multiple trigger occurrences when only one is required, the signal generator uses the first trigger and ignores the rest.

For more information on configuring an external trigger source and to select external as the trigger source, see “:TRIGger[:SOURCE]” on page 663.

RST** NEG**Key Entry** Ext Polarity Neg Pos**:TRIGger[:SOURCE]:EXTErnal[:SOURCE]*Supported** E4438C with Option 402

```
[ :SOURCE ] :RADio:EDGE:TRIGger [ :SOURCE ] :EXTErnal [ :SOURCE ] EPT1|EPT2|
EPTRIGGER1|EPTRIGGER2
[ :SOURCE ] :RADio:EDGE:TRIGger [ :SOURCE ] :EXTErnal [ :SOURCE ] ?
```

This command selects which PATTERN TRIG IN connection the ESG uses to accept an externally applied trigger signal when external is the trigger source selection.

For more information on configuring an external trigger source and to select external as the trigger source, see “:TRIGger[:SOURce]” on page 663. For more information on the rear-panel connectors, see the *E4428C/38C ESG Signal Generators User’s Guide*.

The following list describes the command choices:

EPT1	This choice is synonymous with EPTRIGGER1 and selects the PATTERN TRIG IN rear-panel connector.
EPT2	This choice is synonymous with EPTRIGGER2 and selects the PATT TRIG IN 2 pin on the rear-panel AUXILIARY I/O connector.
EPTRIGGER1	This choice is synonymous with EPT1 and selects the PATTERN TRIG IN rear-panel connector.
EPTRIGGER2	This choice is synonymous with EPT2 and selects the PATT TRIG IN 2 pin on the rear-panel AUXILIARY I/O connector.
*RST	EPT1
Key Entry	Patt Trig In 1 Patt Trig In 2

[[:STATe]]

Supported E4438C with Option 402

```
[:SOURce]:RADio:EDGE[:STATe] ON|OFF|1|0
[:SOURce]:RADio:EDGE[:STATe] ?
```

This command enables or disables the EDGE modulation format.

***RST** 0

Key Entry **EDGE Off On**

Remarks Although the EDGE modulation is enabled with this command, the RF carrier is not modulated unless you also activate the front panel **Mod On/Off** hardkey.

9 Receiver Test Digital Commands (continued)

This chapter provides a continuation of SCPI descriptions for commands dedicated to digital real-time testing using the E4438C ESG Vector Signal Generator. This chapter contains the following sections:

- “GPS Subsystem–Option 409 ([:SOURce]:RADio[1]|2|3|4:GPS)” on page 670
- “GSM Subsystem–Option 402 ([:SOURce]:RADio:GSM)” on page 677
- “HSDPA over W-CDMA Subsystem–Option 418 ([:SOURce]:RADio:WCDMa:HSDPa[:BBG])” on page 717
- “NADC Subsystem–Option 402 ([:SOURce]:RADio[:NADC])” on page 779
- “PDC Subsystem–Option 402 ([:SOURce]:RADio:PDC)” on page 814
- “PHS Subsystem–Option 402 ([:SOURce]:RADio:PHS)” on page 850
- “TETRA Subsystem–Option 402 ([:SOURce]:RADio:TETRa)” on page 889
- “Wideband CDMA Base Band Generator Subsystem–Option 400 ([:SOURce]:RADio:WCDMa:TGPP[:BBG])” on page 934

GPS Subsystem–Option 409

([:SOURce]:RADio[1] | 2 | 3 | 4:GPS)

:DATA

Supported E4438C with Option 409

```
[:SOURce]:RADio[1] | 2 | 3 | 4:GPS:DATA PN9 | PN15 | FIX4 | "<user file>"
[:SOURce]:RADio[1] | 2 | 3 | 4:GPS:DATA?
```

This command sets the data type for the selected data mode.

***RST** PN9

Key Entry PN9 PN15 FIX4 User file

Remarks This command is only effective when the data mode is RAW or ENCOded. To set the data mode, refer to "DMODE".

:DMODE

Supported E4438C with Option 409

```
[:SOURce]:RADio[1] | 2 | 3 | 4:GPS:DMODE RAW | ENCOded | TLM
[:SOURce]:RADio[1] | 2 | 3 | 4:GPS:DMODE?
```

This command sets the data mode.

RAW This choice modulates data onto the C/A (coarse acquisition) code at 50-bits per second. No parity bits are computed by the signal generator. Every 6 seconds, 300-bits from the source data are transmitted.

ENCOded This choice modulates data onto the C/A (coarse acquisition) code at 50-bits per second. The signal generator computes 6 parity bits for every 24 data bits from the selected data source. Every six seconds, 240-bits of the source data are transmitted along with 60-bits of computed parity.

TLM This choice transmits a standard default navigation data transmission which includes a telemetry word (TLM), a handover word (HOW), and default navigation data. The signal generator transmits an incrementing time-of-week (TOW) as part of the HOW.

***RST** RAW

Key Entry **Data Mode Raw Enc TLM**

Remarks Since the TLM mode transmits default navigation data, there is no data selection for this mode.

For selecting the data type when RAW or ENCOded is the selection, refer to “:DATA” on page 670.

:DSHift

Supported E4438C with Option 409

`[:SOURce]:RADio[1] | 2 | 3 | 4:GPS:DSHift <val>`
`[:SOURce]:RADio[1] | 2 | 3 | 4:GPS:DSHift?`

This command sets the frequency and chip rate offsets to simulate a doppler shift.

The variable <val> is expressed in units of hertz (Hz to kHz).

***RST** +0.00000000E+000

Range –125 to 125

Key Entry **Doppler Shift**

Remarks The lower bound of the doppler shift is limited by the frequency set on the signal generator. For example, if the signal generator frequency is set to 100 kHz, then the lower limit of the doppler shift would be 0.00 Hz. The doppler shift can not extend lower than the limitations of the signal generator

:FILTer

Supported E4438C with Option 409

`[:SOURce]:RADio[1] | 2 | 3 | 4:GPS:FILTer RNYQuist | NYQuist | GAUSSian | RECTangle | IS95 | IS95_EQ | IS95_MOD | IS95_MOD_EQ | AC4Fm | UGGaussian | "<user FIR>"`
`[:SOURce]:RADio[1] | 2 | 3 | 4:GPS:FILTer?`

This command sets the pre-modulation filter type.

IS95 This choice selects a filter that meets the criteria of the IS-95 standard.

IS95_EQ This choice selects a filter which is a combination of the IS-95 filter (above) and the equalizer filter described in the IS-95 standard. This filter is only used for IS-95 baseband filtering.

IS95_MOD This choice selects a filter that meets the criteria of the IS-95 error function (for

GPS Subsystem–Option 409 ([:SOURce]:RADio[1] | 2 | 3 | 4:GPS)

	improved adjacent channel performance) with lower passband rejection than the filter specified in the IS-95 standard.
IS95_MOD_EQ	This choice selects a filter which is a combination of the equalizer filter described in the IS-95 standard and a filter that meets the criteria of the IS-95 error function (for improved adjacent channel performance) with lower passband rejection.
AC4Fm	This choice selects a predefined Association of Public Safety Communications Officials (APCO) specified compatible 4-level frequency modulation (C4FM) filter.
UGGaussian	This choice selects a backwards compatible GSM Gaussian filter (Gaussian filter with a fixed BbT value of 0.300) for the ESG E44xxB Option UN3 or UN4.
"<user FIR>"	This variable is any filter file that you have stored into memory.
*RST	RECT
Key Entry	Root Nyquist Nyquist Gaussian Rectangle IS-95 IS-95 w/EQ IS-95 Mod IS-95 Mod w/EQ APC025 C4FM UN3/4 GSM Gaussian User FIR

:FILTer:ALPHA

Supported E4438C with Option 409

```
[ :SOURce ] :RADio [1] | 2 | 3 | 4 :GPS :FILTer :ALPHA <val>
[ :SOURce ] :RADio [1] | 2 | 3 | 4 :GPS :FILTer :ALPHA?
```

This command sets the Nyquist or root Nyquist filter's alpha value.

The filter alpha value can be set to the minimum value (0), maximum value (1), or in between by using fractional numeric values (0.001–0.999).

***RST** +2.20000000E-001

Range 0.000–1.000

Key Entry **Filter Alpha**

Remarks To change the current filter type, refer to “:FILTer” on page 671.

:FILTer:BBT

Supported E4438C with Option 409

```
[ :SOURce ] :RADio [1] | 2 | 3 | 4 :GPS :FILTer :BBT <val>  
[ :SOURce ] :RADio [1] | 2 | 3 | 4 :GPS :FILTer :BBT?
```

This command changes the bandwidth-multiplied-by-bit-time (BbT) filter parameters.

The filter BbT value can be set to the minimum value (0), the maximum value (1), or in between by using fractional numeric values (0.001–0.999)

***RST** +5.00000000E-001

Range 0.000–1.000

Key Entry **Filter BbT**

Remarks This command is effective only after choosing a Gaussian filter. It does not have an effect on other types of filters.

To change the current filter type, refer to “:FILTer” on page 671.

:FILTer:CHANnel

Supported E4438C with Option 409

```
[ :SOURce ] :RADio [1] | 2 | 3 | 4 :GPS :FILTer :CHANnel  
[ :SOURce ] :RADio [1] | 2 | 3 | 4 :GPS :FILTer :CHANnel?
```

This command optimizes the Nyquist and root Nyquist filters to minimize error vector magnitude (EVM) or to minimize adjacent channel power (ACP).

EVM This choice provides the most ideal passband.

ACP This choice improves stopband rejection.

***RST** EVM

Key Entry **Optimize FIR For EVM ACP**

Remarks To change the current filter type, refer to “:FILTer” on page 671.

:IQPHase**Supported** E4438C with Option 409

[:SOURce]:RADio[1]|2|3|4:GPS:IQPHase NORMal|INVerted

[:SOURce]:RADio[1]|2|3|4:GPS:IQPHase?

This command sets the I/Q phase for the GPS signal.

NORMal This choice selects normal phase polarity.**INVerted** This choice inverts the internal Q signal.***RST** NORM**Key Entry** **IQ Phase Normal Invert****:PCODE****Supported** E4438C with Option 409

[:SOURce]:RADio[1]|2|3|4:GPS:PCODE <val>

[:SOURce]:RADio[1]|2|3|4:GPS:PCODE?

This command sets the P code power relative to the C/A code power.

RST** -3**Range** -40 to 0**Key Entry** **P Code Pwr*Remarks** This command is normally used when the CAP (C/A+P) ranging mode choice is selected. Refer to **":RCODE"** for selecting the ranging mode.**:RCODE****Supported** E4438C with Option 409

[:SOURce]:RADio[1]|2|3|4:GPS:RCODE CA|P|CAP

[:SOURce]:RADio[1]|2|3|4:GPS:RCODE?

This command selects the ranging code for the GPS transmission.

CA This choice selects a 1023-bit pseudorandom C/A (coarse acquisition) code that is BPSK modulated onto the L1 (1575.42 MHz) carrier. The C/A code factory set chip rate is 1.023 Mcps using a 10.23 Mcps reference clock.**P** This choice selects the precise (P) code which is a very long pseudorandom sequence that is BPSK modulated onto the L2

(1227.6 MHz) carrier. The P code factory set chip rate is 10.23 Mcps using a 10.23 Mcps reference clock.

CAP This choice permits both the C/A (coarse acquisition) and P (precise) codes to modulate the L1 (1575.42 MHz) carrier simultaneously by providing the P code on the Q component and the C/A code in quadrature on the I component.

***RST** CA

Key Entry **Ranging Code C/A P C/A+P**

:REFClk

Supported E4438C with Option 409

```
[:SOURce]:RADio[1] | 2 | 3 | 4:GPS:REFClk [INT] | Ext
[:SOURce]:RADio[1] | 2 | 3 | 4:GPS:REFClk?
```

This command sets the GPS reference clock to either internal or external.

INT This selection sets the signal generator to use the internal chip clock.

EXT This selection sets the signal generator to use an external chip clock which is supplied to the DATA CLOCK INPUT connector.

***RST** INT

Key Entry **GPS Ref Clk**

:REFFreq

Supported E4438C with Option 409

```
[:SOURce]:RADio[1] | 2 | 3 | 4:GPS:REFFreq <val><unit>
[:SOURce]:RADio[1] | 2 | 3 | 4:GPS:REFFreq?
```

This command sets the GPS reference clock frequency. If an external source is being used, its frequency must match the value set with this command

***RST** +1.02300000E+007

Range 1kCPS–12.5MCPS

Key Entry **GPS Ref (f0)**

Remarks Changing the GPS reference frequency will change the P and C/A code chip rates.

GPS Subsystem—Option 409 ([:SOURCE]:RADio[1]|2|3|4:GPS)

:SATid

Supported E4438C with Option 409

```
[ :SOURCE ] :RADio [1] | 2 | 3 | 4 :GPS :SATid <val>  
[ :SOURCE ] :RADio [1] | 2 | 3 | 4 :GPS :SATid?
```

This command selects the pseudorandom number (PRN) code used for transmission.

Satellite identification numbers 1–32 are used for GPS satellites. Satellite identification numbers 33–37 are reserved for ground transmitter use in the real-world system.

***RST** +1

Range 1–37

Key Entry **Satellite ID**

[:STATE]

Supported E4438C with Option 409

```
[ :SOURCE ] :RADio [1] | 2 | 3 | 4 :GPS [ :STATE ] ON | OFF | 1 | 0  
[ :SOURCE ] :RADio [1] | 2 | 3 | 4 :GPS [ :STATE ] ?
```

This command enables or disables the real-time GPS signal.

***RST** 0

Key Entry **Real-time GPS Off On**

GSM Subsystem–Option 402 ([:SOURce]:RADio:GSM)

:ALPha

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:GSM:ALPha <val>  
[ :SOURce ] :RADio:GSM:ALPha?
```

This command changes the Nyquist or root Nyquist filter’s alpha value.

The filter alpha value can be set to the minimum level (0), the maximum level (1), or in between by using fractional numeric values (0.001–0.999).

***RST** +5.00000000E–001

Range 0.000–1.000

Key Entry **Filter Alpha**

Remarks To change the current filter type, refer to “:FILTer” on page 691.

:BBCLock

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:GSM:BBCLock INT [1] | EXT [1]  
[ :SOURce ] :RADio:GSM:BBCLock?
```

This command toggles the data (bit) clock input to the baseband generator board to either internal or external. This command is independent in each mode and works for both non-burst (continuous) and burst modes. This allows for a matrix of selections between burst/non-burst, internal/external data generation, internal/external data clock, and external bit/symbol data clock.

INT[1] This choice selects the signal generator internal data clock.

EXT[1] This choice selects an external data clock input.

***RST** INT

Key Entry **BBG Data Clock Ext Int**

Remarks A data clock or continuous symbol sync input must be supplied when external mode is used.

This will be ignored if the external reference is set to EXTERNAL. To change the external reference type, refer to “:EREFerence” on page 690.

:BBT

Supported E4438C with Option 402

[:SOURCE] :RADIO:GSM:BBT <val>

[:SOURCE] :RADIO:GSM:BBT?

This command changes the bandwidth-multiplied-by-bit-time (BbT) filter parameter.

The filter BbT value can be set to the maximum level (1) or in between the minimum level (0.100) and maximum level by using fractional numeric values (0.101–0.999).

***RST** +3.00000000E-001

Range 0.100–1.000

Key Entry **Filter BbT**

Remarks This command is effective only after choosing a Gaussian filter. It does not have an effect on other types of filters.

To change the current filter type, refer to “:FILTER” on page 691.

:BRATe

Supported E4438C with Option 402

[:SOURCE] :RADIO:GSM:BRATe <val>

[:SOURCE] :RADIO:GSM:BRATe?

This command sets the bit rate.

The variable <val> is expressed in units of bits per second (bps–Mbps) and the maximum range value is dependent upon the source of data (internal or external), the modulation type, and filter.

***RST** +2.70833333E+005

Range	Modulation Type	Bits per Symbol	Internal Data	External Serial Data
	BPSK	1	1–50 Mbps	1–50 Mbps
	FSK2			
	MSK			

Range

Modulation Type	Bits per Symbol	Internal Data	External Serial Data
C4FM	2	2–100 Mbps	2–50 Mbps
FSK4			
OQPSK			
OQPSK195			
P4QPPSK			
QAM4			
QPSK			
QPSKIS95			
QPSKISAT			
D8PSK	3	3–100 Mbps	3–50 Mbps
EDGE			
FSK8			
PSK8			
FSK16	4	4–100 Mbps	4–50 Mbps
PSK16			
QAM16			
QAM32	5	5–100 Mbps	5–50 Mbps
QAM64	6	6–100 Mbps	6–50 Mbps
QAM256	7	8–100 Mbps	8–50 Mbps

Key Entry

Symbol Rate

Remarks

When user-defined filters are selected using the command in section “:FILTer” on page 691, the upper bit rate will be restricted in line with the following symbol rate restriction:

- FIR filter length > 32 symbols: upper limit is 12.5 Msps
- FIR filter length > 16 symbols: upper limit is 25 Msps

When internal FIR filters are used, the limits of the above table always apply. For higher symbol rates, the FIR filter length will be truncated and will impact the relative timing of the modulated data, as well as the actual filter response (see “:SRATe” on page 709).

A change in the bit rate value will affect the symbol rate value; refer to “:SRATe” on page 709 for a list of the minimum and maximum symbol rate values.

To change the modulation type, refer to “:MODulation[:TYPE]” on page 694.

:BURSt:PN9

Supported E4438C with Option 402

```
[ :SOURCE ] :RADIO:GSM:BURSt:PN9 NORMal | QUICK  
[ :SOURCE ] :RADIO:GSM:BURSt:PN9?
```

This command controls the software PN9 generation.

NORMAL This choice produces a maximum length PN9 sequence.

QUICK This choice produces a truncated PN9 sequence.

***RST** NORM

Key Entry PN9 Mode Normal Quick

Remarks Use Normal mode for bit-error-rate tests where a maximum length PN9 sequence is required.

:BURSt:SHAPE:FALL:DELay

Supported E4438C with Option 402

```
[ :SOURCE ] :RADIO:GSM:BURSt:SHAPE:FALL:DELay <val>  
[ :SOURCE ] :RADIO:GSM:BURSt:SHAPE:FALL:DELay?
```

This command sets the burst shape fall delay.

The variable <val> is expressed in bits. The minimum and maximum values depend upon modulation type and symbol rate.

***RST** +0.00000000E+000

Range -11.0625 to 99

Key Entry **Fall Delay**

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

To change the modulation type, refer to “:MODulation[:TYPE]” on page 694. Refer to “:SRATE” on page 709 for a list of the minimum and maximum symbol rate values.

“:BURSt:SHAPE:FDELay” on page 681 performs the same function; in compliance with the SCPI standard, both commands are listed.

For concept information on burst shaping, refer to the *E4428C/38C ESG Signal Generators User’s Guide*.

:BURSt:SHAPe:FALL:TIME

Supported E4438C with Option 402

[:SOURCE] :RADIo:GSM:BURSt:SHAPe:FALL:TIME <val>

[:SOURCE] :RADIo:GSM:BURSt:SHAPe:FALL:TIME?

This command sets the burst shape fall time.

The variable <val> is expressed in bits. The minimum and maximum values depend upon modulation type and symbol rate.

***RST** +1.00000000E+001

Range 0.0625–127.9375

Key Entry Fall Time

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

To change the modulation type, refer to “:MODulation[:TYPE]” on page 694. Refer to “:SRATe” on page 709 for a list of the minimum and maximum symbol rate values.

“:BURSt:SHAPe:FTIME” on page 682 performs the same function; in compliance with the SCPI standard, both commands are listed.

For concept information on burst shaping, refer to the *E4428C/38C ESG Signal Generators User’s Guide*.

:BURSt:SHAPe:FDElay

Supported E4438C with Option 402

[:SOURCE] :RADIo:GSM:BURSt:SHAPe:FDElay <val>

[:SOURCE] :RADIo:GSM:BURSt:SHAPe:FDElay?

This command sets the burst shape fall delay.

The variable <val> is expressed in bits. The minimum and maximum values depend upon modulation type and symbol rate.

***RST** +0.00000000E+000

Range –11.0625 to 99

Key Entry Fall Delay

GSM Subsystem—Option 402 ([:SOURCE]:RADio:GSM)

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

To change the modulation type, refer to “:MODulation[:TYPE]” on page 694. Refer to “:SRATE” on page 709 for a list of the minimum and maximum symbol rate values.

“:BURSt:SHAPe:FALL:DELay” on page 680 performs the same function; in compliance with the SCPI standard, both commands are listed.

For concept information on burst shaping, refer to the *E4428C/38C ESG Signal Generators User’s Guide*.

:BURSt:SHAPe:FTIME

Supported E4438C with Option 402

```
[:SOURCE]:RADio:GSM:BURSt:SHAPe:FTIME <val>
[:SOURCE]:RADio:GSM:BURSt:SHAPe:FTIME?
```

This command sets the burst shape fall time.

The variable <val> is expressed in bits. The minimum and maximum values depend upon modulation type and symbol rate.

***RST** +3.00000000E+000

Range 0.0625–127.9375

Key Entry Fall Time

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

To change the modulation type, refer to “:MODulation[:TYPE]” on page 694. Refer to “:SRATE” on page 709 for a list of the minimum and maximum symbol rate values.

“:BURSt:SHAPe:FALL:TIME” on page 681 performs the same function; in compliance with the SCPI standard, both commands are listed.

For concept information on burst shaping, refer to the *E4428C/38C ESG Signal Generators User’s Guide*.

:BURSt:SHAPe:RDElay

Supported E4438C with Option 402

[:SOURce] :RADio:GSM:BURSt:SHAPe:RDElay <val>

[:SOURce] :RADio:GSM:BURSt:SHAPe:RDElay?

This command sets the burst shape rise delay.

The variable <val> is expressed in bits. The minimum and maximum values depend upon modulation type and symbol rate. For concept information on burst shaping, refer to the *E4428C/38C ESG Signal Generators User's Guide*.

***RST** +0.00000000E+000

Range -8.0625 to 99

Key Entry Rise Delay

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

To change the modulation type, refer to “:MODulation[:TYPE]” on page 694. Refer to “:SRATE” on page 709 for a list of the minimum and maximum symbol rate values.

“:BURSt:SHAPe:RISE:DElay” on page 683 performs the same function; in compliance with the SCPI standard, both commands are listed.

:BURSt:SHAPe:RISE:DElay

Supported E4438C with Option 402

[:SOURce] :RADio:GSM:BURSt:SHAPe:RISE:DElay <val>

[:SOURce] :RADio:GSM:BURSt:SHAPe:RISE:DElay?

This command sets the burst shape rise delay.

The variable <val> is expressed in bits. The minimum and maximum values depend upon modulation type and symbol rate. For concept information on burst shaping, refer to the *E4428C/38C ESG Signal Generators User's Guide*.

***RST** +0.00000000E+000

Range -8.0625 to 99

Key Entry Rise Delay

GSM Subsystem—Option 402 ([:SOURCE]:RADio:GSM)

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

To change the modulation type, refer to “:MODulation[:TYPE]” on page 694. Refer to “:SRATe” on page 709 for a list of the minimum and maximum symbol rate values.

“:BURSt:SHAPe:RDElay” on page 683 performs the same function; in compliance with the SCPI standard, both commands are listed.

:BURSt:SHAPe:RISE:TIME

Supported E4438C with Option 402

[:SOURCE] :RADio:GSM:BURSt:SHAPe:RISE:TIME <val>

[:SOURCE] :RADio:GSM:BURSt:SHAPe:RISE:TIME?

This command sets the burst shape rise time.

The variable <val> is expressed in bits. The minimum and maximum values depend upon modulation type and symbol rate. For concept information on burst shaping, refer to the *E4428C/38C ESG Signal Generators User’s Guide*.

***RST** +3.00000000E+000

Range 0.0625–11.1875

Key Entry Rise Time

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

To change the modulation type, refer to “:MODulation[:TYPE]” on page 694. Refer to “:SRATe” on page 709 for a list of the minimum and maximum symbol rate values.

“:BURSt:SHAPe:RTIME” on page 685 performs the same function; in compliance with the SCPI standard, both commands are listed.

:BURSt:SHAPe:RTIME

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:GSM:BURSt:SHAPe:RTIME <val>
```

```
[ :SOURce ] :RADio:GSM:BURSt:SHAPe:RTIME?
```

This command sets the burst shape rise time.

The variable <val> is expressed in bits. The minimum and maximum values depend upon modulation type and symbol rate. For concept information on burst shaping, refer to the *E4428C/38C ESG Signal Generators User's Guide*.

***RST** +3.00000000E+000

Range 0.0625–11.1875

Key Entry Rise Time

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

To change the modulation type, refer to “:MODulation[:TYPE]” on page 694. Refer to “:SRATE” on page 709 for a list of the minimum and maximum symbol rate values.

“:BURSt:SHAPe:RISE:TIME” on page 684 performs the same function; in compliance with the SCPI standard, both commands are listed.

:BURSt:SHAPe[:TYPE]

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:GSM:BURSt:SHAPe[:TYPE] SINE| "<file name>"
```

```
[ :SOURce ] :RADio:GSM:BURSt:SHAPe[:TYPE] ?
```

This command specifies the burst shape as either SINE or a user-defined file ("<file name>").

SINE This choice selects a state that is defined by the burst rise and fall *RST values, as the default burst shape type.

"<file name>" This choice selects a user designated file from signal generator memory (non-volatile).

***RST** SINE

Key Entry **Sine** **User File**

GSM Subsystem—Option 402 ([:SOURCE]:RADIO:GSM)**:BURSt[:STATe]****Supported** E4438C with Option 402

[:SOURCE]:RADIO:GSM:BURSt [:STATe] ON|OFF|1|0

[:SOURCE]:RADIO:GSM:BURSt [:STATe] ?

This command enables or disables the burst function.

ON (1) This choice enables the transmission of framed data. If all timeslots which are switched on are up traffic channels or custom, you will be bursting the timeslots that are on; there will be no RF carrier during the off timeslots.

If you have switched on any timeslot that you have configured as a down traffic channel, the RF carrier is not switched off between any of the timeslots. The off timeslots are transmitted as a continuous series of ones for the time period of the off timeslots.

OFF (0) This choice enables the transmission of unframed data.

RST** 0**Key Entry** Data Format Pattern Framed**:CHANnel*Supported** E4438C with Option 402

[:SOURCE]:RADIO:GSM:CHANnel EVM|ACP

[:SOURCE]:RADIO:GSM:CHANnel ?

This command optimizes the Nyquist and root Nyquist filters to minimize error vector magnitude (EVM) or to minimize adjacent channel power (ACP).

EVM This choice provides the most ideal passband.

ACP This choice improves stopband rejection.

RST** ACP**Key Entry** **Optimize FIR For Evm ACP*Remarks** To change the current filter type, refer to “:FILTer” on page 691.

:DATA

Supported E4438C with Option 402

```
[ :SOURce] :RADio:GSM:DATA PN9 | PN11 | PN15 | PN20 | PN23 | FIX4 | "<file_name>" |
EXT | P4 | P8 | P16 | P32 | P64 | PRAM
[:SOURce] :RADio:GSM:DATA?
```

This command sets the data pattern type (pseudo-random number sequence, 4-bit pattern, sequence of 1's and 0's, data from an external source, or a user file) for unframed data transmission.

***RST** PN23

Key Entry	PN9	PN11	PN15	PN20	PN23	FIX4	User File	Ext
	4 1's & 4 0's	8 1's & 8 0's	16 1's & 16 0's	16 1's & 16 0's	32 1's & 32 0's		32 1's & 32 0's	
	64 1's & 64 0's	PRAM File						

Remarks Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:DATA:PRAM

Supported E4438C with Option 402

```
[ :SOURce] :RADio:GSM:DATA:PRAM "<file_name>"
[:SOURce] :RADio:GSM:DATA:PRAM?
```

This command selects a pattern RAM (PRAM) file as the pattern data type for the GSM (Global System for Mobile communication) format.

"<file_name>" This variable designates the PRAM file in WFM1. Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

Key Entry **PRAM File**

Remarks Selecting this data source forces the burst source to INTERNAL to allow framing control.

The PRAM file must reside in the signal generator's volatile memory (WFM1) in order to be accessed by this command. For more information on PRAM files, refer to [“:DATA:PRAM:FILE:BLOCK” on page 111](#).

GSM Subsystem—Option 402 ([:SOURCE]:RADio:GSM)**:DATA:FIX4****Supported** E4438C with Option 402

[:SOURCE]:RADio:GSM:DATA:FIX4 <val>

[:SOURCE]:RADio:GSM:DATA:FIX4?

This command sets the binary, 4-bit repeating sequence data pattern for unframed transmission according to the modulation type, symbol rate, filter, and burst shape selected for the GSM modulation format.

RST** #B0000**Range** #B0000–#B1111 or 0–15**Key Entry** **FIX4*Remarks** FIX4 must already be defined as the data type.**:DEFAULT****Supported** E4438C with Option 402

[:SOURCE]:RADio:GSM:DEFAULT

This command returns all of the GSM format parameters to their factory default conditions. It does not affect any other signal generator parameters.

Key Entry Restore GSM Factory Default**:DENCCode****Supported** E4438C with Option 402

[:SOURCE]:RADio:GSM:DENCCode ON|OFF|1|0

[:SOURCE]:RADio:GSM:DENCCode?

This command enables or disables the differential data encoding function. Once this function is enabled, data bits are encoded prior to modulation; each modulated bit is 1 if the data bit is different from the previous one, or 0 if the data bit is the same as the previous one.

***RST** 1**Key Entry** **Diff Data Encode Off On**

:EDATa:DELay

Supported E4438C with Option 402

[:SOURce] :RADio:GSM:EDATa:DELay?

This query returns the amount of delay (in symbols) from the external data input to the beginning of the symbol on the I OUT and Q OUT rear panel connectors and the front panel RF OUTPUT connector.

Remarks When the format is turned off, the delay value is unchanged; the query will return the same delay value if the format is on or off.

:EDCLock

Supported E4438C with Option 402

[:SOURce] :RADio:GSM:EDCLock SYMBol |NORMal

[:SOURce] :RADio:GSM:EDCLock?

This command sets the external data clock use.

SYMBol This choice specifies that a continuous symbol clock signal must be provided to the SYMBOL SYNC input connector.

NORMal This choice specifies that the DATA CLOCK input connector requires a bit clock. The SYMBOL SYNC input connector requires a (one-shot or continuous) symbol sync signal.

***RST** NORM

Key Entry Ext Data Clock Normal Symbol

Remarks Both choices have no effect in internal clock mode. Refer to “:BBCLock” on [page 677](#) to select EXT as the data clock type.

:EREFERENCE

Supported E4438C with Option 402

[:SOURCE] :RADIO:GSM:EREFERENCE INT|EXT

[:SOURCE] :RADIO:GSM:EREFERENCE?

This command selects either an internal or external bit-clock reference for the data generator.

***RST** INT

Key Entry **BBG Ref Ext Int**

Remarks If the EXT choice is selected, the external source's frequency value must be applied to the BASEBAND GEN REF IN rear panel connector. The external reference and external data clock are not applicable at the same time. If both are selected, then the external reference takes precedence.

:EREFERENCE:VALUE

Supported E4438C with Option 402

[:SOURCE] :RADIO:GSM:EREFERENCE:VALUE <val>

[:SOURCE] :RADIO:GSM:EREFERENCE:VALUE?

This command sets the expected bit-clock reference frequency value for an externally applied reference signal.

The variable <val> is expressed in units of hertz (Hz–MHz).

***RST** +1.30000000E+007

Range 2.5E5–1E8

Key Entry **Ext BBG Ref Freq**

Remarks The value specified by this command is effective only when you are using an external reference applied to the BASEBAND GEN REF IN rear panel connector.

Refer to “:EREFERENCE” on page 690 to select EXT (external source) as the reference for the bit-clock reference.

:FILTer

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:GSM:FILTer RNYQuist | NYQuist | GAUSSian | RECTangle |
IS95 | IS95_EQ | IS95_MOD | IS95_MOD_EQ | AC4Fm | UGGaussian | "<user FIR>"
[ :SOURce ] :RADio:GSM:FILTer?
```

This command selects the pre-modulation filter type.

- IS95 This choice selects a filter that meets the criteria of the IS-95 standard.
- IS95_EQ This choice selects a filter which is a combination of the IS-95 filter (above) and the equalizer filter described in the IS-95 standard. This filter is only used for IS-95 baseband filtering.
- IS95_MOD This choice selects a filter that meets the criteria of the IS-95 error function (for improved adjacent channel performance) with lower passband rejection than the filter specified in the IS-95 standard.
- IS95_MOD_EQ This choice selects a filter which is a combination of the equalizer filter described in the IS-95 standard and a filter that meets the criteria of the IS-95 error function (for improved adjacent channel performance), with lower passband rejection.
- AC4Fm This choice selects a predefined Association of Public Safety Communications Officials (APCO) specified compatible 4-level frequency modulation (C4FM) filter.
- UGGaussian This choice selects a backwards compatible GSM Gaussian filter (Gaussian filter with a fixed BbT value of 0.300) for the ESG E44xxB Option UN3 or UN4.
- "<user FIR>" This variable is any filter file that you have stored into memory.

***RST** GAUS

Key Entry	Root Nyquist	Nyquist	Gaussian	Rectangle	IS-95	IS-95 w/EQ
	IS-95 Mod	IS-95 Mod w/EQ	APCO 25 C4FM	UN3/4 GSM Gaussian		
	User FIR					

Remarks Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:IQ:SCALE

Supported E4438C with Option 402

[:SOURCE] :RADIO:GSM:IQ:SCALE <val>

[:SOURCE] :RADIO:GSM:IQ:SCALE?

This command sets the amplitude of the I/Q outputs for better adjacent channel power (ACP); lower scaling values equate to better ACP.

The variable <val> is expressed in units of percent.

***RST** +100

Range 1–200

Key Entry I/Q Scaling

Remarks This command has no effect with MSK or FSK modulation.

:MODulation:FSK[:DEVIation]

Supported E4438C with Option 402

[:SOURCE] :RADIO:GSM:MODulation:FSK[:DEVIation] <val>

[:SOURCE] :RADIO:GSM:MODulation:FSK[:DEVIation]?

This command sets the symmetric FSK frequency deviation value.

The variable <val> is expressed in units of Hertz and the maximum range value equals the current symbol rate value multiplied by four, limited to 20 MHz.

***RST** +4.00000000E+002

Range 0–2E7

Key Entry Freq Dev

Remarks To change the modulation type, refer to “:MODulation[:TYPE]” on page 694.

Refer to “:SRATE” on page 709 for a list of the minimum and maximum symbol rate values.

To set an asymmetric FSK deviation value, refer to the *E4428C/38C ESG Signal Generators User’s Guide* for more information.

:MODulation:MSK[:PHASe]

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:GSM:MODulation:MSK[:PHASe] <val>  
[ :SOURCE ] :RADio:GSM:MODulation:MSK[:PHASe] ?
```

This command sets the MSK phase deviation value. The variable <val> is in units of degrees

***RST** +9.00000000E+001

Range 0–100

Key Entry Phase Dev

:MODulation:UFSK

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:GSM:MODulation:UFSK "<file name>"  
[ :SOURCE ] :RADio:GSM:MODulation:UFSK?
```

This command selects a user-defined FSK file from the signal generator memory.

Key Entry **User FSK**

Remarks The user-defined FSK file is held in signal generator memory until the command that selects user FSK as the modulation type is sent. See “:MODulation[:TYPE]” on page 694 to change the current modulation type.

See “File Name Variables” on page 13 for information on the file name syntax.

:MODulation:UIQ

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:GSM:MODulation:UIQ "<file name>"  
[ :SOURCE ] :RADio:GSM:MODulation:UIQ?
```

This command selects a user-defined I/Q file from the signal generator memory.

Key Entry **User I/Q**

Remarks The user-defined I/Q file is held in signal generator memory until the command that selects user I/Q as the modulation type is sent. Refer to “:MODulation[:TYPE]” on page 694 to change the current modulation type.

See “File Name Variables” on page 13 for information on the file name syntax.

:MODulation[:TYPE]

Supported E4438C with Option 402

```
[:SOURCE]:RADIO:GSM:MODulation[:TYPE] BPSK|QPSK|IS95QPSK|
GRAYQPSK|OQPSK|IS95OQPSK|P4DQPSK|PSK8|PSK16|D8PSK|MSK|FSK2|FSK4|FSK8|
FSK16|C4FM|QAM4|QAM16|QAM32|QAM64|QAM128|QAM256|UIQ|UFSK
[:SOURCE]:RADIO:GSM:MODulation[:TYPE] ?
```

This command sets the modulation type for the GSM personality.

***RST** MSK

Key Entry	BPSK	QPSK	IS-95 QPSK	Gray Coded QPSK	OQPSK			
	IS-95 OQPSK	$\pi/4$ DQPSK	8PSK	16PSK	D8PSK	MSK	2-Lvl FSK	
	4-Lvl FSK	8-Lvl FSK	16-Lvl FSK	C4FM	4QAM	16QAM	32QAM	
	64QAM	128QAM	256QAM	User I/Q	User FSK			

:POLarity[:ALL]

Supported E4438C with Option 402

```
[:SOURCE]:RADIO:GSM:POLarity[:ALL] NORMal|INVerted
[:SOURCE]:RADIO:GSM:POLarity[:ALL] ?
```

This command sets the rotation direction of the phase modulation vector.

NORMal This choice selects normal phase polarity.

INVerted This choice inverts the internal Q signal.

***RST** NORM

Key Entry **Phase Polarity Normal Invert**

Remarks This command is useful for lower sideband mixing applications.

:SECondary:RECall

Supported E4438C with Option 402

[:SOURce] :RADio:GSM:SECondary:RECall

This command recalls the secondary frame configuration, overwriting the current state.

Key Entry **Recall Secondary Frame State**

Remarks To save a secondary frame state, refer to “:SECondary:SAVE” on page 695.

A secondary frame is not active until the secondary state is enabled. To activate a secondary frame, refer to “:SECondary[:STATe]” on page 696.

:SECondary:SAVE

Supported E4438C with Option 402

[:SOURce] :RADio:GSM:SECondary:SAVE

This command saves the current frame configuration as the secondary frame with the filename GSM_SECONDARY_FRAME.

Key Entry **Save Secondary Frame State**

Remarks To recall the secondary frame state (saved in non-volatile signal generator memory), refer to “:SECondary:RECall” on page 695.

:SECondary:TRIGger[:SOURce]

Supported E4438C with Option 402

[:SOURce] :RADio:GSM:SECondary:TRIGger [:SOURce] KEY | EXT | BUS

[:SOURce] :RADio:GSM:SECondary:TRIGger [:SOURce] ?

This command selects the type of triggering for the secondary frame.

KEY This choice enables triggering by pressing the front panel **Trigger** hardkey.

EXT This choice enables triggering using an externally applied signal at the PATT TRIG IN rear panel connector or the PATT TRIG IN 2 pin on the rear panel AUX I/O connector. To select the appropriate connector, refer to “:TRIGger[:SOURce]:EXTernal[:SOURce]” on page 715.

BUS This choice enables GPIB triggering using the *TRG or GET command or LAN and RS-232 triggering using the *TRG command.

Key Entry **Trigger Key Ext Bus**

:SECondary[:STATe]

Supported E4438C with Option 402

```
[:SOURCE]:RADio:GSM:SECondary[:STATe] ON|OFF|1|0  
[:SOURCE]:RADio:GSM:SECondary[:STATe] ?
```

This command enables or disables the ability to switch to the secondary frame.

***RST** 0

Key Entry Secondary Frame Off On

Remarks A frame must already be saved as the secondary frame in order to turn the secondary state function on. To save a frame as the secondary frame, refer to “:SECondary:SAVE” on page 695.

:SLOT0|[1]|2|3|4|5|6|7:ACCess:ENCRyption

Supported E4438C with Option 402

```
[:SOURCE]:RADio:GSM:SLOT0|[1]|2|3|4|5|6|7:ACCess:ENCRyption  
PN9|PN15|FIX4|"<file name>"|EXT|P4|P8|P16|P32|P64  
[:SOURCE]:RADio:GSM:SLOT0|[1]|2|3|4|5|6|7:ACCess:ENCRyption?
```

This command creates and configures an access encrypted data field.

***RST** PN9

Key Entry PN9 PN15 FIX4 User File Ext 4 1's & 4 0's 8 1's & 8 0's
16 1's & 16 0's 32 1's & 32 0's 64 1's & 64 0's

Remarks See “File Name Variables” on page 13 for information on the file name syntax.

:SLOT0|[1]|2|3|4|5|6|7:ACCess:ENCRyption:FIX4

Supported E4438C with Option 402

```
[:SOURCE]:RADio:GSM:SLOT0|[1]|2|3|4|5|6|7:ACCess:ENCRyption:FIX4 <val>  
[:SOURCE]:RADio:GSM:SLOT0|[1]|2|3|4|5|6|7:ACCess:ENCRyption:FIX4?
```

This command sets the binary, 4-bit repeating sequence data pattern that is used in the selected access timeslot encryption field.

***RST** #B0000

Range #B0000–#B1111 or 0–15

Key Entry FIX4

Remarks FIX4 must already be defined as the data type.

:SLOT0|[1]|2|3|4|5|6|7:ACCess:ETAIl

Supported E4438C with Option 402

```
[:SOURCE]:RADIO:GSM:SLOT0|[1]|2|3|4|5|6|7:ACCess:ETAIl <bit_pattern>
[:SOURCE]:RADIO:GSM:SLOT0|[1]|2|3|4|5|6|7:ACCess:ETAIl?
```

This command specifies the extended tail bits (8 bits) field for the selected access timeslot.

***RST** #H3A

Range #H00–#HFF

Key Entry **ET**

:SLOT0|[1]|2|3|4|5|6|7:ACCess:SSEquence

Supported E4438C with Option 402

```
[:SOURCE]:RADIO:GSM:SLOT0|[1]|2|3|4|5|6|7:ACCess:SSEquence <bit_pattern>
[:SOURCE]:RADIO:GSM:SLOT0|[1]|2|3|4|5|6|7:ACCess:SSEquence?
```

This command specifies the synchronization sequence bits (41 bits) for the selected access timeslot.

***RST** #H096FF335478

Range #H0–#H1FFFFFFFF

Key Entry **SS**

:SLOT0|[1]|2|3|4|5|6|7:ACCess:CUSTom

Supported E4438C with Option 402

```
[:SOURCE]:RADIO:GSM:SLOT0|[1]|2|3|4|5|6|7:CUSTom PN9|PN15|FIX4|
"<file name>"|EXT|P4|P8|P16|P32|P64
[:SOURCE]:RADIO:GSM:SLOT0|[1]|2|3|4|5|6|7:CUSTom?
```

This command configures the data field for the selected custom timeslot.

***RST** PN9

Key Entry **PN9 PN15 FIX4 User File Ext 4 1's & 4 0's 8 1's & 8 0's**
16 1's & 16 0's 32 1's & 32 0's 64 1's & 64 0's

Remarks See “[File Name Variables](#)” on [page 13](#) for information on the file name syntax.

:SLOT0|[1]|2|3|4|5|6|7:CUSTom:FIX4

Supported E4438C with Option 402

```
[ :SOURCE ] :RADIO:GSM:SLOT0 | [1] | 2 | 3 | 4 | 5 | 6 | 7 :CUSTom:FIX4 <val>  
[ :SOURCE ] :RADIO:GSM:SLOT0 | [1] | 2 | 3 | 4 | 5 | 6 | 7 :CUSTom:FIX4?
```

This command sets the binary, 4-bit repeating sequence data pattern that is used in the selected custom timeslot.

***RST** #B0000

Range #B0000–#B1111 or 0–15

Key Entry **FIX4**

Remarks FIX4 must already be defined as the data type.

:SLOT0|[1]|2|3|4|5|6|7:DUMMy:TSEQuence

Supported E4438C with Option 402

```
[ :SOURCE ] :RADIO:GSM:SLOT0 | [1] | 2 | 3 | 4 | 5 | 6 | 7 :DUMMy:TSEQuence TSC0 |  
TSC1 | TSC2 | TSC3 | TSC4 | TSC5 | TSC6 | TSC7 | <bit_pattern>  
[ :SOURCE ] :RADIO:GSM:SLOT0 | [1] | 2 | 3 | 4 | 5 | 6 | 7 :DUMMy:TSEQuence?
```

This command changes the 26-bit dummy training sequence (TS) for the selected dummy timeslot.

***RST** #H0000000

Range <bit_pattern>: #H0–#H3FFFFFF

Key Entry **TSC0 TSC1 TSC2 TSC3 TSC4 TSC5 TSC6 TSC7**
Custom TS

Remarks When normal preset is selected, the preset hexadecimal value for TS reflects the GSM protocol, however you may use this command to enter a new value.

:SLOT0|[1]|2|3|4|5|6|7:MULTIslot

Supported E4438C with Option 402

```
[:SOURCE]:RADIO:GSM:SLOT0|[1]|2|3|4|5|6|7:MULTIslot ON|OFF|1|0
[:SOURCE]:RADIO:GSM:SLOT0|[1]|2|3|4|5|6|7:MULTIslot?
```

This command turns bursting (ramping) on or off between the selected timeslot and the next higher numbered adjacent timeslot.

ON (1) This choice turns ramping off between timeslots.

OFF (0) This choice turns ramping on between timeslots.

***RST** 0

Key Entry **Multislot Off On**

:SLOT0|[1]|2|3|4|5|6|7:NORMAL:ENCRyption

Supported E4438C with Option 402

```
[:SOURCE]:RADIO:GSM:SLOT0|[1]|2|3|4|5|6|7:NORMAL:ENCRyption
PN9|PN15|FIX4|"<filename>"|EXT|P4|P8|P16|P32|P64|TCHFS|TCHHS|CS1|CS4|
DMCS1|UMCS1|BCH1|BCH2
[:SOURCE]:RADIO:GSM:SLOT0|[1]|2|3|4|5|6|7:NORMAL:ENCRyption?
```

This command creates and configures an encrypted data field for a normal timeslot.

PN9 This choice uses a standard PN9 bit pattern. In the case of TDMA bursted data, a PN9 repeats continuously, running from one timeslot to the matching timeslot in the next frame.

PN15 This choice uses a standard PN15 bit pattern. In the case of TDMA bursted data, a PN15 repeats continuously, running from one timeslot to the matching timeslot in the next frame.

FIX4 This choice uses a fixed 4-bit pattern. The selected 4-bit pattern will be repeated as necessary to fill the selected data to set the desired pattern.

User File This choice selects a user-supplied file to be used as the bit pattern. In the case of TDMA bursted data, enough bits must be supplied to fill the desired number of timeslots (left over bit are ignored). User files contain 8 data bits per byte.

EXT This choice uses an external user signal as the modulating data stream. Serial data is supplied via the front panel DATA BNC connector.

P4 This choice selects a data pattern with 4 1's followed by 4 0's. The selected pattern will be repeated as necessary to fill the selected data area.

P8	This choice selects a data pattern with 8 1's followed by 8 0's. The selected pattern will be repeated as necessary to fill the selected data area.
P16	This choice selects a data pattern with 16 1's followed by 16 0's. The selected pattern will be repeated as necessary to fill the selected data area.
P32	This choice selects a data pattern with 32 1's followed by 32 0's. The selected pattern will be repeated as necessary to fill the selected data area.
P64	This choice selects a data pattern with 64 1's followed by 64 0's. The selected pattern will be repeated as necessary to fill the selected data area.
TCHFS	This choice selects traffic channel with full rate speech (TCH/FS). This channel would be represented by a 26 frame multiframe with an SACCH and IDLE frame.
TCHHS	This choice selects traffic channel with half rate speech (TCH/HS). This is when a complex coding scheme is used that can allow two mobile stations to share the same timeslot. On an ESG this is represented by having one timeslot with a normal burst and user definable training sequence and the same timeslot on an alternate frame using a dummy burst. This represents the situation where TCH/HS is being used in one timeslot and the other timeslot is not being used.
CS-1	This choice selects the CS-1 channel, a packet data traffic channel with block type 1 as per 3GPP standard GSM 05.03.
CS4	This choice selects the CS-4 channel, a packet data traffic channel with block type 4 as per 3GPP standard GSM 05.03.
DMCS1	This choice selects the downlink MCS-1 channel, a packet data traffic channel with block type 5 as per 3GPP standard GSM 05.03.
UMCS1	This choice selects the uplink MCS-1 channel, a packet data traffic channel with block type 5 as per 3GPP standard GSM 05.03.
BCH1	This choice selects a non-combined broadcast channel. BCH1 can only be set in timeslot zero and can be the only multiframe type in a frame. This means that BCH1 will conflict with the following parameters: TCH/FS, TCH/HS, CS-1, CS-4, DMCS-1 and UMCS-1.
BCH2	This choice selects a combined broadcast channel. BCH2 can only be set in timeslot zero and can be the only multiframe type in a frame. This means that BCH2 will conflict with the following parameters: TCH/FS, TCH/HS, CS-1, CS-4, DMCS-1, and UMCS-1.
*RST	PN9
Range	BCH1: 0–65535

	BCH2: 0–65535						
Key Entry	PN9	PN15	FIX4	User File	Ext	4 1's & 4 0's	8 1's & 8 0's
	16 1's & 16 0's		32 1's & 32 0's		64 1's & 64 0's		TCH/FS TCH/HS
	CS-1	CS-4	Downlink MCS-1		Uplink MCS-1		
Remarks	See “File Name Variables” on page 13 for information on the file name syntax.						

:SLOT0:NORMAL:ENCRyption:BCH:BCC

Supported E4438C with Option 416

```
[:SOURce]:RADio:GSM:SLOT0:NORMAL:ENCRyption:BCH:BCC <val>
[:SOURce]:RADio:GSM:SLOT0:NORMAL:ENCRyption:BCH:BCC?
```

This command sets the broadcast control code (BCC) which is used to indicate what training sequence is being used by the basestation in the forward channels. This code will allow the mobile station to decode the other channels in the broadcast channel.

***RST** 0

Range 0–7

:SLOT0:NORMAL:ENCRyption:BCH:CELLid

Supported E4438C with Option 416

```
[:SOURce]:RADio:GSM:SLOT0:NORMAL:ENCRyption:BCH:CELLid <val>
[:SOURce]:RADio:GSM:SLOT0:NORMAL:ENCRyption:BCH:CELLid?
```

This command sets the cell identification. This will identify a cell within a location area.

***RST** 0

Range 0–65535

:SLOT0:NORMAL:ENCRyption:BCH:LAC

Supported E4438C with Option 416

```
[:SOURce]:RADio:GSM:SLOT0:NORMAL:ENCRyption:BCH:LAC <val>
[:SOURce]:RADio:GSM:SLOT0:NORMAL:ENCRyption:BCH:LAC?
```

This command sets the location area code (LAC). The location area code provides 16 bits to allow the administrator to define a location.

***RST** 0

Range 0–65535

GSM Subsystem—Option 402 ([:SOURCE]:RADIO:GSM)**:SLOT0:NORMAL:ENCRyption:BCH:MCC****Supported** E4438C with Option 416

[:SOURCE]:RADIO:GSM:SLOT0:NORMAL:ENCRyption:BCH:MCC <val>

[:SOURCE]:RADIO:GSM:SLOT0:NORMAL:ENCRyption:BCH:MCC?

This command sets the mobile country code (MCC). The mobile country code is a 12 bit number used to represent the country where the basestation is located.

RST** 0**Range** 0–4095**:SLOT0:NORMAL:ENCRyption:BCH:MNC*Supported** E4438C with Option 416

[:SOURCE]:RADIO:GSM:SLOT0:NORMAL:ENCRyption:BCH:MNC <val>

[:SOURCE]:RADIO:GSM:SLOT0:NORMAL:ENCRyption:BCH:MNC?

This command sets the mobile network code (MNC). The mobile network code is the individual number a network will be assigned.

***RST** 0**Range** 0–255

Remarks Federal regulation mandates that a 3-digit MNC will be used. For the ESG implementation the upper four bits are set to 1111.

:SLOT0:NORMAL:ENCRyption:BCH:PLMN**Supported** E4438C with Option 416

[:SOURCE]:RADIO:GSM:SLOT0:NORMAL:ENCRyption:BCH:PLMN <val>

[:SOURCE]:RADIO:GSM:SLOT0:NORMAL:ENCRyption:BCH:PLMN?

This command is used to set the Public Land Mobile Network (PLMN) which is used to indicate the country the phone is in. PLMN is also referred to as the National Country Code (NCC).

***RST** 0**Range** 0–7

:SLOT0|[1]|2|3|4|5|6|7:NORMAL:ENCRyption:CS1:DATA

Supported E4438C with Option 402

```
[ :SOURCE ] :RADIo:GSM:SLOT0 | [1] | 2 | 3 | 4 | 5 | 6 | 7 :NORMAl:ENCRyption:CS1:DATA  
PN9 | PN15  
[ :SOURCE ] :RADIo:GSM:SLOT0 | [1] | 2 | 3 | 4 | 5 | 6 | 7 :NORMAl:ENCRyption:CS1:DATA?
```

This command sets the bit pattern for the CS1 packet data traffic channel.

***RST** PN9

Key Entry **PN9 PN15**

:SLOT0|[1]|2|3|4|5|6|7:NORMAL:ENCRyption:CS4:DATA

Supported E4438C with Option 402

```
[ :SOURCE ] :RADIo [1] | 2 | 3 | 4 :GSM:SLOT0 | [1] | 2 | 3 | 4 | 5 | 6 | 7 :NORMAl:ENCRyption:CS4  
:DATA PN9 | PN15  
[ :SOURCE ] :RADIo [1] | 2 | 3 | 4 :GSM:SLOT0 | [1] | 2 | 3 | 4 | 5 | 6 | 7 :NORMAl:ENCRyption:CS4  
:DATA?
```

This command selects the encryption field data, if the selected timeslot uses the packet data block type 4 coding scheme.

***RST** PN9

Key Entry **PN9 PN15**

Remarks Refer to “[:SLOT0|\[1\]|2|3|4|5|6|7:NORMAL:ENCRyption](#)” on page 699 for selecting the coding scheme.

:SLOT0|[1]|2|3|4|5|6|7:NORMAL:ENCRyption:DLINK:MCS1:DATA

Supported E4438C with Option 402

```
[ :SOURCE ] :RADIo:GSM:SLOT0 | [1] | 2 | 3 | 4 | 5 | 6 | 7 :NORMAl:ENCRyption:DLINK:MCS1:  
DATA PN9 | PN15  
[ :SOURCE ] :RADIo:GSM:SLOT0 | [1] | 2 | 3 | 4 | 5 | 6 | 7 :NORMAl:ENCRyption:DLINK:MCS1:  
DATA?
```

This command sets the bit pattern for the downlink MCS1 packet data traffic channel.

***RST** PN9

Key Entry **PN9 PN15**

GSM Subsystem—Option 402 ([:SOURCE]:RADIO:GSM)**:SLOT0|[1]|2|3|4|5|6|7:NORMAL:ENCRyption:FIX4****Supported** E4438C with Option 402

[:SOURCE]:RADIO:GSM:SLOT0|[1]|2|3|4|5|6|7:NORMAL:ENCRyption:FIX4 <val>

[:SOURCE]:RADIO:GSM:SLOT0|[1]|2|3|4|5|6|7:NORMAL:ENCRyption:FIX4?

This command sets the binary, 4-bit repeating sequence data pattern that is used in the selected normal timeslot encryption field.

RST** #B0000**Range** #B0000–#B1111 or 0–15**Key Entry** **FIX4*Remarks** FIX4 must already be defined as the data type.**:SLOT0|[1]|2|3|4|5|6|7:NORMAL:ENCRyption:TCH:FS:DATA****Supported** E4438C with Option 402[:SOURCE]:RADIO:GSM:SLOT0|[1]|2|3|4|5|6|7:NORMAL:ENCRyption:TCH:FS:DATA
PN9|PN15

[:SOURCE]:RADIO:GSM:SLOT0|[1]|2|3|4|5|6|7:NORMAL:ENCRyption:TCH:FS:DATA?

This command sets the bit pattern for the TCH/FS channel.

RST** PN9**Key Entry** **PN9 PN15*:SLOT0|[1]|2|3|4|5|6|7:NORMAL:ENCRyption:ULINK:MCS1:DATA****Supported** E4438C with Option 402[:SOURCE]:RADIO:GSM:SLOT0|[1]|2|3|4|5|6|7:NORMAL:ENCRyption:ULINK:MCS1:
DATA PN9|PN15[:SOURCE]:RADIO:GSM:SLOT0|[1]|2|3|4|5|6|7:NORMAL:ENCRyption:ULINK:MCS1:
DATA?

This command sets the bit pattern for the uplink MCS1 packet data traffic channel.

***RST** PN9**Key Entry** **PN9 PN15**

:SLOT0|[1]|2|3|4|5|6|7:NORMAL:STeal

Supported E4438C with Option 402

```
[:SOURCE]:RADIO:GSM:SLOT0|[1]|2|3|4|5|6|7:NORMAL:STeal <val>
[:SOURCE]:RADIO:GSM:SLOT0|[1]|2|3|4|5|6|7:NORMAL:STeal?
```

This command specifies the normal stealing bits for the selected timeslot. The single bit defines the value for both 1-bit fields.

***RST** #H0

Range #H0–#H1

Key Entry S

:SLOT0|[1]|2|3|4|5|6|7:NORMAL:TSEQUence

Supported E4438C with Option 402

```
[:SOURCE]:RADIO:GSM:SLOT0|[1]|2|3|4|5|6|7:NORMAL:TSEQUence
TSC0|TSC1|TSC2|TSC3|TSC4|TSC5|TSC6|TSC7|<bit_pattern>
[:SOURCE]:RADIO:GSM:SLOT0|[1]|2|3|4|5|6|7:NORMAL:TSEQUence?
```

This command changes the 26-bit training sequence (TS) for a normal timeslot. The preset hexadecimal value (when normal preset is selected) for TS reflects the GSM protocol, however you can enter a new value by using this command. The hexadecimal values for the 8 training sequence codes are listed below:

***RST** #H0000000

Range <bit_pattern>: #H0–#H3FFFFFF

Key Entry TSC0 TSC1 TSC2 TSC3 TSC4 TSC5 TSC6 TSC7

Custom TS

Remarks The preset hexadecimal value (when normal preset is selected) for TS reflects the GSM protocol, however you can enter a new value by using this command.

:SLOT0|[1]|2|3|4|5|6|7:POWer

Supported E4438C with Option 402

```
[ :SOURCE ] :RADIo:GSM:SLOT0 | [1] | 2 | 3 | 4 | 5 | 6 | 7 :POWer MAIN | DELTa
[ :SOURCE ] :RADIo:GSM:SLOT0 | [1] | 2 | 3 | 4 | 5 | 6 | 7 :POWer?
```

This command defines the RF output power level for the selected timeslot.

MAIN This choice specifies RF output as the main power level.

DELTA This choice specifies RF output as the alternative power level.

***RST** MAIN

Key Entry Timeslot Ampl Main Delta

:SLOT0|[1]|2|3|4|5|6|7:STATe

Supported E4438C with Option 402

```
[ :SOURCE ] :RADIo:GSM:SLOT0 | [1] | 2 | 3 | 4 | 5 | 6 | 7 :STATe ON | OFF | 1 | 0
[ :SOURCE ] :RADIo:GSM:SLOT0 | [1] | 2 | 3 | 4 | 5 | 6 | 7 :STATe?
```

This command enables or disables the operating state of the selected timeslot.

***RST** Timeslot 0: 1 Timeslot 1–7: 0

Key Entry Timeslot Off On

:SLOT0|[1]|2|3|4|5|6|7:SYNC:ENCRyption

Supported E4438C with Option 402

```
[ :SOURCE ] :RADIo:GSM:SLOT0 | [1] | 2 | 3 | 4 | 5 | 6 | 7 :SYNC:ENCRyption PN9 | PN11 | PN15 |
PN20 | PN23 | FIX4 | "<file name>" | EXT | P4 | P8 | P16 | P32 | P64
[ :SOURCE ] :RADIo:GSM:SLOT0 | [1] | 2 | 3 | 4 | 5 | 6 | 7 :SYNC:ENCRyption?
```

This command creates and configures an encrypted data field for a synchronization timeslot.

***RST** PN9

Key Entry

PN9	PN11	PN15	PN20	PN23	FIX4	User File	EXT
4 1's & 4 0's	8 1's & 8 0's	16 1's & 16 0's	32 1's & 32 0's	64 1's & 64 0's			

Remarks Refer to “File Name Variables” on page 13 for information on the file name syntax.

:SLOT0|[1]|2|3|4|5|6|7:SYNC:ENCryption:FIX4

Supported E4438C with Option 402

```
[:SOURCE]:RADIO:GSM:SLOT0|[1]|2|3|4|5|6|7:SYNC:ENCryption:FIX4 <val>
[:SOURCE]:RADIO:GSM:SLOT0|[1]|2|3|4|5|6|7:SYNC:ENCryption:FIX4?
```

This command sets the binary, 4-bit repeating sequence data pattern that is used in the selected synchronization timeslot encryption field.

***RST** #B0000

Range #B0000–#B1111 or 0–15

Key Entry **FIX4**

Remarks FIX4 must already be defined as the data type.

:SLOT0|[1]|2|3|4|5|6|7:SYNC:TSEquence

Supported E4438C with Option 402

```
[:SOURCE]:RADIO:GSM:SLOT0|[1]|2|3|4|5|6|7:SYNC:TSEquence <bit_pattern>
[:SOURCE]:RADIO:GSM:SLOT0|[1]|2|3|4|5|6|7:SYNC:TSEquence?
```

This command customizes the training sequence (TS) for the selected synchronization timeslot. The preset hexadecimal value (when normal preset is selected) for TS reflects the GSM protocol, however you can enter a new value by using this command.

***RST** #HB962040F2D45761B

Range #H0–#FFFFFFFFFFFFFFFF

Key Entry **TS**

:SLOT0|[1]|2|3|4|5|6|7[:TYPE]

Supported E4438C with Option 402

```
[:SOURCE]:RADIO:GSM:SLOT0|[1]|2|3|4|5|6|7[:TYPE] CUSTom|NORMaL|
FCORrection|SYNC|DUMMy|ACCess|NORMAL_ALL
[:SOURCE]:RADIO:GSM:SLOT0|[1]|2|3|4|5|6|7[:TYPE]?
```

This command sets the timeslot type for the selected timeslot.

***RST** NORMAL

Key Entry **Custom Normal FCorr Sync Dummy Access Normal All**

:SOUT

Supported E4438C with Option 402

```
[ :SOURCE ] :RADIO:GSM:SOUT FRAME | SLOT | ALL
[ :SOURCE ] :RADIO:GSM:SOUT?
```

This command sets the synchronization location (within the pattern of data) and the type of output at the EVENT 1 rear panel connector.

FRAME This choice outputs a 1-bit signal, synchronized to the bit selected by the synchronization output offset command, for a framed data pattern.

SLOT This choice outputs a 1-bit signal, synchronized to the bit selected by the synchronization output offset command, for a selected timeslot.

ALL This choice outputs a 1-bit signal, synchronized to the bit selected by the synchronization output offset command, for all active timeslots.

***RST** FRAME

Key Entry	Begin Frame	Begin Timeslot #	All Timeslots
------------------	--------------------	-------------------------	----------------------

:SOUT:OFFSet

Supported E4438C with Option 402

```
[ :SOURCE ] :RADIO:GSM:SOUT:OFFSet <val>
[ :SOURCE ] :RADIO:GSM:SOUT:OFFSet?
```

This command sets the offset value for the location of the output synchronization signal on the EVENT1 rear panel connector relative to the beginning of the framed data pattern or timeslot.

The variable <val> is expressed as a number of bits.

***RST** +0

Range -155 to 155

Key Entry **Sync Out Offset**

Remarks Negative values move the synchronization output signal earlier; positive values move it later.

To change the output of the EVENT1 rear panel connector to SLOT, refer to [“:SOUT” on page 708](#).

:SOUT:SLOT

Supported E4438C with Option 402

[:SOURce] :RADio:GSM:SOUT:SLOT <val>

[:SOURce] :RADio:GSM:SOUT:SLOT?

This command selects the timeslot that will trigger a 1-bit output signal at the EVENT 1 rear panel connector.

***RST** +0

Range 0–7

Key Entry **Begin Timeslot #**

Remarks To change the output of the EVENT1 rear panel connector to SLOT, refer to [“:SOUT” on page 708](#).

:SRATe

Supported E4438C with Option 402

[:SOURce] :RADio:GSM:SRATe <val>

[:SOURce] :RADio:GSM:SRATe?

This command sets the transmission symbol rate.

The variable <val> is expressed in units of bits per second (bps–Mbps) and the maximum range value is dependent upon the source of data (internal or external), the modulation type, and filter.

***RST** +2.70833333E+005

Range	Modulation Type	Bits per Symbol	Internal Data	External Serial Data
	BPSK	1	1–50 Msps	1–50 Msps
	FSK2			
	MSK			
	C4FM	2	1–50 Msps	1–25 Msps
	FSK4			
	OQPSK			
	OQPSK195			
	P4QPPSK			
	QAM4			
	QPSK			
	QPSKIS95			
	QPSKISAT			

Receiver Test Digital Commands (continued)
GSM Subsystem—Option 402 ([:SOURCE]:RADio:GSM)

Range	Modulation Type	Bits per Symbol	Internal Data	External Serial Data
	D8PSK	3	1–33.33 MspS	1–16.67 MspS
	EDGE			
	FSK8			
	PSK8			
	FSK16	4	1–25 MspS	1–12.5 MspS
	PSK16			
	QAM16			
	QAM32	5	1–20 MspS	1–10 MspS
	QAM64	6	1–16.67 MspS	1–8.33 MspS
	QAM256	7	1–12.50 MspS	1–6.25 MspS

Key Entry

Symbol Rate

Remarks

When user-defined filters are selected using the command “:FILTer” on page 691, the upper bit rate will be restricted by the symbol rate as follows:

- FIR filter length > 32 symbols: upper limit is 12.5 MspS
- FIR filter length > 16 symbols: upper limit is 25 MspS

When internal FIR filters are used, the limits of the above table always apply. For higher symbol rates, the FIR filter length will be truncated as follows:

- Above 12.5 MspS, the FIR length will be truncated to 32 symbols
- Above 25 MspS, the FIR length will be truncated to 16 symbols

This will impact the relative timing of the modulated data, as well as the actual filter response (see “:BRATe” on page 678).

A change in the symbol rate value will affect the bit rate value; refer to “:BRATe” on page 678 for a list of the minimum and maximum symbol rate values. To change the modulation type, refer to “:MODulation[:TYPE]” on page 694.

:TRIGger:EXTernal:DELay

Supported E4438C with Option 416

```
[ :SOURCE ] :RADio:GSM:TRIGger:EXTernal:DELay <val>
[ :SOURCE ] :RADio:GSM:TRIGger:EXTernal:DELay?
```

This command sets the trigger delay for synchronizing the ESG. The variable <val> is expressed in number of symbols.

***RST** +0

Range 0–1048575

:TRIGger:TYPE

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:GSM:TRIGger:TYPE CONTInuous | SINGle | GATE
[ :SOURce ] :RADio:GSM:TRIGger:TYPE?
```

This command sets the trigger type.

CONTInuous The framed data sequence repeats continuously; the sequence restarts every time the previous playback is completed. To customize continuous triggering, refer to “:TRIGger:TYPE:CONTInuous[:TYPE]” on page 711.

SINGle The framed data sequence plays once for every trigger received.

GATE An external trigger signal interrupts the playback while the gating signal is in the inactive state. Playback resumes when the external control signal returns to the active state. The active state can be set to high or low.

***RST** CONT

Key Entry **Continuous** **Single** **Gated**

:TRIGger:TYPE:CONTInuous[:TYPE]

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:GSM:TRIGger:TYPE:CONTInuous [ :TYPE ] FREE | TRIGger | RESet
[ :SOURce ] :RADio:GSM:TRIGger:TYPE:CONTInuous [ :TYPE ] ?
```

This commands selects the waveform’s response to a trigger signal while using the continuous trigger mode. See “:TRIGger:TYPE” on page 711 for more information on triggering modes.

The following list describes the waveform’s response to each of the command choices:

FREE Turning the ARB format on immediately triggers the waveform. The waveform repeats until the format is turned off or another trigger or waveform is selected.

TRIGger The waveform waits for a trigger before play begins. When the waveform receives the trigger, it plays continuously until you turn the format off, select another trigger, or choose another waveform file.

RESet The waveform waits for a trigger before play begins. When the waveform receives the trigger, it plays continuously. Subsequent triggers reset the waveform to the beginning. For a waveform sequence, this means to the beginning of the first segment in the sequence.

***RST** FREE

Key Entry **Free Run** **Trigger & Run** **Reset & Run**

:TRIGger:TYPE:GATE:ACTive

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:GSM:TRIGger:TYPE:GATE:ACTive LOW|HIGH  
[ :SOURCE ] :RADio:GSM:TRIGger:TYPE:GATE:ACTive?
```

This command selects the active state (gate polarity) of the gate while using the gating trigger mode.

The LOW and HIGH selections correspond to the low and high states of an external trigger signal. For example, when you select HIGH, the active state occurs during the high of the trigger signal. When the active state occurs, the ESG stops the waveform playback at the last played sample point, then restarts the playback at the next sample point when the inactive state occurs. For more information on triggering and to select gating as the trigger mode, see “:TRIGger:TYPE” on page 711.

The following list describes the signal generator’s gating behavior for the external trigger signal polarity selections:

LOW	The waveform playback stops when the trigger signal goes low (active state) and restarts when the trigger signal goes high (inactive state).
HIGH	The waveform playback stops when the trigger signal goes high (active state) and restarts when the trigger signal goes low (inactive state).
*RST	HIGH
Key Entry	Gate Active Low High

:TRIGger[:SOURCE]

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:GSM:TRIGger [ :SOURCE ] KEY|EXT|BUS  
[ :SOURCE ] :RADio:GSM:TRIGger [ :SOURCE ] ?
```

This command sets the trigger source.

For more information on triggering, see “:TRIGger:TYPE” on page 711. The following list describes the command choices:

KEY	This choice enables manual triggering by pressing the front-panel Trigger hardkey.
EXT	An externally applied signal triggers the waveform. This is the only choice that works with gating. The following conditions affect an external trigger: <ul style="list-style-type: none">• The input connector selected for the trigger signal. You have a choice between the rear-panel PATTERN TRIG IN connector or the PATT TRIG IN 2 pin on the rear-panel AUXILIARY I/O connector. To make the connector selection, see “:TRIGger[:SOURCE]:EXTernal[:SOURCE]” on page 715.

For more information on the connectors and on connecting the cables, see the *ESG User's Guide*.

- The trigger signal polarity:
 - gating mode, see “:TRIGger:TYPE:GATE:ACTive” on page 712
 - continuous and single modes, see “:TRIGger[:SOURce]:EXTernal:SLOPe” on page 714
- The time delay between when the ESG receives a trigger and when the waveform responds to the trigger. There are two parts to setting the delay:
 - setting the amount of delay, see “:TRIGger[:SOURce]:EXTernal:DELay” on page 713
 - turning the delay on, see “:TRIGger[:SOURce]:EXTernal:DELay:STATe” on page 714

BUS This choice enables triggering over the GPIB or LAN using the *TRG or GET commands or the AUXILIARY INTERFACE (RS-232) using the *TRG command.

*RST	KEY			
Key Entry	Trigger Key	Ext	Bus	

:TRIGger[:SOURce]:EXTernal:DELay

Supported E4438C with Option 402

This command sets the number of bits to delay the signal generator's response to an external trigger.

The bit delay is a delay between when the ESG receives the trigger and when it responds to the trigger. The delay uses the clocks of the bit-clock to time the delay. After the ESG receives the trigger and the set number of delay bits (clocks) occurs, the ESG transmits the data pattern.

The delay occurs after you enable the state. See “:TRIGger[:SOURce]:EXTernal:DELay:STATe” on page 714. You can set the number of bits either before or after enabling the state.

For more information on configuring an external trigger source and to select external as the trigger source, see “:TRIGger[:SOURce]” on page 712.

*RST	+0
Range	0–1048575
Key Entry	Ext Delay Bits

:TRIGger[:SOURCE]:EXTErnal:DELay:FINE

Supported E4438C with Option 416

```
[ :SOURCE ] :RADio:GSM:TRIGger [ :SOURCE ] :EXTErnal:DELay:FINE <val>  
[ :SOURCE ] :RADio:GSM:TRIGger [ :SOURCE ] :EXTErnal:DELay:FINE?
```

This command sets the fine trigger delay for synchronizing the ESG.

The fine delay value is added to the coarse delay setting (see “:TRIGger[:SOURCE]:EXTErnal:DELay” on page 713).

The variable <val> is expressed as a fraction of one symbol.

***RST** +0.00000000E+000

Range 0–1

:TRIGger[:SOURCE]:EXTErnal:DELay:STATe

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:GSM:TRIGger [ :SOURCE ] :EXTErnal:DELay:STATe ON|OFF|1|0  
[ :SOURCE ] :RADio:GSM:TRIGger [ :SOURCE ] :EXTErnal:DELay:STATe?
```

This command enables or disables the operating state of the external trigger delay function.

For setting the delay time, see “:TRIGger[:SOURCE]:EXTErnal:DELay” on page 713, and for more information on configuring an external source, see “:TRIGger[:SOURCE]” on page 712.

***RST** 0

Key Entry Ext Delay Off On

:TRIGger[:SOURCE]:EXTErnal:SLOPe

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:GSM:TRIGger [ :SOURCE ] :EXTErnal:SLOPe POSitive|NEGative  
[ :SOURCE ] :RADio:GSM:TRIGger [ :SOURCE ] :EXTErnal:SLOPe?
```

This command sets the polarity for an external trigger signal while using the continuous, single triggering mode. To set the polarity for gating, see “:TRIGger:TYPE:GATE:ACTive” on page 712.

The POSitive and NEGative selections correspond to the high (positive) and low (negative) states of the external trigger signal. For example, when you select POSitive, the waveform responds (plays) during the high state of the trigger signal. When the PSG receives multiple trigger occurrences when only one is required, the signal generator uses the first trigger and ignores the rest.

For more information on configuring an external trigger source and to select external as the trigger source, see “:TRIGger[:SOURce]” on page 712.

***RST** NEG
Key Entry **Ext Polarity Neg Pos**

:TRIGger[:SOURce]:EXTErnal[:SOURce]

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:GSM:TRIGger [ :SOURce ] :EXTErnal [ :SOURce ] EPT1 |
EPT2 | EPTRIGGER1 | EPTRIGGER2
[ :SOURce ] :RADio:GSM:TRIGger [ :SOURce ] :EXTErnal [ :SOURce ] ?
```

This command selects which PATTERN TRIG IN connection the ESG uses to accept an externally applied trigger signal when external is the trigger source selection.

For more information on configuring an external trigger source and to select external as the trigger source, see “:TRIGger[:SOURce]” on page 712. For more information on the rear-panel connectors, see the *E4428C/38C ESG Signal Generators User’s Guide*.

The following list describes the command choices:

EPT1	This choice is synonymous with EPTRIGGER1 and selects the PATTERN TRIG IN rear-panel connector.
EPT2	This choice is synonymous with EPTRIGGER2 and selects the PATT TRIG IN 2 pin on the rear-panel AUXILIARY I/O connector.
EPTRIGGER1	This choice is synonymous with EPT1 and selects the PATTERN TRIG IN rear-panel connector.
EPTRIGGER2	This choice is synonymous with EPT2 and selects the PATT TRIG IN 2 pin on the rear-panel AUXILIARY I/O connector.
*RST	EPT1
Key Entry	Patt Trig In 1 Patt Trig In 2

GSM Subsystem—Option 402 ([:SOURCE]:RADio:GSM)

[:STATE]

Supported E4438C with Option 402

[:SOURCE] :RADio:GSM [:STATE] ON|OFF|1|0

[:SOURCE] :RADio:GSM [:STATE] ?

This command enables or disables the GSM modulation format.

***RST** 0

Key Entry **GSM Off On**

Remarks Although the GSM modulation is enabled with this command, the RF carrier is not modulated unless you also activate the front panel **Mod On/Off** hardkey.

HSDPA over W-CDMA Subsystem—Option 418 ([:SOURCE]:RADio:WCDMa:HSDPa[:BBG])

The commands in this subsystem support the remote functionality of the Signal Studio for HSDPA over W-CDMA software. For a complete description of terms and HSDPA functionality, refer to the software online help. Commands used for configuring the carrier signal and performing general signal generator functions are located in different SCPI command subsystems found within the SCPI Command Reference volumes.

There are two methods to determine the SCPI commands for a setup. One method is to locate each individual command listed in this subsystem and others within the *SCPI Command Reference* volumes. The other method is to use the HSDPA software UI. After downloading a UI setup to the ESG, the software lets you export a SCPI file that contains the commands used in the UI setup. Refer to the HSDPA software online help for information on this feature.

File Overview

The ESG's memory catalog (signal generator memory) uses several file types, each assigned with a unique syntax to recall the file. This section provides information on using files with SCPI commands.

This subsystem uses the following two command variables to represent two different file types stored in signal generator memory:

"<file name>" Bit file
"<user FIR>" FIR file

For more information on managing and using files, refer to the resources in the following list:

- [“File Name Variables” on page 13](#) for information on the file name syntax
- [Table 3-1 on page 122](#) for a listing of the different file types
- *E4428C/38C ESG Signal Generators Programming Guide* for information on downloading bit files
- *E4428C/38C ESG Signal Generators User's Guide* for information on creating and editing bit and FIR files using the signal generator

NOTE To create or edit HSDPA files with the ESG, use the table editors located in the Real Time W-CDMA modulation format. Access the bit table editor through the **Data** field and then select **User File** as the data source. Access the FIR filter table editor through the **Filter** field and then select **Define User FIR** as the filter type.

The HSDPA software interface downloads user files (bit and FIR file types) to the ESG when **USER** is the software data or filter type selection. You can see these files on the ESG by pressing **Utility > Memory Catalog > Catalog Type** and then selecting the file type, or by using the SCPI commands located in the Memory subsystem. User files are located on the ESG in the following directory path: /USER/<file type directory>/<file name>. [Table 9-1](#) shows the software naming convention for the different files created by the HSDPA software.

Table 9-1 HSDPA Software Downloaded File Names

Link Direction	Data Source	File Name	ESG File Type
Downlink and Uplink	Filter	<project name>–FIR	FIR
Downlink	BCH	<project name>–BCH	Bit
	PICH	<project name>–PICH	
	DPCH	<project name>–DPCH	
	DCH _x ^a	<project name>–DCH _x ^a	
	Inter-TTI	<project name>–ITTI _x ^b	
	HARQ ACK/NACK Pattern	<project name>–DLCPT	
	AMC CQI Pattern	<project name>–DLAPT	
	HS-DSCH	<project name>–DSCH1	
	HS-PDSCH	<project name>–HSPD _x ^b	
	HS-SCCH	<project name>–HSSCC _x ^b	
Uplink	DPCCH	<project name>–DPCCH	
	FBI	<project name>–FBI	
	TPC	<project name>–TPC	
	DPDCH	<project name>–DPDCH	
	DCH _x ^a	<project name>–DCH _x ^a	
	ACK Pattern	<project name>–APAT	
	CQI Pattern	<project name>–CPAT	

a. x is the DCH number (1–6).

b. x is the channel number (1–4) for the HSDPA, the HS-PDSCH and the HS-SCCH.

Managing ESG Setting Conflicts and Error Messages

The ESG reports setting conflicts as error messages. When a setting conflict occurs, an error number and a brief message appear at the bottom of the ESG display. You can view the full text of the error message in either of two ways: by using the front panel of the ESG, or by executing SCPI commands.

Front Panel Press **Utility > Error Info**.

SCPI Execute the SCPI error commands described in the “[System Subsystem \(:SYSTEM\)](#)” on page 155.

For more information on Error messages, refer to the *E4428C/38C ESG Signal Generators Programming Guide* for remote viewing or the *E4428C/38C ESG Signal Generators User’s Guide* for front panel viewing.

:DLINK:APPLY

Supported E4438C with Option 418418

```
[ :SOURCE ] :RADIO:WCDMA:HSDPA [ :BBG ] :DLINK:APPLY  
[ :SOURCE ] :RADIO:WCDMA:HSDPA [ :BBG ] :DLINK:APPLY?
```

This command applies changes to the channel setup and data for active downlink physical and transport channels, immediately starting the channel coding generation process. A progress bar may appear on the ESG display indicating that the new signal parameters are being applied. Signal parameters are also applied when the HSDPA modulation format is turned on.

Use the query to determine whether or not execution of this command is required. It returns the following responses:

0	Command execution is not required.
1	Command execution is required.

NOTE The apply query response is valid only when downlink HSDPA format is active.

The apply function will not work if there is a conflict with range values and coupled parameters. For example, if all the physical channel codes are not orthogonal to each other, the new settings are not applied to the signal when this command is executed. Resolve any conflicts before reapplying the changes. The ESG reports an error when conflicts occur.

HSDPA over W-CDMA Subsystem—Option 418 ([:SOURCE]:RADio:WCDMa:HSDPa[:BBG])**Nk:AWGN:CN****Supported** E4438C with Option 418

[:SOURCE]:RADio:WCDMa:HSDPa[:BBG]:DLINK:AWGN:CN <val>

[:SOURCE]:RADio:WCDMa:HSDPa[:BBG]:DLINK:AWGN:CN?

This command sets the downlink in-band carrier to noise ratio (C/N) value using AWGN.

RST** 0**Range** –30 to 30**Remarks** Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:DLINK:APPLY” on page 719.**:DLINK:AWGN[:STATe]*Supported** E4438C with Option 418

[:SOURCE]:RADio:WCDMa:HSDPa[:BBG]:DLINK:AWGN[:STATe] ON|OFF|0|1

[:SOURCE]:RADio:WCDMa:HSDPa[:BBG]:DLINK:AWGN[:STATe] ?

This command turns the downlink AWGN on or off.

RST** 0**Remarks** Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:DLINK:APPLY” on page 719.**:DLINK:BBClock[:SOURCE]*Supported** E4438C with Option 418

[:SOURCE]:RADio:WCDMa:HSDPa[:BBG]:DLINK:BBClock[:SOURCE] INT|EXT

[:SOURCE]:RADio:WCDMa:HSDPa[:BBG]:DLINK:BBClock[:SOURCE] ?

This command selects the downlink baseband generator chip clock source, which is either internal to the signal generator or applied externally.

***RST** INT**Remarks** When using an external chip clock source, connect the signal to the DATA CLOCK connector on the front panel of the ESG.

:DLINK:CPICH:CCODE

Supported E4438C with Option 418

[:SOURCE] :RADIO:WCDMA:HSDPA [:BBG] :DLINK:CPICH:CCODE?

This query returns the CPICH channelization code, which is always set to zero.

:DLINK:CPICH:POWER

Supported E4438C with Option 418

[:SOURCE] :RADIO:WCDMA:HSDPA [:BBG] :DLINK:CPICH:POWER <val>

[:SOURCE] :RADIO:WCDMA:HSDPA [:BBG] :DLINK:CPICH:POWER?

This command sets the CPICH power level. The variable <val> is expressed in decibels (dB).

***RST** 3.30000000E+000

Range -40 to 0

Remarks Setting the command parameter while the signal is active also requires executing the apply command. Refer to “[:DLINK:APPLY](#)” on page 719.

:DLINK:CPICH[:STATe]

Supported E4438C with Option 418

[:SOURCE] :RADIO:WCDMA:HSDPA [:BBG] :DLINK:CPICH [:STATe] ON | OFF | 1 | 0

[:SOURCE] :RADIO:WCDMA:HSDPA [:BBG] :DLINK:CPICH [:STATe] ?

This command turns the CPICH on or off.

***RST** 1

Remarks Setting the command parameter while the signal is active also requires executing the apply command. Refer to “[:DLINK:APPLY](#)” on page 719.

:DLINK:DPCH:CCODE

Supported E4438C with Option 418

[:SOURCE] :RADIO:WCDMA:HSDPA [:BBG] :DLINK:DPCH:CCODE <val>

[:SOURCE] :RADIO:WCDMA:HSDPA [:BBG] :DLINK:DPCH:CCODE?

This command sets the downlink DPCH channel code number.

***RST** 10

Range 0–511

HSDPA over W-CDMA Subsystem—Option 418 ([:SOURCE]:RADio:WCDMa:HSDPa[:BBG])

- Remarks** Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:DLINK:APPLY” on page 719.
- The channel code is coupled with the slot format and all other physical channel codes. Set the channel code to not exceed limits of the slot format and ensure that all physical channel codes are orthogonal to each other. If any channel codes fail to meet this criteria, the apply function (downlink apply command) will not work.

:DLINK:DPCH:DATA

Supported E4438C with Option 418

```
[ :SOURCE ] :RADio:WCDMa:HSDPa [ :BBG ] :DLINK:DPCH:DATA PN9 | PN15 | FIX4 | DCH |
"<file name>"
[ :SOURCE ] :RADio:WCDMa:HSDPa [ :BBG ] :DLINK:DPCH:DATA?
```

This command configures the downlink DPCH data pattern.

DCH This selects the transport channel as the data source. The DCH selection is not available for a DPCH slot format of 16.

"<file name>" This represents a data pattern file stored in signal generator memory. The data pattern must contain at least one bit or the apply function (downlink apply command) will not work. Refer to “File Overview” on page 717 for more information on files.

***RST** PN9

Remarks Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:DLINK:APPLY” on page 719.

:DLINK:DPCH:DATA:FIX4

Supported E4438C with Option 418

```
[ :SOURCE ] :RADio:WCDMa:HSDPa [ :BBG ] :DLINK:DPCH:DATA:FIX4 <val>
[ :SOURCE ] :RADio:WCDMa:HSDPa [ :BBG ] :DLINK:DPCH:DATA:FIX4?
```

This command sets the downlink DPCH repeating 4-bit binary data pattern.

The variable <val> accepts values in binary, hexadecimal, or decimal format, however the query returns only binary values.

***RST** 0

Range 0–15

Remarks Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:DLINK:APPLY” on page 719.

:DLINK:DPCH:DCH[1]|2|3|4|5|6:BSIZE

Supported E4438C with Option 418

```
[ :SOURCE ] :RADIo:WCDMA:HSDPa [ :BBG ] :DLINK:DPCH:DCH [1] | 2 | 3 | 4 | 5 | 6
:BSIZE <val>
[ :SOURCE ] :RADIo:WCDMA:HSDPa [ :BBG ] :DLINK:DPCH:DCH [1] | 2 | 3 | 4 | 5 | 6 :BSIZE?
```

This command sets the block size for the selected downlink DCH.

***RST** 20

Range 0–5000

Remarks Setting the command parameter while the signal is active also requires executing the apply command. Refer to “[:DLINK:APPLY](#)” on page 719.

The number of data bits per DCH cannot exceed 200,000. To maintain this data bit limit, the ESG calculates the product of the block size and the number of blocks. If the product of these two parameters exceeds 200,000, the apply function (downlink apply command) will not work.

:DLINK:DPCH:DCH[1]|2|3|4|5|6:CTYPE

Supported E4438C with Option 418

```
[ :SOURCE ] :RADIo:WCDMA:HSDPa [ :BBG ] :DLINK:DPCH:DCH [1] | 2 | 3 | 4 | 5 | 6
:CTYPE HCONv | TCONv | TURBo | NONE
[ :SOURCE ] :RADIo:WCDMA:HSDPa [ :BBG ] :DLINK:DPCH:DCH [1] | 2 | 3 | 4 | 5 | 6 :CTYPE?
```

This command sets the coder type for the selected downlink DCH.

HCONv This choice selects the 1/2 rate convolutional encoder.

TCONv This choice selects the 1/3 rate convolutional encoder.

TURBo This choice selects the turbo coder.

NONE This choice selects no coding.

***RST** HCON

Remarks Setting the command parameter while the signal is active also requires executing the apply command. Refer to “[:DLINK:APPLY](#)” on page 719.

:DLINK:DPCH:DCH[1]|2|3|4|5|6:CRC**Supported** E4438C with Option 418

```
[:SOURCE]:RADIO:WCDMA:HSDPA[:BBG]:DLINK:DPCH:DCH[1]|2|3|4|5|6:CRC 0|8|
12|16|24
[:SOURCE]:RADIO:WCDMA:HSDPA[:BBG]:DLINK:DPCH:DCH[1]|2|3|4|5|6:CRC?
```

This command sets the number of CRC bits for the selected downlink DCH.

RST** 8**Remarks** Setting the command parameter while the signal is active also requires executing the apply command. Refer to “[DLINK:APPLY](#)” on page 719.**:DLINK:DPCH:DCH[1]|2|3|4|5|6:DATA*Supported** E4438C with Option 418

```
[:SOURCE]:RADIO:WCDMA:HSDPA[:BBG]:DLINK:DPCH:DCH[1]|2|3|4|5|6:DATA PN9|
PN15|FIX4|"<file name>"
[:SOURCE]:RADIO:WCDMA:HSDPA[:BBG]:DLINK:DPCH:DCH[1]|2|3|4|5|6:DATA?
```

This command configures the data for the selected downlink DCH.

"<file name>" This variable represents a data pattern file stored in signal generator memory. The data pattern must contain at least one bit or the apply function (downlink apply command) will not work. Refer to “[File Overview](#)” on page 717 for more information on files.

RST** PN9**Remarks** Setting the command parameter while the signal is active also requires executing the apply command. Refer to “[DLINK:APPLY](#)” on page 719.**:DLINK:DPCH:DCH[1]|2|3|4|5|6:DATA:FIX4*Supported** E4438C with Option 418

```
[:SOURCE]:RADIO:WCDMA:HSDPA[:BBG]:DLINK:DPCH:DCH[1]|2|3|4|5|6:DATA:
FIX4 <val>
[:SOURCE]:RADIO:WCDMA:HSDPA[:BBG]:DLINK:DPCH:DCH[1]|2|3|4|5|6:DATA:FIX4?
```

This command sets the repeating 4-bit binary data pattern for the selected downlink DCH.

HSDPA over W-CDMA Subsystem—Option 418 [:SOURCE]:RADIO:WCDMA:HSDPA[:BBG]

The variable <val> accepts values in binary, hexadecimal, or decimal format, however the query returns only binary values.

*RST	0
Range	0–15
Remarks	Setting the command parameter while the signal is active also requires executing the apply command. Refer to “ :DLINK:APPLY ” on page 719.

:DLINK:DPCH:DCH[1] | 2 | 3 | 4 | 5 | 6:NBLocks

Supported E4438C with Option 418

```
[ :SOURCE ] :RADIO:WCDMA:HSDPA [ :BBG ] :DLINK:DPCH:DCH [ 1 ] | 2 | 3 | 4 | 5 | 6 :
NBLocks <val>
```

```
[ :SOURCE ] :RADIO:WCDMA:HSDPA [ :BBG ] :DLINK:DPCH:DCH [ 1 ] | 2 | 3 | 4 | 5 | 6 :NBLocks?
```

This command sets the number of data blocks for the selected downlink DCH.

*RST	1
Range	0–512
Remarks	Setting the command parameter while the signal is active also requires executing the apply command. Refer to “ :DLINK:APPLY ” on page 719. The number of data bits per DCH cannot exceed 200,000. To maintain this data bit limit, the ESG calculates the product of the block size and the number of blocks. If the product of these two parameters exceeds 200,000, the apply function (downlink apply command) will not work.

:DLINK:DPCH:DCH[1] | 2 | 3 | 4 | 5 | 6:RMATtribute

Supported E4438C with Option 418

```
[ :SOURCE ] :RADIO:WCDMA:HSDPA [ :BBG ] :DLINK:DPCH:DCH [ 1 ] | 2 | 3 | 4 | 5 | 6 :
RMATtribute <val>
```

```
[ :SOURCE ] :RADIO:WCDMA:HSDPA [ :BBG ] :DLINK:DPCH:DCH [ 1 ] | 2 | 3 | 4 | 5 | 6 :
RMATtribute?
```

This command sets the rate matching attribute for the selected downlink DCH.

*RST	1
Range	1–256
Remarks	Setting the command parameter while the signal is active also requires executing the apply command. Refer to “ :DLINK:APPLY ” on page 719.

:DLINK:DPCH:DCH[1]|2|3|4|5|6:TTI**Supported** E4438C with Option 418

[:SOURCE]:RADio:WCDMa:HSDPa[:BBG]:DLINK:DPCH:DCH[1]|2|3|4|5|6:TTI 10|20|40|80

[:SOURCE]:RADio:WCDMa:HSDPa[:BBG]:DLINK:DPCH:DCH[1]|2|3|4|5|6:TTI?

This command sets the TTI for the selected downlink DCH.

The choices are expressed in millisecond (ms).

RST** 10**Remarks** Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:DLINK:APPLY” on page 719.**:DLINK:DPCH:DCH2|3|4|5|6[:STATe]*Supported** E4438C with Option 418

[:SOURCE]:RADio:WCDMa:HSDPa[:BBG]:DLINK:DPCH:DCH2|3|4|5|6[:STATe] ON|OFF|1|0

[:SOURCE]:RADio:WCDMa:HSDPa[:BBG]:DLINK:DPCH:DCH2|3|4|5|6[:STATe]?

This command turns the selected downlink DCH on or off; DCH1 is always on.

***RST** DCH 1: 1 DCH 2–6: 0**Remarks** Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:DLINK:APPLY” on page 719.

The apply command will not work and the ESG will report an error if you turn on a DCH where lower numbered DCHs are off. For example, turning on DCH5 requires turning on DCH2–4. The reverse is true when turning off the DCHs.

:DLINK:DPCH:POWer**Supported** E4438C with Option 418

[:SOURCE]:RADio:WCDMa:HSDPa[:BBG]:DLINK:DPCH:POWer <val>

[:SOURCE]:RADio:WCDMa:HSDPa[:BBG]:DLINK:DPCH:POWer?

This command sets the downlink DPCH power level.

***RST** -1.02000000E+001**Range** -40 to 0**Remarks** Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:DLINK:APPLY” on page 719.

:DLINK:DPCH:SFORmat

Supported E4438C with Option 418

```
[ :SOURCE ] :RADIO:WCDMA:HSDPA [ :BBG ] :DLINK:DPCH:SFORmat <val>
```

```
[ :SOURCE ] :RADIO:WCDMA:HSDPA [ :BBG ] :DLINK:DPCH:SFORmat?
```

This command configures the downlink DPCH slot format.

***RST** 0

Range 0–16

Remarks Setting the command parameter while the signal is active also requires executing the apply command. Refer to “[:DLINK:APPLY](#)” on page 719.

The slot format is coupled with the channel code, so a change in one value may require a change in the other. If the channel code exceeds the limits of the slot format or if it is not orthogonal with all other physical channel codes, the apply function (downlink apply command) will not work.

:DLINK:DPCH:SSCOffset

Supported E4438C with Option 418

```
[ :SOURCE ] :RADIO:WCDMA:HSDPA [ :BBG ] :DLINK:DPCH:SSCOffset <val>
```

```
[ :SOURCE ] :RADIO:WCDMA:HSDPA [ :BBG ] :DLINK:DPCH:SSCOffset?
```

This command sets the downlink DPCH secondary scrambling code offset.

***RST** +0

Range 0–15

Remarks Setting the command parameter while the signal is active also requires executing the apply command. Refer to “[:DLINK:APPLY](#)” on page 719.

:DLINK:DPCH:TFCI

Supported E4438C with Option 418

```
[ :SOURCE ] :RADIO:WCDMA:HSDPA [ :BBG ] :DLINK:DPCH:TFCI <val>
```

```
[ :SOURCE ] :RADIO:WCDMA:HSDPA [ :BBG ] :DLINK:DPCH:TFCI?
```

This command sets the TFCI 10-bit pattern for the downlink DPCH.

The variable <val> accepts values in binary, hexadecimal, or decimal format, however the query returns only binary values.

***RST** +0

Range 0–1023

Remarks Setting the command parameter while the signal is active also requires executing the apply command. Refer to “[:DLINK:APPLY](#)” on page 719.

Setting the TFCI bits is optional; they describe the type of service in use, for example voice or data.

:DLINK:DPCH:TOFFset

Supported E4438C with Option 418

```
[ :SOURCE ] :RADIO:WCDMA:HSDPA [ :BBG ] :DLINK:DPCH:TOFFset <val>
```

```
[ :SOURCE ] :RADIO:WCDMA:HSDPA [ :BBG ] :DLINK:DPCH:TOFFset?
```

This command adjusts the downlink DPCH timing offset.

The variable <val> is expressed in chips.

***RST** +0

Range 0–149

Remarks Setting the command parameter while the signal is active also requires executing the apply command. Refer to “[:DLINK:APPLY](#)” on page 719.

:DLINK:DPCH:TPC:NSTeps

Supported E4438C with Option 418

```
[ :SOURce] :RADio:WCDMa:HSDPa [:BBG] :DLINK:DPCH:TPC:NSTeps <val>
[:SOURce] :RADio:WCDMa:HSDPa [:BBG] :DLINK:DPCH:TPC:NSTeps?
```

This command sets the number of steps for the down and up (DUP) or up and down (UDOWn) TPC pattern selections.

***RST** +1

Range 1–80

Remarks Setting the command parameter while the signal is active also requires executing the apply command. Refer to “[:DLINK:APPLY](#)” on page 719.

:DLINK:DPCH:TPC:PATtern

Supported E4438C with Option 418

```
[ :SOURce] :RADio:WCDMa:HSDPa [:BBG] :DLINK:DPCH:TPC:PATtern UDOWn|DUP|UALL|
DALL| "<file name>"
[:SOURce] :RADio:WCDMa:HSDPa [:BBG] :DLINK:DPCH:TPC:PATtern?
```

This command configures the downlink DPCH TPC pattern for increasing or decreasing, or increasing and decreasing the UE power level.

UDOWn The TPC pattern repetitively steps up and down.

DUP The TPC pattern repetitively steps down and up.

UALL The TPC pattern consecutively steps up.

DALL The TPC pattern consecutively steps down.

"<file name>" This variable represents a TPC pattern file stored in signal generator memory. The pattern must contain at least one bit or the apply function (downlink apply command) will not work. Refer to “[File Overview](#)” on page 717 for more information on files.

***RST** UDOW

Remarks Setting the command parameter while the signal is active also requires executing the apply command. Refer to “[:DLINK:APPLY](#)” on page 719.

Each step in a TPC pattern signals an increase or decrease of 1 dB in the UE output power level.

:DLINK:DPCH:TRPosition**Supported** E4438C with Option 418

[:SOURCE]:RADio:WCDMa:HSDPa[:BBG]:DLINK:DPCH:TRPosition?

This query returns the downlink DPCH transport channel position that is always set to FIX.

:DLINK:DPCH[:STATe]**Supported** E4438C with Option 418

[:SOURCE]:RADio:WCDMa:HSDPa[:BBG]:DLINK:DPCH[:STATe] ON|OFF|1|0

[:SOURCE]:RADio:WCDMa:HSDPa[:BBG]:DLINK:DPCH[:STATe] ?

This command turns the downlink DPCH on or off.

RST** 1**Remarks** Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:DLINK:APPLY” on page 719.**:DLINK:FILTer*Supported** E4438C with Option 418[:SOURCE]:RADio:WCDMa:HSDPa[:BBG]:DLINK:FILTer RNYQuist|NYQuist|GAUSSian|RECTangle|IS95|IS95_EQ|IS95_MOD|IS95_MOD_EQ|AC4Fm|UGGaussian|"
" <user FIR > "

[:SOURCE]:RADio:WCDMa:HSDPa[:BBG]:DLINK:FILTer?

This command selects the downlink filter type.

IS95 This filter meets the criteria of the IS-95 standard.**IS95_EQ** This filter is a combination of the IS-95 filter (above) and the equalizer filter described in the IS-95 standard and is best suited for IS-95 baseband filtering.**IS95_MOD** This filter meets the criteria of the IS-95 error function (for improved adjacent channel performance) with lower passband rejection than the filter specified in the IS-95 standard.**IS95_MOD_EQ** This filter is a combination of the equalizer filter described in the IS-95 standard and a filter that meets the criteria of the IS-95 error function (for improved adjacent channel performance), with lower passband rejection.**UGGaussian** This is a GSM Gaussian filter with a fixed BbT value of 0.300.**AC4Fm** This is a predefined Association of Public Safety Communications Officials (APCO) specified compatible 4-level frequency modulation (C4FM) filter.

HSDPA over W-CDMA Subsystem—Option 418 ([:SOURCE]:RADIO:WCDMA:HSDPA[:BBG])

"<user FIR>"	This variable represents any FIR filter file stored in signal generator memory. Refer to “File Overview” on page 717 for more information on files.
*RST	RNYQ
Remarks	Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:DLINK:APPLY” on page 719 .

:DLINK:FILTer:ALPHA

Supported E4438C with Option 418

```
[ :SOURCE ] :RADio:WCDMa:HSDPa [ :BBG ] :DLINK:FILTer:ALPHA <val>
[ :SOURCE ] :RADio:WCDMa:HSDPa [ :BBG ] :DLINK:FILTer:ALPHA?
```

This command sets the downlink Nyquist or root Nyquist filter alpha value.

***RST** +2.20000000E-001

Range 0-1

Remarks Setting the command parameter while the signal is active also requires executing the apply command. Refer to [“:DLINK:APPLY” on page 719](#).

Executing this command while a filter other than Nyquist or root Nyquist is selected changes the parameter value, but it is not used by the signal generator until one of the Nyquist filters is selected.

:DLINK:FILTer:BBT

Supported E4438C with Option 418

```
[ :SOURCE ] :RADio:WCDMa:HSDPa [ :BBG ] :DLINK:FILTer:BBT <val>
[ :SOURCE ] :RADio:WCDMa:HSDPa [ :BBG ] :DLINK:FILTer:BBT?
```

This command sets the downlink Gaussian filter BbT value.

***RST** +5.00000000E-001

Range 0-1

Remarks Setting the command parameter while the signal is active also requires executing the apply command. Refer to [“:DLINK:APPLY” on page 719](#).

Executing this command while a filter other than the Gaussian filter is selected changes the parameter value, but it is not used by the signal generator until the Gaussian filter is selected.

:DLINK:FILTer:CHANnel**Supported** E4438C with Option 418

```
[:SOURCE]:RADIO:WCDMA:HSDPA[:BBG]:DLINK:FILTer:CHANnel EVM|ACP
[:SOURCE]:RADIO:WCDMA:HSDPA[:BBG]:DLINK:FILTer:CHANnel?
```

Execute this command to optimize a downlink filter for minimized EVM or for minimized ACP.

EVM This choice provides the most ideal passband

ACP This choice improves stopband rejection for the root Nyquist and Nyquist filters.

***RST** EVM

Remarks Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:DLINK:APPLY” on page 719.

To change the filter selection, refer to “:DLINK:FILTer” on page 730.

:DLINK:HSBurst**Supported** E4438C with Option 418

```
[:SOURCE]:RADIO:WCDMA:HSDPA[:BBG]:DLINK:HSBurst ON|OFF|1|0
[:SOURCE]:RADIO:WCDMA:HSDPA[:BBG]:DLINK:HSBurst?
```

This command sets the handling of the off slot periods for the downlink HSDPA channels.

ON|1 This choice turns off the ESG ALC feature and uses DTX during the off slots.

OFF|0 This choice continuously transmits the HSDPA channels filling the off slots with dummy bits.

***RST** 0

Remarks Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:DLINK:APPLY” on page 719.

HSDPA over W-CDMA Subsystem—Option 418 [:SOURCE]:RADIO:WCDMA:HSDPA[:BBG]**:DLINK:HSDPA:AMC:CQIMapping:UECategory****Supported** E4438C with Option 418

[:SOURCE]:RADIO:WCDMA:HSDPA[:BBG]:DLINK:HSDPA:AMC:CQIMapping:UECategory <val>

[:SOURCE]:RADIO:WCDMA:HSDPA[:BBG]:DLINK:HSDPA:AMC:CQIMapping:UECategory?

This command sets the UE category that determines the CQI mapping table per the 3GPP standards.

***RST** 5**Range** 1–12

Remarks To use this command's parameter in a setup, you must also set AMC as the feedback selection. Refer to the “:DLINK:HSDPA:FCONtrol” on page 734 for selecting the feedback type.

Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:DLINK:APPLY” on page 719.

:DLINK:HSDPA:AMC:CPATtern**Supported** E4438C with Option 418

[:SOURCE]:RADIO:WCDMA:HSDPA[:BBG]:DLINK:HSDPA:AMC:CPATtern ALL_1|ALL_2|ALL_3|ALL_4|ALL_5|ALL_6|ALL_7|ALL_8|ALL_9|ALL_10|ALL_11|ALL_12|ALL_13|ALL_14|ALL_15|ALL_16|ALL_17|ALL_18|ALL_19|ALL_20|ALL_21|ALL_22|ALL_23|ALL_24|ALL_25|ALL_26|ALL_27|ALL_28|ALL_29|ALL_30|"<file_name>"

[:SOURCE]:RADIO:WCDMA:HSDPA[:BBG]:DLINK:HSDPA:AMC:CPATtern?

This command sets a simulated UE CQI pattern that determines HSDPA1's response including the modulation type (QPSK or 16QAM) and the constellation version for 16QAM per the set UE category.

ALL_<val> These choices configure a simulated UE ACK response with a single CQI value for 1,280 subframes.

"<file name>" This variable represents a CQI pattern file stored in signal generator memory. Create this file either by using the AMC CQI pattern Data Type Entry window and downloading the file to the ESG, or by using the ESG Real Time W-CDMA table editor to create a bit file with the following bit patterns:

- CQI value of 1–30 using an 8-bit pattern, 00000001 to 00011110
- DTX is represented by 11111111

In the file, do not use delimiters between subframes; enter subframe bits as a binary string.

HSDPA over W-CDMA Subsystem—Option 418 ([:SOURCE]:RADio:WCDMa:HSDPa[:BBG])

When creating a pattern, you can determine the number of active subframes from 1 to 1,280. The subframes are numbered 0 to 1,279. A subframe is active when it contains 8-bits. If a subframe contains at least 1-bit but less than 8-bits, the apply function (downlink apply command) will not work.

***RST** ALL_21

Remarks To use this command's parameter in a setup, you must also set AMC as the feedback selection. Refer to the **":DLINK:HSDPa:FCONtrol"** for selecting the feedback type.

Setting the command parameter while the signal is active also requires executing the apply command. Refer to **":DLINK:APPLY"** on page 719.

:DLINK:HSDPa:FCONtrol

Supported E4438C with Option 418

```
[ :SOURCE ] :RADio:WCDMa:HSDPa [ :BBG ] :DLINK:HSDPa:FCONtrol NONE | HARQ | AMC
[ :SOURCE ] :RADio:WCDMa:HSDPa [ :BBG ] :DLINK:HSDPa:FCONtrol ?
```

This command sets the HSDPA1 feedback control type.

NONE This choice turns off the feedback control.

HARQ This choice provides UE feedback using the HARQ process. This selection provides the capability of configuring a simulated UE ACK/NACK response, setting the maximum number of HARQ transmissions, and providing up to eight different RV parameters.

AMC This choice provides UE feedback using adaptive modulation coding. This selection provides the capability of configuring a simulated UE CQI response aligned with a UE category input.

***RST** NONE

Remarks Setting the command parameter while the signal is active also requires executing the apply command. Refer to **":DLINK:APPLY"** on page 719

:DLINK:HSDPa:HARQ:APATtern

Supported E4438C with Option 418

```
[ :SOURCE ] :RADio:WCDMa:HSDPa [ :BBG ] :DLINK:HSDPa:HARQ:APATtern ACK_ALL |
"<file name>"
[ :SOURCE ] :RADio:WCDMa:HSDPa [ :BBG ] :DLINK:HSDPa:HARQ:APATtern ?
```

This command sets a simulated UE ACK/NACK pattern that determines HSDPA1's HARQ response.

HSDPA over W-CDMA Subsystem—Option 418 ([:SOURCE]:RADIO:WCDMA:HSDPA[:BBG])

ACK_ALL	This choice configures 1,280 subframes for a simulated ACK only response.
"<file name>"	<p>This variable represents an ACK pattern file stored in signal generator memory. Create this file either by using the HARQ ACK/NACK pattern Data Type Entry window and download the file to the ESG, or by using the ESG Real Time W-CDMA table editor to create a bit file with the following bit patterns:</p> <ul style="list-style-type: none"> • An ACK response is represented by 00. • A NACK response is represented by 01. • DTX is represented by 10. <p>In the file, do not use delimiters between subframes; enter subframe bits as a binary string.</p> <p>When creating a pattern, you can determine the number of active subframes from 1 to 1,280. The subframes are numbered 0 to 1,279. A subframe is active when it contains 2-bits. If a subframe contains only 1-bit, the apply function (downlink apply command) will not work.</p>
*RST	ACK_ALL
Remarks	<p>To use this command's parameter in a setup, you must also set HARQ as the feedback selection. Refer to the ":DLINK:HSDPA:FCONtrol" for selecting the feedback type.</p> <p>Setting the command parameter while the signal is active also requires executing the apply command. Refer to ":DLINK:APPLY" on page 719.</p>

:DLINK:HSDPA:HARQ:MNHTrans

Supported E4438C with Option 418

```
[:SOURCE]:RADIO:WCDMA:HSDPA[:BBG]:DLINK:HSDPA:HARQ:MNHTrans <val>
[:SOURCE]:RADIO:WCDMA:HSDPA[:BBG]:DLINK:HSDPA:HARQ:MNHTrans?
```

This command configures the HSDPA1 maximum number of HARQ transmissions for the HARQ function.

Use the command for UE performance testing or for specifying an arbitrary number of HARQ transmissions. When the software encounters a UE NACK response that is set by the HARQ ACK pattern command (see **":DLINK:HSDPA:HARQ:APATtern"**), the software re-sends the same packet payload until either the maximum number of HARQ transmissions is reached or a simulated ACK

HSDPA over W-CDMA Subsystem—Option 418 ([:SOURCE]:RADio:WCDMa:HSDPa[:BBG])

response is encountered. Whenever the software re-sends the same packet payload, it also transmits another RV parameter that is configured by the RV sequence command.

***RST** 1

Range 1–8

Remarks To use this command's parameter in a setup, you must also set HARQ as the feedback selection. Refer to the “[:DLINK:HSDPa:FCONtrol](#)” on page 734 for selecting the feedback type.

Setting the command parameter while the signal is active also requires executing the apply command. Refer to “[:DLINK:APPLY](#)” on page 719.

:DLINK:HSDPa:HARQ:RVSequence[1]|2|3|4|5|6|7|8

Supported E4438C with Option 418

```
[ :SOURCE ] :RADio:WCDMa:HSDPa [ :BBG ] :DLINK:HSDPa:HARQ:RVSequence [ 1 ] | 2 | 3 | 4 |
5 | 6 | 7 | 8 <val>
```

```
[ :SOURCE ] :RADio:WCDMa:HSDPa [ :BBG ] :DLINK:HSDPa:HARQ:RVSequence [ 1 ] | 2 | 3 | 4 |
5 | 6 | 7 | 8?
```

This command sets the HSDPA1 RV parameter sequence used with the maximum number of HARQ transmission setting. You can set eight different RV parameters for the RV sequence.

During simulated ACK responses, the software uses the first RV parameter. When the software encounters a simulated NACK response, it sends data using the next RV parameter. The software keeps incrementing to the next RV parameter in the sequence until it receives a simulated ACK response. When the software encounters an ACK response, the RV sequence resets to the first RV parameter.

***RST** 0

Range 0–7

Remarks To use this command's parameter in a setup, you must also set HARQ as the feedback selection. Refer to the “[:DLINK:HSDPa:FCONtrol](#)” on page 734 for selecting the feedback type.

Setting the command parameter while the signal is active also requires executing the apply command. Refer to “[:DLINK:APPLY](#)” on page 719.

:DLINK:HSDPa[1] | 2 | 3 | 4:BSINfo

Supported E4438C with Option 418

```
[ :SOURce ] :RADio:WCDMa:HSDPa [ :BBG ] :DLINK:HSDPa [1] | 2 | 3 | 4 :BSINfo <val>
[ :SOURce ] :RADio:WCDMa:HSDPa [ :BBG ] :DLINK:HSDPa [1] | 2 | 3 | 4 :BSINfo?
```

This command sets the HS-DSCH block size. HSDPA1 is the only HSDPA channel configuration that supports the HS-DSCH, however the block size information parameter is also available for HSDPA2–4 for HS-SCCH coding purposes.

***RST** 36

Range 0–63

Remarks Setting the command parameter while the signal is active also requires executing the apply command. Refer to “[:DLINK:APPLY](#)” on page 719.

:DLINK:HSDPa[1] | 2 | 3 | 4:HSPDsch:COFFset

Supported E4438C with Option 418

```
[ :SOURce ] :RADio:WCDMa:HSDPa [ :BBG ] :DLINK:HSDPa [1] | 2 | 3 | 4 :HSPDsch:
COFFset <val>
[ :SOURce ] :RADio:WCDMa:HSDPa [ :BBG ] :DLINK:HSDPa [1] | 2 | 3 | 4 :HSPDsch:COFFset?
```

This command sets the HS-PDSCH code offset. The code offset is used in determining the HS-PDSCH channel code.

***RST** HSDPA1: 4 HSDPA2: 8 HSDPA3: 9 HSDPA4: 10

Range 1–15

Remarks Setting the command parameter while the signal is active also requires executing the apply command. Refer to “[:DLINK:APPLY](#)” on page 719.

Set all physical channel codes orthogonal to each other. For any channel codes that fail this criteria, the apply function (downlink apply command) will not work.

:DLINK:HSDPa[1] | 2 | 3 | 4:HSPDsch:DATA

Supported E4438C with Option 418

```
[ :SOURce ] :RADio:WCDMa:HSDPa [ :BBG ] :DLINK:HSDPa [1] | 2 | 3 | 4 :HSPDsch:DATA PN9 |
FIX4 | "<file name>" | DSCH
[ :SOURce ] :RADio:WCDMa:HSDPa [ :BBG ] :DLINK:HSDPa [1] | 2 | 3 | 4 :HSPDsch:DATA?
```

This command configures the HS-PDSCH data type.

DSCH This choice is the HS-DSCH selection that is supported on only HSDPA1. Selecting the DSCH choice for HSDPA2–4 will generate an error.

HSDPA over W-CDMA Subsystem—Option 418 ([:SOURCE]:RADio:WCDMa:HSDPa[:BBG])

"<file name>" This variable represents a data pattern file stored in signal generator memory. The data pattern must contain at least one bit or the apply function (downlink apply command) will not work. Refer to [“File Overview” on page 717](#) for more information on files.

***RST** PN9

Remarks Setting the command parameter while the signal is active also requires executing the apply command. Refer to [“DLINK:APPLY” on page 719](#).

:DLINK:HSDPa[1] | 2 | 3 | 4:HSPDSch:DATA:FIX4

Supported E4438C with Option 418

```
[ :SOURCE ] :RADio:WCDMa:HSDPa [ :BBG ] :DLINK:HSDPa [ 1 ] | 2 | 3 | 4 :HSPDSch:DATA:
FIX4 <val>
```

```
[ :SOURCE ] :RADio:WCDMa:HSDPa [ :BBG ] :DLINK:HSDPa [ 1 ] | 2 | 3 | 4 :HSPDSch:DATA:
FIX4?
```

This command sets the HS-PDSCH repeating 4-bit binary data pattern.

The variable <val> accepts values in binary, hexadecimal, or decimal format, however the query returns only binary values.

***RST** 0

Range 0–15

Remarks Setting the command parameter while the signal is active also requires executing the apply command. Refer to [“DLINK:APPLY” on page 719](#).

:DLINK:HSDPa:HSPDsch:DSCH:DATA

Supported E4438C with Option 418

```
[ :SOURCE ] :RADio:WCDMa:HSDPa [ :BBG ] :DLINK:HSDPa:HSPDsch:DSCH:DATA PN9 |
FIX4 | "<file name>"
```

```
[ :SOURCE ] :RADio:WCDMa:HSDPa [ :BBG ] :DLINK:HSDPa:HSPDsch:DSCH:DATA?
```

This command defines the HS-DSCH data type for HSDPA1. The HS-DSCH is not supported on HSDPA2–4.

"<file name>" This variable represents a data pattern file stored in signal generator memory. The data pattern must contain at least one bit or the apply function (downlink apply command) will not work. Refer to [“File Overview” on page 717](#) for more information on files.

***RST** PN9

HSDPA over W-CDMA Subsystem—Option 418 ([:SOURCE]:RADIO:WCDMA:HSDPA[:BBG])

Remarks Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:DLINK:APPLY” on page 719.

:DLINK:HSDPA:HSPDSch:DSCH:DATA:FIX4

Supported E4438C with Option 418

```
[ :SOURCE ] :RADIO:WCDMA:HSDPA [ :BBG ] :DLINK:HSDPA:HSPDSch:DSCH:DATA:
FIX4 <val>
```

```
[ :SOURCE ] :RADIO:WCDMA:HSDPA [ :BBG ] :DLINK:HSDPA:HSPDSch:DSCH:DATA:FIX4?
```

This command defines the HS-DSCH repeating 4-bit binary data pattern for HSDPA1. The HS-DSCH is not supported on HSDPA2–4.

The variable <val> accepts values in binary, hexadecimal, or decimal format, however the query returns only binary values.

***RST** 0

Range 0–15

Remarks Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:DLINK:APPLY” on page 719.

:DLINK:HSDPA:HSPDSch:DSCH:IRBSize

Supported E4438C with Option 418

```
[ :SOURCE ] :RADIO:WCDMA:HSDPA [ :BBG ] :DLINK:HSDPA:HSPDSch:DSCH:IRBSize <val>
```

```
[ :SOURCE ] :RADIO:WCDMA:HSDPA [ :BBG ] :DLINK:HSDPA:HSPDSch:DSCH:IRBSize?
```

This command sets the HS-DSCH IR buffer size per the HARQ process for HSDPA1. The HS-DSCH is not supported on HSDPA2–4.

***RST** 9600

Range 960–28800

Remarks Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:DLINK:APPLY” on page 719.

HSDPA over W-CDMA Subsystem—Option 418 ([:SOURCE]:RADio:WCDMa:HSDPa[:BBG])**:DLINK:HSDPa:HSPDsch:NCODE****Supported** E4438C with Option 418

[:SOURCE]:RADio:WCDMa:HSDPa[:BBG]:DLINK:HSDPa:HSPDsch:NCODE <val>

[:SOURCE]:RADio:WCDMa:HSDPa[:BBG]:DLINK:HSDPa:HSPDsch:NCODE?

This command sets number of codes for the HS-PDSCH on HSDPA1. HSDPA2–4 do not support multicodes.

***RST** 1**Range** 1–15

Remarks Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:DLINK:APPLY” on page 719.

Set all physical channel codes so they are orthogonal to each other. If any of the channel codes fail to meet this criteria, the apply function (downlink apply command) will not work.

:DLINK:HSDPa[1] | 2 | 3 | 4:HSPDsch:POWER**Supported** E4438C with Option 418

[:SOURCE]:RADio:WCDMa:HSDPa[:BBG]:DLINK:HSDPa[1] | 2 | 3 | 4:HSPDsch:POWER <val>

[:SOURCE]:RADio:WCDMa:HSDPa[:BBG]:DLINK:HSDPa[1] | 2 | 3 | 4:HSPDsch:POWER?

This command sets the HS-PDSCH power level.

The variable <val> is expressed in decibels (dB).

***RST** -1.02000000E+001**Range** -40 to 0

Remarks Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:DLINK:APPLY” on page 719.

HSDPA over W-CDMA Subsystem—Option 418 ([:SOURCE]:RADIO:WCDMA:HSDPA[:BBG])**:DLINK:HSDPA[1]|2|3|4:HSPDSch:SFORmat****Supported** E4438C with Option 418

[:SOURCE]:RADIO:WCDMA:HSDPA[:BBG]:DLINK:HSDPA[1]|2|3|4:HSPDSch:SFORmat 0|1

[:SOURCE]:RADIO:WCDMA:HSDPA[:BBG]:DLINK:HSDPA[1]|2|3|4:HSPDSch:SFORmat?

This command sets the HS-PDSCH slot format.

0 This sets the modulation type to QPSK.

1 This sets the modulation type to 16QAM.

RST** 1**Remarks** Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:DLINK:APPLY” on page 719.**:DLINK:HSDPA[1]|2|3|4:HSPDSch[:STATe]*Supported** E4438C with Option 418

[:SOURCE]:RADIO:WCDMA:HSDPA[:BBG]:DLINK:HSDPA[1]|2|3|4:HSPDSch[:STATe] ON|OFF|1|0

[:SOURCE]:RADIO:WCDMA:HSDPA[:BBG]:DLINK:HSDPA[1]|2|3|4:HSPDSch[:STATe]?

This command turns the selected HS-PDSCH on or off.

***RST** HSDPA1: 1 HSDPA2–4: 0**Remarks** Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:DLINK:APPLY” on page 719.

The HS-SCCH must be on for the HS-PDSCH to turn on. Turning off the HS-SCCH also turns off the active HS-PDSCH. See “:DLINK:HSDPA[1]|2|3|4[:STATe]” on page 746 for turning the HS-SCCH on or off.

HSDPA over W-CDMA Subsystem—Option 418 ([:SOURCE]:RADIO:WCDMA:HSDPA[:BBG])**:DLINK:HSDPA[1] | 2 | 3 | 4:HSSCch:CCODE****Supported** E4438C with Option 418

[:SOURCE]:RADIO:WCDMA:HSDPA[:BBG]:DLINK:HSDPA[1] | 2 | 3 | 4:HSSCch:CCODE <val>

[:SOURCE]:RADIO:WCDMA:HSDPA[:BBG]:DLINK:HSDPA[1] | 2 | 3 | 4:HSSCch:CCODE?

This command sets the HS-SCCH channel code.

***RST** HSDPA1: 4 HSDPA2: 5 HSDPA3: 6 HSDPA4: 7**Range** 1–127**Remarks** Setting the command parameter while the signal is active also requires executing the apply command. Refer to “[:DLINK:APPLY](#)” on page 719.

Set all physical channel codes so they are orthogonal to each other. If any of the channel codes fail to meet this criteria, the apply function (downlink apply command) will not work.

:DLINK:HSDPA[1] | 2 | 3 | 4:HSSCch:DATA**Supported** E4438C with Option 418

[:SOURCE]:RADIO:WCDMA:HSDPA[:BBG]:DLINK:HSDPA[1] | 2 | 3 | 4:HSSCch:DATA PN9 | FIX4 | "<file name>" | STD

[:SOURCE]:RADIO:WCDMA:HSDPA[:BBG]:DLINK:HSDPA[1] | 2 | 3 | 4:HSSCch:DATA?

This command sets the data type for the selected downlink HS-SCCH.

STD This choice configures the bit field as defined by the 3GPP standards."<file name>" This variable represents a data pattern file stored in signal generator memory. The data pattern must contain at least one bit or the apply function (downlink apply command) will not work. Refer to “[File Overview](#)” on page 717 for more information on files.***RST** STD**Remarks** Setting the command parameter while the signal is active also requires executing the apply command. Refer to “[:DLINK:APPLY](#)” on page 719.

HSDPA over W-CDMA Subsystem—Option 418 ([:SOURCE]:RADIO:WCDMA:HSDPA[:BBG])**:DLINK:HSDPA[1] | 2 | 3 | 4:HSSCch:DATA:FIX4****Supported** E4438C with Option 418

[:SOURCE]:RADIO:WCDMA:HSDPA[:BBG]:DLINK:HSDPA[1] | 2 | 3 | 4:HSSCch:DATA:FIX4 <val>

[:SOURCE]:RADIO:WCDMA:HSDPA[:BBG]:DLINK:HSDPA[1] | 2 | 3 | 4:HSSCch:DATA:FIX4?

This command sets the HS-SCCH repeating 4-bit binary data pattern.

The variable <val> accepts values in binary, hexadecimal, or decimal format, however the query returns only binary values.

RST** 0**Range** 0–15**Remarks** Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:DLINK:APPLY” on page 719.**:DLINK:HSDPA[1] | 2 | 3 | 4:HSSCch:POWer*Supported** E4438C with Option 418

[:SOURCE]:RADIO:WCDMA:HSDPA[:BBG]:DLINK:HSDPA[1] | 2 | 3 | 4:HSSCch:POWer <val>

[:SOURCE]:RADIO:WCDMA:HSDPA[:BBG]:DLINK:HSDPA[1] | 2 | 3 | 4:HSSCch:POWer?

This command sets the HS-SCCH power level.

The variable <val> is expressed in decibels (dB).

***RST** -1.02000000E+001**Range** -40 to 0**Remarks** Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:DLINK:APPLY” on page 719.

:DLINK:HSDPa[1]|2|3|4:ITTI**Supported** E4438C with Option 418

```
[:SOURCE]:RADio:WCDMa:HSDPa[:BBG]:DLINK:HSDPa[1]|2|3|4:ITTI <val>
[:SOURCE]:RADio:WCDMa:HSDPa[:BBG]:DLINK:HSDPa[1]|2|3|4:ITTI?
```

This command sets the static inter-TTI pattern value for the selected HSDPA.

The variable <val> is expressed in subframes (one subframe = 2 ms).

***RST** 8**Range** 1–16

Remarks To use a static pattern, select FIX as the choice for the [:DLINK:HSDPa\[1\]|2|3|4:ITTI:PATtern](#) command.

Setting the command parameter while the signal is active also requires executing the apply command. Refer to “[:DLINK:APPLY](#)” on page 719.

:DLINK:HSDPa[1]|2|3|4:ITTI:PATtern**Supported** E4438C with Option 418

```
[:SOURCE]:RADio:WCDMa:HSDPa[:BBG]:DLINK:HSDPa[1]|2|3|4:ITTI:
PATtern FIX|"<file name>"
[:SOURCE]:RADio:WCDMa:HSDPa[:BBG]:DLINK:HSDPa[1]|2|3|4:ITTI:PATtern?
```

This command selects which method sets the inter-TTI pattern for the selected HSDPA.

FIX This choice enables a static pattern. To configure the pattern, see “[:DLINK:HSDPa\[1\]|2|3|4:ITTI](#)”.

"<file name>" This variable represents an inter-TTI pattern file stored in signal generator memory. Creating and using a file provides the option of having a flexible inter-TTI pattern where you can vary the distance between HS-PDSCH transmissions. To create a file, use one or a combination of the following methods:

- To create a file internal to the software, use the inter-TTI user pattern editor.
- To create a file external to the software, use a text editor.

For more information, see the Signal Studio for HSDPA over W-CDMA software online help.

The file name follows the form <project name>-ITTIx, where 'x' is the HSDPA number from one to four. The inter-TTI pattern must contain at least one bit, or the apply function (downlink apply command) will not work.

HSDPA over W-CDMA Subsystem—Option 418 [:SOURCE]:RADIO:WCDMA:HSDPA[:BBG]***RST** FIX**Remarks** Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:DLINK:APPLY” on page 719.**:DLINK:HSDPA:NHPRocess****Supported** E4438C with Option 418[:SOURCE]:RADIO:WCDMA:HSDPA[:BBG]:DLINK:HSDPA:NHPRocess <val>
[:SOURCE]:RADIO:WCDMA:HSDPA[:BBG]:DLINK:HSDPA:NHPRocess?

This command sets the HS-DSCH number of HARQ processes for HSDPA1. For HSDPA2–4, this parameter is fixed at one and is used only for HS-SCCH coding purposes.

RST** 4**Range** 1–8**Remarks** Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:DLINK:APPLY” on page 719.**:DLINK:HSDPA[1] | 2 | 3 | 4:RVParameter*Supported** E4438C with Option 418[:SOURCE]:RADIO:WCDMA:HSDPA[:BBG]:DLINK:HSDPA[1] | 2 | 3 | 4:RVParameter <val>
[:SOURCE]:RADIO:WCDMA:HSDPA[:BBG]:DLINK:HSDPA[1] | 2 | 3 | 4:RVParameter?

This command sets the HS-DSCH RV parameter. For HSDPA2–4, which do not support an HS-DSCH, this parameter is used only for HS-SCCH coding purposes.

***RST** 0**Range** 0–7**Remarks** Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:DLINK:APPLY” on page 719.

HSDPA over W-CDMA Subsystem—Option 418 ([:SOURCE]:RADio:WCDMa:HSDPa[:BBG])**:DLINK:HSDPa[1]|2|3|4:UEID****Supported** E4438C with Option 418

```
[:SOURCE]:RADio:WCDMa:HSDPa[:BBG]:DLINK:HSDPa[1]|2|3|4:UEID <val>
[:SOURCE]:RADio:WCDMa:HSDPa[:BBG]:DLINK:HSDPa[1]|2|3|4:UEID?
```

This command sets the UEID.

RST** HSDPA1: 0 HSDPA2: 1 HSDPA3: 2 HSDPA4: 3**Range** 0–65535**Remarks** Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:DLINK:APPLY” on page 719.**:DLINK:HSDPa[1]|2|3|4[:STATe]*Supported** E4438C with Option 418

```
[:SOURCE]:RADio:WCDMa:HSDPa[:BBG]:DLINK:HSDPa[1]|2|3|4[:STATe] ON|OFF|
1|0
[:SOURCE]:RADio:WCDMa:HSDPa[:BBG]:DLINK:HSDPa[1]|2|3|4[:STATe]?
```

This command turns the selected downlink HSDPA channel on or off.

- | | |
|---------|---|
| ON (1) | <ul style="list-style-type: none"> • Turns on the HS-SCCH for the selected HSDPA. • Enables turning on the HS-PDSCH for the selected HSDPA. |
| OFF (0) | <ul style="list-style-type: none"> • Turns off the HS-SCCH for the selected HSDPA. • Turns off the active HS-PDSCH for the selected HSDPA. |

***RST** HSDPA1: 1 HSDPA2–4: 0**Remarks** Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:DLINK:APPLY” on page 719.

Refer to “:DLINK:HSDPa[1]|2|3|4:HSPDsch[:STATe]” on page 741 for turning the HS-PDSCH on or off.

An HSDPA consists of a HS-SCCH and a HS-PDSCH, however the HS-DSCH is supported on only HSDPA1.

:DLINK:OCNS[1]|2|3|4|5|6|7|8|9|10|11|12|13|14|15|16:CCODE

Supported E4438C with Option 418

```
[ :SOURCE ] :RADIO:WCDMA:HSDPA [ :BBG ] :DLINK:OCNS [1] | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 |
12 | 13 | 14 | 15 | 16 :CCODE <val>
```

```
[ :SOURCE ] :RADIO:WCDMA:HSDPA [ :BBG ] :DLINK:OCNS [1] | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 |
12 | 13 | 14 | 15 | 16 :CCODE?
```

This command sets the channel code for the selected downlink OCNS.

*RST	OCNS1: 2	OCNS2: 3	OCNS3: 4	OCNS4: 5
	OCNS5: 6	OCNS6: 7	OCNS7: 8	OCNS8: 9
	OCNS9: 10	OCNS10: 11	OCNS11: 12	OCNS12: 13
	OCNS13: 14	OCNS14: 15	OCNS15: 16	OCNS16: 17

Range 1–127

Remarks Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:DLINK:APPLY” on page 719.

:DLINK:OCNS[1]|2|3|4|5|6|7|8|9|10|11|12|13|14|15|16:DATA

Supported E4438C with Option 418

```
[ :SOURCE ] :RADIO:WCDMA:HSDPA [ :BBG ] :DLINK:OCNS [1] | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 |
12 | 13 | 14 | 15 | 16 :DATA PN9 | PN15
```

```
[ :SOURCE ] :RADIO:WCDMA:HSDPA [ :BBG ] :DLINK:OCNS [1] | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 |
12 | 13 | 14 | 15 | 16 :DATA?
```

This command configures the data pattern for the selected downlink OCNS.

***RST** PN9

Remarks Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:DLINK:APPLY” on page 719.

HSDPA over W-CDMA Subsystem—Option 418 ([:SOURCE]:RADIO:WCDMA:HSDPA[:BBG])**:DLINK:OCNS[1] | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16:POWER****Supported** E4438C with Option 418

[:SOURCE]:RADIO:WCDMA:HSDPA[:BBG]:DLINK:OCNS[1] | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16:POWER <val>

[:SOURCE]:RADIO:WCDMA:HSDPA[:BBG]:DLINK:OCNS[1] | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16:POWER?

This command sets the power level for the selected downlink OCNS.

The variable <val> is expressed in units of dB.

*RST	OCNS1: -6	OCNS2: -8	OCNS3: -8	OCNS4: -10
	OCNS5: -7	OCNS6: -9	OCNS7-16: -10	

Range -40 to 0**Remarks** Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:DLINK:APPLY” on page 719.**:DLINK:OCNS[1] | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16:SSCOFFSET****Supported** E4438C with Option 418

[:SOURCE]:RADIO:WCDMA:HSDPA[:BBG]:DLINK:OCNS[1] | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16:SSCOFFSET <val>

[:SOURCE]:RADIO:WCDMA:HSDPA[:BBG]:DLINK:OCNS[1] | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16:SSCOFFSET?

This command sets the secondary scrambling code offset for the selected downlink OCNS.

***RST** 0**Range** 0-15**Remarks** Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:DLINK:APPLY” on page 719.

:DLINK:OCNS[1]|2|3|4|5|6|7|8|9|10|11|12|13|14|15|16:TOFFset

Supported E4438C with Option 418

```
[:SOURCE]:RADIO:WCDMA:HSDPA[:BBG]:DLINK:OCNS[1]|2|3|4|5|6|7|8|9|10|11|
12|13|14|15|16:TOFFset <val>
[:SOURCE]:RADIO:WCDMA:HSDPA[:BBG]:DLINK:OCNS[1]|2|3|4|5|6|7|8|9|10|11|
12|13|14|15|16:TOFFset?
```

This command adjusts the timing offset for the OCNS.

*RST	OCNS1: 1	OCNS2: 2	OCNS3: 3	OCNS4: 4
	OCNS5: 5	OCNS6: 6	OCNS7: 7	OCNS8: 8
	OCNS9: 9	OCNS10: 10	OCNS11: 11	OCNS12: 12
	OCNS13: 13	OCNS14: 14	OCNS15: 15	OCNS16: 16

Range 0–149

Remarks Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:DLINK:APPLY” on page 719.

:DLINK:OCNS[1]|2|3|4|5|6|7|8|9|10|11|12|13|14|15|16[:STATE]

Supported E4438C with Option 418

```
[:SOURCE]:RADIO:WCDMA:HSDPA[:BBG]:DLINK:OCNS[1]|2|3|4|5|6|7|8|9|10|11|
12|13|14|15|16[:STATE] ON|OFF|1|0
[:SOURCE]:RADIO:WCDMA:HSDPA[:BBG]:DLINK:OCNS[1]|2|3|4|5|6|7|8|9|10|11|
12|13|14|15|16[:STATE]?
```

This command turns the selected OCNS on or off.

***RST** 0

Remarks Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:DLINK:APPLY” on page 719.

:DLINK:PCCPch:BCH:DATA

Supported E4438C with Option 418

```
[:SOURCE]:RADIO:WCDMA:HSDPA[:BBG]:DLINK:PCCPch:BCH:DATA PN9|PN15|FIX4|
"<file name>"
[:SOURCE]:RADIO:WCDMA:HSDPA[:BBG]:DLINK:PCCPch:BCH:DATA?
```

This command sets the BCH data format that is transmitted on the P-CCPCH.

"<file name>" This variable represents a data pattern file stored in signal generator memory. The data pattern must contain at least one bit or the apply function (downlink apply

HSDPA over W-CDMA Subsystem—Option 418 ([:SOURCE]:RADio:WCDMa:HSDPa[:BBG])

command) will not work. Refer to “File Overview” on page 717 for more information on files.

***RST** FIX4

Remarks Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:DLINK:APPLY” on page 719.

:DLINK:PCCPch:BCH:DATA:FIX4

Supported E4438C with Option 418

```
[ :SOURCE ] :RADio:WCDMa:HSDPa [ :BBG ] :DLINK:PCCPch:BCH:DATA:FIX4 <val>
[ :SOURCE ] :RADio:WCDMa:HSDPa [ :BBG ] :DLINK:PCCPch:BCH:DATA:FIX4?
```

This command sets the BCH repeating 4-bit binary data pattern.

The variable <val> accepts values in binary, hexadecimal, or decimal format, however the query returns only binary values.

***RST** 0

Range 0–15

Remarks Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:DLINK:APPLY” on page 719.

:DLINK:PCCPch:CCODE

Supported E4438C with Option 418

```
[ :SOURCE ] :RADio:WCDMa:HSDPa [ :BBG ] :DLINK:PCCPch:CCODE <val>
[ :SOURCE ] :RADio:WCDMa:HSDPa [ :BBG ] :DLINK:PCCPch:CCODE?
```

This command sets the P-CCPCH channel code.

***RST** +1

Range 0–255

Remarks Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:DLINK:APPLY” on page 719.

Set all physical channel codes so they are orthogonal to each other. If any of the channel codes fail to meet this criteria, the apply function (downlink apply command) will not work.

:DLINK:PCCPch:POWer

Supported E4438C with Option 418

```
[ :SOURCE ] :RADIO:WCDMA:HSDPA [ :BBG ] :DLINK:PCCPch:POWer <val>  
[ :SOURCE ] :RADIO:WCDMA:HSDPA [ :BBG ] :DLINK:PCCPch:POWer?
```

This command sets the P-CCPCH power level.

The variable <val> is expressed in decibels (dB).

***RST** -5.30000000E+000

Range -40 to 0

Remarks Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:DLINK:APPLY” on page 719.

:DLINK:PCCPch[:STATe]

Supported E4438C with Option 418

```
[ :SOURCE ] :RADIO:WCDMA:HSDPA [ :BBG ] :DLINK:PCCPch [ :STATe ] ON | OFF | 1 | 0  
[ :SOURCE ] :RADIO:WCDMA:HSDPA [ :BBG ] :DLINK:PCCPch [ :STATe ] ?
```

This command turns the P-CCPCH on or off.

***RST** 1

Remarks Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:DLINK:APPLY” on page 719.

:DLINK:PICH:CCODE

Supported E4438C with Option 418

```
[ :SOURCE ] :RADIO:WCDMA:HSDPA [ :BBG ] :DLINK:PICH:CCODE <val>  
[ :SOURCE ] :RADIO:WCDMA:HSDPA [ :BBG ] :DLINK:PICH:CCODE?
```

This command sets the PICH channelization code.

***RST** +3

Range 0–255

Remarks Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:DLINK:APPLY” on page 719.

Set all physical channel codes so they are orthogonal to each other. If any of the channel codes fail to meet this criteria, the apply function (downlink apply command) will not work.

:DLINK:PICH:DATA

Supported E4438C with Option 418

```
[ :SOURCE ] :RADIO:WCDMA:HSDPA [ :BBG ] :DLINK:PICH:DATA PN9 | PN15 | FIX4 |
"<file name>"
[ :SOURCE ] :RADIO:WCDMA:HSDPA [ :BBG ] :DLINK:PICH:DATA?
```

This command sets the PICH data type.

"<file name>" This variable represents a data pattern file stored in signal generator memory. The data pattern must contain at least one bit or the apply function (downlink apply command) will not work. Refer to [“File Overview” on page 717](#) for more information on files.

***RST** PN9

Remarks Setting the command parameter while the signal is active also requires executing the apply command. Refer to [“:DLINK:APPLY” on page 719](#).

:DLINK:PICH:DATA:FIX4

Supported E4438C with Option 418

```
[ :SOURCE ] :RADIO:WCDMA:HSDPA [ :BBG ] :DLINK:PICH:DATA:FIX4 <val>
[ :SOURCE ] :RADIO:WCDMA:HSDPA [ :BBG ] :DLINK:PICH:DATA:FIX4?
```

This command sets the PICH repeating 4-bit binary data pattern.

The variable <val> accepts values in binary, hexadecimal, or decimal format, however the query returns only binary values.

***RST** 0

Range 0–15

Remarks Setting the command parameter while the signal is active also requires executing the apply command. Refer to [“:DLINK:APPLY” on page 719](#).

:DLINK:PICH:POWer

Supported E4438C with Option 418

```
[ :SOURCE ] :RADIO:WCDMA:HSDPA [ :BBG ] :DLINK:PICH:POWER <val>  
[ :SOURCE ] :RADIO:WCDMA:HSDPA [ :BBG ] :DLINK:PICH:POWER?
```

This command sets the PICH power level.

The variable <val> is expressed in decibels (dB).

***RST** -8.300000000E+000

Range -40 to 0

Remarks Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:DLINK:APPLY” on page 719.

:DLINK:PICH[:STATe]

Supported E4438C with Option 418

```
[ :SOURCE ] :RADIO:WCDMA:HSDPA [ :BBG ] :DLINK:PICH [ :STATe ] ON | OFF | 1 | 0  
[ :SOURCE ] :RADIO:WCDMA:HSDPA [ :BBG ] :DLINK:PICH [ :STATe ] ?
```

This command turns the PICH on or off.

***RST** 0

Remarks Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:DLINK:APPLY” on page 719.

:DLINK:POLarity

Supported E4438C with Option 418

```
[ :SOURCE ] :RADIO:WCDMA:HSDPA [ :BBG ] :DLINK:POLarity NORMal | INVerted | INVert  
[ :SOURCE ] :RADIO:WCDMA:HSDPA [ :BBG ] :DLINK:POLarity?
```

This command selects the phase polarity of the downlink signal.

NORMal This choice selects normal polarity.

INVerted, INVert These choices perform the same function, inverting the internal Q signal.

***RST** NORM

Remarks Setting the command parameter while the signal is active also requires executing the apply command. For more information, refer to “:DLINK:APPLY” on page 719.

HSDPA over W-CDMA Subsystem—Option 418 ([:SOURce]:RADio:WCDMa:HSDPa[:BBG])**:DLINK:PSCH:POWer****Supported** E4438C with Option 418

[:SOURce]:RADio:WCDMa:HSDPa[:BBG]:DLINK:PSCH:POWer <val>

[:SOURce]:RADio:WCDMa:HSDPa[:BBG]:DLINK:PSCH:POWer?

This command sets the PSCH power level.

The variable <val> is expressed in decibels (dB).

RST** -8.30000000E+000**Range** -40 to 0**Remarks** Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:DLINK:APPLY” on page 719.**:DLINK:PSCH[:STATe]*Supported** E4438C with Option 418

[:SOURce]:RADio:WCDMa:HSDPa[:BBG]:DLINK:PSCH[:STATe] ON|OFF|1|0

[:SOURce]:RADio:WCDMa:HSDPa[:BBG]:DLINK:PSCH[:STATe] ?

This command turns the PSCH on or off.

RST** 1**Remarks** Setting the command parameter while the signal is active also requires executing the apply command. For more information, refer to “:DLINK:APPLY” on page 719.**:DLINK:SCRamblecode*Supported** E4438C with Option 418

[:SOURce]:RADio:WCDMa:HSDPa[:BBG]:DLINK:SCRamblecode <val>

[:SOURce]:RADio:WCDMa:HSDPa[:BBG]:DLINK:SCRamblecode?

This command sets the downlink scramble code number.

***RST** +0**Range** 0–511**Remarks** Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:DLINK:APPLY” on page 719.

:DLINK:SSCH:POWer

Supported E4438C with Option 418

```
[ :SOURce ] :RADio:WCDMa:HSDPa [ :BBG ] :DLINK:SSCH:POWer <val>  
[ :SOURce ] :RADio:WCDMa:HSDPa [ :BBG ] :DLINK:SSCH:POWer?
```

This command sets the SSCH power level. The variable <val> is expressed in decibels (dB)

***RST** -8.3000000E+000

Range -40 to 0

Remarks Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:DLINK:APPLY” on page 719.

:DLINK:SSCH[:STATe]

Supported E4438C with Option 418

```
[ :SOURce ] :RADio:WCDMa:HSDPa [ :BBG ] :DLINK:SSCH [ :STATe ] ON | OFF | 1 | 0  
[ :SOURce ] :RADio:WCDMa:HSDPa [ :BBG ] :DLINK:SSCH [ :STATe ] ?
```

This command turns the SSCH on or off.

***RST** 1

Remarks Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:DLINK:APPLY” on page 719.

:DLINK:TXDiversity

Supported E4438C with Option 418

```
[ :SOURce ] :RADio:WCDMa:HSDPa [ :BBG ] :DLINK:TXDiversity NONE | OANT1 | OANT2  
[ :SOURce ] :RADio:WCDMa:HSDPa [ :BBG ] :DLINK:TXDiversity?
```

This command selects the downlink signal transmit diversity mode.

NONE This choice disables the transmit diversity mode.

OANT1 This choice selects the transmit diversity openloop antenna 1 mode.

OANT2 This choice selects the transmit diversity openloop antenna 2 mode.

***RST** NONE

Remarks To configure both antennas (one and two) requires two ESGs.
Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:DLINK:APPLY” on page 719.

:LINK

Supported E4438C with Option 418

[:SOURCE] :RADIO:WCDMA:HSDPA [:BBG] :LINK DOWN|UP

[:SOURCE] :RADIO:WCDMA:HSDPA [:BBG] :LINK?

This command sets the uplink or downlink mode.

***RST** DOWN

:ULINK:APPLY

Supported E4438C with Option 418

[:SOURCE] :RADIO:WCDMA:HSDPA [:BBG] :ULINK:APPLY

[:SOURCE] :RADIO:WCDMA:HSDPA [:BBG] :ULINK:APPLY?

This command applies changes to the channel setup and data for active physical and transport channels, immediately starting the channel coding generation process. A progress bar may appear on the ESG display indicating that the new signal parameters are being applied. Turning on the HSDPA modulation format also applies the signal parameters.

The query response determines whether or not there is a need to execute the command. It returns the following responses:

0 Command execution is not required.

1 Command execution is required.

NOTE The query response is only valid while the HSDPA format is active.

When there is a setting conflict (ESG reports an error) with the range values or coupled parameters, or both, executing the uplink apply command does not apply the new changes until the conflicts are resolved. After resolving the setting conflicts, execute the command to apply the new settings.

:ULINK:AWGN:CN

Supported E4438C with Option 418

```
[:SOURce]:RADio:WCDMa:HSDPa[:BBG]:ULINK:AWGN:CN <val>
[:SOURce]:RADio:WCDMa:HSDPa[:BBG]:ULINK:AWGN:CN?
```

This command sets the uplink in-band carrier to noise ratio (C/N) value using AWGN.

***RST** 0

Range -30 to 30

Remarks Setting the command parameter while the signal is active also requires executing the apply command. Refer to [:ULINK:APPLY](#) .

:ULINK:AWGN[:STATe]

Supported E4438C with Option 418

```
[:SOURce]:RADio:WCDMa:HSDPa[:BBG]:ULINK:AWGN[:STATe] ON|OFF|0|1
[:SOURce]:RADio:WCDMa:HSDPa[:BBG]:ULINK:AWGN[:STATe]?
```

This command turns the uplink AWGN on or off.

***RST** 0

Remarks Setting the command parameter while the signal is active also requires executing the apply command. Refer to [“:ULINK:APPLY” on page 756](#).

:ULINK:BBReference:EXTErnal:MRATe

Supported E4438C with Option 418

```
[:SOURce]:RADio:WCDMa:HSDPa[:BBG]:ULINK:BBReference:EXTErnal:MRATe X1|X2|X4
[:SOURce]:RADio:WCDMa:HSDPa[:BBG]:ULINK:BBReference:EXTErnal:MRATe?
```

This command configures the ESG, so it can accept an external baseband generator clock that is a multiple of the internal 3.84 MHz chip clock.

X1 This sets the ESG to accept an external clock rate identical to the chip clock.

X2 This sets the ESG to accept an external clock rate that is two times the rate of the chip clock.

X4 This sets the ESG to accept an external clock rate that is four times the rate of the chip clock.

***RST** X1

HSDPA over W-CDMA Subsystem—Option 418 ([:SOURCE]:RADio:WCDMa:HSDPa[:BBG])**:ULINK:BBReference[:SOURCE]****Supported** E4438C with Option 418

[:SOURCE]:RADio:WCDMa:HSDPa[:BBG]:ULINK:BBReference[:SOURCE] INT[1] | EXT[1]

[:SOURCE]:RADio:WCDMa:HSDPa[:BBG]:ULINK:BBReference[:SOURCE]?

This command selects the baseband generator reference source for the radio uplink channel.

RST** INT**:ULINK:DPCCh:CCODE*Supported** E4438C with Option 418

[:SOURCE]:RADio:WCDMa:HSDPa[:BBG]:ULINK:DPCCh:CCODE?

This query returns the channelization code for the uplink DPCCH.

The slot format determines the channelization code in accordance with the 3GPP standards. See “:ULINK:DPCCh:SFORmat” on page 761 for setting the slot format.

:ULINK:DPCCh:DATA**Supported** E4438C with Option 418

[:SOURCE]:RADio:WCDMa:HSDPa[:BBG]:ULINK:DPCCh:DATA PN9 | PN15 | FIX4 | "<file name>" | STD

[:SOURCE]:RADio:WCDMa:HSDPa[:BBG]:ULINK:DPCCh:DATA?

This command configures the uplink DPCCH data pattern.

STD This sets the DPCCH bit fields according to the 3GPP standards.

"<file name>" This variable represents a data pattern file stored in signal generator memory. The data pattern must contain at least one bit or the apply function (uplink apply command) will not work. Refer to “File Overview” on page 717 for more information on files.

***RST** STD**Remarks** Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:ULINK:APPLY” on page 756.

HSDPA over W-CDMA Subsystem—Option 418 ([:SOURCE]:RADIO:WCDMA:HSDPA[:BBG])**:ULINK:DPCCh:DATA:FIX4****Supported** E4438C with Option 418

[:SOURCE]:RADIO:WCDMA:HSDPA[:BBG]:ULINK:DPCCh:DATA:FIX4 <val>

[:SOURCE]:RADIO:WCDMA:HSDPA[:BBG]:ULINK:DPCCh:DATA:FIX4?

This command sets the uplink DPCCH repeating 4-bit binary data pattern.

The variable <val> accepts values in binary, hexadecimal, or decimal format, however the query returns only binary values.

RST** 0**Range** 0–15**Remarks** Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:ULINK:APPLY” on page 756.**:ULINK:DPCCh:FBI:PATtern*Supported** E4438C with Option 418[:SOURCE]:RADIO:WCDMA:HSDPA[:BBG]:ULINK:DPCCh:FBI:PATtern PN9|PN15|FIX|
"<file name>"

[:SOURCE]:RADIO:WCDMA:HSDPA[:BBG]:ULINK:DPCCh:FBI:PATtern?

This command configures the uplink DPCCH FBI pattern.

"<file name>" This variable represents a data pattern file stored in signal generator memory. The data pattern must contain at least one bit or the apply function (uplink apply command) will not work. Refer to “File Overview” on page 717 for more information on files.

***RST** FIX**Remarks** Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:ULINK:APPLY” on page 756.

HSDPA over W-CDMA Subsystem—Option 418 ([:SOURce]:RADio:WCDMa:HSDPa[:BBG])**:ULINK:DPCCh:FBI:PATtern:FIX****Supported** E4438C with Option 418

[:SOURce]:RADio:WCDMa:HSDPa[:BBG]:ULINK:DPCCh:FBI:PATtern:FIX <val>

[:SOURce]:RADio:WCDMa:HSDPa[:BBG]:ULINK:DPCCh:FBI:PATtern:FIX?

This command sets the 30-bit FBI pattern for the uplink DPCCH.

The variable <val> accepts values in binary, hexadecimal, or decimal format, however the query returns only binary values.

RST** +0**Range** 0–10737418235**Remarks** Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:ULINK:APPLY” on page 756.**:ULINK:DPCCh:POWer*Supported** E4438C with Option 418

[:SOURce]:RADio:WCDMa:HSDPa[:BBG]:ULINK:DPCCh:POWer <val>

[:SOURce]:RADio:WCDMa:HSDPa[:BBG]:ULINK:DPCCh:POWer?

This command sets the uplink DPCCH power level.

The variable <val> is expressed in decibels (dB)

***RST** –2.69000000E+000**Range** –40 to 0**Remarks** Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:ULINK:APPLY” on page 756.

:ULINK:DPCCh:SFORmat

Supported E4438C with Option 418

```
[ :SOURCE ] :RADio:WCDMa:HSDPa [ :BBG ] :ULINK:DPCCh:SFORmat <val>  
[ :SOURCE ] :RADio:WCDMa:HSDPa [ :BBG ] :ULINK:DPCCh:SFORmat ?
```

This command sets the uplink DPCCH slot format.

***RST** +0

Range 0–5

Remarks Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:ULINK:APPLY” on page 756.

The slot format determines the settings for other parameters in accordance with 3GPP standards.

:ULINK:DPCCh[:STATe]

Supported E4438C with Option 418

```
[ :SOURCE ] :RADio:WCDMa:HSDPa [ :BBG ] :ULINK:DPCCh [ :STATe ] ON | OFF | 1 | 0  
[ :SOURCE ] :RADio:WCDMa:HSDPa [ :BBG ] :ULINK:DPCCh [ :STATe ] ?
```

This command turns the uplink DPCCH on or off.

***RST** 1

Remarks Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:ULINK:APPLY” on page 756.

:ULINK:DPCCh:TFCI

Supported E4438C with Option 418

```
[ :SOURCE ] :RADio:WCDMa:HSDPa [ :BBG ] :ULINK:DPCCh:TFCI <val>  
[ :SOURCE ] :RADio:WCDMa:HSDPa [ :BBG ] :ULINK:DPCCh:TFCI ?
```

This command sets the uplink DPCCH TFCI 10-bit data pattern.

The variable <val> accepts values in binary, hexadecimal, or decimal format, however the query returns only decimal values.

***RST** +0

Range 0–1023

Remarks Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:ULINK:APPLY” on page 756.

:ULINK:DPCCh:TPC:NSTeps

Supported E4438C with Option 418

```
[:SOURCE]:RADio:WCDMa:HSDPa[:BBG]:ULINK:DPCCh:TPC:NSTeps <val>
[:SOURCE]:RADio:WCDMa:HSDPa[:BBG]:ULINK:DPCCh:TPC:NSTeps?
```

This command sets the number of steps for the down and up (DUP) or up and down (UDOWn) TPC pattern selections.

The variable <val> is expressed in decibels (dB).

***RST** +1

Range 1–80

Remarks Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:ULINK:APPLY” on page 756.

:ULINK:DPCCh:TPC:PATtern

Supported E4438C with Option 418

```
[:SOURCE]:RADio:WCDMa:HSDPa[:BBG]:ULINK:DPCCh:TPC:PATtern
UDOWn|DUP|UALL|DALL|"<file name>"
[:SOURCE]:RADio:WCDMa:HSDPa[:BBG]:ULINK:DPCCh:TPC:PATtern?
```

This command configures the uplink DPCCH TPC pattern for increasing or decreasing, or increasing and decreasing the BTS power level.

UDOWn The TPC pattern repetitively steps up and down.

DUP The TPC pattern repetitively steps down and up.

UALL The TPC pattern consecutively steps up.

DALL The TPC pattern consecutively steps down.

"<file name>" This variable represents a power pattern file stored in signal generator memory. The pattern must contain at least one bit or the apply function (downlink apply command) will not work. Refer to “File Overview” on page 717 for more information on files.

***RST** UDOW

Remarks Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:ULINK:APPLY” on page 756.

Each step in a TPC pattern signals an increase or decrease of 1 dB in the BTS output power level.

HSDPA over W-CDMA Subsystem—Option 418 ([:SOURCE]:RADIO:WCDMA:HSDPA[:BBG])**:ULINK:DPDCh:CCODE****Supported** E4438C with Option 418

[:SOURCE]:RADIO:WCDMA:HSDPA[:BBG]:ULINK:DPDCh:CCODE?

This query returns the uplink DPDCH channelization code.

The slot format determines the channelization code in accordance with the 3GPP standards. See “:ULINK:DPDCh:SFORmat” on page 768 for setting the slot format.

:ULINK:DPDCh:DATA**Supported** E4438C with Option 418[:SOURCE]:RADIO:WCDMA:HSDPA[:BBG]:ULINK:DPDCh:DATA PN9|PN15|FIX4|DCH|"
"<file name>"

[:SOURCE]:RADIO:WCDMA:HSDPA[:BBG]:ULINK:DPDCh:DATA?

This command configures the uplink DPDCH data pattern.

DCH This choice selects the transport channel as the data source."**<file name>**" This variable represents a data pattern file stored in signal generator memory. The data pattern must contain at least one bit or the apply function (uplink apply command) will not work. Refer to “File Overview” on page 717 for more information on files.***RST** PN9**Remarks** Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:ULINK:APPLY” on page 756.**:ULINK:DPDCh:DATA:FIX4****Supported** E4438C with Option 418

[:SOURCE]:RADIO:WCDMA:HSDPA[:BBG]:ULINK:DPDCh:DATA:FIX4 <val>

[:SOURCE]:RADIO:WCDMA:HSDPA[:BBG]:ULINK:DPDCh:DATA:FIX4?

This command sets the uplink DPDCH repeating 4-bit binary data pattern.

The variable <val> accepts values in binary, hexadecimal, or decimal format, however the query returns only binary values.

***RST** 0**Range** 0–15**Remarks** Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:ULINK:APPLY” on page 756.

:ULINK:DPDCh:DCH[1]|2|3|4|5|6:BSIZE**Supported** E4438C with Option 418

[:SOURCE]:RADIO:WCDMA:HSDPA[:BBG]:ULINK:DPDCh:DCH[1]|2|3|4|5|6:

BSIZE <val>

[:SOURCE]:RADIO:WCDMA:HSDPA[:BBG]:ULINK:DPDCh:DCH[1]|2|3|4|5|6:BSIZE?

This command sets the block size for the selected uplink DCH.

***RST** 20**Range** 0–5000**Remarks** Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:ULINK:APPLY” on page 756.

The number of data bits per DCH cannot exceed 200,000. To maintain this data bit limit, the ESG calculates the product of the block size and the number of blocks. If the product of these two parameters exceeds 200,000, the apply function (uplink apply command) will not work.

:ULINK:DPDCh:DCH[1]|2|3|4|5|6:CRC**Supported** E4438C with Option 418

[:SOURCE]:RADIO:WCDMA:HSDPA[:BBG]:ULINK:DPDCh:DCH[1]|2|3|4|5|6:

CRC 0|8|12|16|24

[:SOURCE]:RADIO:WCDMA:HSDPA[:BBG]:ULINK:DPDCh:DCH[1]|2|3|4|5|6:CRC?

This command sets the number of CRC bits for the selected uplink DCH.

RST** 8**Remarks** Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:ULINK:APPLY” on page 756.**:ULINK:DPDCh:DCH[1]|2|3|4|5|6:CTYPE*Supported** E4438C with Option 418

[:SOURCE]:RADIO:WCDMA:HSDPA[:BBG]:ULINK:DPDCh:DCH[1]|2|3|4|5|6:

CTYPE HCONv|TCONv|TURBO|NONE

[:SOURCE]:RADIO:WCDMA:HSDPA[:BBG]:ULINK:DPDCh:DCH[1]|2|3|4|5|6:CTYPE?

This command selects the encoder type for the selected uplink DCH.

HCONv This choice selects the 1/2 rate convolutional encoder.**TCONv** This choice selects the 1/3 rate convolutional encoder.

HSDPA over W-CDMA Subsystem—Option 418 ([:SOURce]:RADio:WCDMa:HSDPa[:BBG])

TURBo	This choice selects the turbo coder.
NONE	This choice selects no coding.
*RST	HCON
Remarks	Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:ULINK:APPLY” on page 756.

:ULINK:DPDCh:DCH[1] | 2 | 3 | 4 | 5 | 6:DATA

Supported E4438C with Option 418

```
[ :SOURce ] :RADio:WCDMa:HSDPa [ :BBG ] :ULINK:DPDCh:DCH [ 1 ] | 2 | 3 | 4 | 5 | 6 :DATA PN9 |
PN15 | FIX4 | "<file name>"
[ :SOURce ] :RADio:WCDMa:HSDPa [ :BBG ] :ULINK:DPDCh:DCH [ 1 ] | 2 | 3 | 4 | 5 | 6 :DATA?
```

This command configures the data for the selected uplink DCH.

"<file name>" This variable represents a data pattern file stored in signal generator memory. The data pattern must contain at least one bit or the apply function (uplink apply command) will not work. Refer to “File Overview” on page 717 for more information on files.

***RST** PN9

Remarks Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:ULINK:APPLY” on page 756.

:ULINK:DPDCh:DCH[1] | 2 | 3 | 4 | 5 | 6:DATA:FIX4

Supported E4438C with Option 418

```
[ :SOURce ] :RADio:WCDMa:HSDPa [ :BBG ] :ULINK:DPDCh:DCH [ 1 ] | 2 | 3 | 4 | 5 | 6 :DATA :
FIX4 <val>
[ :SOURce ] :RADio:WCDMa:HSDPa [ :BBG ] :ULINK:DPDCh:DCH [ 1 ] | 2 | 3 | 4 | 5 | 6 :DATA :
FIX4?
```

This command sets the repeating 4-bit binary data pattern for the selected uplink DCH.

The variable <val> accepts values in binary, hexadecimal, or decimal format, however the query returns only binary values.

***RST** 0

Range 0–15

Remarks Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:ULINK:APPLY” on page 756.

HSDPA over W-CDMA Subsystem—Option 418 ([:SOURCE]:RADIO:WCDMA:HSDPA[:BBG])**:ULINK:DPDCh:DCH[1]|2|3|4|5|6:NBLocks****Supported** E4438C with Option 418[:SOURCE]:RADIO:WCDMA:HSDPA[:BBG]:ULINK:DPDCh:DCH[1]|2|3|4|5|6:
NBLocks <val>

[:SOURCE]:RADIO:WCDMA:HSDPA[:BBG]:ULINK:DPDCh:DCH[1]|2|3|4|5|6:NBLocks?

This command sets the number of blocks for the selected uplink DCH.

***RST** 1**Range** 0–512**Remarks** Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:ULINK:APPLY” on page 756.

The number of data bits per DCH cannot exceed 200,000. To maintain this data bit limit, the block size is multiplied by the number of blocks. If the product of these two parameters exceeds 200,000, the apply function (uplink apply command) will not work.

:ULINK:DPDCh:DCH[1]|2|3|4|5|6:RMATtribute**Supported** E4438C with Option 418[:SOURCE]:RADIO:WCDMA:HSDPA[:BBG]:ULINK:DPDCh:DCH[1]|2|3|4|5|6:
RMATtribute <val>[:SOURCE]:RADIO:WCDMA:HSDPA[:BBG]:ULINK:DPDCh:DCH[1]|2|3|4|5|6:
RMATtribute?

This command sets the rate matching attribute for the selected uplink DCH.

***RST** 1**Range** 1–256**Remarks** Setting the command parameter while the signal is active also requires executing the apply command. For more information, refer to “:ULINK:APPLY” on page 756.

HSDPA over W-CDMA Subsystem—Option 418 ([:SOURCE]:RADIO:WCDMA:HSDPA[:BBG])**:ULINK:DPDCh:DCH[1]|2|3|4|5|6:TTI****Supported** E4438C with Option 418

```
[:SOURCE]:RADIO:WCDMA:HSDPA[:BBG]:ULINK:DPDCh:DCH[1]|2|3|4|5|6:
TTI 10|20|40|80
[:SOURCE]:RADIO:WCDMA:HSDPA[:BBG]:ULINK:DPDCh:DCH[1]|2|3|4|5|6:TTI?
```

This command sets the TTI for the selected uplink DCH.

The choices are expressed in millisecond (ms).

***RST** 10

Remarks Setting the command parameter while the signal is active also requires executing the apply command. For more information, refer to “:ULINK:APPLY” on page 756.

:ULINK:DPDCh:DCH2|3|4|5|6[:STATe]**Supported** E4438C with Option 418

```
[:SOURCE]:RADIO:WCDMA:HSDPA[:BBG]:ULINK:DPDCh:
DCH2|3|4|5|6[:STATe] ON|OFF|1|0
[:SOURCE]:RADIO:WCDMA:HSDPA[:BBG]:ULINK:DPDCh:DCH2|3|4|5|6[:STATe]?
```

This command turns the selected uplink DCH on or off; DCH1 is always on.

***RST** *DCH 1: 1 DCH 2–6: 0*

Remarks Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:ULINK:APPLY” on page 756.

The apply command will not work and the ESG will report an error if you turn on a DCH where lower numbered DCHs are off. For example, turning on DCH5 requires turning on DCH2–4. The reverse is true when turning off the DCHs.

:ULINK:DPDCh:POWer

Supported E4438C with Option 418

```
[:SOURCE]:RADio:WCDMa:HSDPa[:BBG]:ULINK:DPDCh:POWer <val>
```

```
[:SOURCE]:RADio:WCDMa:HSDPa[:BBG]:ULINK:DPDCh:POWer?
```

This command sets the uplink DPDCH power level.

The variable <val> is expressed in decibels (dB).

***RST** +0.00000000E+000

Range -40 to 0

Remarks Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:ULINK:APPLY” on page 756.

:ULINK:DPDCh:SFORmat

Supported E4438C with Option 418

```
[:SOURCE]:RADio:WCDMa:HSDPa[:BBG]:ULINK:DPDCh:SFORmat <val>
```

```
[:SOURCE]:RADio:WCDMa:HSDPa[:BBG]:ULINK:DPDCh:SFORmat?
```

This command sets the uplink DPDCH slot format.

***RST** +2

Range 0– 6

Remarks Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:ULINK:APPLY” on page 756.

The slot format determines the settings for other parameters in accordance with the 3GPP standards.

:ULINK:DPDCh[:STATe]

Supported E4438C with Option 418

```
[:SOURCE]:RADio:WCDMa:HSDPa[:BBG]:ULINK:DPDCh[:STATe] ON|OFF|1|0
```

```
[:SOURCE]:RADio:WCDMa:HSDPa[:BBG]:ULINK:DPDCh[:STATe]?
```

This command turns the uplink DPDCH on or off.

***RST** 1

Remarks Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:ULINK:APPLY” on page 756.

:ULINK:FCLock:INTerval

Supported E4438C with Option 418

```
[ :SOURCE ] :RADIo:WCDMA:HSDPa [ :BBG ] :ULINK:FCLock:INTerval 10 | 20 | 40 | 80 | 2560  
[ :SOURCE ] :RADIo:WCDMA:HSDPa [ :BBG ] :ULINK:FCLock:INTerval?
```

This command selects the frame clock interval for the synchronization signal.

The frame clock interval is set in milliseconds (ms).

***RST** 80

Remarks Ensure that the selected interval is equal to or longer than the longest transport channel TTI period.

This command is applicable only when FCLock is the sync source selection. See “:ULINK:SYNC[:SOURCE]” on page 777 for selecting the sync source.

:ULINK:FCLock:POLarity

Supported E4438C with Option 418

```
[ :SOURCE ] :RADIo:WCDMA:HSDPa [ :BBG ] :ULINK:FCLock:POLarity POSitive |  
NEGative  
[ :SOURCE ] :RADIo:WCDMA:HSDPa [ :BBG ] :ULINK:FCLock:POLarity?
```

This command sets the frame clock polarity.

POSitive This choice sets the clock gate to trigger when the signal is high.

NEGative This choice sets the clock gate to trigger when the signal is low.

***RST** POS

Remarks This command is applicable only when FCLock is the sync source selection. See “:ULINK:SYNC[:SOURCE]” on page 777 for selecting the sync source.

:ULINK:FILTer

Supported E4438C with Option 418

```
[:SOURCE]:RADio:WCDMa:HSDPa[:BBG]:ULINK:FILTer RNYQuist|NYQuist|
GAUSSian|RECTangle|IS95|IS95_EQ|IS95_MOD|IS95_MOD_EQ|AC4Fm|UGGaussian|
"<user FIR>"
[:SOURCE]:RADio:WCDMa:HSDPa[:BBG]:ULINK:FILTer?
```

This command selects the uplink filter type.

IS95	This filter meets the criteria of the IS-95 standard.
IS95_EQ	This filter is a combination of the IS-95 filter (above) and the equalizer filter described in the IS-95 standard and is best suited for IS-95 baseband filtering.
IS95_MOD	This filter meets the criteria of the IS-95 error function (for improved adjacent channel performance) with lower passband rejection than the filter specified in the IS-95 standard.
IS95_MOD_EQ	This filter is a combination of the equalizer filter described in the IS-95 standard and a filter that meets the criteria of the IS-95 error function (for improved adjacent channel performance), with lower passband rejection.
UGGaussian	This is a GSM Gaussian filter with a fixed BbT value of 0.300.
AC4Fm	This is a predefined Association of Public Safety Communications Officials (APCO) specified compatible 4-level frequency modulation (C4FM) filter.
"<user FIR>"	This variable represents any FIR filter file stored in signal generator memory. Refer to “ File Overview ” on page 717 for more information on files.
*RST	RNYQ
Remarks	Setting the command parameter while the signal is active also requires executing the apply command. Refer to “ :ULINK:APPLY ” on page 756.

ULINK:FILTer:ALPHa

Supported E4438C with Option 418

```
[:SOURCE]:RADio:WCDMa:HSDPa[:BBG]:ULINK:FILTer:ALPHa <val>
[:SOURCE]:RADio:WCDMa:HSDPa[:BBG]:ULINK:FILTer:ALPHa?
```

This command sets the uplink Nyquist or root Nyquist filter alpha value.

***RST** +2.20000000E-001

Range 0–1

Remarks Setting the command parameter while the signal is active also requires executing the apply command. Executing this command while a filter other than Nyquist or

HSDPA over W-CDMA Subsystem—Option 418 ([:SOURce]:RADio:WCDMa:HSDPa[:BBG])

root Nyquist is selected changes the parameter value, but it is not used by the signal generator until one of the Nyquist filters is selected. Refer to “:ULINK:APPLY” on page 756.

:ULINK:FILTer:BBT

Supported E4438C with Option 418

```
[ :SOURce ] :RADio:WCDMa:HSDPa [ :BBG ] :ULINK:FILTer:BBT <val>
[ :SOURce ] :RADio:WCDMa:HSDPa [ :BBG ] :ULINK:FILTer:BBT?
```

This command sets the uplink Gaussian filter BbT value.

***RST** +5.00000000E-001

Range 0–1

Remarks Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:ULINK:APPLY” on page 756.

Executing this command while a filter other than the Gaussian filter is selected changes the parameter value, but it is not used by the signal generator until the Gaussian filter is selected.

:ULINK:FILTer:CHANnel

Supported E4438C with Option 418

```
[ :SOURce ] :RADio:WCDMa:HSDPa [ :BBG ] :ULINK:FILTer:CHANnel EVM|ACP
[ :SOURce ] :RADio:WCDMa:HSDPa [ :BBG ] :ULINK:FILTer:CHANnel?
```

This command optimizes an uplink filter for minimized EVM or for minimized ACP.

EVM This choice provides the most ideal passband.

ACP This choice improves stopband rejection for the root Nyquist and Nyquist filters.

***RST** EVM

Remarks Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:ULINK:APPLY” on page 756.

To change the filter selection, refer to “:ULINK:FILTer” on page 770.

:ULINK:FOFFset

Supported E4438C with Option 418

```
[ :SOURCE ] :RADio:WCDMa:HSDPa [ :BBG ] :ULINK:FOFFset <val>
```

```
[ :SOURCE ] :RADio:WCDMa:HSDPa [ :BBG ] :ULINK:FOFFset?
```

This command sets the CFN starting frame within the SFN by setting a frame offset relative to SFN zero.

***RST** 0

Range 0–255

Remarks The command adds delays to the internal frame counter by specifying the starting frame number count. When the frame offset (FOFFset) is set to 0, the frame number starts at the system sync trigger. When the FOFFset is set to 2, the signal generator triggers two frames after the SFN RST. For additional information, refer to 3GPP TS25.402 for SFN and CFN relationship.

:ULINK:HSDPcch:APATtern

Supported E4438C with Option 418

```
[ :SOURCE ] :RADio:WCDMa:HSDPa [ :BBG ] :ULINK:HSDPcch:APATtern NONE | ACK_ALL |  
"<file name>"
```

```
[ :SOURCE ] :RADio:WCDMa:HSDPa [ :BBG ] :ULINK:HSDPcch:APATtern?
```

This command sets the HS-DPCCH ACK/NACK transmission pattern for each of the 1280 sub-frames that make up the pattern.

NONE This choice sets all subframes to DTX.

"<file name>" This variable represents an ACK pattern file stored in signal generator memory. The file must contain 2,560-bits of data (2-bits per subframe) or the apply function (uplink apply command) will not work.

- An ACK response is represented by 00.
- A NACK response is represented by 01.
- DTX is represented by 10.

Enter the 2,560-bits into the file as a binary string.

Refer to [“File Overview” on page 717](#) for more information on files.

***RST** NONE

Remarks Setting the command parameter while the signal is active also requires executing the apply command. Refer to [“:ULINK:APPLY” on page 756](#).

:ULINK:HSDPcch:APOWer

Supported E4438C with Option 418

[:SOURCE] :RADIO:WCDMA:HSDPA [:BBG] :ULINK:HSDPcch:APOWer <val>

[:SOURCE] :RADIO:WCDMA:HSDPA [:BBG] :ULINK:HSDPcch:APOWer?

This command sets the HS-DPCCH ACK part power level.

The variable <val> is expressed in decibels (dB).

***RST** -2.69000000E+000

Range -40 to 0

Remarks Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:ULINK:APPLY” on page 756.

:ULINK:HSDPcch:CCODE

Supported E4438C with Option 418

[:SOURCE] RADIO:WCDMA:HSDPA [:BBG] :ULINK:HSDPcch:CCODE?

This query returns the HS-DPCCH channelization code.

:ULINK:HSDPcch:CPATtern**Supported** E4438C with Option 418

```
[:SOURCE]:RADio:WCDMa:HSDPa[:BBG]:ULINK:HSDPcch:CPATtern NONE |
"<file name>"
[:SOURCE]:RADio:WCDMa:HSDPa[:BBG]:ULINK:HSDPcch:CPATtern?
```

This command sets the HS-DPCCH CQI transmission pattern for each of the 1280 sub-frames that make up the pattern.

NONE This choice sets all subframes to DTX.

"<file name>" This variable represents a bit file stored in signal generator memory. The file must contain 10,240-bits of data (8-bits per subframe) or the apply function (uplink apply command) will not work.

- A CQI response range is one to thirty using 8-bits, 00000001 to 00011110.
- DTX is represented by 11111111.

Enter the 10,240-bits into the file as a binary string.

Refer to [“File Overview” on page 717](#) for more information on files.

***RST** NONE

Remarks Setting the command parameter while the signal is active also requires executing the apply command. Refer to [“:ULINK:APPLY” on page 756](#).

:ULINK:HSDPcch:CPOWer**Supported** E4438C with Option 418

```
[:SOURCE]:RADio:WCDMa:HSDPa[:BBG]:ULINK:HSDPcch:CPOWer <val>
[:SOURCE]:RADio:WCDMa:HSDPa[:BBG]:ULINK:HSDPcch:CPOWer?
```

This command sets the HS-DPCCH CQI part power level.

The variable <val> is expressed in decibels (dB).

***RST** -2.69000000E+000**Range** -40 to 0

Remarks Setting the command parameter while the signal is active also requires executing the apply command. Refer to [“:ULINK:APPLY” on page 756](#).

:ULINK:HSDPcch:NPOWER

Supported E4438C with Option 418

[:SOURCE] :RADIO:WCDMA:HSDPA [:BBG] :ULINK:HSDPcch:NPOWER <val>

[:SOURCE] :RADIO:WCDMA:HSDPA [:BBG] :ULINK:HSDPcch:NPOWER?

This command sets the HS-DPCCH NACK part power level. The variable <val> is expressed in decibels (dB).

***RST** -2.69000000E+000

Range -40 to 0

Remarks Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:ULINK:APPLY” on page 756.

:ULINK:HSDPcch:SFDelay

Supported E4438C with Option 418

[:SOURCE] :RADIO:WCDMA:HSDPA [:BBG] :ULINK:HSDPcch:SFDelay <val>

[:SOURCE] :RADIO:WCDMA:HSDPA [:BBG] :ULINK:HSDPcch:SFDelay?

This command sets the HS-DPCCH subframe delay. The variable <val> is expressed in units of 256 chips.

***RST** 0

Range 0–150

Remarks Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:ULINK:APPLY” on page 756.

:ULINK:HSDPcch[:STATe]

Supported E4438C with Option 418

[:SOURCE] :RADIO:WCDMA:HSDPA [:BBG] :ULINK:HSDPcch [:STATe] ON | OFF | 1 | 0

[:SOURCE] :RADIO:WCDMA:HSDPA [:BBG] :ULINK:HSDPcch [:STATe] ?

This command turns the HS-DPCCH on or off.

***RST** 1

Remarks Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:ULINK:APPLY” on page 756.

:ULINK:POLarity**Supported** E4438C with Option 418

```
[:SOURCE]:RADio:WCDMa:HSDPa[:BBG]:ULINK:POLarity NORMAL|INVerted|INVert
[:SOURCE]:RADio:WCDMa:HSDPa[:BBG]:ULINK:POLarity?
```

This command selects the phase polarity of the uplink signal.

NORMAL This choice selects normal polarity.**INVerted, INVert** These choices perform the same function, inverting the internal Q signal.***RST** NORM**Remarks** Setting the command parameter while the signal is active also requires executing the apply command. Refer to “:ULINK:APPLY” on page 756.**:ULINK:SCRamblecode****Supported** E4438C with Option 418

```
[:SOURCE]:RADio:WCDMa:HSDPa[:BBG]:ULINK:SCRamblecode <val>
[:SOURCE]:RADio:WCDMa:HSDPa[:BBG]:ULINK:SCRamblecode?
```

This command sets the scramble code.

RST** +0**Range** 0–16777215**:ULINK:SDElay*Supported** E4438C with Option 418

```
[:SOURCE]:RADio:WCDMa:HSDPa[:BBG]:ULINK:SDElay <val>
[:SOURCE]:RADio:WCDMa:HSDPa[:BBG]:ULINK:SDElay?
```

This command sets the uplink DPCH delay, measured in slots.

***RST** +0**Range** 0–119**Remarks** Calculate the delay between downlink and uplink DPCH, in slots, using the following formulas. Total Delay = (T0) + (TOFFset) + ((SDElay) * 2560 chips)

- T0 = 1024 chips
- TOFFset is set by “:ULINK:TOFFset” on page 778

Slot Delay = (Total Delay – T0) / 2560

:ULINK:SFNRst:POLarity

Supported E4438C with Option 418

```
[:SOURCE]:RADio:WCDMa:HSDPa[:BBG]:ULINK:SFNRst:POLarity POSitive|
NEGative
[:SOURCE]:RADio:WCDMa:HSDPa[:BBG]:ULINK:SFNRst:POLarity?
```

This command sets the polarity of the system frame number reset signal for the uplink synchronization source.

POSitive This choice sets the signal to trigger when the trigger signal is high.

NEGative This choice sets the signal to trigger when the trigger signal is low.

***RST** POS

Remarks This command is applicable only when SFN_RST is the sync source selection. See “:ULINK:SYNC[:SOURCE]” on page 777 for selecting the sync source.

:ULINK:SYNC:MODE

Supported E4438C with Option 418

```
[:SOURCE]:RADio:WCDMa:HSDPa[:BBG]:ULINK:SYNC:MODE SINGle|CONTInuous
[:SOURCE]:RADio:WCDMa:HSDPa[:BBG]:ULINK:SYNC:MODE?
```

This command selects the uplink frame synchronization triggering mode.

SINGle The signal generator, once triggered, generates frames based on the reference clock.

CONTInuous The signal generator continuously aligns the frame timing with the frame sync trigger signal.

***RST** SING

:ULINK:SYNC[:SOURCE]

Supported E4438C with Option 418

```
[:SOURCE]:RADio:WCDMa:HSDPa[:BBG]:ULINK:SYNC[:SOURCE] SFN_RST|FCLock
[:SOURCE]:RADio:WCDMa:HSDPa[:BBG]:ULINK:SYNC[:SOURCE]?
```

This command selects the uplink frame synchronization source type.

SFN_RST The uplink signal triggers on the system frame number reset signal.

FCLock The uplink signal triggers on the frame clock.

***RST** FCL

HSDPA over W-CDMA Subsystem—Option 418 ([:SOURCE]:RADio:WCDMa:HSDPa[:BBG])**:ULINK:TOFFset****Supported** E4438C with Option 418

[:SOURCE]:RADio:WCDMa:HSDPa[:BBG]:ULINK:TOFFset <val>

[:SOURCE]:RADio:WCDMa:HSDPa[:BBG]:ULINK:TOFFset?

This command sets the uplink DPCH timing offset (delay), measured in chips.

***RST** +0**Range** -512 to 2560**Remarks** The downlink signal timing is provided by the synchronization signal.

Calculate the delay between downlink and uplink DPCH, in chips, using the following formulas:

Total Delay = (T0) + (TOFFset) + ((SDELaY) * 2560 chips)

- T0 = 1024 chips
- SDELaY is set by “:ULINK:SDELaY” on page 776

Chip Delay = (Total Delay - T0) mod 2560

[:STATe]**Supported** E4438C with Option 418

[:SOURCE]:RADio:WCDMa:HSDPa[:BBG][:STATe] ON|OFF|1|0

[:SOURCE]:RADio:WCDMa:HSDPa[:BBG][:STATe]?

This command turns the HSDPA functionality on or off.

***RST** 0**Remarks** This command only works when there is at least one active physical channel within the selected link.

NADC Subsystem–Option 402 ([:SOURce]:RADio[:NADC])

:ALPha

Supported E4438C with Option 402

```
[:SOURce]:RADio[:NADC]:ALPha <val>  
[:SOURce]:RADio[:NADC]:ALPha?
```

This command changes the Nyquist or root Nyquist filter’s alpha value.

The filter alpha value can be set to a minimum level (0), a maximum level (1), or in between by using fractional numeric values (0.001–0.999).

***RST** +3.50000000E–001

Range 0.000–1.000

Key Entry **Filter Alpha**

Remarks This command is effective only after choosing a root Nyquist or Nyquist filter; it does not effect other types of filters. To change the current filter type, refer to “:FILTer” on page 793.

:BBCLock

Supported E4438C with Option 402

```
[:SOURce]:RADio[:NADC]:BBCLock INT[1] |EXT[1]  
[:SOURce]:RADio[:NADC]:BBCLock?
```

This command toggles the data (bit) clock input to the baseband generator board to either internal or external. This command is independent in each mode and works for both non-burst (continuous) and burst modes. This allows for a matrix of selections between burst/non-burst, internal/external data generation, internal/external data clock, and external bit/symbol data clock.

INT[1] This choice selects the signal generator internal data clock.

EXT[1] This choice selects an external data clock input.

***RST** INT

Key Entry **BBG Data Clock Ext Int**

Remarks A data clock or continuous symbol sync input must be supplied when external mode is used.

:BBT

Supported E4438C with Option 402

```
[:SOURce]:RADio[:NADC]:BBT <val>
[:SOURce]:RADio[:NADC]:BBT?
```

This command changes the bandwidth-multiplied-by-bit-time (BbT) filter parameter.

The filter BbT value can be set to the maximum level (1) or in between the minimum level (0.100) and maximum level by using fractional numeric values (0.101–0.999).

***RST** +5.00000000E–001

Range 0.100–1.000

Key Entry Filter BbT

Remarks This command is effective only after choosing a Gaussian filter. It does not have an effect on other types of filters. To change the current filter type, refer to [“:FILTer” on page 793](#).

:BRATe

Supported E4438C with Option 402

```
[:SOURce]:RADio[:NADC]:BRATe <val>
[:SOURce]:RADio[:NADC]:BRATe?
```

This command sets the bit rate.

The variable <val> is expressed in units of bits per second (bps–Mbps) and the maximum range value is dependent upon the source of data (internal or external), the modulation type, and filter.

***RST** +4.86000000E+004

Range	Modulation Type	Bits per Symbol	Internal Data	External Serial Data
	BPSK	1	1–50 Mbps	1–50 Mbps
	FSK2			
	MSK			
	C4FM	2	2–100 Mbps	2–50 Mbps
	FSK4			
	OQPSK			
	OQPSK195			
	P4QPPSK			
	QAM4			
	QPSK			
	QPSKIS95			
	QPSKISAT			

Range	Modulation Type	Bits per Symbol	Internal Data	External Serial Data
	D8PSK	3	3–100 Mbps	3–50 Mbps
	EDGE			
	FSK8			
	PSK8			
	FSK16	4	4–100 Mbps	4–50 Mbps
	PSK16			
	QAM16			
	QAM32	5	5–100 Mbps	5–50 Mbps
	QAM64	6	6–100 Mbps	6–50 Mbps
	QAM256	7	8–100 Mbps	8–50 Mbps

Key Entry

Symbol Rate

Remarks

When user-defined filters are selected using the command in section “:FILTer” on page 793, the upper bit rate will be restricted by the symbol rate as follows:

- FIR filter length > 32 symbols: upper limit is 12.5 Msps
- FIR filter length > 16 symbols: upper limit is 25 Msps

When internal FIR filters are used, the limits of the above table always apply. For higher symbol rates, the FIR filter length will be truncated and will impact the relative timing of the modulated data, as well as the actual filter response (see “:SRATe” on page 807).

A change in the bit rate value will affect the symbol rate value; refer to “:SRATe” on page 807 for a list of the minimum and maximum symbol rate values.

To change the modulation type, refer to “:MODulation[:TYPE]” on page 796.

:BURSt:PN9

Supported

E4438C with Option 402

(:SOURce]:RADio[:NADC]:BURSt:PN9 NORMAl|QUICK

(:SOURce]:RADio[:NADC]:BURSt:PN9?

This command controls the software PN9 generation.

NORMAl This choice produces a maximum length PN9 sequence.

QUICK This choice produces a truncated PN9 sequence.

***RST** NORM

Key Entry **PN9 Mode Normal Quick**

Remarks Use Normal mode for bit-error-rate tests where a maximum length PN9 sequence is required.

:BURSt:SHAPe[:TYPE]

Supported E4438C with Option 402

```
[:SOURce]:RADio[:NADC]:BURSt:SHAPe[:TYPE] SINE| "<file name>"  
[:SOURce]:RADio[:NADC]:BURSt:SHAPe[:TYPE] ?
```

This command specifies the burst shape as either SINE or a user-defined file ("*<file name>*").

SINE This choice selects a state that is defined by the burst rise and fall *RST values, as the default burst shape type.

"*<file name>*" This choice selects a user designated file from signal generator memory (non-volatile).

***RST** SINE

Key Entry **Sine** **User File**

:BURSt:SHAPe:FALL:DElay

Supported E4438C with Option 402

```
[:SOURce]:RADio[:NADC]:BURSt:SHAPe:FALL:DElay <val>  
[:SOURce]:RADio[:NADC]:BURSt:SHAPe:FALL:DElay?
```

This command sets the burst shape fall delay.

The variable *<val>* is expressed in bits. The minimum and maximum values depend upon modulation type and symbol rate.

***RST** +0.00000000E+000

Range -22.3750 to 99

Key Entry **Fall Delay**

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

To change the modulation type, refer to “:MODulation[:TYPE]” on page 796. Refer to “:SRate” on page 807 for a list of the minimum and maximum symbol rate values.

“:BURSt:SHAPe:FDElay” on page 784 performs the same function; in compliance with the SCPI standard, both commands are listed.

For concept information on burst shaping, refer to the *E4428C/38C ESG Signal Generators User’s Guide*.

:BURSt:SHAPe:FALL:TIME

Supported E4438C with Option 402

[[:SOURCE]:RADIO[:NADC]:BURSt:SHAPe:FALL:TIME <val>

[[:SOURCE]:RADIO[:NADC]:BURSt:SHAPe:FALL:TIME?

This command sets the burst shape fall time.

The variable <val> is expressed in bits. The minimum and maximum values depend upon modulation type and symbol rate.

***RST** +5.00000000E+000

Range 0.1250–255.8750

Key Entry **Fall Time**

Remarks The setting enabled by this command is not affected by signal

generator power-on, preset, or *RST.

To change the modulation type, refer to “:MODulation[:TYPE]” on page 796.

Refer to “:SRATE” on page 807 for a list of the minimum and maximum symbol rate values.

“:BURSt:SHAPe:FTIME” on page 784 performs the same function; in compliance with the SCPI standard, both commands are listed.

For concept information on burst shaping, refer to the *E4428C/38C ESG Signal Generators User’s Guide*.

:BURSt:SHAPe:FDElay

Supported E4438C with Option 402

[[:SOURce]:RADio[:NADC]:BURSt:SHAPe:FDElay <val>

[[:SOURce]:RADio[:NADC]:BURSt:SHAPe:FDElay?

This command sets the burst shape fall delay.

The variable <val> is expressed in bits. The minimum and maximum values depend upon modulation type and symbol rate.

***RST** +0.00000000E+000

Range -22.3750 to 99

Key Entry **Fall Delay**

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

To change the modulation type, refer to “:MODulation[:TYPE]” on page 796. Refer to “:SRATE” on page 807 for a list of the minimum and maximum symbol rate values.

“:BURSt:SHAPe:FALL:DElay” on page 782 performs the same function; in compliance with the SCPI standard, both commands are listed.

For concept information on burst shaping, refer to the *E4428C/38C ESG Signal Generators User’s Guide*.

:BURSt:SHAPe:FTIME

Supported E4438C with Option 402

[[:SOURce]:RADio[:NADC]:BURSt:SHAPe:FTIME <val>

[[:SOURce]:RADio[:NADC]:BURSt:SHAPe:FTIME?

This command sets the burst shape fall time.

The variable <val> is expressed in bits. The minimum and maximum values depend upon modulation type and symbol rate.

***RST** +0.00000000E+000

Range 0.1250–255.8750

Key Entry **Fall Time**

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

To change the modulation type, refer to “:MODulation[:TYPE]” on page 796. Refer to “:SRATE” on page 807 for a list of the minimum and maximum symbol rate values.

“:BURSt:SHAPe:FALL:TIME” on page 783 performs the same function; in compliance with the SCPI standard, both commands are listed.

For concept information on burst shaping, refer to the *E4428C/38C ESG Signal Generators User’s Guide*.

:BURSt:SHAPe:RDElay

Supported E4438C with Option 402

[[:SOURCE]:RADIO[:NADC]:BURSt:SHAPe:RDElay <val>
[:SOURCE]:RADIO[:NADC]:BURSt:SHAPe:RDElay?

This command sets the burst shape rise delay.

The variable <val> is expressed in bits. The minimum and maximum values depend upon modulation type and symbol rate.

***RST** +0.00000000E+000

Range –17.3750 to 99

Key Entry **Rise Delay**

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

To change the modulation type, refer to “:MODulation[:TYPE]” on page 796. Refer to “:SRATE” on page 807 for minimum and maximum symbol rate values.

“:BURSt:SHAPe:RISE:DElay” on page 786 performs the same function; in compliance with the SCPI standard, both commands are listed.

Refer to the *E4428C/38C ESG User’s Guide* for more information.

:BURSt:SHAPE:RISE:DELay

Supported E4438C with Option 402

```
[ :SOURce ] :RADio [ :NADC ] :BURSt :SHAPE :RISE :DELay <val>  
[ :SOURce ] :RADio [ :NADC ] :BURSt :SHAPE :RISE :DELay?
```

This command sets the burst shape rise delay.

The variable <val> is expressed in bits. The minimum and maximum values depend upon modulation type and symbol rate.

***RST** +0.00000000E+000

Range -17.3750 to 99

Key Entry **Rise Delay**

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

To change the modulation type, refer to “:MODulation[:TYPE]” on page 796. Refer to “:SRATE” on page 807 for a list of the minimum and maximum symbol rate values.

“:BURSt:SHAPE:RDELay” on page 785 performs the same function; in compliance with the SCPI standard, both commands are listed.

Refer to the *E4428C/38C ESG User’s Guide* for more information.

:BURSt:SHAPE:RISE:TIME

Supported E4438C with Option 402

```
[ :SOURce ] :RADio [ :NADC ] :BURSt :SHAPE :RISE :TIME <val>  
[ :SOURce ] :RADio [ :NADC ] :BURSt :SHAPE :RISE :TIME?
```

This command sets the burst shape rise time.

The variable <val> is expressed in bits. The minimum and maximum values depend upon modulation type and symbol rate.

***RST** +5.00000000E+000

Range 0.1250–22.5000

Key Entry Rise Time

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

To change the modulation type, refer to “:MODulation[:TYPE]” on page 796. Refer to “:SRATE” on page 807 for a list of the minimum and maximum symbol rate values.

“:BURSt:SHAPe:RTIME” on page 787 performs the same function; in compliance with the SCPI standard, both commands are listed.

For concept information on burst shaping, refer to the *E4428C/38C ESG Signal Generators User’s Guide*.

:BURSt:SHAPe:RTIME

Supported E4438C with Option 402

[:SOURCE] :RADIO [:NADC] :BURSt:SHAPe:RTIME <val>

[:SOURCE] :RADIO [:NADC] :BURSt:SHAPe:RTIME?

This command sets the burst shape rise time.

The variable <val> is expressed in bits. The minimum and maximum values depend upon modulation type and symbol rate.

***RST** +5.00000000E+000

Range 0.1250–22.5000

Key Entry **Rise Time**

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

To change the modulation type, refer to “:MODulation[:TYPE]” on page 796. Refer to “:SRATE” on page 807 for a list of the minimum and maximum symbol rate values.

“:BURSt:SHAPe:RISE:TIME” on page 786 performs the same function; in compliance with the SCPI standard, both commands are listed.

For concept information on burst shaping, refer to the *E4428C/38C ESG Signal Generators User’s Guide*.

:BURSt[:STATe]

Supported E4438C with Option 402

```
[ :SOURCE ] :RADIO [ :NADC ] :BURSt [ :STATe ] ON | OFF | 1 | 0  
[ :SOURCE ] :RADIO [ :NADC ] :BURSt [ :STATe ] ?
```

This command enables or disables the burst function.

ON (1) This choice enables the transmission of framed data. If all timeslots which are switched on are up traffic channels or custom, you will be bursting the timeslots that are on; there will be no RF carrier during the off timeslots.

If you have switched on any timeslot that you have configured as a down traffic channel, the RF carrier is not switched off between any of the timeslots. The off timeslots are transmitted as a continuous series of ones for the time period of the off timeslots.

OFF (0) This choice enables the transmission of unframed data.

***RST** 0

Key Entry **Data Format Pattern Framed**

:BURSt:SHAPE[:TYPE]

Supported E4438C with Option 402

```
[ :SOURCE ] :RADIO [ :NADC ] :BURSt:SHAPE [ :TYPE ] SINE | "<file name>"  
[ :SOURCE ] :RADIO [ :NADC ] :BURSt:SHAPE [ :TYPE ] ?
```

This command specifies the burst shape as either SINE or a user-defined file ("<file name>").

SINE This choice selects a state that is defined by the burst rise and fall *RST values, as the default burst shape type.

"<file name>" This choice selects a user designated file from signal generator memory (non-volatile).

***RST** SINE

Key Entry **Sine User File**

:CHANnel

Supported E4438C with Option 402

```
[:SOURce]:RADio[:NADC]:CHANnel EVM|ACP
[:SOURce]:RADio[:NADC]:CHANnel?
```

This command optimizes the Nyquist and root Nyquist filters to minimize error vector magnitude (EVM) or to minimize adjacent channel power (ACP).

EVM This choice provides the most ideal passband.

ACP This choice improves stopband rejection.

***RST** ACP

Key Entry **Optimize FIR For EVM ACP**

Remarks To change the current filter type, refer to “:FILTer” on page 793.

:DATA

Supported E4438C with Option 402

```
[:SOURce]:RADio[:NADC]:DATA PN9|PN11|PN15|PN20|PN23|FIX4|"<file name>"|
EXT|P4|P8|P16|P32|P64|PRAM
[:SOURce]:RADio[:NADC]:DATA?
```

This command sets a pseudo-random number sequence, 4-bit pattern, sequence of 1’s and 0’s, data from an external source, or a user file as the data pattern for unframed transmission.

***RST** PN23

Key Entry	PN9	PN11	PN15	PN20	PN23	FIX4	User File	Ext
	4 1’s & 4 0’s	8 1’s & 8 0’s	16 1’s & 16 0’s	32 1’s & 32 0’s	64 1’s & 64 0’s	PRAM File		

Remarks Refer to “File Name Variables” on page 13 for information on the file name syntax.

:DATA:PRAM

Supported E4438C with Option 402

```
[ :SOURCE ] :RADIO : [NADC] :DATA:PRAM "<file_name>"  
[ :SOURCE ] :RADIO : [NADC] :DATA:PRAM?
```

This command selects a pattern RAM (PRAM) file as the pattern data type for the NADC (North American Digital Cellular) format.

"<file_name>" This variable designates the PRAM file in WFM1. Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

Key Entry **PRAM File**

Remarks Selecting this data source forces the burst source to INTERNAL to allow framing control. The PRAM file must reside in the signal generator’s volatile memory (WFM1) in order to be accessed by this command. For more information refer to [“:DATA:PRAM:FILE:BLOCK” on page 111](#)

:DATA:FIX4

Supported E4438C with Option 402

```
[ :SOURCE ] :RADIO [ :NADC ] :DATA:FIX4 <val>  
[ :SOURCE ] :RADIO [ :NADC ] :DATA:FIX4?
```

This command sets the binary, 4-bit repeating sequence data pattern for unframed transmission according to the modulation type, symbol rate, filter, and burst shape selected for the NADC (North American Digital Cellular) modulation format.

***RST** #B0000

Range #B0000–#B1111 or 0–15

Key Entry **FIX4**

Remarks FIX4 must already be defined as the data type.

:DEFault

Supported E4438C with Option 402

```
[ :SOURCE ] :RADIO [ :NADC ] :DEFault
```

This command returns all of the NADC (North American Digital Cellular) modulation format parameters to factory settings. It does not affect any other signal generator parameters.

Key Entry **Restore NADC Factory Default**

:EDATa:DELay

Supported E4438C with Option 402

[:SOURCE]:RADIO[:NADC]:EDATa:DELay?

This query returns the amount of delay (in symbols) from the external data input to the beginning of the symbol on the I OUT and Q OUT rear panel connectors and the front panel RF OUTPUT connector.

Remarks When the format is turned off, the delay value is unchanged; the query will return the same delay value if the format is on or off.

:EDCLock

Supported E4438C with Option 402

[:SOURCE]:RADIO[:NADC]:EDCLock SYMBOL | NORMal

[:SOURCE]:RADIO[:NADC]:EDCLock?

This command sets the external data clock use.

SYMBOL This choice specifies that a continuous symbol clock signal must be provided to the SYMBOL SYNC input connector.

NORMal This choice specifies that the DATA CLOCK input connector requires a bit clock. The SYMBOL SYNC input connector requires a (one-shot or continuous) symbol sync signal.

***RST** NORM

Key Entry Ext Data Clock Normal Symbol

Remarks Both choices have no effect in internal clock mode. Refer to “:BBClock” on [page 779](#) to select EXT as the data clock type.

:EREFerence

Supported E4438C with Option 402

[:SOURce] :RADio [:NADC] :EREFerence INT | EXT

[:SOURce] :RADio [:NADC] :EREFerence?

This command selects either an internal or external bit-clock reference for the data generator.

***RST** INT

Key Entry **BBG Ref Ext Int**

Remarks If the EXT choice is selected, the external source's frequency value must be applied to the BASEBAND GEN REF IN rear panel connector. The external reference and external data clock are not applicable at the same time. If both are selected, then the external reference takes precedence.

Refer to, “:EREFerence:VALue” on page 792 to enter the external reference frequency setting.

:EREFerence:VALue

Supported E4438C with Option 402

[:SOURce] :RADio [:NADC] :EREFerence:VALue <val>

[:SOURce] :RADio [:NADC] :EREFerence:VALue?

This command sets the expected bit-clock reference frequency value for an externally applied reference signal.

The variable <val> is expressed in units of hertz (Hz–MHz).

***RST** +1.30000000E+007

Range 2.5E5–1E8

Key Entry **Ext BBG Ref Freq**

Remarks The value specified by this command is effective only when you are using an external reference applied to the BASEBAND GEN REF IN rear panel connector.

Refer to “:EREFerence” on page 792 to select EXT (external source) as the reference for the bit-clock.

:FILTer

Supported E4438C with Option 402

```
[:SOURCE]:RADIO[:NADC]:FILTer RNYQuist|NYQuist|GAUSSian|RECTangle|IS95|
IS95_EQ|IS95_MOD|IS95_MOD_EQ|AC4Fm|UGGaussian|"<user FIR>"
[:SOURCE]:RADIO[:NADC]:FILTer?
```

This command selects the pre-modulation filter type.

- IS95 This choice selects a filter that meets the criteria of the IS-95 standard.
- IS95_EQ This choice selects a filter which is a combination of the IS-95 filter (above) and the equalizer filter described in the IS-95 standard. This filter is only used for IS-95 baseband filtering.
- IS95_MOD This choice selects a filter that meets the criteria of the IS-95 error function (for improved adjacent channel performance) with lower passband rejection than the filter specified in the IS-95 standard.
- IS95_MOD_EQ This choice selects a filter which is a combination of the equalizer filter described in the IS-95 standard and a filter that meets the criteria of the IS-95 error function (for improved adjacent channel performance), with lower passband rejection.
- AC4Fm This choice selects a predefined Association of Public Safety Communications Officials (APCO) specified compatible 4-level frequency modulation (C4FM) filter.
- UGGaussian This choice selects a backwards compatible GSM Gaussian filter (Gaussian filter with a fixed BbT value of 0.300) for the ESG E44xxB Option UN3 or UN4.
- "<user FIR>" This variable is any filter file that you have stored into memory.

***RST** RNYQ

Key Entry	Root Nyquist	Nyquist	Gaussian	Rectangle	IS-95	IS-95 w/EQ
	IS-95 Mod	IS-95 Mod w/EQ	APCO 25 C4FM	UN3/4 GSM Gaussian		
	User FIR					

Remarks Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:FRATe

Supported E4438C with Option 402
[:SOURCE]:RADio[:NADC]:FRATe FULL|HALF
[:SOURCE]:RADio[:NADC]:FRATe?

This command toggles between a full- or half-rate traffic channel.

FULL Selects two equally spaced timeslots of the frame. Since there are six timeslots per frame, timeslots 1, 2, and 3 are paired with timeslots 4, 5, and 6, respectively.

HALF Selects one timeslot of the frame (6 individual timeslots per frame).

***RST** FULL

Key Entry **Rate Full Half**

:IQ:SCALE

Supported E4438C with Option 402
[:SOURCE]:RADio[:NADC]:IQ:SCALE <val>
[:SOURCE]:RADio[:NADC]:IQ:SCALE?

This command sets the amplitude of the I/Q outputs for better adjacent channel power (ACP); lower scaling values equate to better ACP.

The variable <val> is expressed in units of percent.

***RST** +100

Range 1–200

Key Entry **I/Q Scaling**

Remarks This command has no effect with MSK or FSK modulation.

:MODulation:FSK[:DEViation]

Supported E4438C with Option 402
[:SOURCE]:RADio[:NADC]:MODulation:FSK[:DEViation] <val>
[:SOURCE]:RADio[:NADC]:MODulation:FSK[:DEViation]?

This command sets the symmetric FSK frequency deviation value. The variable <val> is expressed in units of Hertz and the maximum range value equals the current symbol rate value multiplied by four, limited to 20 MHz

***RST** +4.00000000E+002

Range	0–2E7
Key Entry	Freq Dev
Remarks	To change the modulation type, refer to “:MODulation[:TYPE]” on page 796. Refer to “:SRATe” on page 807 for a list of the minimum and maximum symbol rate values. To set an asymmetric FSK deviation value, refer to the <i>E4428C/38C ESG Signal Generators User’s Guide for more information.</i>

:MODulation:MSK[:PHASe]

Supported	E4438C with Option 402
	[:SOURCE] :RADio [:NADC] :MODulation:MSK [:PHASe] <val> [:SOURCE] :RADio [:NADC] :MODulation:MSK [:PHASe] ?

This command sets the MSK phase deviation value. The variable <val> is expressed in units of degrees.

*RST	+9.00000000E+001
Range	0–100
Key Entry	Phase Dev

:MODulation:UFSK

Supported	E4438C with Option 402
	[:SOURCE] :RADio [:NADC] :MODulation:UFSK "<file name>" [:SOURCE] :RADio [:NADC] :MODulation:UFSK ?

This command selects a user-defined FSK file from the signal generator memory.

Key Entry	User FSK
Remarks	The user-defined FSK file is held in signal generator memory until the command that selects user FSK as the modulation type is sent. Refer to “:MODulation[:TYPE]” on page 796 to change the current modulation type. Refer to “File Name Variables” on page 13 for information on the file name syntax.

:MODulation:UIQ

Supported E4438C with Option 402

```
[:SOURCE]:RADio[:NADC]:MODulation:UIQ "<file name>"
[:SOURCE]:RADio[:NADC]:MODulation:UIQ?
```

This command selects a user-defined I/Q file from the signal generator memory.

Key Entry **User I/Q**

Remarks The user-defined I/Q file is held in signal generator memory until the command that selects user I/Q as the modulation type is sent. Refer to “:MODulation[:TYPE]” on page 796 to change the current modulation type. Refer to “File Name Variables” on page 13 for information on the file name syntax.

:MODulation[:TYPE]

Supported E4438C with Option 402

```
[:SOURCE]:RADio[:NADC]:MODulation[:TYPE] BPSK|QPSK|IS95QPSK|GRAYQPSK|
OQPSK|IS95OQPSK|P4DQPSK|PSK8|PSK16|D8PSK|MSK|FSK2|FSK4|FSK8|FSK16|C4FM|
QAM4|QAM16|QAM32|QAM64|QAM128|QAM256|UIQ|UFSK
[:SOURCE]:RADio[:NADC]:MODulation[:TYPE]?
```

This command sets the modulation type for the NADC personality.

***RST** P4DQPSK

Key Entry	BPSK	QPSK	IS-95 QPSK	Gray Coded QPSK	OQPSK			
	IS-95 OQPSK	$\pi/4$ DQPSK	8PSK	16PSK	D8PSK	MSK	2-Lvl FSK	
	4-Lvl FSK	8-Lvl FSK	16-Lvl FSK	C4FM	4QAM	16QAM	32QAM	
	64QAM	128QAM	256QAM	User I/Q	User FSK			

:REPeat

Supported E4438C with Option 402

```
[:SOURCE]:RADio[:NADC]:REPeat SINGLE|CONTinuous
[:SOURCE]:RADio[:NADC]:REPeat?
```

This command sets the rotation direction of the phase modulation vector.

SINGLE This choice outputs one occurrence of the selected frame.

CONTinuous This choice outputs a continuous stream of the selected frame.

***RST** SING
Key Entry Frame Repeat Single Cont

:POLarity[:ALL]

Supported E4438C with Option 402
[:SOURCE]:RADio[:NADC]:POLarity[:ALL] NORMal | INVerted
[:SOURCE]:RADio[:NADC]:POLarity[:ALL] ?

This command sets the rotation direction of the phase modulation vector.

NORMal This choice selects normal phase polarity.

INVerted This choice inverts the internal Q signal.

***RST** NORM

Key Entry Polarity Normal Invert

:SECondary:RECall

Supported E4438C with Option 402
[:SOURCE]:RADio[:NADC]:SECondary:RECall

This command recalls the secondary frame configuration, overwriting the current state.

Key Entry Recall Secondary Frame State

Remarks To save a secondary frame state, refer to “[:SECondary:SAVE]” on page 797.

A secondary frame is not active until the secondary state is enabled. To activate a secondary frame, refer to “[:SECondary[:STATE]]” on page 798.

:SECondary:SAVE

Supported E4438C with Option 402
[:SOURCE]:RADio[:NADC]:SECondary:SAVE

This command saves the current frame configuration as the secondary frame with the filename NADC_SECONDARY_FRAME.

Key Entry Save Secondary Frame State

Remarks To recall the secondary frame (saved in non-volatile signal generator memory), refer to “[:SECondary:RECall]” on page 797.

:SECondary:TRIGger[:SOURce]

Supported E4438C with Option 402

```
[ :SOURce ] :RADio [ :NADC ] :SECondary :TRIGger [ :SOURce ] KEY | EXT | BUS  
[ :SOURce ] :RADio [ :NADC ] :SECondary :TRIGger [ :SOURce ] ?
```

This command selects the type of triggering for the secondary frame.

- KEY** This choice enables triggering by pressing the front panel **Trigger** hardkey.
- EXT** This choice enables triggering using an externally applied signal at the PATT TRIG IN rear panel connector or the PATT TRIG IN 2 pin on the rear panel AUX I/O connector. To select the appropriate connector, refer to [“:TRIGger\[:SOURce\]:EXTErnal\[:SOURce\]” on page 812](#).
- BUS** This choice enables GPIB triggering using the *TRG or GET command or LAN and RS-232 triggering using the *TRG command.

Key Entry **Trigger Key** **Ext** **Bus**

:SECondary[:STATe]

Supported E4438C with Option 402

```
[ :SOURce ] :RADio [ :NADC ] :SECondary [ :STATe ] ON | OFF | 1 | 0  
[ :SOURce ] :RADio [ :NADC ] :SECondary [ :STATe ] ?
```

This command enables or disables the ability to switch to the secondary frame.

***RST** 0

Key Entry **Secondary Frame Off On**

Remarks A frame must already be saved as the secondary frame in order to turn the secondary state function on.

To save a frame as the secondary frame, refer to [“:SECondary:SAVE” on page 797](#).

:SLOT[1] | 2 | 3 | 4 | 5 | 6:DCUStom

Supported E4438C with Option 402

```
[ :SOURce ] :RADio [ :NADC ] :SLOT [ 1 ] | 2 | 3 | 4 | 5 | 6 :DCUStom  
PN9 | PN11 | PN15 | PN20 | PN23 | FIX4 | "<file name>" | EXT | P4 | P8 | P16 | P32 | P64  
[ :SOURce ] :RADio [ :NADC ] :SLOT [ 1 ] | 2 | 3 | 4 | 5 | 6 :DCUStom?
```

This command configures the data field for the selected downlink custom timeslot.

***RST** PN9

Key Entry	PN9	PN11	PN15	PN20	PN23	FIX4	User File	EXT
	4 1's & 4 0's	8 1's & 8 0's	16 1's & 16 0's	32 1's & 32 0's	64 1's & 64 0's			

Remarks Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:SLOT[1]|2|3|4|5|6:DCUStom:FIX4

Supported E4438C with Option 402

```
[ :SOURCE ] :RADIO [ :NADC ] :SLOT [ 1 | 2 | 3 | 4 | 5 | 6 :DCUStom:FIX4 <val>
[ :SOURCE ] :RADIO [ :NADC ] :SLOT [ 1 | 2 | 3 | 4 | 5 | 6 :DCUStom:FIX4?
```

This command sets the binary, 4-bit repeating sequence data pattern that is used in the selected downlink custom timeslot.

***RST** #B0000

Range #B0000–#B1111 or 0–15

Key Entry **FIX4**

Remarks FIX4 must already be defined as the data type.

:SLOT[1]|2|3|4|5|6:DTCHannel:CDLocator

Supported E4438C with Option 402

```
[ :SOURCE ] :RADIO [ :NADC ] :SLOT [ 1 | 2 | 3 | 4 | 5 | 6 :DTCHannel :
CDLocator <bit_pattern>
[ :SOURCE ] :RADIO [ :NADC ] :SLOT [ 1 | 2 | 3 | 4 | 5 | 6 :DTCHannel :CDLocator?
```

This command changes the 11-bit coded digital control channel locator (CDL) field.

***RST** #H000

Range #H0–#H7FF

Key Entry **CDL**

Remarks The preset hexadecimal value (when normal preset is selected) for CDL reflects the NADC protocol, however you can enter a new value by using this command.

:SLOT[1]|2|3|4|5|6:DTCHannel:CDVCCode

Supported E4438C with Option 402

```
[ :SOURCE ] :RADIO [ :NADC ] :SLOT [ 1 ] | 2 | 3 | 4 | 5 | 6 :DTCHannel :  
CDVCCode <bit_pattern>  
[ :SOURCE ] :RADIO [ :NADC ] :SLOT [ 1 ] | 2 | 3 | 4 | 5 | 6 :DTCHannel :CDVCCode?
```

This command changes the 12-bit coded digital verification color code (CDVCC).

***RST** #H000

Range #H0–#HFFF

Key Entry **CDVCC**

Remarks The preset hexadecimal value (when normal preset is selected) for CDVCC reflects the NADC protocol, however you can enter a new value by using this command.

:SLOT[1]|2|3|4|5|6:DTCHannel:SACChannel

Supported E4438C with Option 402

```
[ :SOURCE ] :RADIO [ :NADC ] :SLOT [ 1 ] | 2 | 3 | 4 | 5 | 6 :DTCHannel :  
SACChannel <bit_pattern>  
[ :SOURCE ] :RADIO [ :NADC ] :SLOT [ 1 ] | 2 | 3 | 4 | 5 | 6 :DTCHannel :SACChannel?
```

This command changes the 15-bit slow associated control channel.

***RST** #H000

Range #H0–#HFFF

Key Entry **SACCH**

Remarks The preset hexadecimal value (when normal preset is selected) for SACCH reflects the value specified by the standard.

:SLOT[1]|2|3|4|5|6:DTCHannel:SWORd

Supported E4438C with Option 402

```
[ :SOURCE ] :RADIO [ :NADC ] :SLOT [ 1 ] | 2 | 3 | 4 | 5 | 6 :DTCHannel :SWORd <bit_pattern>  
[ :SOURCE ] :RADIO [ :NADC ] :SLOT [ 1 ] | 2 | 3 | 4 | 5 | 6 :DTCHannel :SWORd?
```

This command sets the 28-bit synchronization word as the active function. This is used for slot synchronization, equalizer training, and timeslot identification.

***RST** #HA91DE4A
Range #H0–#HFFFFFFF
Key Entry SYNC

:SLOT[1] | 2 | 3 | 4 | 5 | 6:DTCHannel[:DATA]

Supported E4438C with Option 402

```
[:SOURCE]:RADio[:NADC]:SLOT[1] | 2 | 3 | 4 | 5 | 6:DTCHannel[:DATA] PN9 |
PN11 | PN15 | PN20 | PN23 | FIX4 | "<file name>" | EXT | P4 | P8 | P16 | P32 | P64
[:SOURCE]:RADio[:NADC]:SLOT[1] | 2 | 3 | 4 | 5 | 6:DTCHannel[:DATA] ?
```

This command sets a pseudo-random number sequence, 4-bit pattern, sequence of 1's and 0's, data from an external source, or a user file as the data pattern for the selected downlink traffic channel timeslot during framed transmission.

***RST** PN9
Key Entry **PN9 PN11 PN15 PN20 PN23 FIX4 User File EXT**
4 1's & 4 0's 8 1's & 8 0's 16 1's & 16 0's 32 1's & 32 0's
64 1's & 64 0's

Remarks Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:SLOT[1] | 2 | 3 | 4 | 5 | 6:DTCHannel[:DATA]FIX4

Supported E4438C with Option 402

```
[:SOURCE]:RADio[:NADC]:SLOT[1] | 2 | 3 | 4 | 5 | 6:DTCHannel[:DATA]:FIX4 <val>
[:SOURCE]:RADio[:NADC]:SLOT[1] | 2 | 3 | 4 | 5 | 6:DTCHannel[:DATA]:FIX4?
```

This command sets the binary, 4-bit repeating sequence data pattern that is used in the selected downlink traffic channel timeslot.

***RST** #B0000
Range #B0000–#B1111 or 0–15
Key Entry **FIX4**
Remarks FIX4 must already be defined as the data type.

:SLOT[1]|2|3|4|5|6:POWer

Supported E4438C with Option 402

```
[ :SOURce ] :RADio [ :NADC ] :SLOT [ 1 ] | 2 | 3 | 4 | 5 | 6 : POWer MAIN | DELTa
[ :SOURce ] :RADio [ :NADC ] :SLOT [ 1 ] | 2 | 3 | 4 | 5 | 6 : POWer?
```

This command toggles the RF output power level function for the selected timeslot.

- MAIN This choice specifies RF output as the main power level.
- DELTA This choice specifies RF output as the alternative power level.
- *RST MAIN

Key Entry Timeslot Ampl Main Delta

:SLOT[1]|2|3|4|5|6:STATe

Supported E4438C with Option 402

```
[ :SOURce ] :RADio [ :NADC ] :SLOT [ 1 ] | 2 | 3 | 4 | 5 | 6 : STATe ON | OFF | 1 | 0
[ :SOURce ] :RADio [ :NADC ] :SLOT [ 1 ] | 2 | 3 | 4 | 5 | 6 : STATe?
```

This command enables or disables the operating state of the selected timeslot.

- *RST Timeslot 1: 1 Timeslots 2–6: 0

Key Entry Timeslot Off On

:SLOT[1]|2|3|4|5|6:UCUStom

Supported E4438C with Option 402

```
[ :SOURce ] :RADio [ :NADC ] :SLOT [ 1 ] | 2 | 3 | 4 | 5 | 6 : UCUS tom PN9 | PN11 | PN15 |
PN20 | PN23 | FIX4 | "<file name>" | EXT | P4 | P8 | P16 | P32 | P64
[ :SOURce ] :RADio [ :NADC ] :SLOT [ 1 ] | 2 | 3 | 4 | 5 | 6 : UCUS tom?
```

This command configures the data field for the selected uplink custom timeslot.

- *RST PN9

Key Entry

PN9	PN11	PN15	PN20	PN23	FIX4	User File	EXT
4 1's & 4 0's	8 1's & 8 0's	16 1's & 16 0's	32 1's & 32 0's				
64 1's & 64 0's							

Remarks Refer to “File Name Variables” on page 13 for information on the file name syntax.

:SLOT[1]|2|3|4|5|6:UCUStom:FIX4

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio [ :NADC ] :SLOT [ 1 ] | 2 | 3 | 4 | 5 | 6 :UCUStom :FIX4 <val>  
[ :SOURCE ] :RADio [ :NADC ] :SLOT [ 1 ] | 2 | 3 | 4 | 5 | 6 :UCUStom :FIX4?
```

This command sets the binary, 4-bit repeating sequence data pattern that is used in the selected uplink custom timeslot.

***RST** #B0000

Range #B0000–#B1111 or 0–15

Key Entry **FIX4**

Remarks FIX4 must already be defined as the data type.

:SLOT[1]|2|3|4|5|6:UTCHannel:CDVCcode

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio [ :NADC ] :SLOT [ 1 ] | 2 | 3 | 4 | 5 | 6 :UTCHannel :  
CDVCcode <bit_pattern>  
[ :SOURCE ] :RADio [ :NADC ] :SLOT [ 1 ] | 2 | 3 | 4 | 5 | 6 :UTCHannel :CDVCcode?
```

This command changes the 12-bit coded digital verification color code (CDVCC).

***RST** #H000

Range #H0–#HFFF

Key Entry **CDVCC**

Remarks The preset hexadecimal value (when normal preset is selected) for CDVCC reflects the NADC protocol, however you can enter a new value by using this command.

:SLOT[1]|2|3|4|5|6:UTCHannel:SACChannel

Supported E4438C with Option 402

```
[ :SOURCE ] :RADIO [ :NADC ] :SLOT [ 1 ] | 2 | 3 | 4 | 5 | 6 :UTCHannel :SACChannel  
<bit_pattern>  
[ :SOURCE ] :RADIO [ :NADC ] :SLOT [ 1 ] | 2 | 3 | 4 | 5 | 6 :UTCHannel :SACChannel?
```

This command changes the 15-bit slow associated control channel.

***RST** #H000

Range #H0–#HFFF

Key Entry **SACCH**

Remarks The preset hexadecimal value (when normal preset is selected) for SACCH reflects the value specified by the standard.

:SLOT[1]|2|3|4|5|6:UTCHannel:SWORd

Supported E4438C with Option 402

```
[ :SOURCE ] :RADIO [ :NADC ] :SLOT [ 1 ] | 2 | 3 | 4 | 5 | 6 :UTCHannel :SWORd <bit_pattern>  
[ :SOURCE ] :RADIO [ :NADC ] :SLOT [ 1 ] | 2 | 3 | 4 | 5 | 6 :UTCHannel :SWORd?
```

This command sets the 28-bit synchronization word as the active function. This is used for slot synchronization, equalizer training, and timeslot identification.

***RST** #HA91DE4A

Range #H0–#HFFFFFFF

Key Entry **SYNC**

:SLOT[1]|2|3|4|5|6:UTCHannel[:DATA]

Supported E4438C with Option 402

```
[ :SOURCE ] :RADIO [ :NADC ] :SLOT [ 1 ] | 2 | 3 | 4 | 5 | 6 :UTCHannel [ :DATA ] PN9 | PN15 |  
FIX4 | "<file name>" | EXT | P4 | P8 | P16 | P32 | P64  
[ :SOURCE ] :RADIO [ :NADC ] :SLOT [ 1 ] | 2 | 3 | 4 | 5 | 6 :UTCHannel [ :DATA ] ?
```


This command sets a pseudo-random number sequence, 4-bit pattern, sequence of 1's and 0's, data from an external source, or a user file as the data pattern for the selected uplink traffic channel timeslot during framed transmission.

***RST** PN9

Key Entry	PN9	PN11	PN15	PN20	PN23	FIX4	User File	EXT
	4 1's & 4 0's	8 1's & 8 0's	16 1's & 16 0's	32 1's & 32 0's	64 1's & 64 0's			

Remarks Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:SLOT[1] | 2 | 3 | 4 | 5 | 6:UTCHannel[:DATA]:FIX4

Supported E4438C with Option 402

```
[ :SOURce ] :RADio [ :NADC ] :SLOT [ 1 ] | 2 | 3 | 4 | 5 | 6 :UTCHannel [ :DATA ] :FIX4 <val>
[ :SOURce ] :RADio [ :NADC ] :SLOT [ 1 ] | 2 | 3 | 4 | 5 | 6 :UTCHannel [ :DATA ] :FIX4 ?
```

This command sets the binary, 4-bit repeating sequence data pattern that is used in the selected uplink traffic channel timeslot.

***RST** #B0000

Range #B0000–#B1111 or 0–15

Key Entry **FIX4**

Remarks FIX4 must already be defined as the data type.

:SLOT[1] | 2 | 3 | 4 | 5 | 6[:TYPE]

Supported E4438C with Option 402

```
[ :SOURce ] :RADio [ :NADC ] :SLOT [ 1 ] | 2 | 3 | 4 | 5 | 6 [ :TYPE ] UCUSom | DCUSom | UTCH |
UTCH_ALL | DTCH | DTCH_ALL
[ :SOURce ] :RADio [ :NADC ] :SLOT [ 1 ] | 2 | 3 | 4 | 5 | 6 [ :TYPE ] ?
```

This command sets the timeslot type for the selected timeslot.

***RST** Timeslot 1: UTCH Timeslots 2–6: UCUS

Key Entry	Up Custom	Down Custom	Up TCH	Up TCH All	Down TCH
	Down TCH All				

:SOUT

Supported E4438C with Option 402

```
[:SOURCE]:RADio[:NADC]:SOUT FRAME|SLOT|ALL
[:SOURCE]:RADio[:NADC]:SOUT?
```

This command sets the synchronization location (within the pattern of data) and the type of output at the EVENT 1 rear panel connector.

FRAME This choice outputs a 1-bit signal, synchronized to the bit selected by the synchronization output offset command, for a framed data pattern.

SLOT This choice outputs a 1-bit signal, synchronized to the bit selected by the synchronization output offset command, for a selected timeslot.

ALL This choice outputs a 1-bit signal, synchronized to the bit selected by the synchronization output offset command, for all active timeslots.

***RST** FRAME

Key Entry	Begin Frame	Begin Timeslot #	All Timeslots
------------------	--------------------	-------------------------	----------------------

:SOUT:OFFSet

Supported E4438C with Option 402

```
[:SOURCE]:RADio[:NADC]:SOUT:OFFSet <val>
[:SOURCE]:RADio[:NADC]:SOUT:OFFSet?
```

This command sets the offset value for the location of the output synchronization signal on the EVENT1 rear panel connector relative to the beginning of the framed data pattern or timeslot.

The variable <val> is expressed as a number of bits.

***RST** +0

Range -323 to 323

Key Entry **Sync Out Offset**

Remarks Negative values move the synchronization output signal earlier; positive values move it later.

To change the output of the EVENT1 rear panel connector to SLOT, refer to [“:SOUT” on page 806](#).

:SOUT:SLOT

Supported E4438C with Option 402

```
[ :SOURce ] :RADio [ :NADC ] :SOUT :SLOT <val>
[ :SOURce ] :RADio [ :NADC ] :SOUT :SLOT?
```

This command selects the timeslot that will trigger a 1-bit output signal at the EVENT 1 rear panel connector.

***RST** +1

Range 1–3

Key Entry **Begin Timeslot #**

Remarks To change the output of the EVENT1 rear panel connector to SLOT, refer to [“:SOUT” on page 806](#).

:SRATe

Supported E4438C with Option 402

```
[ :SOURce ] :RADio [ :NADC ] :SRATe <val>
[ :SOURce ] :RADio [ :NADC ] :SRATe?
```

This command sets the transmission symbol rate.

The variable <val> is expressed in units of bits per second (bps–Mbps) and the maximum range value is dependent upon the source of data (internal or external), the modulation type, and filter.

***RST** +2.43000000E+004

Range	Modulation Type	Bits per Symbol	Internal Data	External Serial Data
	BPSK	1	1–50 Msps	1–50 Msps
	FSK2			
	MSK			
	C4FM	2	1–50 Msps	1–25 Msps
	FSK4			
	OQPSK			
	OQPSK195			
	P4QPPSK			
	QAM4			
	QPSK			
	QPSKIS95			
	QPSKISAT			

Receiver Test Digital Commands (continued)
NADC Subsystem—Option 402 ([:SOURCE]:RADIO[:NADC])

Range	Modulation Type	Bits per Symbol	Internal Data	External Serial Data
	D8PSK	3	1–33.33 Msps	1–16.67 Msps
	EDGE			
	FSK8			
	PSK8			
	FSK16	4	1–25 Msps	1–12.5 Msps
	PSK16			
	QAM16			
	QAM32	5	1–20 Msps	1–10 Msps
	QAM64	6	1–16.67 Msps	1–8.33 Msps
	QAM256	7	1–12.50 Msps	1–6.25 Msps

Key Entry

Symbol Rate

Remarks

When user-defined filters are selected using the command in section “:FILTer” on page 793, the upper bit rate will be restricted in line with the following symbol rate restriction:

- FIR filter length > 32 symbols: upper limit is 12.5 Msps
- FIR filter length > 16 symbols: upper limit is 25 Msps

When internal FIR filters are used, the limits of the above table always apply. For higher symbol rates, the FIR filter length will be truncated as follows:

- Above 12.5 Msps, the FIR length will be truncated to 32 symbols
- Above 25 Msps, the FIR length will be truncated to 16 symbols

This will impact the relative timing of the modulated data, as well as the actual filter response (see “:BRATe” on page 780).

A change in the symbol rate value will affect the bit rate value; refer to “:BRATe” on page 780 for a list of the minimum and maximum symbol rate values.

To change the modulation type, refer to “:MODulation[:TYPE]” on page 796.

:TRIGger:TYPE

Supported

E4438C with Option 402

[:SOURCE]:RADIO[:NADC]:TRIGger:TYPE CONTinuous | SINGLE | GATE
[:SOURCE]:RADIO[:NADC]:TRIGger:TYPE?

This command sets the trigger type.

CONTInuous	The framed data sequence repeats continuously; the sequence restarts every time the previous playback is completed. To customize continuous triggering, refer to “:TRIGger:TYPE:CONTInuous[:TYPE]” on page 809.		
SINGle	The framed data sequence plays once for every trigger received.		
GATE	An external trigger signal interrupts the playback while the gating signal is in the inactive state. Playback resumes when the external control signal returns to the active state. The active state can be set to high or low.		
*RST	CONT		
Key Entry	Continuous	Single	Gated

:TRIGger:TYPE:CONTInuous[:TYPE]

Supported E4438C with Option 402

```
[:SOURce]:RADio[:NADC]:TRIGger:TYPE:CONTInuous[:TYPE] FREE|TRIGger|RESet
[:SOURce]:RADio[:NADC]:TRIGger:TYPE:CONTInuous[:TYPE] ?
```

This commands selects the waveform’s response to a trigger signal while using the continuous trigger mode.

For more information on triggering and to select the continuous trigger mode, see “:TRIGger:TYPE” on page 808.

The following list describes the waveform’s response to each of the command choices:

FREE	Turning the ARB format on immediately triggers the waveform. The waveform repeats until you turn the format off, select another trigger, or choose another waveform file.		
TRIGger	The waveform waits for a trigger before play begins. When the waveform receives the trigger, it plays continuously until you turn the format off, select another trigger, or choose another waveform file.		
RESet	The waveform waits for a trigger before play begins. When the waveform receives the trigger, it plays continuously. Subsequent triggers reset the waveform to the beginning. For a waveform sequence, this means to the beginning of the first segment in the sequence.		
*RST	FREE		
Key Entry	Free Run	Trigger & Run	Reset & Run

:TRIGger:TYPE:GATE:ACTive

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio [ :NADC ] :TRIGger :TYPE:GATE:ACTive LOW|HIGH  
[ :SOURCE ] :RADio [ :NADC ] :TRIGger :TYPE:GATE:ACTive?
```

This command selects the active state (gate polarity) of the gate while using the gating trigger mode.

The LOW and HIGH selections correspond to the low and high states of an external trigger signal. For example, when you select HIGH, the active state occurs during the high of the trigger signal. When the active state occurs, the ESG stops the waveform playback at the last played sample point, then restarts the playback at the next sample point when the inactive state occurs. For more information on triggering and to select gating as the trigger mode, see “:TRIGger:TYPE” on page 808.

The following list describes the signal generator’s external trigger signal gating behavior for the polarity selections:

LOW	The waveform playback stops when the trigger signal goes low (active state) and restarts when the trigger signal goes high (inactive state).
HIGH	The waveform playback stops when the trigger signal goes high (active state) and restarts when the trigger signal goes low (inactive state).
*RST	HIGH
Key Entry	Gate Active Low High

:TRIGger[:SOURCE]

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio [ :NADC ] :TRIGger [ :SOURCE ] KEY|EXT|BUS  
[ :SOURCE ] :RADio [ :NADC ] :TRIGger [ :SOURCE ] ?
```

This command sets the trigger source.

For more information on triggering, see “:TRIGger:TYPE” on page 808. The following list describes the command choices:

KEY	This choice enables manual triggering by pressing the front-panel Trigger hardkey.
EXT	An externally applied signal triggers the waveform. This is the only choice that works with gating. The following conditions affect an external trigger: <ul style="list-style-type: none">• The input connector selected for the trigger signal. You have a choice between the rear-panel PATTERN TRIG IN connector or the PATT TRIG IN 2 pin on the rear-panel AUXILIARY I/O connector. To make the connector selection, see “:TRIGger[:SOURCE]:EXTernal[:SOURCE]” on page 812.

For more information on the connectors and on connecting the cables, see the *ESG User's Guide*.

- The trigger signal polarity:
 - gating mode, see “:TRIGger:TYPE:GATE:ACTive” on page 810
 - continuous and single modes, see “:TRIGger[:SOURce]:EXTernal:SLOPe” on page 812
- The time delay between when the ESG receives a trigger and when the waveform responds to the trigger. There are two parts to setting the delay:
 - setting the amount of delay, see “:TRIGger[:SOURce]:EXTernal:DELay” on page 811
 - turning the delay on, see “:TRIGger[:SOURce]:EXTernal:DELay:STATe” on page 812

BUS This choice enables triggering over the GPIB or LAN using the *TRG or GET commands or the AUXILIARY INTERFACE (RS-232) using the *TRG command.

***RST** KEY

Key Entry	Trigger Key	Ext	Bus
------------------	--------------------	------------	------------

:TRIGger[:SOURce]:EXTernal:DELay

Supported E4438C with Option 402

```
[:SOURce]:RADio[:NADC]:TRIGger[:SOURce]:EXTernal:DELay <val>
[:SOURce]:RADio[:NADC]:TRIGger[:SOURce]:EXTernal:DELay?
```

This command sets the number of bits to delay the ESG's response to an external trigger.

The bit delay is a delay between when the ESG receives the trigger and when it responds to the trigger. The delay uses the clocks of the bit-clock to time the delay. After the ESG receives the trigger and the set number of delay bits (clocks) occurs, the ESG transmits the data pattern.

The delay occurs after you enable the state. See “:TRIGger[:SOURce]:EXTernal:DELay:STATe” on page 812. You can set the number of bits either before or after enabling the state.

For more information on configuring an external trigger source and to select external as the trigger source, see “:TRIGger[:SOURce]” on page 810.

***RST** +0

Range 0–1048575

Key Entry Ext Delay Bits

:TRIGger[:SOURCE]:EXternal:DELay:STATe

Supported E4438C with Option 402

```
[:SOURCE]:RADio[:NADC]:TRIGger[:SOURCE]:EXternal:DELay:STATe ON|OFF|1|0  
[:SOURCE]:RADio[:NADC]:TRIGger[:SOURCE]:EXternal:DELay:STATe?
```

This command enables or disables the operating state of the external trigger delay function.

For setting the delay time, see “:TRIGger[:SOURCE]:EXternal:DELay” on page 811, and for more information on configuring an external source, see “:TRIGger[:SOURCE]” on page 810.

***RST** 0

Key Entry Ext Delay Off On

:TRIGger[:SOURCE]:EXternal:SLOPe

Supported E4438C with Option 402

```
[:SOURCE]:RADio[:NADC]:TRIGger[:SOURCE]:EXternal:SLOPe POSitive|NEGative  
[:SOURCE]:RADio[:NADC]:TRIGger[:SOURCE]:EXternal:SLOPe?
```

This command sets the polarity for an external trigger signal while using the continuous, single triggering mode. To set the polarity for gating, see “:TRIGger:TYPE:GATE:ACTive” on page 810.

The POSitive and NEGative selections correspond to the high (positive) and low (negative) states of the external trigger signal. For example, when you select POSitive, the waveform responds (plays) during the high state of the trigger signal. When the PSG receives multiple trigger occurrences when only one is required, the signal generator uses the first trigger and ignores the rest.

For more information on configuring an external trigger source and to select external as the trigger source, see “:TRIGger[:SOURCE]” on page 810.

***RST** POS

Key Entry Ext Polarity Neg Pos

:TRIGger[:SOURCE]:EXternal[:SOURCE]

Supported E4438C with Option 402

```
[:SOURCE]:RADio[:NADC]:TRIGger[:SOURCE]:EXternal[:SOURCE] EPT1|EJPT2|  
EPTRIGGER1|EPTRIGGER2  
[:SOURCE]:RADio[:NADC]:TRIGger[:SOURCE]:EXternal[:SOURCE]?
```

This command selects which PATTERN TRIG IN connection the ESG uses to accept an externally applied trigger signal when external is the trigger source selection.

For more information on configuring an external trigger source and to select external as the trigger

source, see “:TRIGger[:SOURce]” on page 810. For more information on the rear-panel connectors, see the *E4428C/38C ESG Signal Generators User’s Guide*.

The following list describes the command choices:

EPT1	This choice is synonymous with EPTRIGGER1 and selects the PATTERN TRIG IN rear-panel connector.
EPT2	This choice is synonymous with EPTRIGGER2 and selects the PATT TRIG IN 2 pin on the rear-panel AUXILIARY I/O connector.
EPTRIGGER1	This choice is synonymous with EPT1 and selects the PATTERN TRIG IN rear-panel connector.
EPTRIGGER2	This choice is synonymous with EPT2 and selects the PATT TRIG IN 2 pin on the rear-panel AUXILIARY I/O connector.
*RST	EPT1
Key Entry	Patt Trig In 1 Patt Trig In 2

[:STATe]

Supported E4438C with Option 402

```
[ :SOURce ] :RADio [ :NADC ] [ :STATe ] ON | OFF | 1 | 0
[ :SOURce ] :RADio [ :NADC ] [ :STATe ] ?
```

This command enables or disables the NADC modulation format.

***RST** OFF

Key Entry **NADC Off On**

Remarks Although the NADC modulation is enabled with this command, the RF carrier is not modulated unless you also activate the front panel **Mod On/Off** hardkey.

PDC Subsystem–Option 402 ([:SOURce]:RADio:PDC)

:ALPha

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:PDC:ALPha <val>  
[ :SOURce ] :RADio:PDC:ALPha?
```

This command changes the Nyquist or root Nyquist filter’s alpha value.

The filter alpha value can be set to a minimum level (0), a maximum level (1), or in between by using fractional numeric values (0.001–0.999).

***RST** +5.00000000E–001

Range 0.000–1.000

Key Entry **Filter Alpha**

Remarks To change the current filter type, refer to “:FILTer” on page 827.

:BBCLock

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:PDC:BBCLock INT [1] | EXT [1]  
[ :SOURce ] :RADio:PDC:BBCLock?
```

This command toggles the data (bit) clock input to the baseband generator board to either internal or external. This command is independent in each mode and works for both non-burst (continuous) and burst modes. This allows for a matrix of selections between burst/non-burst, internal/external data generation, internal/external data clock, and external bit/symbol data clock.

INT[1] This choice selects the signal generator internal data clock.

EXT[1] This choice selects an external data clock input.

***RST** INT

Key Entry **Ext Data Clock Ext Int**

Remarks A data clock or continuous symbol sync input must be supplied when external mode is used.

:BBT

Supported E4438C with Option 402

[:SOURce] :RADio:PDC:BBT <val>

[:SOURce] :RADio:PDC:BBT?

This command changes the bandwidth-multiplied-by-bit-time (BbT) filter parameter.

The filter BbT value can be set to the maximum level (1) or in between the minimum level (0.100) and maximum level by using fractional numeric values (0.101–0.999).

***RST** +5.00000000E–001

Range 0.100–1.000

Key Entry **Filter BbT**

Remarks This command is effective only after choosing a Gaussian filter. It does not have an effect on other types of filters.

To change the current filter type, refer to “:FILTer” on page 827.

:BRATe

Supported E4438C with Option 402

[:SOURce] :RADio:PDC:BRATe <val>

[:SOURce] :RADio:PDC:BRATe?

This command sets the bit rate.

The variable <val> is expressed in units of bits per second (bps–Mbps) and the maximum range value is dependent upon the source of data (internal or external), the modulation type, and filter.

***RST** +4.20000000E+004

Range	Modulation Type	Bits per Symbol	Internal Data	External Serial Data
	BPSK	1	1–50 Mbps	1–50 Mbps
	FSK2			
	MSK			
	C4FM	2	2–100 Mbps	2–50 Mbps
	FSK4			
	OQPSK			
	OQPSK195			
	P4QPPSK			
	QAM4			

Receiver Test Digital Commands (continued)
PDC Subsystem–Option 402 ([:SOURCE]:RADio:PDC)

Range

Modulation Type	Bits per Symbol	Internal Data	External Serial Data
QPSK	2	2–100 Mbps	2–50 Mbps
QPSKIS95			
QPSKISAT			
D8PSK	3	3–100 Mbps	3–50 Mbps
EDGE			
FSK8			
PSK8			
FSK16	4	4–100 Mbps	4–50 Mbps
PSK16			
QAM16			
QAM32	5	5–100 Mbps	5–50 Mbps
QAM64	6	6–100 Mbps	6–50 Mbps
QAM256	7	8–100 Mbps	8–50 Mbps

Key Entry

Symbol Rate

Remarks

When user-defined filters are selected using the command in section “:FILTer” on page 827, the upper bit rate will be restricted in line with the following symbol rate restriction:

- FIR filter length > 32 symbols: upper limit is 12.5 Msps
- FIR filter length > 16 symbols: upper limit is 25 Msps

When internal FIR filters are used, the limits of the above table always apply. For higher symbol rates, the FIR filter length will be truncated and will impact the relative timing of the modulated data, as well as the actual filter response (see “:SRATe” on page 843).

A change in the bit rate value will affect the value of the symbol rate; refer to “:SRATe” on page 843 for a list of minimum and maximum symbol rate values.

To change the modulation type, refer to “:MODulation[:TYPE]” on page 830.

:BURSt:PN9

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:PDC:BURSt:PN9 NORMal |QUICK  
[ :SOURce ] :RADio:PDC:BURSt:PN9?
```

This command controls the software PN9 generation.

NORMal This choice produces a maximum length PN9 sequence.

QUICK This choice produces a truncated PN9 sequence.

***RST** NORM

Key Entry **PN9 Mode Normal Quick**

Remarks Use Normal mode for bit-error-rate tests where a maximum length PN9 sequence is required.

:BURSt:SHAPe:FALL:DELay

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:PDC:BURSt:SHAPe:FALL:DELay <val>  
[ :SOURce ] :RADio:PDC:BURSt:SHAPe:FALL:DELay?
```

This command sets the period of time that the start of the burst fall is delayed.

The variable <val> is expressed in bits. The minimum and maximum values depend upon modulation type and symbol rate.

***RST** +0.00000000E+000

Range -22.3750 to 99

Key Entry **Fall Delay**

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

To change the modulation type, refer to [“:MODulation\[:TYPE\]” on page 830](#). Refer to [“:SRATe” on page 843](#) for a list of minimum and maximum symbol rate values.

[“:BURSt:SHAPe:FDELay” on page 818](#) performs the same function. In compliance with the SCPI standard, both commands are listed.

For concept information on burst shaping, refer to the *E4428C/38C ESG Signal Generators User’s Guide*.

:BURSt:SHAPe:FALL:TIME

Supported E4438C with Option 402

[:SOURCE] :RADio:PDC:BURSt:SHAPe:FALL:TIME <val>

[:SOURCE] :RADio:PDC:BURSt:SHAPe:FALL:TIME?

This command sets the period of time where the burst decreases from full power to minimum power.

The variable <val> is expressed in bits. The minimum and maximum values depend upon modulation type and symbol rate.

***RST** +1.00000000E+001

Range 0.1250–255.8750

Key Entry Fall Time

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

To change the modulation type, refer to “:MODulation[:TYPE]” on page 830. Refer to “:SRATe” on page 843 for a list of minimum and maximum symbol rate values.

“:BURSt:SHAPe:FTIME” on page 819 performs the same function. In compliance with the SCPI standard, both commands are listed.

For concept information on burst shaping, refer to the *E4428C/38C ESG Signal Generators User’s Guide*.

:BURSt:SHAPe:FDElay

Supported E4438C with Option 402

[:SOURCE] :RADio:PDC:BURSt:SHAPe:FDElay <val>

[:SOURCE] :RADio:PDC:BURSt:SHAPe:FDElay?

This command sets the period of time that the start of the burst fall is delayed.

The variable <val> is expressed in bits. The minimum and maximum values depend upon modulation type and symbol rate.

***RST** +0.00000000E+000

Range –22.3750 to 99

Key Entry **Fall Delay**

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

To change the modulation type, refer to “:MODulation[:TYPE]” on page 830. Refer to “:SRATE” on page 843 for a list of minimum and maximum symbol rate values.

“:BURSt:SHAPe:FALL:DELay” on page 817 performs the same function. In compliance with the SCPI standard, both commands are listed.

For concept information on burst shaping, refer to the *E4428C/38C ESG Signal Generators User’s Guide*.

:BURSt:SHAPe:FTIME

Supported E4438C with Option 402

[:SOURCE] :RADio:PDC:BURSt:SHAPe:FTIME <val>

[:SOURCE] :RADio:PDC:BURSt:SHAPe:FTIME?

This command sets the period of time where the burst decreases from full power to minimum power.

The variable <val> is expressed in bits. The minimum and maximum values depend upon modulation type and symbol rate.

***RST** +0.00000000E+000

Range 0.1250–255.8750

Key Entry **Fall Time**

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

To change the modulation type, refer to “:MODulation[:TYPE]” on page 830. Refer to “:SRATE” on page 843 for a list of minimum and maximum symbol rate values.

“:BURSt:SHAPe:FALL:TIME” on page 818 performs the same function. In compliance with the SCPI standard, both commands are listed.

For concept information on burst shaping, refer to the *E4428C/38C ESG Signal Generators User’s Guide*.

:BURSt:SHAPe:RDELaY

Supported E4438C with Option 402

[:SOURce] :RADio:PDC:BURSt:SHAPe:RDELaY <val>

[:SOURce] :RADio:PDC:BURSt:SHAPe:RDELaY?

This command sets the period of time that the start of the burst rise is delayed.

The variable <val> is expressed in bits. The minimum and maximum values depend upon modulation type and symbol rate.

***RST** +0.00000000E+000

Range -18.3750 to 99

Key Entry **Rise Delay**

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

To change the modulation type, refer to “:MODulation[:TYPE]” on page 830.

Refer to “:SRATe” on page 843 for a list of minimum and maximum symbol rate values.

“:BURSt:SHAPe:RISE:DELaY” on page 820 performs the same function. In compliance with the SCPI standard, both commands are listed.

For concept information on burst shaping, refer to the *E4428C/38C ESG Signal Generators User’s Guide*.

:BURSt:SHAPe:RISE:DELaY

Supported E4438C with Option 402

[:SOURce] :RADio:PDC:BURSt:SHAPe:RISE:DELaY <val>

[:SOURce] :RADio:PDC:BURSt:SHAPe:RISE:DELaY?

This command sets the period of time that the start of the burst rise is delayed.

The variable <val> is expressed in bits. The minimum and maximum values depend upon modulation type and symbol rate.

***RST** +0.00000000E+000

Range -18.3750 to 99

Key Entry **Rise Delay**

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

To change the modulation type, refer to “:MODulation[:TYPE]” on page 830. Refer to “:SRATe” on page 843 for a list of minimum and maximum symbol rate values.

“:BURSt:SHAPe:RDElay” on page 820 performs the same function. In compliance with the SCPI standard, both commands are listed.

For concept information on burst shaping, refer to the *E4428C/38C ESG Signal Generators User’s Guide*.

:BURSt:SHAPe:RISE:TIME

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:PDC:BURSt:SHAPe:RISE:TIME <val>  
[ :SOURce ] :RADio:PDC:BURSt:SHAPe:RISE:TIME?
```

This command sets the period of time where the burst increases from a minimum power to full power.

The variable <val> is expressed in bits. The minimum and maximum values depend upon modulation type and symbol rate.

***RST** +1.00000000E+001

Range 0.1250–22.5000

Key Entry **Rise Time**

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

To change the modulation type, refer to “:MODulation[:TYPE]” on page 830. Refer to “:SRATe” on page 843 for a list of minimum and maximum symbol rate values.

“:BURSt:SHAPe:RTIME” on page 822 performs the same function. In compliance with the SCPI standard, both commands are listed.

For concept information on burst shaping, refer to the *E4428C/38C ESG Signal Generators User’s Guide*.

:BURSt:SHAPe:RTIME

Supported E4438C with Option 402

[:SOURCE] :RADio:PDC: BURSt: SHAPe: RTIME <val>

[:SOURCE] :RADio:PDC: BURSt: SHAPe: RTIME?

This command sets the period of time where the burst increases from a minimum power to full power.

The variable <val> is expressed in bits. The minimum and maximum values depend upon modulation type and symbol rate.

***RST** +1.00000000E+001

Range 0.1250–22.5000

Key Entry **Rise Time**

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

To change the modulation type, refer to “:MODulation[:TYPE]” on page 830.

Refer to “:SRATe” on page 843 for a list of minimum and maximum symbol rate values.

“:BURSt:SHAPe:RISE:TIME” on page 821 performs the same function. In compliance with the SCPI standard, both commands are listed.

Refer to the *E4428C/38C ESG User’s Guide* for concept information.

:BURSt:SHAPe[:TYPE]

Supported E4438C with Option 402

[:SOURCE] :RADio:PDC: BURSt: SHAPe [:TYPE] SINE | "<file name>"

[:SOURCE] :RADio:PDC: BURSt: SHAPe [:TYPE] ?

This command specifies the burst shape as either SINE or a user-defined file ("<file name>").

SINE This choice selects a state that is defined by the burst rise and fall *RST values, as the default burst shape type.

"<file name>" This choice selects a user designated file from signal generator memory.

***RST** SINE

Key Entry **Sine** **User File**

:BURSt[:STATe]

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:PDC:BURSt [ :STATe ] ON | OFF | 1 | 0  
[ :SOURce ] :RADio:PDC:BURSt [ :STATe ] ?
```

This command enables or disables the burst function.

ON (1) This choice enables the transmission of framed data. If all timeslots which are switched on are up traffic channels or custom, you will be bursting the timeslots that are on; there will be no RF carrier during the off timeslots.

If you have switched on any timeslot that you have configured as a down traffic channel, the RF carrier is not switched off between any of the timeslots. The off timeslots are transmitted as a continuous series of ones for the time period of the off timeslots.

OFF (0) This choice enables the transmission of unframed data.

***RST** 0

Key Entry **Data Format Pattern Framed**

:CHANnel

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:PDC:CHANnel EVM | ACP  
[ :SOURce ] :RADio:PDC:CHANnel ?
```

This command optimizes the Nyquist and root Nyquist filters to minimize error vector magnitude (EVM) or to minimize adjacent channel power (ACP).

EVM This choice provides the most ideal passband.

ACP This choice improves stopband rejection.

***RST** EVM

Key Entry **Optimize FIR For EVM ACP**

Remarks To change the current filter type, refer to “:FILTer” on page 827.

Receiver Test Digital Commands (continued)
PDC Subsystem—Option 402 ([:SOURCE]:RADio:PDC)

:DATA

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:PDC:DATA PN9 | PN11 | PN15 | PN20 | PN23 | FIX4 | "<file_name>" |  
EXT | P4 | P8 | P16 | P32 | P64 | PRAM  
[ :SOURCE ] :RADio:PDC:DATA?
```

This command sets the data pattern type (pseudo-random number sequence, 4-bit pattern, sequence of 1's and 0's, data from an external source, or a user file) for unframed data transmission.

***RST** PN23

Key Entry	PN9	PN11	PN15	PN20	PN23	FIX4	User File	Ext
	4 1's & 4 0's	8 1's & 8 0's	16 1's & 16 0's	32 1's & 32 0's				
	64 1's & 64 0's	PRAM File						

Remarks Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:DATA:PRAM

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:PDC:DATA:PRAM "<file_name>"  
[ :SOURCE ] :RADio:PDC:DATA:PRAM?
```

This command selects a pattern RAM (PRAM) file as the pattern data type for the PDC (Personal Digital Cellular) format.

"<file_name>" This variable designates the PRAM file in WFM1. Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

Key Entry **PRAM File**

Remarks Selecting this data source forces the burst source to INTERNAL to allow framing control.

The PRAM file must reside in the ESG's volatile memory (WFM1) in order to be accessed by this command. See [“:DATA:PRAM:FILE:BLOCK” on page 111](#).

:DATA:FIX4

Supported E4438C with Option 402

[:SOURce] :RADio:PDC:DATA:FIX4 <val>

[:SOURce] :RADio:PDC:DATA:FIX4?

This command sets the binary, 4-bit repeating sequence data pattern for unframed transmission according to the protocols (modulation type, symbol rate, filter, and burst shape) selected for the PDC format.

***RST** #B0000

Range #B0000–#B1111 or 0–15

Key Entry **FIX4**

Remarks FIX4 must already be defined as the data type.

:DEFault

Supported E4438C with Option 402

[:SOURce] :RADio:PDC:DEFault

This command returns all of the PDC modulation format parameters to factory settings. It does not affect any other signal generator parameters.

Key Entry **Restore PDC Factory Default**

:EDATa:DELay

Supported E4438C with Option 402

[:SOURce] :RADio:PDC:EDATa:DELay?

This query returns the amount of delay (in symbols) from the external data input to the beginning of the symbol on the I OUT and Q OUT rear panel connectors and the front panel RF OUTPUT connector.

Remarks When the format is turned off, the delay value is unchanged; the query will return the same delay value if the format is on or off.

:EDCLock

Supported E4438C with Option 402

[:SOURCE] :RADio:PDC:EDCLock SYMBOL | NORMal

[:SOURCE] :RADio:PDC:EDCLock?

This command sets the external data clock use.

SYMBOL This choice specifies that a continuous symbol clock signal must be provided to the SYMBOL SYNC input connector.

NORMal This choice specifies that the DATA CLOCK input connector requires a bit clock. The SYMBOL SYNC input connector requires a (one-shot or continuous) symbol sync signal.

***RST** NORM

Key Entry **Ext Data Clock Normal Symbol**

Remarks Both choices have no effect in internal clock mode. Refer to “:BBCLock” on page 814 to select EXT as the data clock type.

:EREFerence

Supported E4438C with Option 402

[:SOURCE] :RADio:PDC:EREFerence INT | EXT

[:SOURCE] :RADio:PDC:EREFerence?

This command selects either an internal or external bit-clock reference for the data generator.

***RST** INT

Key Entry **BBG Ref Ext Int**

Remarks If the EXT choice is selected, the external source’s frequency value must be applied to the BASEBAND GEN REF IN rear panel connector. The external reference and external data clock are not applicable at the same time. If both are selected, then the external reference takes precedence.

Refer to, “:EREFerence:VALue” on page 827 to enter the external reference frequency setting.

:EREFerence:VALue

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:PDC:EREFerence:VALue <val>
```

```
[ :SOURce ] :RADio:PDC:EREFerence:VALue?
```

This command sets the expected bit-clock reference frequency value for an externally applied reference signal.

The variable <val> is expressed in units of hertz (Hz–MHz).

***RST** +1.30000000E+007

Range 2.5E5–1E8

Key Entry **Ext BBG Ref Freq**

Remarks The value specified by this command is effective only when you are using an external reference applied to the BASEBAND GEN REF IN rear panel connector.

Refer to “:EREFerence” on page 826 to select EXT (external source) as the reference for the bit-clock.

:FILTer

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:PDC:FILTer RNYQuist|NYQuist|GAUSSian|RECTangle|
```

```
IS95|IS95_EQ|IS95_MOD|IS95_MOD_EQ|AC4Fm|UGGaussian|"<user FIR>"
```

```
[ :SOURce ] :RADio:PDC:FILTer?
```

This command selects the pre-modulation filter type.

IS95 This choice selects a filter that meets the criteria of the IS-95 standard.

IS95_EQ This choice selects a filter which is a combination of the IS-95 filter (above) and the equalizer filter described in the IS-95 standard. This filter is only used for IS-95 baseband filtering.

IS95_MOD This choice selects a filter that meets the criteria of the IS-95 error function (for improved adjacent channel performance) with lower passband rejection than the filter specified in the IS-95 standard.

IS95_MOD_EQ This choice selects a filter which is a combination of the equalizer filter described in the IS-95 standard and a filter that meets the criteria of the IS-95 error function (for improved adjacent channel performance), with lower passband rejection.

AC4Fm Selects a predefined Association of Public Safety Communications Officials (APCO) specified compatible 4-level frequency modulation (C4FM) filter.

PDC Subsystem—Option 402 ([:SOURce]:RADio:PDC)

UGaussian	This choice selects a backwards compatible GSM Gaussian filter (Gaussian filter with a fixed BbT value of 0.300) for the ESG E44xxB Option UN3 or UN4.					
"<user FIR>"	This variable is any filter file that you have stored into memory.					
*RST	RYNQ					
Key Entry	Root Nyquist	Nyquist	Gaussian	Rectangle	IS-95	IS-95 w/EQ
	IS-95 Mod	IS-95 Mod w/EQ	APCO 25 C4FM	UN3/4 GSM Gaussian		
	User FIR					
Remarks	Refer to “File Name Variables” on page 13 for information on the file name syntax.					

:FRATe

Supported E4438C with Option 402

```
[:SOURce]:RADio:PDC:FRATe FULL|HALF
[:SOURce]:RADio:PDC:FRATe?
```

This command toggles between a full- or half-rate traffic channel.

FULL Selects two equally spaced timeslots of the frame. Since there are six timeslots per frame, timeslots 1, 2, and 3 are paired with timeslots 4, 5, and 6, respectively.

HALF Selects one timeslot of the frame (6 individual timeslots per frame).

***RST** FULL

Key Entry **Rate Full Half**

:IQ:SCALE

Supported E4438C with Option 402

```
[:SOURce]:RADio:PDC:IQ:SCALE <val>
[:SOURce]:RADio:PDC:IQ:SCALE?
```

This command sets the amplitude of the I/Q outputs for better adjacent channel power (ACP); lower scaling values equate to better ACP.

The variable <val> is expressed in units of percent.

***RST** +100

Range 1–200

Key Entry **I/Q Scaling**

Remarks This command has no effect with MSK or FSK modulation.

:MODulation:FSK[:DEVIation]

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:PDC:MODulation:FSK[:DEVIation] <val>  
[ :SOURCE ] :RADio:PDC:MODulation:FSK[:DEVIation] ?
```

This command sets the symmetric FSK frequency deviation value.

The variable <val> is expressed in units of Hertz and the maximum range value equals the current symbol rate value multiplied by four, limited to 20 MHz.

***RST** +4.00000000E+002

Range 0–2E7

Key Entry **Freq Dev**

Remarks To change the modulation type, refer to “:MODulation[:TYPE]” on page 830.
Refer to “:SRATe” on page 843 for minimum and maximum symbol rate values.
To set an asymmetric FSK deviation value, refer to the *E4428C/38C ESG Signal Generators User’s Guide* for more information.

:MODulation:MSK[:PHASe]

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:PDC:MODulation:MSK[:PHASe] <val>  
[ :SOURCE ] :RADio:PDC:MODulation:MSK[:PHASe] ?
```

This command sets the MSK phase deviation value.

The variable <val> is expressed in units of degrees.

***RST** +9.00000000E+001

Range 0–100

Key Entry **Phase Dev**

:MODulation:UFSK

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:PDC:MODulation:UFSK "<file name>"
```

```
[ :SOURCE ] :RADio:PDC:MODulation:UFSK?
```

This command selects a user-defined FSK file from the signal generator memory.

Key Entry **User FSK**

Remarks The user-defined FSK file is held in signal generator memory until the command that selects user FSK as the modulation type is sent. Refer to [“:MODulation\[:TYPE\]” on page 830](#) to change the current modulation type.

Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:MODulation:UIQ

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:PDC:MODulation:UIQ "<file name>"
```

```
[ :SOURCE ] :RADio:PDC:MODulation:UIQ?
```

This command selects a user-defined I/Q file from the signal generator memory.

Key Entry **User I/Q**

Remarks The user-defined I/Q file is held in signal generator memory until the command that selects user I/Q as the modulation type is sent. Refer to [“:MODulation\[:TYPE\]” on page 830](#) to change the current modulation type.

Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:MODulation[:TYPE]

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:PDC:MODulation[:TYPE] BPSK|QPSK|IS95QPSK|  
GRAYQPSK|OQPSK|IS95OQPSK|P4DQPSK|PSK8|PSK16|D8PSK|MSK|  
FSK2|FSK4|FSK8|FSK16|C4FM|QAM4|QAM16|QAM32|QAM64|QAM128|QAM256|UIQ|UFSK  
[ :SOURCE ] :RADio:PDC:MODulation[:TYPE] ?
```

This command sets the modulation type for the PDC personality.

*RST	P4DQPSK							
Key Entry	BPSK	QPSK	IS-95 QPSK	Gray Coded QPSK		OQPSK		
	IS-95 OQPSK	$\pi/4$ DQPSK	8PSK	16PSK	D8PSK	MSK	2-Lvl FSK	
	4-Lvl FSK	8-Lvl FSK	16-Lvl FSK	C4FM	4QAM	16QAM	32QAM	
	64QAM	128QAM	256QAM	User I/Q	User FSK			

:POLarity[:ALL]

Supported E4438C with Option 402

[:SOURCE]:RADio:PDC:POLarity[:ALL] NORMal | INVerted
 [:SOURCE]:RADio:PDC:POLarity[:ALL] ?

This command sets the rotation direction for of the phase modulation vector.

NORMal This choice selects normal phase polarity.

INVerted This choice inverts the internal Q signal.

***RST** NORM

Key Entry **Phase Polarity Normal Invert**

:SECondary:RECall

Supported E4438C with Option 402

[:SOURCE]:RADio:PDC:SECondary:RECall

This command recalls the secondary frame configuration, overwriting the current state.

Key Entry **Recall Secondary Frame State**

Remarks To save a secondary frame state, refer to “:SECondary:SAVE” on page 832.

A secondary frame is not active until the secondary state is enabled. To activate a secondary frame, refer to “:SECondary[:STATE]” on page 833.

PDC Subsystem—Option 402 ([:SOURCE]:RADio:PDC)

:SECondary:SAVE

Supported E4438C with Option 402

[:SOURCE] :RADio:PDC:SECondary:SAVE

This command saves the current frame configuration as the secondary frame with the filename PDC_SECONDARY_FRAME.

Key Entry **Save Secondary Frame State**

Remarks To recall the secondary frame (saved in non-volatile signal generator memory), refer to “:SECondary:SAVE” on page 832.

:SECondary:TRIGger[:SOURCE]

Supported E4438C with Option 402

[:SOURCE] :RADio:PDC:SECondary:TRIGger [:SOURCE] KEY | EXT | BUS
[:SOURCE] :RADio:PDC:SECondary:TRIGger [:SOURCE] ?

This command selects the type of triggering for the secondary frame.

KEY This choice enables triggering by pressing the front panel **Trigger** hardkey.

EXT This choice enables triggering using an externally applied signal at the PATT TRIG IN rear panel connector or the PATT TRIG IN 2 pin on the rear panel AUX I/O connector. To select the appropriate connector, refer to “:TRIGger[:SOURCE]:EXTernal[:SOURCE]” on page 848.

BUS This choice enables GPIB triggering using the *TRG or GET command or LAN and RS-232 triggering using the *TRG command.

Key Entry **Trigger Key Ext Bus**

:SECondary[:STATe]

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:PDC:SECondary [ :STATe ] ON | OFF | 1 | 0
[ :SOURce ] :RADio:PDC:SECondary [ :STATe ] ?
```

This command enables or disables the ability to switch to the secondary frame.

***RST** 0

Key Entry **Secondary Frame Off On**

Remarks A frame must already be saved as the secondary frame in order to turn the secondary state function on.

To save a frame as the secondary frame, refer to “:SECondary[:STATe]” on [page 833](#).

:SLOT0|[1]|2|3|4|5:DCUStom

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:PDC:SLOT0 | [1] | 2 | 3 | 4 | 5 :DCUStom PN9 | PN11 | PN15 |
PN20 | PN23 | FIX4 | "<file name>" | EXT | P4 | P8 | P16 | P32 | P64
[ :SOURce ] :RADio:PDC:SLOT0 | [1] | 2 | 3 | 4 | 5 :DCUStom?
```

This command configures the data field for the selected downlink custom timeslot.

***RST** PN9

Key Entry	PN9	PN11	PN15	PN20	PN23	FIX4	User File	EXT
	4 1's & 4 0's	8 1's & 8 0's	16 1's & 16 0's	32 1's & 32 0's	64 1's & 64 0's			

Remarks Refer to “File Name Variables” on [page 13](#) for information on the file name syntax.

:SLOT0|[1]|2|3|4|5:DCUStom:FIX4

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:PDC:SLOT0 | [1] | 2 | 3 | 4 | 5 :DCUStom:FIX4 <val>  
[ :SOURCE ] :RADio:PDC:SLOT0 | [1] | 2 | 3 | 4 | 5 :DCUStom:FIX4?
```

This command sets the binary, 4-bit repeating sequence data pattern that is used in the selected downlink custom timeslot.

***RST** #B0000

Range #B0000–#B1111 or 0–15

Key Entry **FIX4**

Remarks FIX4 must already be defined as the data type. To change the data type, refer to “:SLOT0|[1]|2|3|4|5:DCUStom” on page 833.

:SLOT0|[1]|2|3|4|5:DTCHannel:CCODE

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:PDC:SLOT0 | [1] | 2 | 3 | 4 | 5 :DTCHannel:CCODE <bit_pattern>  
[ :SOURCE ] :RADio:PDC:SLOT0 | [1] | 2 | 3 | 4 | 5 :DTCHannel:CCODE?
```

This command changes the 8-bit color code (CC). The preset hexadecimal value (when normal preset is selected) for CC reflects the PDC protocol, however you can enter a new value using this command.

***RST** #H00

Range #H00–#HFF

Key Entry **CC**

:SLOT0|[1]|2|3|4|5:DTCHannel:SACChannel

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:PDC:SLOT0 | [1] | 2 | 3 | 4 | 5 :DTCHannel:SACChannel <bit_pattern>  
[ :SOURCE ] :RADio:PDC:SLOT0 | [1] | 2 | 3 | 4 | 5 :DTCHannel:SACChannel?
```

This command changes the 15-bit slow associated control channel (SACCH). The preset hexadecimal value (when normal preset is selected) for SACCH reflects the PDC protocol, however you can enter a new value by executing this command.

***RST** #H00000

Range #H0–#HFFFFFF

Key Entry **SACCH**

:SLOT0|[1]|2|3|4|5:DTCHannel:SWORd

Supported E4438C with Option 402

```
[:SOURCE]:RADIO:PDC:SLOT0|[1]|2|3|4|5:DTCHannel:SWORd <bit_pattern>
[:SOURCE]:RADIO:PDC:SLOT0|[1]|2|3|4|5:DTCHannel:SWORd?
```

This command sets the 20-bit synchronization word as the active function. This is used for the control and traffic physical channels.

***RST** #H87A4B

Range #H0–#HFFFFFF

Key Entry **SW**

:SLOT0|[1]|2|3|4|5:DTCHannel[:TCHannel]

Supported E4438C with Option 402

```
[:SOURCE]:RADIO:PDC:SLOT0|[1]|2|3|4|5:DTCHannel[:TCHannel] PN9|
PN11|PN15|PN20|PN23|FIX4|"<file name>"|EXT|P4|P8|P16|P32|P64
[:SOURCE]:RADIO:PDC:SLOT0|[1]|2|3|4|5:DTCHannel[:TCHannel]?
```

This command configures the data field for the selected downlink traffic channel field.

***RST** PN9

Key Entry	PN9	PN11	PN15	PN20	PN23	FIX4	User File	EXT
	4 1's & 4 0's		8 1's & 8 0's		16 1's & 16 0's		32 1's & 32 0's	
	64 1's & 64 0's							

Remarks See “File Name Variables” on page 13 for information on the file name syntax.

PDC Subsystem—Option 402 ([:SOURCE]:RADIO:PDC)**:SLOT0|[1]|2|3|4|5:DTCHannel[:TCHannel]:FIX4****Supported** E4438C with Option 402

```
[:SOURCE]:RADIO:PDC:SLOT0|[1]|2|3|4|5:DTCHannel[:TCHannel]:FIX4 <val>
[:SOURCE]:RADIO:PDC:SLOT0|[1]|2|3|4|5:DTCHannel[:TCHannel]:FIX4?
```

This command sets the binary, 4-bit repeating sequence data pattern that is used in the selected downlink traffic channel timeslot.

RST** #B0000**Range** #B0000–#B1111 or 0–15**Key Entry** **FIX4*Remarks** FIX4 must already be defined as the data type.**:SLOT0|[1]|2|3|4:POWER****Supported** E4438C with Option 402

```
[:SOURCE]:RADIO:PDC:DLINK:SLOT0|[1]|2|3|4:POWER MAIN|DELTA
[:SOURCE]:RADIO:PDC:DLINK:SLOT0|[1]|2|3|4:POWER?
```

This command toggles the RF output power level function for the selected timeslot.

MAIN This choice specifies RF output as the main power level.**DELTA** This choice specifies RF output as the alternative power level.***RST** MAIN**Key Entry** **Timeslot Ampl Main Delta****:SLOT0|[1]|2|3|4|5:STATE****Supported** E4438C with Option 402

```
[:SOURCE]:RADIO:PDC:SLOT0|[1]|2|3|4|5:STATE ON|OFF|1|0
[:SOURCE]:RADIO:PDC:SLOT0|[1]|2|3|4|5:STATE?
```

This command enables or disables the operating state of the selected timeslot.

***RST** Timeslot 0: 1 Timeslots 1–5: 0**Key Entry** **Timeslot Off On**

:SLOT0|[1]|2|3|4|5:UCUStom

Supported E4438C with Option 402

```
[:SOURCE]:RADIO:PDC:SLOT0|[1]|2|3|4|5:UCUStom PN9|PN11|PN15|
PN20|PN23|FIX4|"<file name>"|EXT|P4|P8|P16|P32|P64
[:SOURCE]:RADIO:PDC:SLOT0|[1]|2|3|4|5:UCUStom?
```

This command configures the data field for the selected uplink custom timeslot.

***RST** PN9

Key Entry	PN9	PN11	PN15	PN20	PN23	FIX4	User File	EXT
	4 1's & 4 0's	8 1's & 8 0's	16 1's & 16 0's	32 1's & 32 0's	64 1's & 64 0's			

Remarks Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:SLOT0|[1]|2|3|4|5:UCUStom:FIX4

Supported E4438C with Option 402

```
[:SOURCE]:RADIO:PDC:SLOT0|[1]|2|3|4|5:UCUStom:FIX4 <val>
[:SOURCE]:RADIO:PDC:SLOT0|[1]|2|3|4|5:UCUStom:FIX4?
```

This command sets the binary, 4-bit repeating sequence data pattern that is used in the selected uplink custom timeslot.

***RST** #B0000

Range #B0000–#B1111 or 0–15

Key Entry **FIX4**

Remarks FIX4 must already be defined as the data type.

PDC Subsystem—Option 402 ([:SOURCE]:RADio:PDC)**:SLOT0|[1]|2|3|4|5:UTCHannel:CCODE****Supported** E4438C with Option 402

```
[:SOURCE]:RADio:PDC:SLOT0|[1]|2|3|4|5:UTCHannel:CCODE <bit_pattern>
[:SOURCE]:RADio:PDC:SLOT0|[1]|2|3|4|5:UTCHannel:CCODE?
```

This command changes the 8-bit color code (CC). The preset hexadecimal value (when normal preset is selected) for CC reflects the PDC protocol, however you can enter a new value using this command.

RST** #H00**Range** #H00–#HFF**Key Entry** **CC*:SLOT0|[1]|2|3|4|5:UTCHannel:SACChannel****Supported** E4438C with Option 402

```
[:SOURCE]:RADio:PDC:SLOT0|[1]|2|3|4|5:UTCHannel:SACChannel <bit_pattern>
[:SOURCE]:RADio:PDC:SLOT0|[1]|2|3|4|5:UTCHannel:SACChannel?
```

This command changes the 15-bit slow associated control channel (SACCH). The preset hexadecimal value (when normal preset is selected) for SACCH reflects the PDC protocol, however you can enter a new value by executing this command.

RST** #H0000**Range** #H0–#H7FFF**Key Entry** **SACCH*:SLOT0|[1]|2|3|4|5:UTCHannel:SWORd****Supported** E4438C with Option 402

```
[:SOURCE]:RADio:PDC:SLOT0|[1]|2|3|4|5:UTCHannel:SWORd <bit_pattern>
[:SOURCE]:RADio:PDC:SLOT0|[1]|2|3|4|5:UTCHannel:SWORd?
```

This command sets the 20-bit synchronization word as the active function. This is used for the control and traffic physical channels.

***RST** #H785B4**Range** #H0–#HFFFFFF**Key Entry** **SW**

:SLOT0|[1]|2|3|4|5:UTCHannel[:TCHannel]

Supported E4438C with Option 402

```
[:SOURce]:RADio:PDC:SLOT0|[1]|2|3|4|5:UTCHannel[:TCHannel] PN9|
PN11|PN15|PN20|PN23|FIX4|"<file name>"|EXT|P4|P8|P16|P32|P64
[:SOURce]:RADio:PDC:SLOT0|[1]|2|3|4|5:UTCHannel[:TCHannel]?
```

This command sets a pseudo-random number sequence, 4-bit pattern, sequence of 1's and 0's, data from an external source, or a user file as the data pattern type for the uplink traffic channel field.

***RST** PN9

Key Entry	PN9	PN11	PN15	PN20	PN23	FIX4	User File	EXT
	4 1's & 4 0's	8 1's & 8 0's	16 1's & 16 0's	32 1's & 32 0's	64 1's & 64 0's			

Remarks Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:SLOT0|[1]|2|3|4|5:UTCHannel[:TCHannel]:FIX4

Supported E4438C with Option 402

```
[:SOURce]:RADio:PDC:SLOT0|[1]|2|3|4|5:UTCHannel[:TCHannel]:FIX4 <val>
[:SOURce]:RADio:PDC:SLOT0|[1]|2|3|4|5:UTCHannel[:TCHannel]:FIX4?
```

This command sets the binary, 4-bit repeating sequence data pattern that is used in the selected uplink traffic channel timeslot.

***RST** #B0000

Range #B0000–#B1111 or 0–15

Key Entry **FIX4**

Remarks FIX4 must already be defined as the data type.

:SLOT0|[1]|2|3|4|5:UVOX:CCODE

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:PDC:SLOT0 | [1] | 2 | 3 | 4 | 5 :UVOX:CCODE <bit_pattern>  
[ :SOURCE ] :RADio:PDC:SLOT0 | [1] | 2 | 3 | 4 | 5 :UVOX:CCODE?
```

This command changes the 8-bit color code (CC). The preset hexadecimal value (when normal preset is selected) for CC reflects the PDC protocol, however you can enter a new value using this command.

***RST** #H00

Range #H00–#HFF

Key Entry **CC**

:SLOT0|[1]|2|3|4|5:UVOX:SACChannel

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:PDC:SLOT0 | [1] | 2 | 3 | 4 | 5 :UVOX:SACChannel <bit_pattern>  
[ :SOURCE ] :RADio:PDC:SLOT0 | [1] | 2 | 3 | 4 | 5 :UVOX:SACChannel?
```

This command changes the 15-bit slow associated control channel (SACCH). The preset hexadecimal value (when normal preset is selected) for SACCH reflects the PDC protocol, however you can enter a new value by executing this command.

***RST** #H0000

Range #H0–#H7FFF

Key Entry **SACCH**

:SLOT0|[1]|2|3|4|5:UVOX:SWORD

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:PDC:SLOT0 | [1] | 2 | 3 | 4 | 5 :UVOX:SWORD <bit_pattern>  
[ :SOURCE ] :RADio:PDC:SLOT0 | [1] | 2 | 3 | 4 | 5 :UVOX:SWORD?
```

This command changes the synchronization word, which is used for slot synchronization, equalizer training, and timeslot identification.

***RST** UTCH & UVOX: 785B4 DTCH: 87A4B

Range #H0–#HFFFFFF

Key Entry **SW**

Remarks The *RST hexadecimal value reflects the value specified by the indicated standard.

:SLOT0|[1]|2|3|4|5[:TYPE]

Supported E4438C with Option 402

```
[:SOURCE]:RADIO:PDC:SLOT0|[1]|2|3|4|5[:TYPE] UCUSTOM|DCUSTOM|
UTCH|UTCH_ALL|UVOX|DTCH|DTCH_ALL
[:SOURCE]:RADIO:PDC:SLOT0|[1]|2|3|4|5[:TYPE]?
```

This command sets the timeslot type for the selected timeslot.

***RST** **UTCH**

Key Entry	Up Custom	Down Custom	Up TCH	UP TCH All	Up VOX
	Down TCH	Down TCH All			

:SOUT

Supported E4438C with Option 402

```
[:SOURCE]:RADIO:PDC:SOUT FRAME|SLOT|ALL
[:SOURCE]:RADIO:PDC:SOUT?
```

This command sets the synchronization location (within the pattern of data) and the type of output at the EVENT 1 rear panel connector.

FRAME This choice outputs a 1-bit signal, synchronized to the bit selected by the synchronization output offset command, for a framed data pattern.

SLOT This choice outputs a 1-bit signal, synchronized to the bit selected by the synchronization output offset command, for a selected timeslot.

ALL This choice outputs a 1-bit signal, synchronized to the bit selected by the synchronization output offset command, for all active timeslots.

***RST** **FRAME**

Key Entry	Begin Frame	Begin Timeslot #	All Timeslots
------------------	--------------------	-------------------------	----------------------

:SOUT:OFFSet

Supported E4438C with Option 402

[:SOURce] :RADio:PDC:SOUT:OFFSet <val>

[:SOURce] :RADio:PDC:SOUT:OFFSet?

This command sets the offset value for the location of the output synchronization signal on the EVENT1 rear panel connector relative to the beginning of the framed data pattern or timeslot.

The variable <val> is expressed as a number bits.

***RST** +0

Range -279 to 279

Key Entry **Sync Out Offset**

Remarks Negative values move the synchronization output signal earlier; positive values move it later.

To change the output of the EVENT1 rear panel connector to SLOT, refer to [“:SOUT” on page 841](#).

:SOUT:SLOT

Supported E4438C with Option 402

[:SOURce] :RADio:PDC:SOUT:SLOT <val>

[:SOURce] :RADio:PDC:SOUT:SLOT?

This command selects the timeslot that will trigger a 1-bit signal at the EVENT 1 rear panel connector.

***RST** +0

Range 0–5

Key Entry **Begin Timeslot #**

Remarks To change the output of the EVENT1 rear panel connector to SLOT, refer to [“:SOUT” on page 841](#).

:SRATe

Supported E4438C with Option 402

[:SOURCE] :RADio:PDC:SRATe <val>

[:SOURCE] :RADio:PDC:SRATe?

This command sets the transmission symbol rate.

The variable <val> is expressed in units of bits per second (bps–Mbps) and the maximum range value is dependent upon the source of data (internal or external), the modulation type, and filter.

***RST** +2.1000000E+004

Range

Modulation Type	Bits per Symbol	Internal Data	External Serial Data
BPSK	1	1–50 Msps	1–50 Msps
FSK2			
MSK			
C4FM	2	1–50 Msps	1–25 Msps
FSK4			
OQPSK			
OQPSK195			
P4QPPSK			
QAM4			
QPSK			
QPSKIS95			
QPSKISAT			
D8PSK			
EDGE			
FSK8			
PSK8			
FSK16	4	1–25 Msps	1–12.5 Msps
PSK16			
QAM16			
QAM32	5	1–20 Msps	1–10 Msps
QAM64	6	1–16.67 Msps	1–8.33 Msps
QAM256	7	1–12.50 Msps	1–6.25 Msps

Key Entry

Symbol Rate

Remarks When user-defined filters are selected using the command in section “:FILTer” on page 827, the upper bit rate will be restricted in line with the following symbol rate restriction:

- FIR filter length > 32 symbols: upper limit is 12.5 Msps
- FIR filter length > 16 symbols: upper limit is 25 Msps

When internal FIR filters are used, the limits of the above table always apply. For higher symbol rates, the FIR filter length will be truncated as follows:

- Above 12.5 Msps, the FIR length will be truncated to 32 symbols
- Above 25 Msps, the FIR length will be truncated to 16 symbols

This will impact the relative timing of the modulated data, as well as the actual filter response (see “:BRATe” on page 815).

A change in the symbol rate value will affect the value of the bit rate; refer to “:BRATe” on page 815 for a list of minimum and maximum symbol rate values.

To change the modulation type, refer to “:MODulation[:TYPE]” on page 830.

:TRIGger:TYPE

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:PDC:TRIGger:TYPE CONTInuous | SINGle | GATE
[ :SOURce ] :RADio:PDC:TRIGger:TYPE?
```

This command sets the trigger type.

CONTInuous The framed data sequence repeats continuously; the sequence restarts every time the previous playback is completed. To customize continuous triggering, refer to “:TRIGger:TYPE:CONTInuous[:TYPE]” on page 845.

SINGle The framed data sequence plays once for every trigger received.

GATE An external trigger signal interrupts the playback while the gating signal is in the inactive state. Playback resumes when the external control signal returns to the active state. The active state can be set to high or low.

***RST** CONT

Key Entry **Continuous** **Single** **Gated**

:TRIGger:TYPE:CONTInuous[:TYPE]

Supported E4438C with Option 402

```
[ :SOURCE ] :RADIo:PDC:TRIGger:TYPE:CONTInuous [ :TYPE ] FREE | TRIGger | RESet
[ :SOURCE ] :RADIo:PDC:TRIGger:TYPE:CONTInuous [ :TYPE ] ?
```

This commands selects the waveform’s response to a trigger signal while using the continuous trigger mode.

For more information on triggering and to select the continuous trigger mode, see “:TRIGger:TYPE” on page 844.

The following list describes the waveform’s response to each of the command choices:

FREE	Turning the ARB format on immediately triggers the waveform. The waveform repeats until you turn the format off, select another trigger, or choose another waveform file.			
TRIGger	The waveform waits for a trigger before play begins. When the waveform receives the trigger, it plays continuously until you turn the format off, select another trigger, or choose another waveform file.			
RESet	The waveform waits for a trigger before play begins. When the waveform receives the trigger, it plays continuously. Subsequent triggers reset the waveform to the beginning. For a waveform sequence, this means to the beginning of the first segment in the sequence.			
*RST	FREE			
Key Entry	<table border="0" style="width: 100%;"> <tr> <td style="width: 33%;">Free Run</td> <td style="width: 33%;">Trigger & Run</td> <td style="width: 33%;">Reset & Run</td> </tr> </table>	Free Run	Trigger & Run	Reset & Run
Free Run	Trigger & Run	Reset & Run		

:TRIGger:TYPE:GATE:ACTive

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:PDC:TRIGger:TYPE:GATE:ACTive LOW|HIGH  
[ :SOURCE ] :RADio:PDC:TRIGger:TYPE:GATE:ACTive?
```

This command selects the active state (gate polarity) of the gate while using the gating trigger mode.

The LOW and HIGH selections correspond to the low and high states of an external trigger signal. For example, when you select HIGH, the active state occurs during the high of the trigger signal. When the active state occurs, the ESG stops the waveform playback at the last played sample point, then restarts the playback at the next sample point when the inactive state occurs. For more information on triggering and to select gating as the trigger mode, see “:TRIGger:TYPE” on page 844.

The following list describes the ESG’s gating behavior for the polarity selections:

LOW The waveform playback stops when the trigger signal goes low (active state) and restarts when the trigger signal goes high (inactive state).

HIGH The waveform playback stops when the trigger signal goes high (active state) and restarts when the trigger signal goes low (inactive state).

*RST HIGH

Key Entry Gate Active Low High

:TRIGger[:SOURCE]

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:PDC:TRIGger [ :SOURCE ] KEY|EXT|BUS  
[ :SOURCE ] :RADio:PDC:TRIGger [ :SOURCE ] ?
```

This command sets the trigger source.

For more information on triggering, see “:TRIGger:TYPE” on page 844. The following list describes the command choices:

KEY This choice enables manual triggering by pressing the front-panel **Trigger** hardkey.

EXT An externally applied signal triggers the waveform. This is the only choice that works with gating. The following conditions affect an external trigger:

- The input connector selected for the trigger signal. You have a choice between the rear-panel PATTERN TRIG IN connector or the PATT TRIG IN 2 pin on the rear-panel AUXILIARY I/O connector. To make the connector selection, see “:TRIGger[:SOURCE]:EXTernal[:SOURCE]” on page 848.

For more information on the connectors and on connecting the cables, see the

ESG User's Guide.

- The trigger signal polarity:
 - gating mode, see “:TRIGger:TYPE:GATE:ACTive” on page 846
 - continuous and single modes, see “:TRIGger[:SOURce]:EXTernal:SLOPe” on page 848
- The time delay between when the ESG receives a trigger and when the waveform responds to the trigger. There are two parts to setting the delay:
 - setting the amount of delay, see “:TRIGger[:SOURce]:EXTernal:DELay” on page 847
 - turning the delay on, see “:TRIGger[:SOURce]:EXTernal:DELay:STATe” on page 848

BUS This choice enables triggering over the GPIB or LAN using the *TRG or GET commands or the AUXILIARY INTERFACE (RS-232) using the *TRG command.

***RST** KEY

Key Entry	Trigger Key	Ext	Bus
------------------	--------------------	------------	------------

:TRIGger[:SOURce]:EXTernal:DELay

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:PDC:TRIGger [ :SOURce ] :EXTernal:DELay <val>
[ :SOURce ] :RADio:PDC:TRIGger [ :SOURce ] :EXTernal:DELay?
```

This command sets the number of bits to delay the ESG’s response to an external trigger.

The bit delay is a delay between when the ESG receives the trigger and when it responds to the trigger. The delay uses the clocks of the bit-clock to time the delay. After the ESG receives the trigger and the set number of delay bits (clocks) occurs, the ESG transmits the data pattern.

The delay occurs after you enable the state. See “:TRIGger[:SOURce]:EXTernal:DELay:STATe” on page 848. You can set the number of bits either before or after enabling the state.

For more information on configuring an external trigger source and to select external as the trigger source, see “:TRIGger[:SOURce]” on page 846.

***RST** +0

Range 0–1048575

Key Entry **Ext Delay Bits**

:TRIGger[:SOURce]:EXTErnal:DELay:STATe

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:PDC:TRIGger [ :SOURce ] :EXTErnal:DELay:STATe ON|OFF|1|0  
[ :SOURce ] :RADio:PDC:TRIGger [ :SOURce ] :EXTErnal:DELay:STATe?
```

This command enables or disables the operating state of the external trigger delay function.

For setting the delay time, see “:TRIGger[:SOURce]:EXTErnal:DELay” on page 847, and for more information on configuring an external source, see “:TRIGger[:SOURce]” on page 846.

***RST** 0

Key Entry Ext Delay Off On

:TRIGger[:SOURce]:EXTErnal:SLOPe

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:PDC:TRIGger [ :SOURce ] :EXTErnal:SLOPe POSitive|NEGative  
[ :SOURce ] :RADio:PDC:TRIGger [ :SOURce ] :EXTErnal:SLOPe?
```

This command sets the polarity for an external trigger signal while using the continuous, single triggering mode. To set the polarity for gating, see “:TRIGger:TYPE:GATE:ACTive” on page 846.

The POSitive and NEGative selections correspond to the high (positive) and low (negative) states of the external trigger signal. For example, when you select POSitive, the waveform responds (plays) during the high state of the trigger signal. When the PSG receives multiple trigger occurrences when only one is required, the signal generator uses the first trigger and ignores the rest.

For more information on configuring an external trigger source and to select external as the trigger source, see “:TRIGger[:SOURce]” on page 846.

***RST** NEG

Key Entry Ext Polarity Neg Pos

:TRIGger[:SOURce]:EXTErnal[:SOURce]

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:PDC:TRIGger [ :SOURce ] :EXTErnal [ :SOURce ] EPT1|EPT2|  
EPTRIGGER1|EPTRIGGER2  
[ :SOURce ] :RADio:PDC:TRIGger [ :SOURce ] :EXTErnal [ :SOURce ] ?
```

This command selects which PATTERN TRIG IN connection the ESG uses to accept an externally applied trigger signal when external is the trigger source selection.

For more information on configuring an external trigger source and to select external as the trigger source, see “:TRIGger[:SOURCE]” on page 846. For more information on the rear-panel connectors, see the *E4428C/38C ESG Signal Generators User’s Guide*.

The following list describes the command choices:

EPT1	This choice is synonymous with EPTRIGGER1 and selects the PATTERN TRIG IN rear-panel connector.
EPT2	This choice is synonymous with EPTRIGGER2 and selects the PATT TRIG IN 2 pin on the rear-panel AUXILIARY I/O connector.
EPTRIGGER1	This choice is synonymous with EPT1 and selects the PATTERN TRIG IN rear-panel connector.
EPTRIGGER2	This choice is synonymous with EPT2 and selects the PATT TRIG IN 2 pin on the rear-panel AUXILIARY I/O connector.
*RST	EPT1
Key Entry	Patt Trig In 1 Patt Trig In 2

[:STATe]

Supported E4438C with Option 402

`[:SOURCE] :RADio:PDC [:STATe] ON | OFF | 1 | 0 [:SOURCE] :RADio:PDC [:STATe] ?`

This command enables or disables the PDC modulation format.

***RST** OFF

Key Entry **PDC Off On**

Remarks Although the PDC modulation is enabled with this command, the RF carrier is not modulated unless you also activate the front panel **Mod On/Off** hardkey.

PHS Subsystem–Option 402 ([:SOURce]:RADio:PHS)

:ALPha

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:PHS:ALPha <val>  
[ :SOURce ] :RADio:PHS:ALPha?
```

This command changes the Nyquist or root Nyquist filter’s alpha value.

The filter alpha value can be set to the minimum level (0), the maximum level (1), or in between by using fractional numeric values (0.001–0.999).

***RST** +5.00000000E–001

Range 0.000–1.000

Key Entry **Filter Alpha**

Remarks To change the current filter type, refer to “:FILTer” on page 869.

:BBCLock

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:PHS:BBCLock INT [1] | EXT [1]  
[ :SOURce ] :RADio:PHS:BBCLock?
```

This command toggles the data (bit) clock input to the baseband generator board to either internal or external. This command is independent in each mode and works for both non-burst (continuous) and burst modes. This allows for a matrix of selections between burst/non-burst, internal/external data generation, internal/external data clock, and external bit/symbol data clock.

INT[1] This choice selects the signal generator internal data clock.

EXT[1] This choice selects an external data clock input.

***RST** INT

Key Entry **BBG Data Clock Ext Int**

Remarks A data clock or continuous symbol sync input must be supplied when external mode is used.

:BBT

Supported E4438C with Option 402

[:SOURce] :RADio:PHS:BBT <val>

[:SOURce] :RADio:PHS:BBT?

This command changes the bandwidth-multiplied-by-bit-time (BbT) filter parameter.

The filter BbT value can be set to the maximum level (1) or in between the minimum level (0.100) and maximum level by using fractional numeric values (0.101–0.999).

***RST** +5.00000000E–001

Range 0.100–1.000

Key Entry **Filter BbT**

Remarks This command is effective only after choosing a Gaussian filter. It does not have an effect on other types of filters.

To change the current filter type, refer to “:FILTer” on page 869.

:BRATe

Supported E4438C with Option 402

[:SOURce] :RADio:PHS:BRATe <val>

[:SOURce] :RADio:PHS:BRATe?

This command sets the bit rate.

The variable <val> is expressed in units of bits per second (bps–Mbps) and the maximum range value is dependent upon the source of data (internal or external), the modulation type, and filter.

***RST** +3.84000000E+005

Range	Modulation Type	Bits per Symbol	Internal Data	External Serial Data
	BPSK	1	1–50 Mbps	1–50 Mbps
	FSK2			
	MSK			
	C4FM	2	2–100 Mbps	2–50 Mbps
	FSK4			
	OQPSK			
	OQPSK195			
	P4QPPSK			
	QAM4			

Receiver Test Digital Commands (continued)
PHS Subsystem—Option 402 ([:SOURCE]:RADio:PHS)

Range

Modulation Type	Bits per Symbol	Internal Data	External Serial Data
QPSK	2	2–100 Mbps	2–50 Mbps
QPSKIS95			
QPSKISAT			
D8PSK	3	3–100 Mbps	3–50 Mbps
EDGE			
FSK8			
PSK8			
FSK16	4	4–100 Mbps	4–50 Mbps
PSK16			
QAM16			
QAM32	5	5–100 Mbps	5–50 Mbps
QAM64	6	6–100 Mbps	6–50 Mbps
QAM256	7	8–100 Mbps	8–50 Mbps

Key Entry

Symbol Rate

Remarks

When user-defined filters are selected using the command in section “:FILTer” on page 869, the upper bit rate will be restricted in line with the following symbol rate restriction:

- FIR filter length > 32 symbols: upper limit is 12.5 Msps
- FIR filter length > 16 symbols: upper limit is 25 Msps

When internal FIR filters are used, the limits of the above table always apply. For higher symbol rates, the FIR filter length will be truncated and will impact the relative timing of the modulated data, as well as the actual filter response (see “:SRATe” on page 877).

A change in the bit rate value will affect the symbol rate value; refer to “:SRATe” on page 877 for a list of the minimum and maximum symbol rate values.

To change the modulation type, refer to “:MODulation[:TYPE]” on page 873.

:BURSt:PN9

Supported

E4438C with Option 402

```
[:SOURCE]:RADio:PHS:BURSt:PN9 NORMAl|QUICK
[:SOURCE]:RADio:PHS:BURSt:PN9?
```

This command controls the software PN9 generation.

NORMAl This choice produces a maximum length PN9 sequence.

QUICK This choice produces a truncated PN9 sequence.

*RST	NORM
Key Entry	PN9 Mode Normal Quick
Remarks	Use Normal mode for bit-error-rate tests where a maximum length PN9 sequence is required.

:BURSt:SCRamble:SEED

Supported E4438C with Option 402

```
[:SOURce]:RADio:PHS:BURSt:SCRamble:SEED <16-bit val>  
[:SOURce]:RADio:PHS:BURSt:SCRamble:SEED?
```

This command select a 16-bit scramble seed value for scrambling.

*RST	#H3FF
Range	#H0–#H3FF
Key Entry	Scramble Seed
Remarks	Although values may be set using this command, it does not active that scramble function. To enable the scrambling function, refer to “:BURSt:SCRamble[:STATe]” on page 853 .

:BURSt:SCRamble[:STATe]

Supported E4438C with Option 402

```
[:SOURce]:RADio:PHS:BURSt:SCRamble[:STATe] ON|OFF|1|0  
[:SOURce]:RADio:PHS:BURSt:SCRamble[:STATe]?
```

This command enables or disables the operating state of the scramble function.

ON (1)	This choice scrambles data on the related fields, using the seed setting.
OFF (0)	This choice disables the scramble function.

*RST	0
Key Entry	Scramble Off On
Remarks	To set the seed setting, refer to “:BURSt:SCRamble:SEED” on page 853 .

:BURSt:SHAPe:FALL:DELay

Supported E4438C with Option 402

[:SOURCE] :RADio:PHS: BURSt:SHAPe:FALL:DELay <val>

[:SOURCE] :RADio:PHS: BURSt:SHAPe:FALL:DELay?

This command sets the burst shape fall delay.

The variable <val> is expressed in bits.

***RST** +0.00000000E+000

Range -22.1250 to 99

Key Entry **Fall Delay**

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

To change the modulation type, refer to “:MODulation[:TYPE]” on page 873. Refer to “:SRATE” on page 877 for a list of the minimum and maximum symbol rate values.

“:BURSt:SHAPe:FDELay” on page 855 performs the same function; in compliance with the SCPI standard, both commands are listed.

For concept information on burst shaping, refer to the *E4428C/38C ESG Signal Generators User’s Guide*.

:BURSt:SHAPe:FALL:TIME

Supported E4438C with Option 402

[:SOURCE] :RADio:PHS: BURSt:SHAPe:FALL:TIME <val>

[:SOURCE] :RADio:PHS: BURSt:SHAPe:FALL:TIME?

This command sets the burst shape fall time.

The variable <val> is expressed in bits.

***RST** +4.00000000E+001

Range 0.1250–255.8750

Key Entry **Fall Time**

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

To change the modulation type, refer to “:MODulation[:TYPE]” on page 873.

Refer to “:SRATE” on page 877 for a list of the minimum and maximum symbol rate values.

“:BURSt:SHAPe:FTIME” on page 856 performs the same function; in compliance with the SCPI standard, both commands are listed.

For concept information on burst shaping, refer to the *E4428C/38C ESG Signal Generators User’s Guide*.

:BURSt:SHAPe:FDElay

Supported E4438C with Option 402

[:SOURce] :RADio:PHS:BURSt:SHAPe:FDElay <val>

[:SOURce] :RADio:PHS:BURSt:SHAPe:FDElay?

This command sets the burst shape fall delay.

The variable <val> is expressed in bits.

***RST** +0.00000000E+000

Range –22.1250 to 99

Key Entry **Fall Delay**

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

To change the modulation type, refer to “:MODulation[:TYPE]” on page 873. Refer to “:SRATE” on page 877 for a list of the minimum and maximum symbol rate values.

“:BURSt:SHAPe:FALL:DElay” on page 854 performs the same function; in compliance with the SCPI standard, both commands are listed.

For concept information on burst shaping, refer to the *E4428C/38C ESG Signal Generators User’s Guide*.

:BURSt:SHAPe:FTIME

Supported E4438C with Option 402

[:SOURCE] :RADIo:PHS:BURSt:SHAPe:FTIME <val>

[:SOURCE] :RADIo:PHS:BURSt:SHAPe:FTIME?

This command sets the burst shape fall time.

The variable <val> is expressed in bits.

***RST** +4.00000000E+001

Range 0.1250–255.8750

Key Entry **Fall Time**

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

To change the modulation type, refer to “:MODulation[:TYPE]” on page 873. Refer to “:SRATe” on page 877 for a list of the minimum and maximum symbol rate values.

“:BURSt:SHAPe:FALL:TIME” on page 854 performs the same function; in compliance with the SCPI standard, both commands are listed.

For concept information on burst shaping, refer to the *E4428C/38C ESG Signal Generators User’s Guide*.

:BURSt:SHAPe:RDELay

Supported E4438C with Option 402

[:SOURCE] :RADIo:PHS:BURSt:SHAPe:RDELay <val>

[:SOURCE] :RADIo:PHS:BURSt:SHAPe:RDELay?

This command sets the burst shape rise delay.

The variable <val> is expressed in bits.

***RST** +0.00000000E+000

Range –18.1250 to 99

Key Entry	Rise Delay
Remarks	<p>The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.</p> <p>To change the modulation type, refer to “:MODulation[:TYPE]” on page 873. Refer to “:SRATE” on page 877 for a list of the minimum and maximum symbol rate values.</p> <p>“:BURSt:SHAPe:RISE:DELAy” on page 857 performs the same function; in compliance with the SCPI standard, both commands are listed.</p> <p>For concept information on burst shaping, refer to the <i>E4428C/38C ESG Signal Generators User’s Guide</i>.</p>

:BURSt:SHAPe:RISE:DELAy

Supported	E4438C with Option 402
	<pre>[:SOURCE] :RADio:PHS:BURSt:SHAPe:RISE:DELAy <val> [:SOURCE] :RADio:PHS:BURSt:SHAPe:RISE:DELAy?</pre>
	<p>This command sets the burst shape rise delay.</p> <p>The variable <val> is expressed in bits.</p>
*RST	+0.00000000E+000
Range	–18.1250 to 99
Key Entry	Rise Delay
Remarks	<p>The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.</p> <p>To change the modulation type, refer to “:MODulation[:TYPE]” on page 873. Refer to “:SRATE” on page 877 for minimum and maximum symbol rate values.</p> <p>“:BURSt:SHAPe:RDELAy” on page 856 performs the same function; in compliance with the SCPI standard, both commands are listed.</p> <p>See the <i>E4428C/38C ESG User’s Guide</i> for concept information.</p>

:BURSt:SHAPe:RISE:TIME

Supported E4438C with Option 402

[:SOURCE] :RADio:PHS:BURSt:SHAPe:RISE:TIME <val>

[:SOURCE] :RADio:PHS:BURSt:SHAPe:RISE:TIME?

This command sets the burst shape rise time. The variable <val> is expressed in bits.

***RST** +4.00000000E+001

Range 0.1250–22.500

Key Entry **Rise Time**

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

To change the modulation type, refer to “:MODulation[:TYPE]” on page 873. Refer to “:SRATe” on page 877 for a list of the minimum and maximum symbol rate values. The command “:BURSt:SHAPe:RTIME” on page 858 performs the same function. See the *E4428C/38C ESG User’s Guide* for more information.

:BURSt:SHAPe:RTIME

Supported E4438C with Option 402

[:SOURCE] :RADio:PHS:BURSt:SHAPe:RTIME <val>

[:SOURCE] :RADio:PHS:BURSt:SHAPe:RTIME?

This command sets the burst shape rise time. The variable <val> is expressed in bits.

***RST** +4.00000000E+001

Range 0.1250–22.500

Key Entry **Rise Time**

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

To change the modulation type, refer to “:MODulation[:TYPE]” on page 873. Refer to “:SRATe” on page 877 for a list of the minimum and maximum symbol rate values.

“:BURSt:SHAPe:RISE:TIME” on page 858 performs the same function; in compliance with the SCPI standard, both commands are listed.

For concept information on burst shaping, refer to the *E4428C/38C ESG Signal Generators User’s Guide*.

:BURSt:SHAPe[:TYPE]

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:PHS:BURSt:SHAPe[:TYPE] SINE | "<file name>"  
[ :SOURce ] :RADio:PHS:BURSt:SHAPe[:TYPE] ?
```

This command specifies the burst shape as either SINE or a user-defined file ("<file name>").

SINE This choice selects a state that is defined by the burst rise and fall *RST values, as the default burst shape type.

"<file name>" This choice selects a user designated file from signal generator memory (non-volatile).

***RST** SINE

Key Entry **Sine** **User File**

:BURSt[:STATe]

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:PHS:BURSt[:STATe] ON | OFF | 1 | 0  
[ :SOURce ] :RADio:PHS:BURSt[:STATe] ?
```

This command enables or disables the burst function.

ON (1) This choice enables the transmission of framed data. If all timeslots which are switched on are up traffic channels or custom, you will be bursting the timeslots that are on; there will be no RF carrier during the off timeslots.

If you have switched on any timeslot that you have configured as a down traffic channel, the RF carrier is not switched off between any of the timeslots. The off timeslots are transmitted as a continuous series of ones for the time period of the off timeslots.

OFF (0) This choice enables the transmission of unframed data.

***RST** 0

Key Entry **Data Format Pattern Framed**

:CHANnel

Supported E4438C with Option 402

```
[:SOURCE]:RADio:PHS:CHANnel EVM|ACP
[:SOURCE]:RADio:PHS:CHANnel?
```

This command optimizes the Nyquist and root Nyquist filters to minimize error vector magnitude (EVM) or to minimize adjacent channel power (ACP).

EVM This choice provides the most ideal passband.

ACP This choice improves stopband rejection.

***RST** EVM

Key Entry **Optimize FIR For EVM ACP**

Remarks To change the current filter type, refer to “[:FILTer](#)” on page 869.

:DATA

Supported E4438C with Option 402

```
[:SOURCE]:RADio:PHS:DATA PN9|PN11|PN15|PN20|PN23|FIX4|
"<file name>"|EXT|P4|P8|P16|P32|P64|PRAM
[:SOURCE]:RADio:PHS:DATA?
```

This command sets the data pattern type (pseudo-random number sequence, 4-bit pattern, sequence of 1’s and 0’s, data from an external source, or a user file) for unframed data transmission.

***RST** PN23

Key Entry	PN9	PN11	PN15	PN20	PN23	FIX4	User File	Ext
	4 1’s & 4 0’s	8 1’s & 8 0’s	16 1’s & 16 0’s	32 1’s & 32 0’s	64 1’s & 64 0’s	PRAM File		

Remarks Refer to “[File Name Variables](#)” on page 13 for information on the file name syntax.

:DATA:PRAM

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:PHS:DATA:PRAM "<file_name>"
```

```
[ :SOURce ] :RADio:PHS:DATA:PRAM?
```

This command selects a pattern RAM (PRAM) file as the pattern data type for the PHS (Personal Handy-phone System) format.

"<file_name>" This variable designates the PRAM file in WFM1. Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

Key Entry **PRAM File**

Remarks Selecting this data source forces the burst source to INTERNAL to allow framing control.

The PRAM file must reside in the signal generator’s volatile memory (WFM1) in order to be accessed by this command. For more information on PRAM files, refer to [“:DATA:PRAM:FILE:BLOCK” on page 111](#).

:DATA:FIX4

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:PHS:DATA:FIX4 <val>
```

```
[ :SOURce ] :RADio:PHS:DATA:FIX4?
```

This command sets the binary, 4-bit repeating sequence data pattern for unframed transmission according to the protocols (modulation type, symbol rate, filter, and burst shape) selected for the PHS format.

***RST** #B0000

Range #B0000–#B1111 or 0–15

Key Entry **FIX4**

Remarks FIX4 must already be defined as the data type.

:DEFault

Supported E4438C with Option 402

[:SOURCE] :RADio:PHS:DEFault

This command returns all of the PHS modulation format parameters to factory settings. It does not affect any other signal generator parameters.

Key Entry Restore PHS Factory Default

:DLINK:SLOT[1] | 2 | 3 | 4:CUSTom

Supported E4438C with Option 402

[:SOURCE] :RADio:PHS:DLINK:SLOT [1] | 2 | 3 | 4 :CUSTom PN9 | PN11 | PN15 | PN20 | PN23 | FIX4 | "<file name>" | EXT | P4 | P8 | P16 | P32 | P64
 [:SOURCE] :RADio:PHS:DLINK:SLOT [1] | 2 | 3 | 4 :CUSTom?

This command configures the data field for the selected downlink custom timeslot.

***RST** PN9

Key Entry	PN9	PN11	PN15	PN20	PN23	FIX4	User File	EXT
	4 1's & 4 0's	8 1's & 8 0's	16 1's & 16 0's	32 1's & 32 0's	64 1's & 64 0's			

Remarks Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:DLINK:SLOT[1] | 2 | 3 | 4:CUSTom:FIX4

Supported E4438C with Option 402

[:SOURCE] :RADio:PHS:DLINK:SLOT [1] | 2 | 3 | 4 :CUSTom:FIX4 <val>
 [:SOURCE] :RADio:PHS:DLINK:SLOT [1] | 2 | 3 | 4 :CUSTom:FIX4?

This command sets the binary, 4-bit repeating sequence data pattern that is used in the selected downlink custom timeslot.

***RST** #B0000

Range #B0000–#B1111 or 0–15

Key Entry FIX4

Remarks FIX4 must already be defined as the data type.

:DLINK:SLOT[1]|2|3|4:POWer

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:PHS:DLINK:SLOT [1] | 2 | 3 | 4 :POWer MAIN|DELTA  
[ :SOURce ] :RADio:PHS:DLINK:SLOT [1] | 2 | 3 | 4 :POWer?
```

This command toggles the RF output power level function for the selected timeslot.

MAIN This choice specifies RF output as the main power level.

DELTA This choice specifies RF output as the alternative power level.

***RST** MAIN

Key Entry Timeslot Ampl Main Delta

:DLINK:SLOT[1]|2|3|4:SCHannel:CSID

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:PHS:DLINK:SLOT [1] | 2 | 3 | 4 :SCHannel:CSID <bit_pattern>  
[ :SOURce ] :RADio:PHS:DLINK:SLOT [1] | 2 | 3 | 4 :SCHannel:CSID?
```

This command changes the 42-bit cell station identification code (CSID) field of the selected downlink timeslot. The preset hexadecimal value (when normal preset is selected) for CSID reflects the PHS protocol, however you can enter a new value with this command.

***RST** #H20200020001

Range #H0–#H3FFFFFFFF

Key Entry CSID

:DLINK:SLOT[1]|2|3|4:SCHannel:IDLE

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:PHS:DLINK:SLOT [1] | 2 | 3 | 4 :SCHannel:IDLE <bit_pattern>  
[ :SOURce ] :RADio:PHS:DLINK:SLOT [1] | 2 | 3 | 4 :SCHannel:IDLE?
```

This command changes the 34-bit idle (IDLE) field of the selected downlink timeslot. The preset hexadecimal value (when normal preset is selected) for IDLE reflects the PHS protocol, however you can enter a new value with this command.

***RST** #H000000000

Range #H0–#H3FFFFFFFF

Key Entry IDLE

:DLINK:SLOT[1] | 2 | 3 | 4:SCHannel:PSID

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:PHS:DLINK:SLOT [1] | 2 | 3 | 4 :SCHannel:PSID <bit_pattern>  
[ :SOURCE ] :RADio:PHS:DLINK:SLOT [1] | 2 | 3 | 4 :SCHannel:PSID?
```

This command changes the 28-bit personal station identification code (PSID) field in the synchronization channel of the selected downlink timeslot. The normal preset hexadecimal value for PSID reflects the PHS protocol, however you can enter a new value with this command.

***RST** #H0000001

Range #H0–#H3FFFFFFF

Key Entry **PSID**

:DLINK:SLOT[1] | 2 | 3 | 4:SCHannel:UWORD

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:PHS:DLINK:SLOT [1] | 2 | 3 | 4 :SCHannel:UWORD <bit_pattern>  
[ :SOURCE ] :RADio:PHS:DLINK:SLOT [1] | 2 | 3 | 4 :SCHannel:UWORD?
```

This command changes the unique word (UW) field of the selected downlink timeslot. The preset hexadecimal value (when normal preset is selected) for UW reflects the PHS protocol, however you can enter a new value with this command.

***RST** #H50EF2993

Range #H0–#HFFFFFFF

Key Entry **UW**

:DLINK:SLOT[1] | 2 | 3 | 4:STATe

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:PHS:DLINK:SLOT [1] | 2 | 3 | 4 :STATe ON | OFF | 1 | 0  
[ :SOURCE ] :RADio:PHS:DLINK:SLOT [1] | 2 | 3 | 4 :STATe?
```

This command enables or disables the operating state of the selected downlink timeslot.

***RST** Timeslot 1: 1 *Timeslots 2–4: 0*

Key Entry **Timeslot Off On**

:DLINK:SLOT[1] | 2 | 3 | 4:TCHannel:SACChannel

Supported E4438C with Option 402

```
[ :SOURCE ] :RADIO:PHS:DLINK:SLOT [ 1 ] | 2 | 3 | 4 :TCHannel :SACChannel  
<bit_pattern>  
[ :SOURCE ] :RADIO:PHS:DLINK:SLOT [ 1 ] | 2 | 3 | 4 :TCHannel :SACChannel?
```

This command changes the 15-bit slow associated control channel of the selected downlink timeslot. The preset hexadecimal value (when normal preset is selected) for SACCH reflects the value specified by the standard.

***RST** #H8000
Range #H0–#HFFFF
Key Entry **SA**

:DLINK:SLOT[1] | 2 | 3 | 4:TCHannel:UWORD

Supported E4438C with Option 402

```
[ :SOURCE ] :RADIO:PHS:DLINK:SLOT [ 1 ] | 2 | 3 | 4 :TCHannel :UWORD <bit_pattern>  
[ :SOURCE ] :RADIO:PHS:DLINK:SLOT [ 1 ] | 2 | 3 | 4 :TCHannel :UWORD?
```

This command changes the unique word (UW) field of the selected downlink timeslot. The preset hexadecimal value (when normal preset is selected) for UW reflects the PHS protocol, however you can enter a new value with this command.

***RST** #H3D4C
Range #H0–#HFFFF
Key Entry **UW**

:DLINK:SLOT[1] | 2 | 3 | 4:TCHannel[:TCHannel]

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:PHS:DLINK:SLOT [1] | 2 | 3 | 4 :TCHannel
[ :TCHannel ] PN9 | PN11 | PN15 | PN20 | PN23 | FIX4 | "<file name>" | EXT | P4 | P8 | P16 | P32 |
P64
[ :SOURce ] :RADio:PHS:DLINK:SLOT [1] | 2 | 3 | 4 :TCHannel [ :TCHannel ] ?
```

This command customizes the selected downlink traffic channel timeslot.

***RST** PN9

Key Entry	PN9	PN11	PN15	PN20	PN23	FIX4	User File	EXT
	4 1's & 4 0's	8 1's & 8 0's	16 1's & 16 0's	32 1's & 32 0's	64 1's & 64 0's			

Remarks Refer to “[File Name Variables](#)” on page 13 for information on the file name syntax.

:DLINK:SLOT[1] | 2 | 3 | 4:TCHannel[:TCHannel]:FIX4

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:PHS:DLINK:SLOT [1] | 2 | 3 | 4 :TCHannel [ :TCHannel ] :FIX4 <val>
[ :SOURce ] :RADio:PHS:DLINK:SLOT [1] | 2 | 3 | 4 :TCHannel [ :TCHannel ] :FIX4 ?
```

This command sets the binary, 4-bit repeating sequence data pattern that is used in the selected downlink traffic channel timeslot.

***RST** #B0000

Range #B0000–#B1111 or 0–15

Key Entry **FIX4**

Remarks FIX4 must already be defined as the data type. To change the data type, refer to “[:DLINK:SLOT\[1\]2|3|4:TCHannel\[:TCHannel\]](#)” on page 866.

:DLINK:SLOT[1] | 2 | 3 | 4[:TYPE]

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:PHS:DLINK:SLOT [1] | 2 | 3 | 4 [ :TYPE ] CUSTom | TCH | TCH_ALL | SYNC
[ :SOURCE ] :RADio:PHS:DLINK:SLOT [1] | 2 | 3 | 4 [ :TYPE ] ?
```

This command sets the downlink timeslot type for the selected timeslot.

***RST** Timeslot 1: TCH Timeslots 2–4: CUST

Key Entry **Custom TCH TCH All SYNC**

:EDATa:DELaY

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:PHS:EDATa:DELaY?
```

This query returns the amount of delay (in symbols) from the external data input to the beginning of the symbol on the I OUT and Q OUT rear panel connectors and the front panel RF OUTPUT connector.

Remarks When the format is turned off, the delay value is unchanged; the query will return the same delay value if the format is on or off.

:EDCLock

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:PHS:EDCLock SYMBol | NORMal
[ :SOURCE ] :RADio:PHS:EDCLock?
```

This command sets the external data clock use.

SYMBol This choice specifies that a continuous symbol clock signal must be provided to the SYMBOL SYNC input connector.

NORMal This choice specifies that the DATA CLOCK input connector requires a bit clock. The SYMBOL SYNC input connector requires a (one-shot or continuous) symbol sync signal.

***RST** NORM

Key Entry **Ext Data Clock Normal Symbol**

Remarks Both choices have no effect in internal clock mode. Refer to “:BBCLock” on [page 850](#) to select EXT as the data clock type.

:EREFerence

Supported E4438C with Option 402

[:SOURCE] :RADio:PHS:EREFerence INT|EXT

[:SOURCE] :RADio:PHS:EREFerence?

This command selects either an internal or external bit-clock reference for the data generator.

***RST** INT

Key Entry **BBG Ref Ext Int**

Remarks If the EXT choice is selected, the external source's frequency value must be applied to the BASEBAND GEN REF IN rear panel connector. The external reference and external data clock are not applicable at the same time. If both are selected, then the external reference takes precedence.

Refer to, “:EREFerence:VALue” on page 868 to enter the external reference frequency setting.

:EREFerence:VALue

Supported E4438C with Option 402

[:SOURCE] :RADio:PHS:EREFerence:VALue <val>

[:SOURCE] :RADio:PHS:EREFerence:VALue?

This command sets the expected bit-clock reference frequency value for an externally applied reference signal.

The variable <val> is expressed in units of hertz (Hz–MHz).

***RST** +1.30000000E+007

Range 2.5E5–1E8

Key Entry **Ext BBG Ref Freq**

Remarks The value specified by this command is effective only when you are using an external reference applied to the BASEBAND GEN REF IN rear panel connector.

Refer to “:EREFerence” on page 868 to select EXT (external source) as the reference for the bit-clock.

:FILTER

Supported E4438C with Option 402

```
[:SOURCE]:RADIO:PHS:FILTER RNYquist|NYquist|GAUSSian|RECTangle|
IS95|IS95_EQ|IS95_MOD|IS95_MOD_EQ|AC4Fm|UGGaussian|"<user FIR>"
[:SOURCE]:RADIO:PHS:FILTER?
```

This command selects the pre-modulation filter type.

- | | |
|--------------|--|
| IS95 | This choice selects a filter that meets the criteria of the IS-95 standard. |
| IS95_EQ | This choice selects a filter which is a combination of the IS-95 filter (above) and the equalizer filter described in the IS-95 standard. This filter is only used for IS-95 baseband filtering. |
| IS95_MOD | This choice selects a filter that meets the criteria of the IS-95 error function (for improved adjacent channel performance) with lower passband rejection than the filter specified in the IS-95 standard. |
| IS95_MOD_EQ | This choice selects a filter which is a combination of the equalizer filter described in the IS-95 standard and a filter that meets the criteria of the IS-95 error function (for improved adjacent channel performance), with lower passband rejection. |
| AC4Fm | This choice selects a predefined Association of Public Safety Communications Officials (APCO) specified compatible 4-level frequency modulation (C4FM) filter. |
| UGGaussian | This choice selects a backwards compatible GSM Gaussian filter (Gaussian filter with a fixed BbT value of 0.300) for the ESG E44xxB Option UN3 or UN4. |
| "<user FIR>" | This variable is any filter file that you have stored into memory. |

***RST** RNYQ

Key Entry	Root Nyquist	Nyquist	Gaussian	Rectangle	IS-95	IS-95 w/EQ
	IS-95 Mod	IS-95 Mod w/EQ	APCO 25 C4FM	UN3/4 GSM Gaussian		
	User FIR					

Remarks Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:IQ:SCALe

Supported E4438C with Option 402

[:SOURce] :RADio:PHS:IQ:SCALe <val>

[:SOURce] :RADio:PHS:IQ:SCALe?

This command sets the amplitude of the I/Q outputs for better adjacent channel power (ACP); lower scaling values equate to better ACP.

The variable <val> is expressed in units of percent.

***RST** +100

Range 1–200

Key Entry **I/Q Scaling**

Remarks This command has no effect with MSK or FSK modulation.

:MODulation:FSK[:DEVIation]

Supported E4438C with Option 402

[:SOURce] :RADio:PHS:MODulation:FSK[:DEVIation] <val>

[:SOURce] :RADio:PHS:MODulation:FSK[:DEVIation]?

This command sets the symmetric FSK frequency deviation value.

The variable <val> is expressed in units of Hertz and the maximum range value equals the current symbol rate value multiplied by four, limited to 20 MHz.

***RST** +4.00000000E+002

Range 0–2E7

Key Entry **Freq Dev**

Remarks To change the modulation type, refer to “:MODulation[:TYPE]” on page 873.

Refer to “:SRATE” on page 877 for a list of the minimum and maximum symbol rate values.

To set an asymmetric FSK deviation value, refer to the *E4428C/38C ESG Signal Generators User’s Guide* for more information.

:MODulation:MSK[:PHASe]

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:PHS:MODulation:MSK[:PHASe] <val>  
[ :SOURce ] :RADio:PHS:MODulation:MSK[:PHASe] ?
```

This command sets the MSK phase deviation value. The variable <val> is in units of degrees.

***RST** +9.00000000E+001

Range 0–100

Key Entry **Phase Dev**

:MODulation:UFSK

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:PHS:MODulation:UFSK "<file name>"  
[ :SOURce ] :RADio:PHS:MODulation:UFSK?
```

This command selects a user-defined FSK file from the signal generator memory.

Key Entry **User FSK**

Remarks The user-defined FSK file is held in signal generator memory until the command that selects user FSK as the modulation type is sent. Refer to [“:MODulation\[:TYPE\]” on page 873](#) to change the current modulation type.

Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:MODulation:UIQ

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:PHS:MODulation:UIQ "<file name>"  
[ :SOURce ] :RADio:PHS:MODulation:UIQ?
```

This command selects a user-defined I/Q file from the signal generator memory.

Key Entry **User I/Q**

Remarks The user-defined I/Q file is held in signal generator memory until the command that selects user I/Q as the modulation type is sent. Refer to [“:MODulation\[:TYPE\]” on page 873](#) to change the current modulation type.

Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:MODulation[:TYPE]

Supported E4438C with Option 402

```
[:SOURCE]:RADio:PHS:MODulation[:TYPE] BPSK|QPSK|IS95QPSK|
GRAYQPSK|OQPSK|IS95OQPSK|P4DQPSK|PSK8|PSK16|D8PSK|MSK|FSK2|FSK4|
FSK8|FSK16|C4FM|QAM4|QAM16|QAM32|QAM64|QAM128|QAM256|UIQ|UFSK
[:SOURCE]:RADio:PHS:MODulation[:TYPE] ?
```

This command sets the modulation type for the PHS personality.

***RST** P4DQPSK

Key Entry	BPSK	QPSK	IS-95 QPSK	Gray Coded QPSK	OQPSK			
	IS-95 OQPSK	$\pi/4$ DQPSK	8PSK	16PSK	D8PSK	MSK	2-Lvl FSK	
	4-Lvl FSK	8-Lvl FSK	16-Lvl FSK	C4FM	4QAM	16QAM	32QAM	
	64QAM	128QAM	256QAM	User I/Q	User FSK			

:POLarity[:ALL]

Supported E4438C with Option 402

```
[:SOURCE]:RADio:PHS:POLarity[:ALL] NORMal|INVerted
[:SOURCE]:RADio:PHS:POLarity[:ALL] ?
```

This command sets the rotation direction of the phase modulation vector.

NORMal This choice selects normal phase polarity.

INVerted This choice inverts the internal Q signal.

***RST** NORM

Key Entry **Phase Polarity Normal Invert**

:SECondary:RECall

Supported E4438C with Option 402

[:SOURCE] :RADio:PHS:SECondary:RECall

This command recalls the secondary frame configuration, overwriting the current state.

Key Entry **Recall Secondary Frame State**

Remarks To save a secondary frame state, refer to “:SECondary:SAVE” on page 874.

A secondary frame is not active until the secondary state is enabled. To activate a secondary frame, refer to “:SECondary[:STATE]” on page 875.

:SECondary:SAVE

Supported E4438C with Option 402

[:SOURCE] :RADio:PHS:SECondary:SAVE

This command saves the current frame configuration as the secondary frame with the filename PHS_SECONDARY_FRAME.

Key Entry **Save Secondary Frame State**

Remarks To recall the secondary frame (saved in non-volatile signal generator memory), refer to “:SECondary:RECall” on page 874.

:SECondary:TRIGger[:SOURCE]

Supported E4438C with Option 402

[:SOURCE] :RADio:PHS:SECondary:TRIGger [:SOURCE] KEY | EXT | BUS
[:SOURCE] :RADio:PHS:SECondary:TRIGger [:SOURCE] ?

This command selects the type of triggering for the secondary frame.

KEY This choice enables triggering by pressing the front panel **Trigger** hardkey.

EXT This choice enables triggering using an externally applied signal at the PATT TRIG IN rear panel connector or the PATT TRIG IN 2 pin on the rear panel AUX I/O connector. To select the appropriate connector, refer to “:TRIGger[:SOURCE]:EXTernal[:SOURCE]” on page 882.

BUS This choice enables GPIB triggering using the *TRG or GET command or LAN and RS-232 triggering using the *TRG command.

Key Entry **Trigger Key Ext Bus**

:SECondary[:STATe]

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:PHS:SECondary [ :STATe ] ON | OFF | 1 | 0  
[ :SOURCE ] :RADio:PHS:SECondary [ :STATe ] ?
```

This command enables or disables the ability to switch to the secondary frame.

***RST** 0

Key Entry **Secondary Frame Off On**

Remarks A frame must already be saved as the secondary frame in order to turn the secondary state function on.

To save a frame as the secondary frame, refer to “[:SECondary:SAVE]” on [page 874](#).

:SOUT

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:PHS:SOUT FRAME | SLOT | ALL  
[ :SOURCE ] :RADio:PHS:SOUT ?
```

This command sets the synchronization location (within the pattern of data) and the type of output at the EVENT 1 rear panel connector.

FRAME This choice outputs a 1-bit signal, synchronized to the bit selected by the synchronization output offset command, for a framed data pattern.

SLOT This choice outputs a 1-bit signal, synchronized to the bit selected by the synchronization output offset command, for a selected timeslot.

ALL This choice outputs a 1-bit signal, synchronized to the bit selected by the synchronization output offset command, for all active timeslots.

***RST** FRAME

Choices FRAME SLOT ALL

:SOUT:OFFSet

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:PHS:SOUT:OFFSet <val>  
[ :SOURce ] :RADio:PHS:SOUT:OFFSet?
```

This command sets the offset value for the location of the output synchronization signal on the EVENT1 rear panel connector relative to the beginning of the framed data pattern or timeslot.

The variable <val> is expressed as a number of bits.

***RST** +0

Range -239 to 239

Key Entry **Sync Out Offset**

Remarks Negative values move the synchronization output signal earlier; positive values move it later.

To change the output of the EVENT1 rear panel connector to SLOT, refer to [“:SOUT” on page 875](#).

:SOUT:SLOT

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:PHS:SOUT:SLOT <val>  
[ :SOURce ] :RADio:PHS:SOUT:SLOT?
```

This command selects the timeslot that will trigger a 1-bit output signal at the EVENT 1 rear panel connector.

***RST** +0

Range 1–4

Key Entry **Begin Timeslot #**

Remarks To change the output of the EVENT1 rear panel connector to SLOT, refer to [“:SOUT” on page 875](#).

:SRATe

Supported E4438C with Option 402

[:SOURCE]:RADio:PHS:SRATe <val>

[:SOURCE]:RADio:PHS:SRATe?

This command sets the transmission symbol rate.

The variable <val> is expressed in units of bits per second (bps–Mbps) and the maximum range value is dependent upon the source of data (internal or external), the modulation type, and filter.

***RST** +1.92000000E+005

Range

Modulation Type	Bits per Symbol	Internal Data	External Serial Data
BPSK	1	1–50 Msps	1–50 Msps
FSK2			
MSK			
C4FM	2	1–50 Msps	1–25 Msps
FSK4			
OQPSK			
OQPSK195			
P4QPPSK			
QAM4			
QPSK			
QPSKIS95			
QPSKISAT			
D8PSK			
EDGE			
FSK8			
PSK8			
FSK16	4	1–25 Msps	1–12.5 Msps
PSK16			
QAM16			
QAM32	5	1–20 Msps	1–10 Msps
QAM64	6	1–16.67 Msps	1–8.33 Msps
QAM256	7	1–12.50 Msps	1–6.25 Msps

Key Entry

Symbol Rate

Remarks When user-defined filters are selected using the command in section “:FILTer” on page 869, the upper bit rate will be restricted in line with the following symbol rate restriction:

- FIR filter length > 32 symbols: upper limit is 12.5 Msps
- FIR filter length > 16 symbols: upper limit is 25 Msps

When internal FIR filters are used, the limits of the above table always apply. For higher symbol rates, the FIR filter length will be truncated as follows:

- Above 12.5 Msps, the FIR length will be truncated to 32 symbols
- Above 25 Msps, the FIR length will be truncated to 16 symbols

This will impact the relative timing of the modulated data, as well as the actual filter response (see “:BRATe” on page 851).

A change in the symbol rate value will affect the bit rate value; refer to “:BRATe” on page 851 for a list of the minimum and maximum symbol rate values.

To change the modulation type, refer to “:MODulation[:TYPE]” on page 873.

:TRIGger:TYPE

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:PHS:TRIGger:TYPE CONTInuous | SINGle | GATE
[ :SOURce ] :RADio:PHS:TRIGger:TYPE?
```

This command sets the trigger type.

CONTInuous The framed data sequence repeats continuously; the sequence restarts every time the previous playback is completed. To customize continuous triggering, refer to “:TRIGger:TYPE:CONTInuous[:TYPE]” on page 879.

SINGle The framed data sequence plays once for every trigger received.

GATE An external trigger signal interrupts the playback while the gating signal is in the inactive state. Playback resumes when the external control signal returns to the active state. The active state can be set to high or low.

***RST** CONT

Key Entry **Continuous** **Single** **Gated**

:TRIGger:TYPE:CONTInuous[:TYPE]

Supported E4438C with Option 402

```
[ :SOURce] :RADio:PHS:TRIGger:TYPE:CONTInuous [:TYPE] FREE | TRIGger | RESet
[:SOURce] :RADio:PHS:TRIGger:TYPE:CONTInuous [:TYPE] ?
```

This commands selects the waveform’s response to a trigger signal while using the continuous trigger mode.

For more information on triggering and to select the continuous trigger mode, see “:TRIGger:TYPE” on page 878.

The following list describes the waveform’s response to each of the command choices:

FREE	Turning the ARB format on immediately triggers the waveform. The waveform repeats until you turn the format off, select another trigger, or choose another waveform file.			
TRIGger	The waveform waits for a trigger before play begins. When the waveform receives the trigger, it plays continuously until you turn the format off, select another trigger, or choose another waveform file.			
RESet	The waveform waits for a trigger before play begins. When the waveform receives the trigger, it plays continuously. Subsequent triggers reset the waveform to the beginning. For a waveform sequence, this means to the beginning of the first segment in the sequence.			
*RST	FREE			
Key Entry	<table border="0" style="width: 100%;"> <tr> <td style="width: 33%;">Free Run</td> <td style="width: 33%;">Trigger & Run</td> <td style="width: 33%;">Reset & Run</td> </tr> </table>	Free Run	Trigger & Run	Reset & Run
Free Run	Trigger & Run	Reset & Run		

:TRIGger:TYPE:GATE:ACTive

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:PHS:TRIGger:TYPE:GATE:ACTive LOW|HIGH  
[ :SOURCE ] :RADio:PHS:TRIGger:TYPE:GATE:ACTive?
```

This command selects the active state (gate polarity) of the gate while using the gating trigger mode.

The LOW and HIGH selections correspond to the low and high states of an external trigger signal. For example, when you select HIGH, the active state occurs during the high of the trigger signal. When the active state occurs, the ESG stops the waveform playback at the last played sample point, then restarts the playback at the next sample point when the inactive state occurs. For more information on triggering and to select gating as the trigger mode, see “:TRIGger:TYPE” on page 878.

The following list describes the ESG’s gating behavior for the polarity selections:

LOW The waveform playback stops when the trigger signal goes low (active state) and restarts when the trigger signal goes high (inactive state).

HIGH The waveform playback stops when the trigger signal goes high (active state) and restarts when the trigger signal goes low (inactive state).

*RST HIGH

Key Entry Gate Active Low High

:TRIGger[:SOURCE]:EXTErnal:DELAy

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:PHS:TRIGger[:SOURCE]:EXTErnal:DELAy <val>  
[ :SOURCE ] :RADio:PHS:TRIGger[:SOURCE]:EXTErnal:DELAy?
```

This command sets the number of bits to delay the ESG’s response to an external trigger.

The bit delay is a delay between when the ESG receives the trigger and when it responds to the trigger. The delay uses the clocks of the bit-clock to time the delay. After the ESG receives the trigger and the set number of delay bits (clocks) occurs, the ESG transmits the data pattern.

The delay occurs after you enable the state. See “:TRIGger[:SOURCE]:EXTErnal:DELAy:STATE” on page 881. You can set the number of bits either before or after enabling the state.

For more information on configuring an external trigger source and to select external as the trigger source, see “:TRIGger[:SOURCE]” on page 882.

*RST +0

Range 0–1048575

Key Entry Ext Delay Bits

:TRIGger[:SOURce]:EXTErnal:DELay:STATe

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:PHS:TRIGger [ :SOURce ] :EXTErnal:DELay:STATe ON|OFF|1|0  
[ :SOURce ] :RADio:PHS:TRIGger [ :SOURce ] :EXTErnal:DELay:STATe?
```

This command enables or disables the operating state of the external trigger delay function.

For setting the delay time, see “:TRIGger[:SOURce]:EXTErnal:DELay” on page 880, and for more information on configuring an external source, see “:TRIGger[:SOURce]” on page 882.

***RST** 0

Key Entry Ext Delay Off On

:TRIGger[:SOURce]:EXTErnal:SLOPe

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:PHS:TRIGger [ :SOURce ] :EXTErnal:SLOPe POSitive|NEGative  
[ :SOURce ] :RADio:PHS:TRIGger [ :SOURce ] :EXTErnal:SLOPe?
```

This command sets the polarity for an external trigger signal while using the continuous, single triggering mode. To set the polarity for gating, see “:TRIGger:TYPE:GATE:ACTive” on page 880.

The POSitive and NEGative selections correspond to the high (positive) and low (negative) states of the external trigger signal. For example, when you select POSitive, the waveform responds (plays) during the high state of the trigger signal. When the PSG receives multiple trigger occurrences when only one is required, the signal generator uses the first trigger and ignores the rest.

For more information on configuring an external trigger source and to select external as the trigger source, see “:TRIGger[:SOURce]” on page 882.

***RST** NEG

Key Entry Ext Polarity Neg Pos

:TRIGger[:SOURCE]:EXTernal[:SOURCE]

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:PHS:TRIGger [ :SOURCE ] :EXTernal [ :SOURCE ] EPT1 |
EPT2 | EPTRIGGER1 | EPTRIGGER2
[ :SOURCE ] :RADio:PHS:TRIGger [ :SOURCE ] :EXTernal [ :SOURCE ] ?
```

This command selects which PATTERN TRIG IN connection the ESG uses to accept an externally applied trigger signal when external is the trigger source selection.

For more information on configuring an external trigger source and to select external as the trigger source, see “:TRIGger[:SOURCE]” on page 882. For more information on the rear-panel connectors, see the *E4428C/38C ESG Signal Generators User’s Guide*.

The following list describes the command choices:

- EPT1 This choice is synonymous with EPTRIGGER1 and selects the PATTERN TRIG IN rear-panel connector.
 - EPT2 This choice is synonymous with EPTRIGGER2 and selects the PATT TRIG IN 2 pin on the rear-panel AUXILIARY I/O connector.
 - EPTRIGGER1 This choice is synonymous with EPT1 and selects the PATTERN TRIG IN rear-panel connector.
 - EPTRIGGER2 This choice is synonymous with EPT2 and selects the PATT TRIG IN 2 pin on the rear-panel AUXILIARY I/O connector.
 - *RST** EPT1
- Key Entry** **Patt Trig In 1** **Patt Trig In 2**

:TRIGger[:SOURCE]

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:PHS:TRIGger [ :SOURCE ] KEY | EXT | BUS
[ :SOURCE ] :RADio:PHS:TRIGger [ :SOURCE ] ?
```

This command sets the trigger source.

For more information on triggering, see “:TRIGger:TYPE” on page 878. The following list describes the command choices:

- KEY This choice enables manual triggering by pressing the front-panel **Trigger** hardkey.
- EXT An externally applied signal triggers the waveform. This is the only choice that works with gating. The following conditions affect an external trigger:

- The input connector selected for the trigger signal. You have a choice between the rear-panel PATTERN TRIG IN connector or the PATT TRIG IN 2 pin on the rear-panel AUXILIARY I/O connector. To make the connector selection, see “:TRIGger[:SOURce]:EXTErnal[:SOURce]” on page 882.
 For more information on the connectors and on connecting the cables, see the *ESG User’s Guide*.
- The trigger signal polarity:
 - gating mode, see “:TRIGger:TYPE:GATE:ACTive” on page 880
 - continuous and single modes, see “:TRIGger[:SOURce]:EXTErnal[:SOURce]” on page 882
- The time delay between when the ESG receives a trigger and when the waveform responds to the trigger. There are two parts to setting the delay:
 - setting the amount of delay, see “:TRIGger[:SOURce]:EXTErnal:DELay” on page 880
 - turning the delay on, see “:TRIGger[:SOURce]:EXTErnal:DELay:STATe” on page 881

BUS This choice enables triggering over the GPIB or LAN using the *TRG or GET commands or the AUXILIARY INTERFACE (RS-232) using the *TRG command.

***RST** KEY

Key Entry	Trigger Key	Ext	Bus
------------------	--------------------	------------	------------

:ULINK:SLOT[1] | 2 | 3 | 4:CUSTom

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:PHS:ULINK:SLOT [ 1 ] | 2 | 3 | 4 :CUSTom PN9 | PN11 | PN15 |
PN20 | PN23 | FIX4 | "<file name>" | EXT | P4 | P8 | P16 | P32 | P64
[ :SOURce ] :RADio:PHS:ULINK:SLOT [ 1 ] | 2 | 3 | 4 :CUSTom?
```

This command configures the data field for the selected uplink custom timeslot.

***RST** PN9

Key Entry	PN9	PN11	PN15	PN20	PN23	FIX4	User File	EXT
	4 1’s & 4 0’s		8 1’s & 8 0’s		16 1’s & 16 0’s		32 1’s & 32 0’s	
	64 1’s & 64 0’s							

Remarks Refer to “File Name Variables” on page 13 for information on the file name syntax.

:ULINK:SLOT[1]|2|3|4:CUSTom:FIX4

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:PHS:ULINK:SLOT [1] | 2 | 3 | 4 :CUSTom:FIX4 <val>  
[ :SOURce ] :RADio:PHS:ULINK:SLOT [1] | 2 | 3 | 4 :CUSTom:FIX4?
```

This command sets the binary, 4-bit repeating sequence data pattern that is used in the selected uplink custom timeslot.

***RST** #B0000

Range #B0000–#B1111 or 0–15

Key Entry **FIX4**

Remarks FIX4 must already be defined as the data type.

:ULINK:SLOT[1]|2|3|4:POWer

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:PHS:ULINK:SLOT [1] | 2 | 3 | 4 :POWer MAIN|DELTA  
[ :SOURce ] :RADio:PHS:ULINK:SLOT [1] | 2 | 3 | 4 :POWer?
```

This command toggles the RF output power level function for the selected timeslot.

MAIN This choice specifies RF output as the main power level.

DELTA This choice specifies RF output as the alternative power level.

***RST** MAIN

Key Entry **Timeslot Ampl Main Delta**

:ULINK:SLOT[1]|2|3|4:SCHannel:CSID

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:PHS:ULINK:SLOT [1] | 2 | 3 | 4 :SCHannel:CSID <bit_pattern>  
[ :SOURce ] :RADio:PHS:ULINK:SLOT [1] | 2 | 3 | 4 :SCHannel:CSID?
```

This command changes the 42-bit cell station identification code (CSID) field of the selected uplink timeslot. The preset hexadecimal value (when normal preset is selected) for CSID reflects the PHS protocol, however you can enter a new value with this command.

***RST** #H20200020001

Range #H0–#H3FFFFFFFFF

Key Entry **CSID**

:ULINK:SLOT[1]|2|3|4:SCHannel:IDLE

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:PHS:ULINK:SLOT [1] | 2 | 3 | 4 :SCHannel:IDLE <bit_pattern>  
[ :SOURce ] :RADio:PHS:ULINK:SLOT [1] | 2 | 3 | 4 :SCHannel:IDLE?
```

This command changes the 34-bit idle (IDLE) field of the selected uplink timeslot. The preset hexadecimal value (when normal preset is selected) for IDLE reflects the PHS protocol, however you can enter a new value with this command.

***RST** #H00000000

Range #H0–#H3FFFFFFFF

Key Entry **IDLE**

:ULINK:SLOT[1]|2|3|4:SCHannel:PSID

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:PHS:ULINK:SLOT [1] | 2 | 3 | 4 :SCHannel:PSID <bit_pattern>  
[ :SOURce ] :RADio:PHS:ULINK:SLOT [1] | 2 | 3 | 4 :SCHannel:PSID?
```

This command changes the 28-bit personal station identification code (PSID) field in the synchronization channel of the selected uplink timeslot. The preset (normal) hexadecimal value for PSID reflects the PHS protocol, however you can enter a new value with this command.

***RST** #H0000001

Range #H0–#H3FFFFFFFF

Key Entry **PSID**

:ULINK:SLOT[1]|2|3|4:SCHannel:UWORD

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:PHS:ULINK:SLOT [1] | 2 | 3 | 4 :SCHannel:UWORD <bit_pattern>  
[ :SOURce ] :RADio:PHS:ULINK:SLOT [1] | 2 | 3 | 4 :SCHannel:UWORD?
```

This command changes the unique word (UW) field of the selected uplink timeslot. The preset hexadecimal value (when normal preset is selected) for UW reflects the PHS protocol, however you can enter a new value with this command.

***RST** #H050EF2993

Range #H0–#H0FFFFFFFF

Key Entry **UW**

:ULINK:SLOT[1] | 2 | 3 | 4:STATe

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:PHS:ULINK:SLOT [1] | 2 | 3 | 4 :STATe ON | OFF | 1 | 0  
[ :SOURCE ] :RADio:PHS:ULINK:SLOT [1] | 2 | 3 | 4 :STATe?
```

This command enables or disables the operating state of the selected uplink timeslot.

***RST** Timeslot 1: 1 Timeslots 2–4: 0

Key Entry Timeslot Off On

:ULINK:SLOT[1] | 2 | 3 | 4:TCHannel:SACChannel

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:PHS:ULINK:SLOT [1] | 2 | 3 | 4 :TCHannel:SACChannel  
<bit_pattern>  
[ :SOURCE ] :RADio:PHS:ULINK:SLOT [1] | 2 | 3 | 4 :TCHannel:SACChannel?
```

This command changes the 15-bit slow associated control channel of the selected uplink timeslot. The preset hexadecimal value (when normal preset is selected) for SACCH reflects the value specified by the standard.

***RST** #H8000

Range #H0–#HFFFF

Key Entry SA

:ULINK:SLOT[1] | 2 | 3 | 4:TCHannel:UWORD

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:PHS:ULINK:SLOT [1] | 2 | 3 | 4 :TCHannel:UWORD <bit_pattern>  
[ :SOURCE ] :RADio:PHS:ULINK:SLOT [1] | 2 | 3 | 4 :TCHannel:UWORD?
```

This command changes the unique word (UW) field of the selected uplink timeslot. The preset hexadecimal value (when normal preset is selected) for UW reflects the PHS protocol, however you can enter a new value with this command.

***RST** #H3D4C

Range #H0–#HFFFF

Key Entry UW

:ULINK:SLOT[1] | 2 | 3 | 4:TCHannel[:TCHannel]

Supported E4438C with Option 402

```
[:SOURCE]:RADIO:PHS:ULINK:SLOT[1] | 2 | 3 | 4:TCHannel
[:TCHannel] PN9|PN11|PN15|PN20|PN23|FIX4 | "<file name>" | EXT | P4 | P8 | P16 | P32 |
P64
[:SOURCE]:RADIO:PHS:ULINK:SLOT[1] | 2 | 3 | 4:TCHannel[:TCHannel] ?
```

This command selects the data pattern for the selected uplink traffic channel timeslot.

***RST** PN9

Key Entry	PN9	PN11	PN15	PN20	PN23	FIX4	User File	EXT
	4 1's & 4 0's	8 1's & 8 0's	16 1's & 16 0's	32 1's & 32 0's	64 1's & 64 0's			

Remarks Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:ULINK:SLOT[1] | 2 | 3 | 4:TCHannel[:TCHannel:FIX4]

Supported E4438C with Option 402

```
[:SOURCE]:RADIO:PHS:ULINK:SLOT[1] | 2 | 3 | 4:TCHannel[:TCHannel]:FIX4 <val>
[:SOURCE]:RADIO:PHS:ULINK:SLOT[1] | 2 | 3 | 4:TCHannel[:TCHannel]:FIX4?
```

This command sets the binary, 4-bit repeating sequence data pattern that is used in the selected uplink traffic channel timeslot.

***RST** #B0000

Range #B0000–#B1111 or 0–15

Key Entry **FIX4**

Remarks FIX4 must already be defined as the data type.

PHS Subsystem—Option 402 ([:SOURce]:RADio:PHS)**:ULINK:SLOT[1] | 2 | 3 | 4[:TYPE]****Supported** E4438C with Option 402[:SOURce]:RADio:PHS:ULINK:SLOT [1] | 2 | 3 | 4 [:TYPE] CUSTom | TCH | TCH_ALL | SYNC
[:SOURce]:RADio:PHS:ULINK:SLOT [1] | 2 | 3 | 4 [:TYPE] ?

This command sets the uplink timeslot type for the selected uplink timeslot.

RST** Timeslot 1: TCH Timeslots 2–4: CUST**Key Entry** Timeslot Type**[:STATe]*Supported** E4438C with Option 402[:SOURce]:RADio:PHS[:STATe] ON | OFF | 1 | 0
[:SOURce]:RADio:PHS[:STATe] ?

This command enables or disables the PHS modulation format.

***RST** 0**Key Entry** PHS Off On**Remarks** Although the PHS modulation is enabled with this command, the RF carrier is not modulated unless you also activate the front panel **Mod On/Off** hardkey.

TETRA Subsystem—Option 402 ([:SOURce]:RADio:TETRa)

:ALPha

Supported E4438C with Option 402

[:SOURce]:RADio:TETRa:ALPha <val>

[:SOURce]:RADio:TETRa:ALPha?

This command changes the Nyquist or root Nyquist filter's alpha value.

The filter alpha value can be set to a minimum level (0), a maximum level (1), or in between by using fractional numeric values (0.001–0.999).

***RST** +3.50000000E-001

Range 0.000–1.000

Key Entry **Filter Alpha**

Remarks To change the current filter type, refer to “:FILTer” on page 903.

:BBCLock

Supported E4438C with Option 402

[:SOURce]:RADio:TETRa:BBCLock INT [1] | EXT [1]

[:SOURce]:RADio:TETRa:BBCLock?

This command toggles the data (bit) clock input to the baseband generator board to either internal or external. This command is independent in each mode and works for both non-burst (continuous) and burst modes. This allows for a matrix of selections between burst/non-burst, internal/external data generation, internal/external data clock, and external bit/symbol data clock.

INT[1] This choice selects the signal generator internal data clock.

EXT[1] This choice selects an external data clock input.

***RST** INT

Key Entry **BBG Data Clock Ext Int**

Remarks A data clock or continuous symbol sync input must be supplied when external mode is used.

TETRA Subsystem—Option 402 ([:SOURce]:RADio:TETRa)**:BBT****Supported** E4438C with Option 402

[:SOURce]:RADio:TETRa:BBT <val>

[:SOURce]:RADio:TETRa:BBT?

This command changes the bandwidth-multiplied-by-bit-time (BbT) filter parameter.

The filter BbT value can be set to the maximum level (1) or in between the minimum level (0.100) and maximum level by using fractional numeric values (0.101–0.999).

***RST** +5.00000000E–001**Range** 0.100–1.000**Key Entry** Filter BbT

Remarks This command is effective only after choosing a Gaussian filter. It does not have an effect on other types of filters.

To change the current filter type, refer to “:FILTer” on page 903.

:BRATe**Supported** E4438C with Option 402

[:SOURce]:RADio:TETRa:BRATe <val>

[:SOURce]:RADio:TETRa:BRATe?

This command sets the bit rate.

The variable <val> is expressed in units of bits per second (bps–Mbps) and the maximum range value is dependent upon the source of data (internal or external), the modulation type, and filter.

***RST** +3.60000000E+004

Range	Modulation Type	Bits per Symbol	Internal Data	External Serial Data
	BPSK	1	1–50 Mbps	1–50 Mbps
	FSK2			
	MSK			
	C4FM	2	2–100 Mbps	2–50 Mbps
	FSK4			
	OQPSK			
	OQPSK195			
	P4QPPSK			
	QAM4			

Range

Modulation Type	Bits per Symbol	Internal Data	External Serial Data
QPSK	2	2–100 Mbps	2–50 Mbps
QPSKIS95			
QPSKISAT			
D8PSK	3	3–100 Mbps	3–50 Mbps
EDGE			
FSK8			
PSK8			
FSK16	4	4–100 Mbps	4–50 Mbps
PSK16			
QAM16			
QAM32	5	5–100 Mbps	5–50 Mbps
QAM64	6	6–100 Mbps	6–50 Mbps
QAM256	7	8–100 Mbps	8–50 Mbps

Key Entry

Symbol Rate

Remarks

When user-defined filters are selected using the command in section “:FILTer” on page 903, the upper bit rate will be restricted in line with the following symbol rate restriction:

- FIR filter length > 32 symbols: upper limit is 12.5 Msps
- FIR filter length > 16 symbols: upper limit is 25 Msps

When internal FIR filters are used, the limits of the above table always apply. For higher symbol rates, the FIR filter length will be truncated and will impact the relative timing of the modulated data, as well as the actual filter response (see “:SRATe” on page 926).

A change in the bit rate value will affect the symbol rate value; refer to “:SRATe” on page 926 for a list of the minimum and maximum symbol rate values.

To change the modulation type, refer to “:MODulation[:TYPE]” on page 906.

TETRA Subsystem—Option 402 ([:SOURCE]:RADIO:TETRA)**:BURSt:PN9**

Supported E4438C with Option 402

```
[ :SOURCE ] :RADIo:TETRA:BURSt:PN9 NORMAl | QUICk
```

```
[ :SOURCE ] :RADIo:TETRA:BURSt:PN9?
```

This command controls the software PN9 generation.

NORMAL This choice produces a maximum length PN9 sequence.

QUICK This choice produces a truncated PN9 sequence.

***RST** NORM

Key Entry **PN9 Mode Normal Quick**

Remarks Use Normal mode for bit-error-rate tests where a maximum length PN9 sequence is required.

:BURSt:SCRamble:SEED

Supported E4438C with Option 402

```
[ :SOURCE ] :RADIo:TETRA:BURSt:SCRamble:SEED <32-bit val>
```

```
[ :SOURCE ] :RADIo:TETRA:BURSt:SCRamble:SEED?
```

This command sets the 32-bit scramble seed value.

***RST** #HFFFFFFF

Range #H0–#HFFFFFFF

Key Entry **Scramble Seed**

Remarks Although values may be set using this command, it does not active that scramble function.

Refer to “[:BURSt:SCRamble\[:STATe\]](#)” on page 893 to enable the scrambling function.

:BURSt:SCRamble[:STATe]

Supported E4438C with Option 402

```
[:SOURCE]:RADio:TETRa:BURSt:SCRamble[:STATe] ON|OFF|1|0
[:SOURCE]:RADio:TETRa:BURSt:SCRamble[:STATe]?
```

This command enables or disables the scramble function.

ON (1) This choice scrambles data on the related fields, using the seed setting.

OFF (0) This choice disables the scramble function.

***RST** 0

Key Entry **Scramble Off On**

Remarks To set the seed value, refer to “:BURSt:SCRamble:SEED” on page 892.

:BURSt:SHAPE:FALL:DELay

Supported E4438C with Option 402

```
[:SOURCE]:RADio:TETRa:BURSt:SHAPE:FALL:DELay <val>
[:SOURCE]:RADio:TETRa:BURSt:SHAPE:FALL:DELay?
```

This command sets the burst shape fall delay.

The variable <val> is expressed in bits. The minimum and maximum values depend upon modulation type and symbol rate.

***RST** +0.00000000E+000

Range -22.3750 to 99

Key Entry **Fall Delay**

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

To change the modulation type, refer to “:MODulation[:TYPE]” on page 906. Refer to “:SRATE” on page 926 for a list of the minimum and maximum symbol rate values.

“:BURSt:SHAPE:FDELay” on page 894 performs the same function; in compliance with the SCPI standard, both commands are listed.

For concept information on burst shaping, refer to the *E4428C/38C ESG Signal Generators User’s Guide*.

TETRA Subsystem—Option 402 ([:SOURCE]:RADio:TETRa)**:BURSt:SHAPe:FALL:TIME**

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:TETRa:BURSt:SHAPe:FALL:TIME <val>
```

```
[ :SOURCE ] :RADio:TETRa:BURSt:SHAPe:FALL:TIME?
```

This command sets the burst shape fall time.

The variable <val> is expressed in bits. The minimum and maximum values depend upon modulation type and symbol rate.

***RST** +8.00000000E+000

Range 0.1250–50

Key Entry **Fall Time**

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

To change the modulation type, refer to “:MODulation[:TYPE]” on page 906.

Refer to “:SRATE” on page 926 for a list of the minimum and maximum symbol rate values.

“:BURSt:SHAPe:FTIME” on page 895 performs the same function; in compliance with the SCPI standard, both commands are listed.

For concept information on burst shaping, refer to the *E4428C/38C ESG Signal Generators User’s Guide*.

:BURSt:SHAPe:FDElay

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:TETRa:BURSt:SHAPe:FDElay <val>
```

```
[ :SOURCE ] :RADio:TETRa:BURSt:SHAPe:FDElay?
```

This command sets the burst shape fall delay.

The variable <val> is expressed in bits. The minimum and maximum values depend upon modulation type and symbol rate.

***RST** +0.00000000E+000

Range –22.3750 to 99

Key Entry **Fall Delay**

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

To change the modulation type, refer to “:MODulation[:TYPE]” on page 906. Refer to “:SRATE” on page 926 for a list of the minimum and maximum symbol rate values.

“:BURSt:SHAPe:FALL:DELaY” on page 893 performs the same

function; in compliance with the SCPI standard, both commands are listed.

For concept information on burst shaping, refer to the *E4428C/38C ESG Signal Generators User’s Guide*.

:BURSt:SHAPe:FTIME

Supported E4438C with Option 402

[:SOURCE] :RADio:TETRa: BURSt :SHAPe: FTIME <val>

[:SOURCE] :RADio:TETRa: BURSt :SHAPe: FTIME?

This command sets the burst shape fall time.

The variable <val> is expressed in bits. The minimum and maximum values depend upon modulation type and symbol rate.

***RST** +8.00000000E+000

Range 0.1250–50

Key Entry **Fall Time**

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

To change the modulation type, refer to “:MODulation[:TYPE]” on page 906. Refer to “:SRATE” on page 926 for a list of the minimum and maximum symbol rate values.

“:BURSt:SHAPe:FALL:TIME” on page 894 performs the same function; in compliance with the SCPI standard, both commands are listed.

For concept information on burst shaping, refer to the *E4428C/38C ESG Signal Generators User’s Guide*.

TETRA Subsystem—Option 402 ([:SOURCE]:RADio:TETRa)**:BURSt:SHAPe:RDELay**

Supported E4438C with Option 402

[:SOURCE] :RADio:TETRa:BURSt:SHAPe:RDELay <val>

[:SOURCE] :RADio:TETRa:BURSt:SHAPe:RDELay?

This command sets the burst shape rise delay. The variable <val> is expressed in bits. The minimum and maximum values depend upon modulation type and symbol rate.

***RST** +0.00000000E+000

Range -14.3750 to 99

Key Entry **Rise Delay**

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

To change the modulation type, refer to “:MODulation[:TYPE]” on page 906. Refer to “:SRATe” on page 926 for a list of the minimum and maximum symbol rate values.

“:BURSt:SHAPe:RISE:DELay” on page 896 performs the same function; in compliance with the SCPI standard, both commands are listed.

See the *E4428C/38C ESG User’s Guide* for concept information.

:BURSt:SHAPe:RISE:DELay

Supported E4438C with Option 402

[:SOURCE] :RADio:TETRa:BURSt:SHAPe:RISE:DELay <val>

[:SOURCE] :RADio:TETRa:BURSt:SHAPe:RISE:DELay?

This command sets the burst shape rise delay.

The variable <val> is expressed in bits. The minimum and maximum values depend upon modulation type and symbol rate.

***RST** +0.00000000E+000

Range -14.3750 to 99

Key Entry **Rise Delay**

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

To change the modulation type, refer to “:MODulation[:TYPE]” on page 906. Refer to “:SRATE” on page 926 for a list of the minimum and maximum symbol rate values.

“:BURSt:SHAPe:RDElay” on page 896 performs the same function; in compliance with the SCPI standard, both commands are listed.

For concept information on burst shaping, refer to the *E4428C/38C ESG Signal Generators User’s Guide*.

:BURSt:SHAPe:RISE:TIME

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:TETRA:BURSt:SHAPe:RISE:TIME <val>  
[ :SOURCE ] :RADio:TETRA:BURSt:SHAPe:RISE:TIME?
```

This command sets the burst shape rise time.

The variable <val> is expressed in bits. The minimum and maximum values depend upon modulation type and symbol rate.

***RST** +8.00000000E+000

Range 0.1250–22.5000

Key Entry **Rise Time**

Remarks The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

To change the modulation type, refer to “:MODulation[:TYPE]” on page 906. Refer to “:SRATE” on page 926 for a list of the minimum and maximum symbol rate values.

“:BURSt:SHAPe:RTIME” on page 898 performs the same function; in compliance with the SCPI standard, both commands are listed.

For concept information on burst shaping, refer to the *E4428C/38C ESG Signal Generators User’s Guide*.

:BURSt:SHAPe:RTIME**Supported** E4438C with Option 402

[:SOURCE]:RADio:TETRa:BURSt:SHAPe:RTIME <val>

[:SOURCE]:RADio:TETRa:BURSt:SHAPe:RTIME?

This command sets the burst shape rise time. The variable <val> is expressed in bits. The minimum and maximum values depend upon modulation type and symbol rate.

RST** +8.00000000E+000**Range** 0.1250–22.5000**Key Entry** **Rise Time*Remarks** The setting enabled by this command is not affected by signal generator power-on, preset, or *RST.

To change the modulation type, refer to “:MODulation[:TYPE]” on page 906.

Refer to “:SRATe” on page 926 for a list of the minimum and maximum symbol rate values.

“:BURSt:SHAPe:RISE:TIME” on page 897 performs the same function;

in compliance with the SCPI standard, both commands are listed.

For concept information on burst shaping, refer to the *E4428C/38C ESG Signal Generators User’s Guide*.**:BURSt:SHAPe[:TYPE]****Supported** E4438C with Option 402

[:SOURCE]:RADio:TETRa:BURSt:SHAPe[:TYPE] SINE| "<file name>"

[:SOURCE]:RADio:TETRa:BURSt:SHAPe[:TYPE]?

This command specifies the burst shape as either SINE or a user-defined file("<file name>").

SINE This choice selects a state that is defined by the burst rise and fall *RST values as the default burst shape type.

"<file name>" This choice selects a user designated file from signal generator memory (non-volatile).

***RST** SINE**Key Entry** **Sine User File**

:BURSt[:STATe]

Supported E4438C with Option 402

```
[:SOURCE]:RADio:TETRa:BURSt[:STATe] ON|OFF|1|0
[:SOURCE]:RADio:TETRa:BURSt[:STATe]?
```

This command enables or disables the burst function.

ON (1) This choice enables the transmission of framed data. If all timeslots which are switched on are up traffic channels or custom, you will be bursting the timeslots that are on; there will be no RF carrier during the off timeslots.

If you have switched on any timeslot that you have configured as a down traffic channel, the RF carrier is not switched off between any of the timeslots. The off timeslots are transmitted as a continuous series of ones for the time period of the off timeslots.

OFF (0) This choice enables the transmission of unframed data.

***RST** 0

Key Entry **Data Format Pattern Framed**

:CHANnel

Supported E4438C with Option 402

```
[:SOURCE]:RADio:TETRa:CHANnel EVM|ACP
[:SOURCE]:RADio:TETRa:CHANnel?
```

This command optimizes the Nyquist and root Nyquist filters to minimize error vector magnitude (EVM) or to minimize adjacent channel power (ACP).

EVM This choice provides the most ideal passband.

ACP This choice improves stopband rejection.

***RST** EVM

Key Entry **Optimize FIR For EVM ACP**

Remarks To change the current filter type, refer to “:FILTer” on page 903.

TETRA Subsystem—Option 402 ([:SOURCE]:RADio:TETRa)**:DATA**

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:TETRa:DATA PN9 | PN11 | PN15 | PN20 | PN23 | FIX4 |
"<file_name>" | EXT | P4 | P8 | P16 | P32 | P64 | PRAM
[ :SOURCE ] :RADio:TETRa:DATA?
```

This command sets the data pattern for unframed transmission.

***RST** PN23

Key Entry	PN9	PN11	PN15	PN20	PN23	FIX4	User File	Ext
	4 1's & 4 0's	8 1's & 8 0's	16 1's & 16 0's	32 1's & 32 0's				
	64 1's & 64 0's	PRAM File						

Remarks Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:DATA:PRAM

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:TETRa:DATA:PRAM "<file_name>"
[ :SOURCE ] :RADio:TETRa:DATA:PRAM?
```

This command selects a pattern RAM (PRAM) file as the pattern data type for the TETRA (Trans-European Trunked Radio) format.

"<file_name>" This variable designates the PRAM file in WFM1. Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

Key Entry **PRAM File**

Remarks Selecting this data source forces the burst source to INTERNAL to allow framing control.

The PRAM file must reside in the signal generator's volatile memory (WFM1) in order to be accessed by this command. For more information on PRAM files, refer to [“:DATA:PRAM:FILE:BLOCK” on page 111](#).

:DATA:FIX4

Supported E4438C with Option 402

[:SOURCE] :RADio:TETRa:DATA:FIX4 <val>

[:SOURCE] :RADio:TETRa:DATA:FIX4?

This command sets the binary, 4-bit repeating sequence data pattern for unframed transmission according to the modulation type, symbol rate, filter, and burst shape selected for the TETRA modulation format.

***RST** #B0000

Range #B0000–#B1111 or 0–15

Key Entry **FIX4**

Remarks FIX4 must already be defined as the data type. To change the data type, refer to “:DATA” on page 900.

:DEFault

Supported E4438C with Option 402

[:SOURCE] :RADio:TETRa:DEFault

This command returns all of the TETRA modulation format parameters to factory settings. It does not affect any other signal generator parameters.

Key Entry Restore TETRA Factory Default

:EDATa:DELay

Supported E4438C with Option 402

[:SOURCE] :RADio:TETRa:EDATa:DELay?

This query returns the amount of delay (in symbols) from the external data input to the beginning of the symbol on the I OUT and Q OUT rear panel connectors and the front panel RF OUTPUT connector.

Remarks When the format is turned off, the delay value is unchanged; the query will return the same delay value if the format is on or off.

TETRA Subsystem—Option 402 ([:SOURCE]:RADio:TETRa)**:EDCLock**

Supported E4438C with Option 402

[:SOURCE] :RADio:TETRa:EDCLock SYMBOL | NORMAl

[:SOURCE] :RADio:TETRa:EDCLock?

This command sets the external data clock use.

SYMBOL This choice specifies that a continuous symbol clock signal must be provided to the SYMBOL SYNC input connector.

NORMAl This choice specifies that the DATA CLOCK input connector requires a bit clock. The SYMBOL SYNC input connector requires a (one-shot or continuous) symbol sync signal.

***RST** NORM

Key Entry **Ext Data Clock Normal Symbol**

Remarks Both choices have no effect in internal clock mode. Refer to “:BBCLock” on page 889 to select EXT as the data clock type.

:EREFerence

Supported E4438C with Option 402

[:SOURCE] :RADio:TETRa:EREFerence INT | EXT

[:SOURCE] :RADio:TETRa:EREFerence?

This command selects either an internal or external bit-clock reference for the data generator.

***RST** INT

Key Entry **BBG Ref Ext Int**

Remarks If the EXT choice is selected, the external source’s frequency value

must be applied to the BASEBAND GEN REF IN rear panel connector. The external reference and external data clock are not applicable at the same time. If both are selected, then the external reference takes precedence.

Refer to, “:EREFerence:VALue” on page 903 to enter the external reference frequency setting.

:EREFerence:VALue

Supported E4438C with Option 402

```
[:SOURCE]:RADio:TETRa:EREFerence:VALue <val>
```

```
[:SOURCE]:RADio:TETRa:EREFerence:VALue?
```

This command sets the expected bit-clock reference frequency value for an externally applied reference signal.

The variable <val> is expressed in units of hertz (Hz–MHz).

***RST** +1.30000000E+007

Range 2.5E5–1E8

Key Entry **Ext BBG Ref Freq**

Remarks The value specified by this command is effective only when you are using an external reference applied to the BASEBAND GEN REF IN rear panel connector.

Refer to “:EREFerence” on page 902 to select EXT (external source) as the reference for the bit-clock.

:FILTer

Supported E4438C with Option 402

```
[:SOURCE]:RADio:TETRa:FILTer RNYQuist|NYQuist|GAUSSian|RECTangle|
```

```
IS95|IS95_EQ|IS95_MOD|IS95_MOD_EQ|AC4Fm|UGGaussian|"<user FIR>"
```

```
[:SOURCE]:RADio:TETRa:FILTer?
```

This command selects the pre-modulation filter type.

IS95 This choice selects a filter that meets the criteria of the IS-95 standard.

IS95_EQ This choice selects a filter which is a combination of the IS-95 filter (above) and the equalizer filter described in the IS-95 standard. This filter is only used for IS-95 baseband filtering.

IS95_MOD This choice selects a filter that meets the criteria of the IS-95 error function (for improved adjacent channel performance) with lower passband rejection than the filter specified in the IS-95 standard.

IS95_MOD_EQ This choice selects a filter which is a combination of the equalizer filter described in the IS-95 standard and a filter that meets the criteria of the IS-95 error function (for improved adjacent channel performance), with lower passband rejection.

TETRA Subsystem—Option 402 ([:SOURce]:RADio:TETRa)

AC4Fm	This choice selects a predefined Association of Public Safety Communications Officials (APCO) specified compatible 4-level frequency modulation (C4FM) filter.
UGGaussian	This choice selects a backwards compatible GSM Gaussian filter (Gaussian filter with a fixed BbT value of 0.300) for the ESG E44xxB Option UN3 or UN4.
"<user FIR>"	This variable is any filter file that you have stored into memory.
*RST	RNYQ
Key Entry	Root Nyquist Nyquist Gaussian Rectangle IS-95 IS-95 w/EQ IS-95 Mod IS-95 Mod w/EQ APCO 25 C4FM UN3/4 GSM Gaussian User FIR
Remarks	Refer to “File Name Variables” on page 13 for information on the file name syntax.

:IQ:SCALe

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:TETRa:IQ:SCALe <val>
[ :SOURce ] :RADio:TETRa:IQ:SCALe?
```

This command sets the amplitude of the I/Q outputs for better adjacent channel power (ACP); lower scaling values equate to better ACP.

The variable <val> is expressed in units of percent.

***RST** +65

Range 1–200

Key Entry **I/Q Scaling**

Remarks This command has no effect with MSK or FSK modulation.

:MODulation:FSK[:DEViation]

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:TETRa:MODulation:FSK[:DEViation] <val>
[ :SOURce ] :RADio:TETRa:MODulation:FSK[:DEViation]?
```

This command sets the symmetric FSK frequency deviation value.

The variable <val> is expressed in units of Hertz and the maximum range value equals the current symbol rate value multiplied by four, limited to 20 MHz.

*RST	+4.00000000E+002
Range	0–2E7
Key Entry	Freq Dev
Remarks	To change the modulation type, refer to “:MODulation[:TYPE]” on page 906. Refer to “:SRATe” on page 926 for a list of the minimum and maximum symbol rate values. To set an asymmetric FSK deviation value, refer to the <i>E4428C/38C ESG Signal Generators User’s Guide</i> for more information.

:MODulation:MSK[:PHASe]

Supported	E4438C with Option 402
	<code>[:SOURCE]:RADIO:TETRA:MODulation:MSK[:PHASe] <val></code> <code>[:SOURCE]:RADIO:TETRA:MODulation:MSK[:PHASe]?</code>

This command sets the MSK phase deviation value.

The variable <val> is expressed in units of degrees.

*RST	+9.00000000E+001
Range	0–100
Key Entry	Phase Dev

:MODulation:UFSK

Supported	E4438C with Option 402
	<code>[:SOURCE]:RADIO:TETRA:MODulation:UFSK "<file name>"</code> <code>[:SOURCE]:RADIO:TETRA:MODulation:UFSK?</code>

This command selects a user-defined FSK file from the signal generator memory.

Key Entry	User FSK
Remarks	The user-defined FSK file is held in signal generator memory until the command that selects user FSK as the modulation type is sent. Refer to “:MODulation[:TYPE]” on page 906 to change the current modulation type. Refer to “File Name Variables” on page 13 for information on the file name syntax.

TETRA Subsystem—Option 402 ([:SOURCE]:RADio:TETRa)**:MODulation:UIQ**

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:TETRa:MODulation:UIQ "<file name>"
```

```
[ :SOURCE ] :RADio:TETRa:MODulation:UIQ?
```

This command selects a user-defined I/Q file from the signal generator memory.

Key Entry **User I/Q**

Remarks The user-defined I/Q file is held in signal generator memory until the command that selects user I/Q as the modulation type is sent. Refer to [“:MODulation\[:TYPE\]” on page 906](#) to change the current modulation type.

Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:MODulation[:TYPE]

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:TETRa:MODulation[:TYPE] BPSK|QPSK|IS95QPSK|
GRAYQPSK|OQPSK|IS95OQPSK|P4DQPSK|PSK8|PSK16|D8PSK|MSK|FSK2|FSK4|
FSK8|FSK16|C4FM|QAM4|QAM16|QAM32|QAM64|QAM128|QAM256|UIQ|UFSK
[ :SOURCE ] :RADio:TETRa:MODulation[:TYPE]?
```

This command sets the modulation type for the TETRA personality.

***RST** P4DQPSK

Key Entry	BPSK	QPSK	IS-95 QPSK	Gray Coded QPSK	OQPSK			
	IS-95 OQPSK	$\pi/4$ DQPSK	8PSK	16PSK	D8PSK	MSK	2-Lvl FSK	
	4-Lvl FSK	8-Lvl FSK	16-Lvl FSK	C4FM	4QAM	16QAM	32QAM	
	64QAM	128QAM	256QAM	User I/Q	User FSK			

:POLarity[:ALL]

Supported E4438C with Option 402
[:SOURCE]:RADio:TETRa:POLarity[:ALL] NORMal | INVerted
[:SOURCE]:RADio:TETRa:POLarity[:ALL] ?

This command sets the rotation direction of the phase modulation vector.

NORMal This choice selects normal phase polarity.

INVerted This choice inverts the internal Q signal.

***RST** NORM

Key Entry **Phase Polarity Normal Invert**

:SECondary:RECall

Supported E4438C with Option 402
[:SOURCE]:RADio:TETRa:SECondary:RECall

This command recalls the secondary frame configuration, overwriting the current state.

Key Entry **Recall Secondary Frame State**

Remarks To save a secondary frame state, refer to “:SECondary:SAVE” on page 907.

A secondary frame is not active until the secondary state is enabled. To activate a secondary frame, refer to “:SECondary[:STATE]” on page 908.

:SECondary:SAVE

Supported E4438C with Option 402
[:SOURCE]:RADio:TETRa:SECondary:SAVE

This command saves the current frame configuration as the secondary frame with the file name TETRa_SECONDARY_FRAME.

Key Entry **Save Secondary Frame State**

Remarks To recall the secondary frame (saved in non-volatile signal generator memory), refer to “:SECondary:RECall” on page 907.

TETRA Subsystem—Option 402 ([:SOURCE]:RADio:TETRa)**:SECondary:TRIGger[:SOURCE]****Supported** E4438C with Option 402

```
[:SOURCE]:RADio:TETRa:SECondary:TRIGger[:SOURCE] KEY|EXT|BUS
[:SOURCE]:RADio:TETRa:SECondary:TRIGger[:SOURCE] ?
```

This command selects the type of triggering for the secondary frame.

KEY This choice enables triggering by pressing the front panel **Trigger** hardkey.

EXT This choice enables triggering using an externally applied signal at the PATT TRIG IN rear panel connector or the PATT TRIG IN 2 pin on the rear panel AUX I/O connector. To select the appropriate connector, refer to [“:TRIGger\[:SOURCE\]:EXTErnal\[:SOURCE\]” on page 933](#).

BUS This choice enables GPIB triggering using the *TRG or GET command or LAN and RS-232 triggering using the *TRG command.

Key Entry **Trigger Key** **Ext** **Bus**

:SECondary[:STATE]**Supported** E4438C with Option 402

```
[:SOURCE]:RADio:TETRa:SECondary[:STATE] ON|OFF|1|0
[:SOURCE]:RADio:TETRa:SECondary[:STATE] ?
```

This command enables or disables the ability to switch to the secondary frame.

***RST** 0

Key Entry **Secondary Frame Off On**

Remarks A frame must already be saved as the secondary frame in order to turn the secondary state function on.

To save a frame as the secondary frame, refer to [“:SECondary:SAVE” on page 907](#).

:SLOT[1]|2|3|4:DCCustom**Supported** E4438C with Option 402

```
[:SOURCE]:RADio:TETRa:SLOT[1]|2|3|4:DCCustom PN9|PN11|PN15|
PN20|PN23|FIX4|"<file name>"|EXT|P4|P8|P16|P32|P64
[:SOURCE]:RADio:TETRa:SLOT[1]|2|3|4:DCCustom?
```

This command configures the downlink continuous custom timeslot data field.

*RST	PN9							
Key Entry	PN9	PN11	PN15	PN20	PN23	FIX4	User File	EXT
	4 1's & 4 0's		8 1's & 8 0's		16 1's & 16 0's		32 1's & 32 0's	
	64 1's & 64 0's							
Remarks	Refer to “File Name Variables” on page 13 for information on the file name syntax.							

:SLOT[1] | 2 | 3 | 4:DCCustom:FIX4

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:TETRa:SLOT [1] | 2 | 3 | 4 :DCCustom:FIX4 <val>
[ :SOURCE ] :RADio:TETRa:SLOT [1] | 2 | 3 | 4 :DCCustom:FIX4?
```

This command sets the binary, 4-bit repeating sequence data pattern that is used in the selected downlink continuous custom timeslot.

*RST	#B0000
Range	#B0000–#B1111 or 0–15
Key Entry	FIX4
Remarks	FIX4 must already be defined as the data type.

:DCNormal:B1

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:TETRa:SLOT [1] | 2 | 3 | 4 :DCNormal:B1 <val>
[ :SOURCE ] :RADio:TETRa:SLOT [1] | 2 | 3 | 4 :DCNormal:B1?
```

This command sets the first 14 broadcast bits for the selected downlink continuous normal timeslot.

*RST	#H0000
Range	#H0–#H3FFF
Key Entry	B1

TETRA Subsystem—Option 402 ([:SOURCE]:RADIO:TETRA)**:DCNormal:B2****Supported** E4438C with Option 402

[:SOURCE]:RADIO:TETRA:SLOT[1] | 2 | 3 | 4:DCNormal:B2 <val>

[:SOURCE]:RADIO:TETRA:SLOT[1] | 2 | 3 | 4:DCNormal:B2?

This command sets the last 16 broadcast bits for the selected downlink continuous normal timeslot.

RST** #H0000**Range** #H0–#HFFFF**Key Entry** **B2*:SLOT[1] | 2 | 3 | 4:DCNormal:TSEquence****Supported** E4438C with Option 402

[:SOURCE]:RADIO:TETRA:SLOT[1] | 2 | 3 | 4:DCNormal:TSEquence <val>

[:SOURCE]:RADIO:TETRA:SLOT[1] | 2 | 3 | 4:DCNormal:TSEquence?

This command sets the normal training sequence bits (30-bit mid-amble) for the selected downlink continuous normal timeslot.

RST** #H343A74**Range** #H0–#H3FFFFFF**Key Entry** **TS*Remarks** When 1E90DE is selected, the data fields are scrambled as separate logical channels.**:SLOT[1] | 2 | 3 | 4:DCNormal[:DATA]****Supported** E4438C with Option 402

[:SOURCE]:RADIO:TETRA:SLOT[1] | 2 | 3 | 4:DCNormal[:DATA] PN9 | PN11 | PN15 | PN20 | PN23 | FIX4 | "<file name>" | EXT | P4 | P8 | P16 | P32 | P64

[:SOURCE]:RADIO:TETRA:SLOT[1] | 2 | 3 | 4:DCNormal[:DATA] ?

This command configures the selected downlink continuous normal timeslot data field.

*RST	PN9
Key Entry	PN9 PN11 PN15 PN20 PN23 FIX4 User File EXT 4 1's & 4 0's 8 1's & 8 0's 16 1's & 16 0's 32 1's & 32 0's 64 1's & 64 0's
Remarks	Refer to “File Name Variables” on page 13 for information on the file name syntax.

:SLOT[1] | 2 | 3 | 4:DCNormal[:DATA]:FIX4

Supported	E4438C with Option 402
	[:SOURCE] :RADio:TETRa:SLOT [1] 2 3 4 :DCNormal [:DATA] :FIX4 <val> [:SOURCE] :RADio:TETRa:SLOT [1] 2 3 4 :DCNormal [:DATA] :FIX4?

This command sets the binary, 4-bit repeating sequence data pattern that is used in the selected downlink continuous normal timeslot.

*RST	#B0000
Range	#B0000–#B1111 or 0–15
Key Entry	FIX4
Remarks	FIX4 must already be defined as the data type.

:SLOT[1] | 2 | 3 | 4:DCSync:B

Supported	E4438C with Option 402
	[:SOURCE] :RADio:TETRa:SLOT [1] 2 3 4 :DCSync:B <val> [:SOURCE] :RADio:TETRa:SLOT [1] 2 3 4 :DCSync:B?

This command sets the broadcast bits for the selected downlink continuous synchronization timeslot.

*RST	#H00000000
Range	#H0–#H3FFFFFFF
Key Entry	B

TETRA Subsystem—Option 402 ([:SOURCE]:RADio:TETRa)**:SLOT[1]|2|3|4:DCSync:FCOR****Supported** E4438C with Option 402

[:SOURCE]:RADio:TETRa:SLOT[1]|2|3|4:DCSync:FCOR <val>

[:SOURCE]:RADio:TETRa:SLOT[1]|2|3|4:DCSync:FCOR?

This command sets the frequency correction bits for the selected downlink continuous synchronization timeslot.

RST** #HFF0000000000000000FF**Range** #H0–#HFFFFFFFFFFFFFFFFFFFFFFF**Key Entry** **FCOR*:SLOT[1]|2|3|4:DCSync:SSB****Supported** E4438C with Option 402

[:SOURCE]:RADio:TETRa:SLOT[1]|2|3|4:DCSync:SSB <val>

[:SOURCE]:RADio:TETRa:SLOT[1]|2|3|4:DCSync:SSB?

This command sets the synchronization block bits for the selected downlink synchronization continuous timeslot.

RST** #H00000000000000000000000000000000**Range** #H0–#HFFFFFFFFFFFFFFFFFFFFFFFFF**Key Entry** **SSB*:SLOT[1]|2|3|4:DCSync:STS****Supported** E4438C with Option 402

[:SOURCE]:RADio:TETRa:SLOT[1]|2|3|4:DCSync:STS <val>

[:SOURCE]:RADio:TETRa:SLOT[1]|2|3|4:DCSync:STS?

This command sets the synchronization training sequence for the selected downlink continuous synchronization timeslot.

***RST** #H30673A7067**Range** #H0–#H3FFFFFFFFF**Key Entry** **STS**

:SLOT[1]|2|3|4:DCSync[:DATA]

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:TETRa:SLOT [1] | 2 | 3 | 4 :DCSync [ :DATA ] PN9 | PN11 |
PN15 | PN20 | PN23 FIX4 | "<file name>" | EXT | P4 | P8 | P16 | P32 | P64
[ :SOURCE ] :RADio:TETRa:SLOT [1] | 2 | 3 | 4 :DCSync [ :DATA ] ?
```

This command configures the selected downlink continuous synchronization timeslot data field.

***RST** PN9

Key Entry	PN9	PN11	PN15	PN20	PN23	FIX4	User File	EXT
	4 1's & 4 0's	8 1's & 8 0's	16 1's & 16 0's	32 1's & 32 0's	64 1's & 64 0's			

Remarks Refer to “[File Name Variables](#)” on page 13 for information on the file name syntax.

:SLOT[1]|2|3|4:DCSync[:DATA]:FIX4

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:TETRa:SLOT [1] | 2 | 3 | 4 :DCSync [ :DATA ] :FIX4 <val>
[ :SOURCE ] :RADio:TETRa:SLOT [1] | 2 | 3 | 4 :DCSync [ :DATA ] :FIX4 ?
```

This command sets the binary, 4-bit repeating sequence data pattern that is used in the selected downlink continuous synchronization timeslot.

***RST** #B0000

Range #B0000–#B1111 or 0–15

Key Entry **FIX4**

Remarks FIX4 must already be defined as the data type.

TETRA Subsystem—Option 402 ([:SOURCE]:RADio:TETRa)**:SLOT[1]|2|3|4:DDCustom**

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:TETRa:SLOT [1] | 2 | 3 | 4 :DDCustom PN9 | PN11 | PN15 |
PN20 | PN23 | FIX4 | "<file name>" | EXT | P4 | P8 | P16 | P32 | P64
[ :SOURCE ] :RADio:TETRa:SLOT [1] | 2 | 3 | 4 :DDCustom?
```

This command configures the downlink discontinuous custom timeslot data field.

***RST** PN9

Key Entry	PN9	PN11	PN15	PN20	PN23	FIX4	User File	EXT
	4 1's & 4 0's	8 1's & 8 0's	16 1's & 16 0's	32 1's & 32 0's	64 1's & 64 0's			

Remarks Refer to “[File Name Variables](#)” on page 13 for information on the file name syntax.

:SLOT[1]|2|3|4:DDCustom:FIX4

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:TETRa:SLOT [1] | 2 | 3 | 4 :DDCustom:FIX4 <val>
[ :SOURCE ] :RADio:TETRa:SLOT [1] | 2 | 3 | 4 :DDCustom:FIX4?
```

This command sets the binary, 4-bit repeating sequence data pattern that is used in the selected downlink discontinuous custom timeslot.

***RST** #B0000

Range #B0000–#B1111 or 0–15

Key Entry **FIX4**

Remarks FIX4 must already be defined as the data type.

:SLOT[1]|2|3|4:DDNormal:B1

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:TETRa:SLOT [1] | 2 | 3 | 4 :DDNormal:B1 <val>
[ :SOURCE ] :RADio:TETRa:SLOT [1] | 2 | 3 | 4 :DDNormal:B1?
```

This command sets the first 14 broadcast bits for the selected downlink discontinuous normal timeslot.

***RST** #H0000
Range #H0–#H3FFF
Key Entry **B1**

:SLOT[1] | 2 | 3 | 4:DDNormal:B2

Supported E4438C with Option 402

```
[ :SOURCE ] :RADIO:TETRA:SLOT [ 1 ] | 2 | 3 | 4 :DDNormal:B2 <val>  
[ :SOURCE ] :RADIO:TETRA:SLOT [ 1 ] | 2 | 3 | 4 :DDNormal:B2?
```

This command sets the last 16 broadcast bits for the selected downlink continuous normal timeslot.

***RST** #H0000
Range #H0–#HFFFF
Key Entry **B2**

:SLOT[1] | 2 | 3 | 4:DDNormal:TSEquence

Supported E4438C with Option 402

```
[ :SOURCE ] :RADIO:TETRA:SLOT [ 1 ] | 2 | 3 | 4 :DDNormal:TSEquence <val>  
[ :SOURCE ] :RADIO:TETRA:SLOT [ 1 ] | 2 | 3 | 4 :DDNormal:TSEquence?
```

This command specifies the normal training sequence bits (30-bit mid-amble) for the selected downlink discontinuous normal timeslot.

***RST** #H343A74
Range #H0–#H3FFFFFFF
Key Entry **TS**
Remarks When 1E90DE is selected, the data fields are scrambled as separate logical channels.

TETRA Subsystem—Option 402 ([:SOURCE]:RADIO:TETRA)**:SLOT[1] | 2 | 3 | 4:DDNormal[:DATA]****Supported** E4438C with Option 402

```
[:SOURCE]:RADIO:TETRA:SLOT[1] | 2 | 3 | 4:DDNormal[:DATA] PN9 | PN11 |
PN15 | PN20 | PN23FIX4 | "<file name>" | EXT | P4 | P8 | P16 | P32 | P64
[:SOURCE]:RADIO:TETRA:SLOT[1] | 2 | 3 | 4:DDNormal[:DATA] ?
```

This command configures the selected downlink discontinuous normal timeslot data field.

***RST** PN9

Key Entry	PN9	PN11	PN15	PN20	PN23	FIX4	User File	EXT
	4 1's & 4 0's	8 1's & 8 0's	16 1's & 16 0's	32 1's & 32 0's	64 1's & 64 0's			

Remarks Refer to “[File Name Variables](#)” on page 13 for information on the file name syntax.

:SLOT[1] | 2 | 3 | 4:DDNormal[:DATA]:FIX4**Supported** E4438C with Option 402

```
[:SOURCE]:RADIO:TETRA:SLOT[1] | 2 | 3 | 4:DDNormal[:DATA]:FIX4 <val>
[:SOURCE]:RADIO:TETRA:SLOT[1] | 2 | 3 | 4:DDNormal[:DATA]:FIX4 ?
```

This command sets the binary, 4-bit repeating sequence data pattern that is used in the selected downlink discontinuous normal timeslot.

***RST** #B0000**Range** #B0000–#B1111 or 0–15**Key Entry** **FIX4**

Remarks FIX4 must already be defined as the data type.

:SLOT[1]|2|3|4:DDSync:B

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:TETRa:SLOT [1] | 2 | 3 | 4 :DDSync:B <val>  
[ :SOURCE ] :RADio:TETRa:SLOT [1] | 2 | 3 | 4 :DDSync:B?
```

This command sets the broadcast bits for the selected downlink discontinuous synchronization timeslot.

***RST** #H00000000

Range #H0–#H3FFFFFFF

Key Entry **B**

:SLOT[1]|2|3|4:DDSync:FCOR

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:TETRa:SLOT [1] | 2 | 3 | 4 :DDSync:FCOR <val>  
[ :SOURCE ] :RADio:TETRa:SLOT [1] | 2 | 3 | 4 :DDSync:FCOR?
```

This command sets the frequency correction bits for the selected downlink discontinuous synchronization timeslot.

***RST** #HFF0000000000000000FF

Range #H0–#HFFFFFFFFFFFFFFFFFFFF

Key Entry **FCOR**

:SLOT[1]|2|3|4:DDSync:SSB

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:TETRa:SLOT [1] | 2 | 3 | 4 :DDSync:SSB <val>  
[ :SOURCE ] :RADio:TETRa:SLOT [1] | 2 | 3 | 4 :DDSync:SSB?
```

This command sets the synchronization block bits for the selected downlink synchronization discontinuous timeslot.

***RST** #H00000000000000000000000000000000

Range #H0–#HFFFFFFFFFFFFFFFFFFFFFFFF

Key Entry **SSB**

TETRA Subsystem—Option 402 ([:SOURCE]:RADIO:TETRA)**:SLOT[1]|2|3|4:DDSync:STS****Supported** E4438C with Option 402

```
[:SOURCE]:RADIO:TETRA:SLOT[1]|2|3|4:DDSync:STS <val>
[:SOURCE]:RADIO:TETRA:SLOT[1]|2|3|4:DDSync:STS?
```

This command sets the synchronization training sequence for the selected downlink discontinuous synchronization timeslot.

RST** #H30673A7067**Range** #H0–#H3FFFFFFFFF**Key Entry** **STS*:SLOT[1]|2|3|4:DDSync[:DATA]****Supported** E4438C with Option 402

```
[:SOURCE]:RADIO:TETRA:SLOT[1]|2|3|4:DDSync[:DATA] PN9|PN11|
PN15|PN20|PN23|FIX4|"<file name>"|EXT|P4|P8|P16|P32|P64
[:SOURCE]:RADIO:TETRA:SLOT[1]|2|3|4:DDSync[:DATA]?
```

This command configures the selected downlink discontinuous synchronization timeslot data field.

***RST** PN9

Key Entry	PN9	PN11	PN15	PN20	PN23	FIX4	User File	EXT
	4 1's & 4 0's		8 1's & 8 0's		16 1's & 16 0's		32 1's & 32 0's	
	64 1's & 64 0's							

Remarks Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:SLOT[1]|2|3|4:DDSync[:DATA]:FIX4**Supported** E4438C with Option 402

```
[:SOURCE]:RADIO:TETRA:SLOT[1]|2|3|4:DDSync[:DATA]:FIX4 <val>
[:SOURCE]:RADIO:TETRA:SLOT[1]|2|3|4:DDSync[:DATA]:FIX4?
```

This command sets the binary, 4-bit repeating sequence data pattern that is used in the selected downlink discontinuous synchronization timeslot.

***RST** #B0000**Range** #B0000–#B1111 or 0–15**Key Entry** **FIX4**

Remarks FIX4 must already be defined as the data type. To change the data type, refer to “:SLOT[1]|2|3|4:DCNormal[:DATA]” on page 910.

:SLOT[1]|2|3|4:POWer

Supported E4438C with Option 402

```
[:SOURCE]:RADio:TETRa:SLOT [1] | 2 | 3 | 4 :POWer MAIN|DELTA
[:SOURCE]:RADio:TETRa:SLOT [1] | 2 | 3 | 4 :POWer?
```

This command toggles the RF output power level function for the selected timeslot.

MAIN This choice specifies RF output as the main power level.

DELTA This choice specifies RF output as the alternative power level.

***RST** MAIN

Key Entry **Timeslot Ampl Main Delta**

:SLOT[1]|2|3|4:STATe

Supported E4438C with Option 402

```
[:SOURCE]:RADio:TETRa:SLOT [1] | 2 | 3 | 4 :STATe ON|OFF|1|0
[:SOURCE]:RADio:TETRa:SLOT [1] | 2 | 3 | 4 :STATe?
```

This command enables or disables the selected timeslot.

***RST** Timeslot 1: 1 Timeslot 2-4:

Key Entry **Timeslot Off On**

Remarks Continuous timeslots cannot be disabled.

:SLOT[1]|2|3|4:UC1:TSEQuence

Supported E4438C with Option 402

```
[:SOURCE]:RADio:TETRa:SLOT [1] | 2 | 3 | 4 :UC1:TSEQuence <val>
[:SOURCE]:RADio:TETRa:SLOT [1] | 2 | 3 | 4 :UC1:TSEQuence?
```

This command specifies the extended training sequence bits (30-bit mid-amble) for the selected uplink control 1 timeslot.

***RST** #H2743A743

Range #H0–#H3FFFFFFF

Key Entry **TS**

TETRA Subsystem—Option 402 ([:SOURCE]:RADIO:TETRA)**:SLOT[1]|2|3|4:UC1[:DATA]****Supported** E4438C with Option 402

```
[:SOURCE]:RADIO:TETRA:SLOT[1]|2|3|4:UC1[:DATA] PN9|PN11|PN15|
PN20|PN23|FIX4|"<file name>"|EXT|P4|P8|P16|P32|P64
[:SOURCE]:RADIO:TETRA:SLOT[1]|2|3|4:UC1[:DATA]?
```

This command configures the selected uplink control 1 data field.

***RST** PN9

Key Entry	PN9	PN11	PN15	PN20	PN23	FIX4	User File	EXT
	4 1's & 4 0's	8 1's & 8 0's	16 1's & 16 0's	32 1's & 32 0's	64 1's & 64 0's			

Remarks Refer to “[File Name Variables](#)” on page 13 for information on the file name syntax.

:SLOT[1]|2|3|4:UC1[:DATA]:FIX4**Supported** E4438C with Option 402

```
[:SOURCE]:RADIO:TETRA:SLOT[1]|2|3|4:UC1[:DATA]:FIX4 <val>
[:SOURCE]:RADIO:TETRA:SLOT[1]|2|3|4:UC1[:DATA]:FIX4?
```

This command configures the uplink control 1 data field FIX4 value for the selected timeslot.

RST** #B0000**Range** #B0000–#B1111 or 0–15**Key Entry** **FIX4*:SLOT[1]|2|3|4:UC2:TSEquence****Supported** E4438C with Option 402

```
[:SOURCE]:RADIO:TETRA:SLOT[1]|2|3|4:UC2:TSEquence <val>
[:SOURCE]:RADIO:TETRA:SLOT[1]|2|3|4:UC2:TSEquence?
```

This command specifies the extended training sequence bits (30-bit mid-amble) for the selected uplink control 2 timeslot.

***RST** #H2743A743**Range** #H0–#H3FFFFFF**Key Entry** **TS**

:SLOT[1] | 2 | 3 | 4:UC2[:DATA]

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:TETRa:SLOT [ 1 ] | 2 | 3 | 4 :UC2 [ :DATA ] PN9 | PN11 | PN15 |
PN20 | PN23 | FIX4 | "<file name>" | EXT | P4 | P8 | P16 | P32 | P64
[ :SOURCE ] :RADio:TETRa:SLOT [ 1 ] | 2 | 3 | 4 :UC2 [ :DATA ] ?
```

This command configures the selected uplink control 2 data field.

***RST** PN9

Key Entry	PN9	PN11	PN15	PN20	PN23	FIX4	User File	EXT
	4 1's & 4 0's	8 1's & 8 0's	16 1's & 16 0's	32 1's & 32 0's	64 1's & 64 0's			

Remarks Refer to “[File Name Variables](#)” on page 13 for information on the file name syntax.

:SLOT[1] | 2 | 3 | 4:UC2[:DATA]:FIX4

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:TETRa:SLOT [ 1 ] | 2 | 3 | 4 :UC2 [ :DATA ] :FIX4 <val>
[ :SOURCE ] :RADio:TETRa:SLOT [ 1 ] | 2 | 3 | 4 :UC2 [ :DATA ] :FIX4 ?
```

This command configures the uplink control 2 data field FIX4 value for the selected timeslot.

***RST** #B0000

Range #B0000–#B1111 or 0–15

Key Entry **FIX4**

TETRA Subsystem—Option 402 ([:SOURCE]:RADio:TETRa)**:SLOT[1]|2|3|4:UCUStom****Supported** E4438C with Option 402

```
[:SOURCE]:RADio:TETRa:SLOT[1]|2|3|4:UCUStom PN9|PN11|PN15|
PN20|PN23|FIX4|"<file name>"|EXT|P4|P8|P16|P32|P64
[:SOURCE]:RADio:TETRa:SLOT[1]|2|3|4:UCUStom?
```

This command configures the uplink custom data field.

***RST** PN9

Key Entry	PN9	PN11	PN15	PN20	PN23	FIX4	User File	EXT
	4 1's & 4 0's	8 1's & 8 0's	16 1's & 16 0's	32 1's & 32 0's	64 1's & 64 0's			

Remarks See “File Name Variables” on page 13 for information on the file name syntax.**:SLOT[1]|2|3|4:UCUStom:FIX4****Supported** E4438C with Option 402

```
[:SOURCE]:RADio:TETRa:SLOT[1]|2|3|4:UCUStom:FIX4 <val>
[:SOURCE]:RADio:TETRa:SLOT[1]|2|3|4:UCUStom:FIX4?
```

This command configures the uplink custom data field to FIX4 (4-bit repeating sequence data pattern).

RST** #B0000**Range** #B0000–#B1111 or 0–15**Key Entry** **FIX4*:SLOT[1]|2|3|4:UNORmal:TSEquence****Supported** E4438C with Option 402

```
[:SOURCE]:RADio:TETRa:SLOT[1]|2|3|4:UNORmal:TSEquence <val>
[:SOURCE]:RADio:TETRa:SLOT[1]|2|3|4:UNORmal:TSEquence?
```

This command specifies the extended training sequence bits (22-bit mid-amble) for the selected uplink normal timeslot.

RST** #H343A74**Range** #H0–#H3FFFFFF**Key Entry** **TS*Remarks** When 1E90DE is selected, data fields are scrambled as separate logical channels.

:SLOT[1] | 2 | 3 | 4:UNORmal[:DATA]

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:TETRa:SLOT [1] | 2 | 3 | 4:UNORmal [:DATA] PN9 | PN11 |
PN15 | PN20 | PN23 | FIX4 | "<file name>" | EXT | P4 | P8 | P16 | P32 | P64
[ :SOURCE ] :RADio:TETRa:SLOT [1] | 2 | 3 | 4:UNORmal [:DATA] ?
```

This command configures the selected uplink normal data field.

***RST** PN9

Key Entry	PN9	PN11	PN15	PN20	PN23	FIX4	User File	EXT
	4 1's & 4 0's	8 1's & 8 0's	16 1's & 16 0's	32 1's & 32 0's	64 1's & 64 0's			

Remarks Refer to [“File Name Variables” on page 13](#) for information on the file name syntax.

:SLOT[1] | 2 | 3 | 4:UNORmal[:DATA]:FIX4

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:TETRa:SLOT [1] | 2 | 3 | 4:UNORmal [:DATA] :FIX4 <val>
[ :SOURCE ] :RADio:TETRa:SLOT [1] | 2 | 3 | 4:UNORmal [:DATA] :FIX4 ?
```

This command configures the uplink normal data field FIX4 value for the selected timeslot.

***RST** #B0000

Range #B0000–#B1111 or 0–15

Key Entry **FIX4**

TETRA Subsystem—Option 402 ([:SOURCE]:RADIO:TETRA)**:SLOT[1]|2|3|4[:TYPE]****Supported** E4438C with Option 402

```
[:SOURCE]:RADIO:TETRA:SLOT[1]|2|3|4[:TYPE] UCUSTom|UC1|UC2|
UNORmal|DDNormal|DDSync|DCNormal|DCSync|DCCustom|DDCustom
[:SOURCE]:RADIO:TETRA:SLOT[1]|2|3|4[:TYPE] ?
```

This command sets the timeslot type for the selected timeslot.

***RST** *Timeslot 1:* UCUS *Timeslot 2-4:* UNOR

Key Entry **Up Custom** **Up Control 1** **Up Control 2** **Up Normal** **Dn Normal Disc**
Dn Sync Disc **Dn Normal Cont** **Dn Sync Cont** **Dn Custom Cont**
Dn Custom Disc

Remarks When downlink is selected and the frame is uplink, the following mapping is made to convert the uplink protocols to downlink; an error will be generated.

From	To (Continuous Downlink)	To (Discontinuous Downlink)
UC1	DCCustom	DDCustom
UC2	DCCustom	DDCustom
UCUSTom	DCCustom	DDCustom
UNORmal	DCNormal	DDNormal

When uplink is selected and the frame is downlink, the following mapping is made to convert the downlink protocols to uplink; an error will be generated.

From	To
DCCustom/ DDCustom	UCUSTom
DCNormal/ DDNormal	UNORmal
DCSync/ DDSync	UCUSTom

When continuous downlink protocols are selected, all timeslots must be on, and they cannot be turned off. Any attempts to do so will generate an error.

:SOUT**Supported** E4438C with Option 402

```
[:SOURCE]:RADIO:TETRA:SOUT FRAME|SLOT|ALL
[:SOURCE]:RADIO:TETRA:SOUT?
```

This command sets the synchronization location (within the pattern of data) and the type of output at the EVENT 1 rear panel connector.

FRAME	This choice outputs a 1-bit signal, synchronized to the bit selected by the synchronization output offset command, for a framed data pattern.
SLOT	This choice outputs a 1-bit signal, synchronized to the bit selected by the synchronization output offset command, for a selected timeslot.
ALL	This choice outputs a 1-bit signal, synchronized to the bit selected by the synchronization output offset command, for all active timeslots.
*RST	FRAME
Key Entry	Begin Frame Begin Timeslot # All Timeslots
Remarks	See “:SOUT:OFFSet” on page 925 to change the synchronization output offset.

:SOUT:OFFSet

Supported	E4438C with Option 402
	[:SOURCE] :RADio:TETRa:SOUT:OFFSet <val> [:SOURCE] :RADio:TETRa:SOUT:OFFSet?
	This command sets the offset value for the location of the output synchronization signal on the EVENT1 rear panel connector relative to the beginning of the framed data pattern or timeslot.
	The variable <val> is expressed as a number of bits.
*RST	+0
Range	–509 to 509
Key Entry	Sync Out Offset
Remarks	Negative values move the synchronization output signal earlier; positive values move it later. To change the output of the EVENT1 rear panel connector to SLOT, refer to “:SOUT” on page 924.

TETRA Subsystem—Option 402 ([:SOURCE]:RADio:TETRa)**:SOUT:SLOT****Supported** E4438C with Option 402

[:SOURCE]:RADio:TETRa:SOUT:SLOT <val>

[:SOURCE]:RADio:TETRa:SOUT:SLOT?

This command selects the timeslot that will trigger a 1-bit output signal at the EVENT 1 rear panel connector.

RST** +1**Range** 1–4**Key Entry** **Begin Timeslot #*Remarks** SLOT must be selected as the output signal type for the EVENT 1 rear panel connector.

To change the output of the EVENT1 rear panel connector to SLOT, refer to [“:SOUT” on page 924](#).

:SRATe**Supported** E4438C with Option 402

[:SOURCE]:RADio:TETRa:SRATe <val>

[:SOURCE]:RADio:TETRa:SRATe?

This command sets the transmission symbol rate.

The variable <val> is expressed in units of bits per second (bps–Mbps) and the maximum range value is dependent upon the source of data (internal or external), the modulation type, and filter.

***RST** +1.80000000E+004**Range**

Modulation Type	Bits per Symbol	Internal Data	External Serial Data
BPSK	1	1–50 Msps	1–50 Msps
FSK2			
MSK			

Range

Modulation Type	Bits per Symbol	Internal Data	External Serial Data
C4FM	2	1–50 Msps	1–25 Msps
FSK4			
OQPSK			
OQPSK195			
P4QPPSK			
QAM4			
QPSK			
QPSKIS95			
QPSKISAT			
D8PSK	3	1–33.33 Msps	1–16.67 Msps
EDGE			
FSK8			
PSK8			
FSK16	4	1–25 Msps	1–12.5 Msps
PSK16			
QAM16			
QAM32	5	1–20 Msps	1–10 Msps
QAM64	6	1–16.67 Msps	1–8.33 Msps
QAM256	7	1–12.50 Msps	1–6.25 Msps

Key Entry

Symbol Rate

Remarks

When user-defined filters are selected using the command in section “:FILTer” on page 903, the upper bit rate will be restricted in line with the following symbol rate restriction:

- FIR filter length > 32 symbols: upper limit is 12.5 Msps
- FIR filter length > 16 symbols: upper limit is 25 Msps

When internal FIR filters are used, the limits of the above table always apply. For higher symbol rates, the FIR filter length will be truncated as follows:

- Above 12.5 Msps, the FIR length will be truncated to 32 symbols
- Above 25 Msps, the FIR length will be truncated to 16 symbols

This will impact the relative timing of the modulated data, as well as the actual filter response (see “:BRATe” on page 890).

A change in the symbol rate value will affect the bit rate value; refer to “:BRATe” on page 890 for a list of the minimum and maximum bit rate values.

To change the modulation type, refer to “:MODulation[:TYPE]” on page 906.

TETRA Subsystem—Option 402 ([:SOURce]:RADio:TETRa)**:TRIGger:TYPE**

Supported E4438C with Option 402

```
[ :SOURce] :RADio:TETRa:TRIGger:TYPE CONTInuous | SINGle | GATE
[:SOURce] :RADio:TETRa:TRIGger:TYPE?
```

This command sets the trigger type.

CONTInuous The framed data sequence repeats continuously; the sequence restarts every time the previous playback is completed. To customize continuous triggering, refer to [“:TRIGger:TYPE:CONTInuous\[:TYPE\]” on page 928](#).

SINGle The framed data sequence plays once for every trigger received.

GATE An external trigger signal interrupts the playback while the gating signal is in the inactive state. Playback resumes when the external control signal returns to the active state. The active state can be set to high or low.

***RST** CONT

Key Entry **Continuous** **Single** **Gated**

:TRIGger:TYPE:CONTInuous[:TYPE]

Supported E4438C with Option 402

```
[ :SOURce] :RADio:TETRa:TRIGger:TYPE:CONTInous [:TYPE] FREE |
TRIGger | RESet
[:SOURce] :RADio:TETRa:TRIGger:TYPE:CONTInous [:TYPE] ?
```

This commands selects the waveform’s response to a trigger signal while using the continuous trigger mode.

For more information on triggering and to select the continuous trigger mode, see [“:TRIGger:TYPE” on page 928](#).

The following list describes the waveform’s response to each of the command choices:

FREE Turning the ARB format on immediately triggers the waveform. The waveform repeats until you turn the format off, select another trigger, or choose another waveform file.

TRIGger The waveform waits for a trigger before play begins. When the waveform receives the trigger, it plays continuously until you turn the format off, select another trigger, or choose another waveform file.

RESet The waveform waits for a trigger before play begins. When the waveform receives the trigger, it plays continuously. Subsequent triggers reset the waveform to the beginning. For a waveform sequence, this means to the beginning of the

first segment in the sequence.

*RST	FREE		
Key Entry	Free Run	Trigger & Run	Reset & Run

:TRIGger:TYPE:GATE:ACTive

Supported E4438C with Option 402

```
[:SOURCE]:RADio:TETRa:TRIGger:TYPE:GATE:ACTive LOW|HIGH
[:SOURCE]:RADio:TETRa:TRIGger:TYPE:GATE:ACTive?
```

This command selects the active state (gate polarity) of the gate while using the gating trigger mode.

The LOW and HIGH selections correspond to the low and high states of an external trigger signal. For example, when you select HIGH, the active state occurs during the high of the trigger signal. When the active state occurs, the ESG stops the waveform playback at the last played sample point, then restarts the playback at the next sample point when the inactive state occurs. For more information on triggering and to select gating as the trigger mode, see “:TRIGger:TYPE” on page 928.

The following list describes the ESG’s gating behavior for the polarity selections:

LOW The waveform playback stops when the trigger signal goes low (active state) and restarts when the trigger signal goes high (inactive state).

HIGH The waveform playback stops when the trigger signal goes high (active state) and restarts when the trigger signal goes low (inactive state).

***RST** HIGH

Key Entry **Gate Active Low High**

TETRA Subsystem—Option 402 (:SOURce):RADio:TETRa)**:TRIGger[:SOURce]****Supported** E4438C with Option 402

[:SOURce]:RADio:TETRa:TRIGger[:SOURce] KEY|EXT|BUS

[:SOURce]:RADio:TETRa:TRIGger[:SOURce]?

This command sets the trigger source.

For more information on triggering, see “:TRIGger:TYPE” on page 928. The following list describes the command choices:

KEY This choice enables manual triggering by pressing the front-panel **Trigger** hardkey.**EXT** An externally applied signal triggers the waveform. This is the only choice that works with gating. The following conditions affect an external trigger:

- The input connector selected for the trigger signal. You have a choice between the rear-panel PATTERN TRIG IN connector or the PATT TRIG IN 2 pin on the rear-panel AUXILIARY I/O connector. To make the connector selection, see “:TRIGger[:SOURce]:EXTErnal[:SOURce]” on page 933.

For more information on the connectors and on connecting the cables, see the *ESG User’s Guide*.

- The trigger signal polarity:
 - gating mode, see “:TRIGger:TYPE:GATE:ACTive” on page 929
 - continuous and single modes, see “:TRIGger[:SOURce]:EXTErnal:SLOPe” on page 932
- The time delay between when the ESG receives a trigger and when the waveform responds to the trigger. There are two parts to setting the delay:
 - setting the amount of delay, see “:TRIGger[:SOURce]:EXTErnal:DELAy” on page 931
 - turning the delay on, see “:TRIGger[:SOURce]:EXTErnal:DELAy:STATe” on page 931

BUS This choice enables triggering over the GPIB or LAN using the *TRG or GET commands or the AUXILIARY INTERFACE (RS-232) using the *TRG command.***RST** KEY**Key Entry** **Trigger Key** **Ext** **Bus**

:TRIGger[:SOURCE]:EXtErnal:DELay

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:TETRa:TRIGger [ :SOURCE ] :EXtErnal:DELay <val>  
[ :SOURCE ] :RADio:TETRa:TRIGger [ :SOURCE ] :EXtErnal:DELay?
```

This command sets the number of bits to delay the ESG's response to an external trigger.

The bit delay is a delay between when the ESG receives the trigger and when it responds to the trigger. The delay uses the clocks of the bit-clock to time the delay. After the ESG receives the trigger and the set number of delay bits (clocks) occurs, the ESG transmits the data pattern.

The delay occurs after you enable the state. See “[:TRIGger\[:SOURCE\]:EXtErnal:DELay:STATe](#)” on [page 931](#). You can set the number of bits either before or after enabling the state.

For more information on configuring an external trigger source and to select external as the trigger source, see “[:TRIGger\[:SOURCE\]](#)” on [page 930](#).

***RST** +0

Range 0–1048575

Key Entry **Ext Delay Bits**

:TRIGger[:SOURCE]:EXtErnal:DELay:STATe

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:TETRa:TRIGger [ :SOURCE ] :EXtErnal:DELay:STATe  
ON|OFF|1|0  
[ :SOURCE ] :RADio:TETRa:TRIGger [ :SOURCE ] :EXtErnal:DELay:STATe?
```

This command enables or disables the operating state of the external trigger delay function.

For setting the delay time, see “[:TRIGger\[:SOURCE\]:EXtErnal:DELay](#)” on [page 931](#), and for more information on configuring an external source, see “[:TRIGger\[:SOURCE\]](#)” on [page 930](#).

***RST** 0

Key Entry **Ext Delay Off On**

TETRA Subsystem—Option 402 (:SOURce):RADio:TETRa)

:TRIGger[:SOURce]:EXTernal:SLOPe

Supported E4438C with Option 402

```
[ :SOURce ] :RADio:TETRa:TRIGger [ :SOURce ] :EXTernal:SLOPe POSitive|NEGative  
[ :SOURce ] :RADio:TETRa:TRIGger [ :SOURce ] :EXTernal:SLOPe?
```

This command sets the polarity for an external trigger signal while using the continuous, single triggering mode. To set the polarity for gating, see “[:TRIGger:TYPE:GATE:ACTive](#)” on page 929.

The POSitive and NEGative selections correspond to the high (positive) and low (negative) states of the external trigger signal. For example, when you select POSitive, the waveform responds (plays) during the high state of the trigger signal. When the PSG receives multiple trigger occurrences when only one is required, the signal generator uses the first trigger and ignores the rest.

For more information on configuring an external trigger source and to select external as the trigger source, see “[:TRIGger\[:SOURce\]](#)” on page 930.

***RST** NEG

Key Entry **Ext Polarity Neg Pos**

:TRIGger[:SOURCE]:EXTeRnal[:SOURCE]

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:TETRa:TRIGger [ :SOURCE ] :EXTeRnal [ :SOURCE ] EPT1 |
EPT2 | EPTRIGGER1 | EPTRIGGER2
[ :SOURCE ] :RADio:TETRa:TRIGger [ :SOURCE ] :EXTeRnal [ :SOURCE ] ?
```

This command selects which PATTERN TRIG IN connection the ESG uses to accept an externally applied trigger signal when external is the trigger source selection.

For more information on configuring an external trigger source and to select external as the trigger source, see “:TRIGger[:SOURCE]” on page 930. For more information on the rear-panel connectors, see the *E4428C/38C ESG Signal Generators User’s Guide*.

The following list describes the command choices:

EPT1	This choice is synonymous with EPTRIGGER1 and selects the PATTERN TRIG IN rear-panel connector.
EPT2	This choice is synonymous with EPTRIGGER2 and selects the PATT TRIG IN 2 pin on the rear-panel AUXILIARY I/O connector.
EPTRIGGER1	This choice is synonymous with EPT1 and selects the PATTERN TRIG IN rear-panel connector.
EPTRIGGER2	This choice is synonymous with EPT2 and selects the PATT TRIG IN 2 pin on the rear-panel AUXILIARY I/O connector.
*RST	EPT1
Key Entry	Patt Trig In 1 Patt Trig In 2

[:STAtE]

Supported E4438C with Option 402

```
[ :SOURCE ] :RADio:TETRa [ :STAtE ] ON | OFF | 1 | 0
[ :SOURCE ] :RADio:TETRa [ :STAtE ] ?
```

This command enables or disables the TETRA modulation format.

***RST** OFF

Key Entry TETRA Off On

Remarks Although the TETRA modulation is enabled with this command, the RF carrier is not modulated unless you also activate the front panel **Mod On/Off** hardkey.

Wideband CDMA Base Band Generator Subsystem—Option 400 [:SOURce]:RADio:WCDMa:TGPP[:BBG])

:BBClock

Supported E4438C with Option 400

[:SOURce]:RADio:WCDMa:TGPP[:BBG]:BBClock INT[1] | EXT[1]

[:SOURce]:RADio:WCDMa:TGPP[:BBG]:BBClock?

This command selects the baseband generator chip clock source for the radio uplink channel.

***RST** INT

Key Entry **BBG Chip Clock Ext Int**

Remarks Refer to “:BBClock:EXT:RATE” on page 934 for the EXT clock rate selections.

:BBClock:EXT:RATE

Supported E4438C with Option 400

[:SOURce]:RADio:WCDMa:TGPP[:BBG]:BBClock:EXT:RATE X1 | X2 | X4

[:SOURce]:RADio:WCDMa:TGPP[:BBG]:BBClock:EXT:RATE?

This command sets the external clock rate for the baseband generator.

X1 This choice sets an external clock rate that is identical to the chip clock (3.84 MHz).

X2 This choice sets an external clock rate that is two times the rate of the chip clock.

X4 This choice sets an external clock rate that is four times the rate of the chip clock.

***RST** X1

Key Entry **Ext Clock Rate x1 x2 x4**

Remarks This command only applies to uplink.

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADIo:WCDMa:TGPP[:BBG])**:DLINK:APPLY****Supported** E4438C with Option 400

[:SOURCE]:RADIo:WCDMa:TGPP[:BBG]:DLINK:APPLY

[:SOURCE]:RADIo:WCDMa:TGPP[:BBG]:DLINK:APPLY?

This command immediately starts the channel coding generation process according to the channel setup and data entered for the downlink physical and transport channels.

Key Entry **Apply Channel Setup**

Remarks If pre-computing is required, then a progress bar will appear on the signal generator's display.

:DLINK:AWGN:CN**Supported** E4438C with Option 400 and 403

[:SOURCE]:RADIo:WCDMa:TGPP[:BBG]:DLINK:AWGN:CN <val>

[:SOURCE]:RADIo:WCDMa:TGPP[:BBG]:DLINK:AWGN:CN?

This command sets the in band carrier to noise ratio (C/N) value in the AWGN carrier to noise.

RST** -10.2**Range** -20 to 20**Field Entry** C/N value**:DLINK:AWGN:CPOWer*Supported** E4438C with Option 400 and 403

[:SOURCE]:RADIo:WCDMa:TGPP[:BBG]:DLINK:AWGN:CPOWer?

This query returns the carrier power of the RF signal.

***RST** 0**Field Entry** C Power

:DLINK:AWGN:ECNO

Supported E4438C with Option 400 and 403

[:SOURCE] :RADio:WCDMa:TGPP [:BBG] :DLINK:AWGN:ECNO <val>

[:SOURCE] :RADio:WCDMa:TGPP [:BBG] :DLINK:AWGN:ECNO?

This command sets the Ec/No value of the Ec Ref channel.

The variable <val> is expressed in decibels (dB).

***RST** 0

Range -30 to 30

Field Entry Ec/No value

:DLINK:AWGN:ECRPower

Supported E4438C with Option 400 and 403

[:SOURCE] :RADio:WCDMa:TGPP [:BBG] :DLINK:AWGN:ECRPower?

This query returns the carrier noise power in the Ec Ref channel.

***RST** 0

Field Entry Ec Ref Power

:DLINK:AWGN:ECRef

Supported E4438C with Option 400 and 403

[:SOURCE] :RADio:WCDMa:TGPP [:BBG] :DLINK:AWGN:ECRef DPCH1 | DPCH2 | PCCPCH | PICH | CPICH

[:SOURCE] :RADio:WCDMa:TGPP [:BBG] :DLINK:AWGN:ECRef?

This command selects the reference used for the Ec/No value.

DPCH1 This choice selects 1 dedicated physical channel.

DPCH2 This choice selects 2 dedicated physical channel.

PCCPCH This choice selects a primary command control physical channel.

PICH This choice selects a paging indicator channel.

CPICH This choice selects a common pilot channel.

***RST** DPCH1

Key Entry DPCH + 1 DPCH + 2 PCCPCH PICH CPICH

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADIO:WCDMA:TGPP[:BBG])

Remarks White noise is a frequency spectrum that is uniform over a specific frequency band. White noise has equal power per hertz over the specific frequency band.

:DLINK:AWGN:FNBW

Supported E4438C with Option 400 and 403

[:SOURCE] :RADIO:WCDMA:TGPP [:BBG] :DLINK:AWGN:FNBW?

This query returns the flat noise bandwidth value.

***RST** +6.1440000E+006

:DLINK:AWGN:NPOWER

Supported E4438C with Option 400 and 403

[:SOURCE] :RADIO:WCDMA:TGPP [:BBG] :DLINK:AWGN:NPOWER?

This query returns the in-band noise power portion of the total RF power.

***RST** +0

:DLINK:AWGN:TICPower

Supported E4438C with Option 400 and 403

[:SOURCE] :RADIO:WCDMA:TGPP [:BBG] :DLINK:AWGN:TICPower?

This query returns the total in-channel power (carrier with noise) as defined by the 3GPP standard.

***RST** +0

Field Entry Total Pwr

Remarks The total in-channel power is a sum of carrier power and in-channel noise power. Changing the noise related parameters such as C/N, Eb/No, and Eb Ref will cause a recalculation of the total in-channel power.

The maximum value returned by this query depends on the power option that is installed in the signal generator.

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADio:WCDMa:TGPP[:BBG])**:DLINK:AWGN[:STATe]****Supported** E4438C with Option 400 and 403

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:AWGN:STATe ON|OFF|1|0

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:AWGN:STATe?

This command enables or disables the additive white gaussian noise (AWGN) physical channel.

RST** 0**Key Entry** Channel State Off On**:DLINK:BBCLock*Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:BBCLock INT[1]|EXT[1]

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:BBCLock?

This command selects the baseband generator chip clock source for the channel.

RST** INT**Key Entry** BBG Data Clock Ext Int**:DLINK:CARB:CMODE:CCODE*Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:CARB:CMODE:CCODE <val>

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:CARB:CMODE:CCODE?

This command sets the channel code for the chip ARB based dedicated physical channel (DPCH) in compressed mode.

RST** 6**Range** 0–511**Field Entry** Channel Code**:DLINK:CARB:CMODE:DATA*Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:CARB:CMODE:DATA PN9|PN15

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:CARB:CMODE:DATA?

This command sets the dedicated physical channel (DPCH) data pattern in compressed mode (CM).

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADio:WCDMa:TGPP[:BBG])

*RST	PN9
Key Entry	PN9 PN15
Remarks	The data pattern contains one frame of each normal DPCH frame with a chosen slot structure. CM is enabled via spread factor reduction using a single frame method.

:DLINK:CARB:CMODE:FOFFset

Supported E4438C with Option 400

```
[ :SOURCE ] :RADio:WCDMa:TGPP [ :BBG ] :DLINK:CARB:CMODE:FOFFset <val>
[ :SOURCE ] :RADio:WCDMa:TGPP [ :BBG ] :DLINK:CARB:CMODE:FOFFset?
```

This command sets the frame offset for the dedicated physical channel (DPCH) in compressed mode.

*RST	0
Range	0–149
Field Entry	Frame Offset

:DLINK:CARB:CMODE:FSTRuct

Supported E4438C with Option 400

```
[ :SOURCE ] :RADio:WCDMa:TGPP [ :BBG ] :DLINK:CARB:CMODE:FSTRuct A|B
[ :SOURCE ] :RADio:WCDMa:TGPP [ :BBG ] :DLINK:CARB:CMODE:FSTRuct?
```

This command selects the frame structure for the downlink compressed mode.

A This choice maximizes the transmission gap length in a compressed frame.

B This choice optimized for power control during a compressed frame.

*RST	A
Key Entry	A B

:DLINK:CARB:CMODE:POWER**Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:CARB:CMODE:POWER <val>

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:CARB:CMODE:POWER?

This command sets the power for the downlink compressed mode.

The variable <val> is expressed in units of decibels (dB).

RST** +0.00000000E+000**Range** -40 to 0**Field Entry** Power**:DLINK:CARB:CMODE:PRATio*Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:CARB:CMODE:PRATio <val>

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:CARB:CMODE:PRATio?

This command sets the playback ratio for the downlink compressed mode.

***RST** 2**Range** 0–4096**Field Entry** Playback Ratio**Remarks** The value that is set represents the number of normal frames played between each compressed frame.

For example: 1:30

30 represents the un-compressed (normal) DPCH frames. The 30 frames will be played and then 1 compressed DPCH frame. The sequence then repeats.

:DLINK:CARB:CMODE:SCTYpe**Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:CARB:CMODE:SCTYpe NORMal | RIGHT | LEFT

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:CARB:CMODE:SCTYpe?

This command sets the scramble type for the downlink compressed mode.

NORMal This choice selects scramble codes 0–8191 (16 x 511 + 15 = 8191).

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADIO:WCDMA:TGPP[:BBG])

RIGHT	This choice selects scramble codes 8192–16383 (Normal + 8192).		
LEFT	This choice selects scramble codes 16384–24575 (Normal + 16384).		
*RST	NORM		
Key Entry	Normal	Right	Left

:DLINK:CARB:CMODE:SFORmat

Supported E4438C with Option 400

```
[ :SOURCE ] :RADIO:WCDMA:TGPP [ :BBG ] :DLINK:CARB:CMODE:SFORmat <val>
[ :SOURCE ] :RADIO:WCDMA:TGPP [ :BBG ] :DLINK:CARB:CMODE:SFORmat?
```

This command sets the slot format value for the dedicated physical channel (DPCH) in compressed mode. This value is used for both compressed and uncompressed frames.

*RST	+11
Range	1–15
Field Entry	Slot Format

:DLINK:CARB:CMODE:SSCodeos

Supported E4438C with Option 400

```
[ :SOURCE ] :RADIO:WCDMA:TGPP [ :BBG ] :DLINK:CARB:CMODE:SSCodeos <val>
[ :SOURCE ] :RADIO:WCDMA:TGPP [ :BBG ] :DLINK:CARB:CMODE:SSCodeos?
```

This command sets the secondary scramble code offset for the dedicated physical channel (DPCH) in compressed mode.

*RST	+0
Range	0–15
Field Entry	SecScr Code OS

:DLINK:CARB:CMODE:TFIRST**Supported** E4438C with Option 400

[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:DLINK:CARB:CMODE:TFIRST <val>

[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:DLINK:CARB:CMODE:TFIRST?

This command sets the first slot at which a gap appears.

RST** 7**Range** 0–7**Field Entry** Tfirst**:DLINK:CARB:CMODE:TGL*Supported** E4438C with Option 400

[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:DLINK:CARB:CMODE:TGL <val>

[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:DLINK:CARB:CMODE:TGL?

This command sets the number of slots in the gap.

RST** 7**Range** 1–7**Field Entry** Tgl**:DLINK:CARB:CMODE[:STATE]*Supported** E4438C with Option 400

[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:DLINK:CARB:CMODE[:STATE] ON|OFF|1|0

[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:DLINK:CARB:CMODE[:STATE]?

This command enables or disables the downlink dedicated physical channel (DPCH) in compressed mode.

RST** 0**Key Entry** Channel State Off On**:DLINK:CPICH:CCODE*Supported** E4438C with Option 400

[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:DLINK:CPICH:CCODE?

This query returns the common paging indicator channel (CPICH) channel code value.

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADio:WCDMa:TGPP[:BBG])***RST** +0**Remarks** The channelization code is always expected to be 0.**:DLINK:CPICH:POWER****Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:CPICH:POWER <val>

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:CPICH:POWER?

This command sets the power level for the common paging indicator channel (CPICH). The variable <val> is expressed in units of decibels (dB).

RST** -3.30000000E+000**Range** -40 to 0**Field Entry** Power**:DLINK:CPICH[:STATE]*Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:CPICH[:STATE]

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:CPICH[:STATE] ?

This command enables or disables the common paging indicator channel (CPICH).

RST** 1**Key Entry** **Channel State Off On*:DLINK:CRATE****Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:CRATE <val>

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:CRATE?

This command adjusts the chip rate.

The variable <val> is expressed in units of cycle per second (cps).

***RST** +3.84000000E+006**Range** 1000∠4250000**Field Entry** Chip Rate**Remarks** The chip rate is equivalent to the spreading rate.

:DLINK:DPCH[1]:BALance

Supported E4438C with Option 400

```
[ :SOURCE ] :RADio:WCDMa:TGPP [ :BBG ] :DLINK:DPCH [ 1 ] :BALance <val>
```

```
[ :SOURCE ] :RADio:WCDMa:TGPP [ :BBG ] :DLINK:DPCH [ 1 ] :BALance?
```

This command sets DPCH1 power while scaling the power of all available OCNS channels in order to maintain a total power of 0 dB.

The variable <val> is expressed in units of decibels (dB).

Key Entry **DPCH Channel Balance**

Remarks At least one DPCH and one OCNS channel must be on prior to channel balancing. Refer to “:DLINK:DPCH[1]2[:STATE]” on page 951 and “:DLINK:OCNS[1]2|3|4|5|6|7|8|9|10|11|12|13|14|15|16[:STATE]” on page 956.

The command [:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:DPCH[1]:BINitalize must be initiated prior to channel balancing.

:DLINK:DPCH[1]:BINitalize

Supported E4438C with Option 400

```
[ :SOURCE ] :RADio:WCDMa:TGPP [ :BBG ] :DLINK:DPCH [ 1 ] :BINitalize
```

This command initializes the DPCH1 or DPCH2 power of the OCNS channel balancing.

Remarks To insure proper balancing, this command must be called before the channel balancing.

:DLINK:DPCH[1] | 2:ALL[:STATE]

Supported E4438C with Option 400

```
[ :SOURCE ] :RADio:WCDMa:TGPP [ :BBG ] :DLINK:DPCH [ 1 ] | 2:ALL [ :STATE ] ON | OFF | 1 | 0
```

This command enables or disables both of the downlink dedicated physical channels.

Key Entry **Channel State Off On**

Remarks If the parameter is changed, the apply command must be executed after the change. Refer to “:DLINK:APPLY” on page 935.

To query the state of the individual channel, refer to “:DLINK:DPCH[1]2[:STATE]” on page 951

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADIO:WCDMA:TGPP[:BBG])

:DLINK:DPCH[1]|2:CCODE

Supported E4438C with Option 400

```
[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:DLINK:DPCH[1]|2:CCODE <val>
```

```
[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:DLINK:DPCH[1]|2:CCODE?
```

This command sets the downlink dedicated physical channel (DPCH) code number.

```
*RST DPCH 1: 10 DPCH 2: 11
```

Range 0–511

Field Entry Chan Code

Remarks The channel code is coupled with the slot format and symbol rate. Refer to “:DLINK:DPCH[1]|2:SLOTformat” on page 948 and “:DLINK:DPCH[1]|2:SRATE” on page 948.

If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to “:DLINK:APPLY” on page 935.

:DLINK:DPCH[1]|2:DATA

Supported E4438C with Option 400

```
[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:DLINK:DPCH[1]|2:DATA PN9|PN15|FIX4|
```

```
"<file name>"|TGRA|TGRB
```

```
[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:DLINK:DPCH[1]|2:DATA?
```

This command configures the data pattern for the downlink dedicated physical channel (DPCH).

TGRA This choice selects transport channel A.

TGRB This choice selects transport channel B.

"<file name>" This variable specifies a data pattern that has been stored in memory.

```
*RST PN9
```

Key Entry **PN9** **PN15** **FIX4** **“User File”** **Transp Chan A** **Transp Chan B**

Remarks The data is now independent, on each of the DPCH channels. The data is limited to PN9 and PN15 when the DPCH is in slot format 16.

If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to “:DLINK:APPLY” on page 935.

:DLINK:DPCH[1] | 2:DATA:FIX4**Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:DPCH[1] | 2:DATA:FIX4 <val>

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:DPCH[1] | 2:DATA:FIX4?

This command sets the data type to a FIX4 pattern for the downlink dedicated physical channel (DPCH). While the variable <val> can be entered in binary, hexadecimal, or decimal formats, the query returns only binary values.

***RST** #B0000**Range:** 0–15**Key Entry** **FIX4**

Remarks If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to “:DLINK:APPLY” on page 935.

:DLINK:DPCH[1] | 2:POWer**Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:DPCH[1] | 2:DATA:POWer <val>

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:DPCH[1] | 2:DATA:POWer?

This command sets the power level for the downlink dedicated physical channel (DPCH). The variable <val> is expressed in units of decibels (dB).

***RST** -1.02000000E+001**Range:** -40 to 0**Field Entry** Power

:DLINK:DPCH[1] | 2:RCSetup**Supported** E4438C with Option 400

```
[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:DLINK:DPCH[1] | 2:RCSetup REF122 | REF64 |
REF144 | REF384 | AMR122 | ISDN
[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:DLINK:DPCH[1] | 2:RCSetup?
```

This command configures the downlink reference measurement setup for the transport channel.

REF122	This choice configures the transport channel per the 3G TS 34.121 specification to a downlink reference measurement channel 12.2 kbps rate.			
REF64	This choice configures the transport channel per the 3G TS 34.121 specification to a downlink reference measurement channel 64 kbps rate.			
REF144	This choice configures the transport channel per the 3G TS 34.121 specification to a downlink reference measurement channel 144 kbps rate.			
REF384	This choice configures the transport channel per the 3G TS 34.121 specification to a downlink reference measurement channel 384 kbps rate.			
AMR122	This choice configures the transport channel per the 3G TS 25.944 specification to a downlink reference measurement channel AMR 12.2 kbps rate.			
ISDN	This choice configures the transport channel as follows: 64 kbps rate, channel 1 with 4 blocks of 640 and channel 2 with 1 block of 148.			
Key Entry	12.2 kbps (34.121 v3.10)	64 kbps (34.121 v3.10)	144 kbps (34.121 v3.10)	384 kbps (34.121 v3.10)
	AMR 12.2 (25.944 v4.1)	UDI ISDN (25.944 v4.1)		
Remarks	If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to “:DLINK:APPLY” on page 935.			

:DLINK:DPCH[1] | 2:SLOTformat**Supported** E4438C with Option 400[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:DPCH[1] | 2:DATA:SLOTformat <val>
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:DPCH[1] | 2:DATA:SLOTformat?

This command configures the slot format for the dedicated physical channel (DPCH).

***RST** 0**Range:** 0–16**Field Entry** Slot Format**Remarks** The slot format is coupled with the channel code and symbol rate. The transmit power control (TPC), the transport format combination indicator (TFCI), and the Pilot bits are also set as per specification and not displayed.

For a description of slot formats, see the 3GPP Technical Specifications (TS 25.211 v3.10).

If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to “:DLINK:APPLY” on page 935.

:DLINK:DPCH[1] | 2:SRATE**Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:DPCH[1] | 2:SRATE?

This query returns the symbol rate for the downlink dedicated physical channel.

RST** +7.50000000E+003**:DLINK:DPCH[1] | 2:SSCodeos*Supported** E4438C with Option 400[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:DPCH[1] | 2:SSCodeos <val>
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:DPCH[1] | 2:SSCodeos?

This command sets the secondary scrambling code offset for the downlink dedicated physical channel (DPCH).

***RST** +0**Range:** 0–15

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADIO:WCDMA:TGPP[:BBG])

Field Entry	2nd Scr Offset
Remarks	If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to “:DLINK:APPLY” on page 935.

:DLINK:DPCH[1] | 2:TFCI:PATtern

Supported E4438C with Option 400

```
[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:DLINK:DPCH[1] | 2:TFCI:PATtern <val>
[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:DLINK:DPCH[1] | 2:TFCI:PATtern?
```

This command sets a 10-bit pattern for the transport format combination indicator (TFCI) for the dedicated physical channel (DPCH).

While the variable <val> is expressed in binary or decimal formats, the query returns only decimal values.

***RST** +0

Range: 0–1023

Field Entry TFCI Pat

Remarks The TFCI is optional and describes the services in use (for example, voice or data). If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to “:DLINK:APPLY” on page 935.

:DLINK:DPCH[1] | 2:TOFFset

Supported E4438C with Option 400

```
[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:DLINK:DPCH[1] | 2:TOFFset <val>
[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:DLINK:DPCH[1] | 2:TOFFset?
```

This command adjusts the timing offset for the dedicated physical channel (DPCH). The variable <val> is expressed in chips.

***RST** +0

Range: 0–149

Field Entry tDPCH Offset

Remarks If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to “:DLINK:APPLY” on page 935.

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADio:WCDMa:TGPP[:BBG])**:DLINK:DPCH[1] | 2:TPC:NUMSteps****Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:DPCH[1] | 2:TPC:NUMSteps <val>

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:DPCH[1] | 2:TPC:NUMSteps?

This command sets the number of steps for increasing/decreasing the user's equipment (UE) power.

RST** +1**Range:** 1–80**Field Entry** TPC Steps**Remarks** The command is used with the transmit power control (TPC) patterns up/down (UDOWN), down/up (DUP), all down(DALL), all up (UALL), external (EXT), or user file ("`<file name>`"). Refer to [“:DLINK:DPCH\[1\] | 2:TPC:PATtern”](#)If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to [“:DLINK:APPLY”](#) on page 935.**:DLINK:DPCH[1] | 2:TPC:PATtern*Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:DPCH[1] | 2:TPC:PATtern UDOWN | DUP |

UALL | DALL | EXT | "`<file name>`"

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:DPCH[1] | 2:TPC:PATtern?

This command controls the power of the user's equipment (UE). The increase/decrease direction for UE power level changes is determined by the transmit power control (TPC) pattern.

UDOWN This choice repetitively steps up and down the TPC pattern.

DUP This choice repetitively steps down and up the TPC pattern.

UALL This choice consecutively steps up the TPC pattern.

DALL This choice consecutively steps down the TPC pattern.

EXT This choice specifies an external TPC pattern.

"`<file name>`" This choice specifies a user file.***RST** UDOW**Key Entry** All Down All Up Down/Up Up/Down Ext User File

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADIO:WCDMA:TGPP[:BBG])

Remarks If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to “:DLINK:APPLY” on page 935.

:DLINK:DPCH[1]|2[:STATE]

Supported E4438C with Option 400

```
[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:DLINK:DPCH[1]|2:ALL[:STATE] ON|OFF|1|0
[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:DLINK:DPCH[1]|2:ALL[:STATE]?
```

This command enables or disables the dedicated physical channels (DPCH1 or DPCH2).

***RST** DPCH1: 1 DPCH2: 0

Key Entry **Channel State Off On**

Remarks If the parameter is changed, the apply command must be executed after the change. Refer to “:DLINK:APPLY” on page 935.

:DLINK:FILTer

Supported E4438C with Option 400

```
[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:DLINK:FILTer RNYQuist|NYQuist|GAUSSian|
RECTangle|IS95|IS95_EQ|IS95_MOD|IS95_MOD_EQ|AC4Fm|UGGaussian|
"<user FIR>"
[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:DLINK:FILTer?
```

This command selects the filter type for the downlink configuration.

IS95 This choice selects a filter that meets the criteria of the IS-95 standard.

IS95_EQ This choice selects a filter which is a combination of the IS-95 filter (above) and the equalizer filter described in the IS-95 standard. This filter is only used for IS-95 baseband filtering.

IS95_MOD This choice selects a filter that meets the criteria of the IS-95 error function (for improved adjacent channel performance) with lower passband rejection than the filter specified in the IS-95 standard.

IS95_MOD_EQ This choice selects a filter which is a combination of the equalizer filter described in the IS-95 standard and a filter that meets the criteria of the IS-95 error function (for improved adjacent channel performance), with lower passband rejection.

UGGaussian This choice selects a backwards compatible GSM Gaussian filter (Gaussian filter with a fixed BbT value of 0.300) for the ESG E44xxB Option UN3 or UN4.

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADio:WCDMa:TGPP[:BBG])

AC4Fm	This choice selects a predefined Association of Public Safety Communications Officials (APCO) specified compatible 4-level frequency modulation (C4FM) filter.					
"<user FIR>"	This variable is any filter file that you have stored into memory.					
*RST	RNYQ					
Key Entry	Root Nyquist	Nyquist	Gaussian	Rectangle	IS-95	IS-95 w/EQ
	IS-95 Mod	IS-95 Mod w/EQ	APCO 25 C4FM	UN3/4 GSM	Gaussian	
	User FIR					
Remarks	See “File Name Variables” on page 13 for information on the file name syntax.					

:DLINK:FILTER:ALPHA

Supported E4438C with Option 400

```
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:FILTER:ALPHA <val>
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:FILTER:ALPHA?
```

Execute this command to change the alpha value for a Nyquist or root Nyquist filter.

***RST** +2.20000000E-001

Range 0-1

Key Entry **Filter Alpha**

Remarks This command is effective only after selection of a root Nyquist or Nyquist filter; it does not affect other types of filters. To change the current filter type, refer to [“:DLINK:FILTER” on page 951](#).

:DLINK:FILTER:BBT

Supported E4438C with Option 400

```
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:FILTER:BBT <val>
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:FILTER:BBT?
```

Execute this command to change the bandwidth-multiplied-by-bit-time filter parameter value.

***RST** +5.00000000E-001

Range 0.0000-1.0

Key Entry **Filter BbT**

Remarks This command is effective only after selecting a Gaussian filter; it does not affect other types of filters. See [“:DLINK:FILTER” on page 951](#) to change the filter type.

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADIO:WCDMA:TGPP[:BBG])**:DLINK:FILTer:CHANnel****Supported** E4438C with Option 400[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:DLINK:FILTer:CHANnel EVM|ACP
[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:DLINK:FILTer:CHANnel?

Execute this command to optimize a filter for minimized error vector magnitude (EVM) or for minimized adjacent channel power (ACP).

EVM This choice provides the most ideal passband.**ACP** This choice improves stopband rejection. This feature only applies to root Nyquist and Nyquist filters.***RST** EVM**Key Entry** **Optimize FIR For EVM ACP****Remarks** To change the current filter type, refer to “:DLINK:FILTer” on page 951.**:DLINK:MSYNc****Supported** E4438C with Option 400

[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:DLINK:MSYNc

This command generates a one shot trigger pulse to synchronize multiple ESGs. This is a command only; there is no query.

Key Entry **Multi ESG Sync Trigger****Remarks** The trigger pulse will be generated when the user assigns the DRPS42 signal to any output port.**:DLINK:OCNS[1]|2|3|4|5|6|7|8|9|10|11|12|13|14|15|16:ALL[:STATe]****Supported** E4438C with Option 400

[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:DLINK:OCNS[1]|2|3|4|5|6|7|8|9|10|11|12|13|14|15|16:ALL[:STATe] ON|OFF|1|0

This command enables or disables all of the orthogonal channel noise simulator (OCNS) channels.

RST** +0**Key Entry** **Channel State Off On*Remarks** To query the state of the individual channel, refer to “:DLINK:OCNS[1]|2|3|4|5|6|7|8|9|10|11|12|13|14|15|16:STATe]” on page 956.

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADio:WCDMa:TGPP[:BBG])**:DLINK:OCNS[1]|2|3|4|5|6|7|8|9|10|11|12|13|14|15|16:CCODE****Supported** E4438C with Option 400

```
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:OCNS[1]|2|3|4|5|6|7|8|9|10|11|12|
13|14|15|16:CCODE <val>
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:OCNS[1]|2|3|4|5|6|7|8|9|10|11|12|
13|14|15|16:CCODE?
```

This command sets the channel code number for the downlink orthogonal channel noise simulator (OCNS).

***RST** +24**Range** 0–255**Field Entry** Chan Code

Remarks The channel code is coupled with the symbol rate. Refer to
“:DLINK:OCNS[1]|2|3|4|5|6|7|8|9|10|11|12|13|14|15|16:SRATE” on page 955.

:DLINK:OCNS[1]|2|3|4|5|6|7|8|9|10|11|12|13|14|15|16:DATA**Supported** E4438C with Option 400

```
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:OCNS[1]|2|3|4|5|6|7|8|9|10|11|12|
13|14|15|16:DATA PN9|PN15
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:OCNS[1]|2|3|4|5|6|7|8|9|10|11|12|
13|14|15|16:DATA?
```

This command configures the data pattern for the downlink orthogonal channel noise simulator (OCNS).

RST** PN9**Key Entry** **PN9** **PN15*:DLINK:OCNS[1]|2|3|4|5|6|7|8|9|10|11|12|13|14|15|16:POWer****Supported** E4438C with Option 400

```
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:OCNS[1]|2|3|4|5|6|7|8|9|10|11|12|
13|14|15|16:POWer <val>
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:OCNS[1]|2|3|4|5|6|7|8|9|10|11|12|
13|14|15|16:POWer?
```

This command sets the power level for the orthogonal channel noise simulator (OCNS).

Wideband CDMA Base Band Generator Subsystem—Option 400 [:SOURCE]:RADIo:WCDMa:TGPP[:BBG]

The variable <val> is expressed in units of decibels (dB).

***RST** -1.200000000E+001

Range -40 to 0

Field Entry Power

:DLINK:OCNS[1]|2|3|4|5|6|7|8|9|10|11|12|13|14|15|16:SRATe

Supported E4438C with Option 400

```
[ :SOURCE ] :RADIo:WCDMa:TGPP [ :BBG ] :DLINK:OCNS [1] | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 |
13 | 14 | 15 | 16 :SRATe <val>
```

```
[ :SOURCE ] :RADIo:WCDMa:TGPP [ :BBG ] :DLINK:OCNS [1] | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 |
13 | 14 | 15 | 16 :SRATe?
```

This command selects the symbol rate for the orthogonal channel noise simulator (OCNS).

The choices are expressed in units of kilo symbols per second (ksps).

***RST** +1.50000000E+004

Key Entry **7.5 ksps 15 ksps 30 ksps 60 ksps 120 ksps 240 ksps**
480 ksps 960 ksps

Remarks The symbol rate is coupled with the channel code. Refer to
“:DLINK:OCNS[1]|2|3|4|5|6|7|8|9|10|11|12|13|14|15|16:CCODE” on page 954.

:DLINK:OCNS[1]|2|3|4|5|6|7|8|9|10|11|12|13|14|15|16:SSCodeos

Supported E4438C with Option 400

```
[ :SOURCE ] :RADIo:WCDMa:TGPP [ :BBG ] :DLINK:OCNS [1] | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 |
13 | 14 | 15 | 16 :SSCodeos <val>
```

```
[ :SOURCE ] :RADIo:WCDMa:TGPP [ :BBG ] :DLINK:OCNS [1] | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 |
13 | 14 | 15 | 16 :SSCodeos?
```

This command sets the secondary scrambling code offset for the orthogonal channel noise simulator (OCNS).

***RST** +0

Range 0–15

Field Entry 2nd Scr Offset

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADio:WCDMa:TGPP[:BBG])**:DLINK:OCNS[1|2|3|4|5|6|7|8|9|10|11|12|13|14|15|16:TOffset****Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:OCNS[1|2|3|4|5|6|7|8|9|10|11|12|13|14|15|16:TOffset <val>

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:OCNS[1|2|3|4|5|6|7|8|9|10|11|12|13|14|15|16:TOffset?

This command adjusts the timing offset for the orthogonal channel noise simulator (OCNS) channel.

RST** +0**Range:** 0–149**Field Entry** tOCNS Offset**:DLINK:OCNS[1|2|3|4|5|6|7|8|9|10|11|12|13|14|15|16:STATe]*Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:OCNS[1|2|3|4|5|6|7|8|9|10|11|12|13|14|15|16[:STATe] ON|OFF|1|0

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:OCNS[1|2|3|4|5|6|7|8|9|10|11|12|13|14|15|16[:STATe]?

This command enables or disables the orthogonal channel noise simulator (OCNS) channel.

RST** +0**Field Entry** On/Off**:DLINK:OOSTest[:STATe]*Supported** E4438C with Option 400 and 403

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:OOSTest[:STATe] ON|OFF|1|0

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:OOSTest[:STATe]?

This command enables or disables the Out-of-Sync-Test mode.

RST** 0**Key Entry** **Out-of-Sync Test Off On*Remarks** When **Compressed Mode Off On** is set to On, Out-of-Sync Test mode cannot be enabled.When **Out-of-Sync Test Off On** is set to On, ALC is automatically disabled; when **Out-of-Sync Test Off On** is set to Off, **ALC Off On** is automatically enabled.

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADio:WCDMa:TGPP[:BBG])**:DLINK:OOSTest:DTXGate:POLarity****Supported** E4438C with Option 400 and 403

```
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:OOSTest:DTXGate:
POLarity POSitive|NEGative
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:OOSTest:DTXGate:POLarity?
```

This command sets the multiple ESG synchronization trigger signal polarity.

RST** POS**Key Entry** **DPCH1 DTX-Gate Trigger Polarity Neg Pos*:DLINK:PADJust****Supported** E4438C with Option 400

```
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:PADJust EQUal|SCALE
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:PADJust?
```

This command adjusts the code domain power levels of all downlink channels.

EQUal This choice will adjust all channel powers to equal power settings.

SCALE This choice will scale the channel power levels so that the sum of the powers are equal to 0 dB.

RST** EQU**Key Entry** **Equal Powers Scale To 0dB*:DLINK:PCCPch:BCHData****Supported** E4438C with Option 400

```
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:PCCPch:BCHData PN9|PN15|FIX4|
"<file name>"|TRANspch
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:PCCPch:BCHData?
```

This command sets the broadcast channel (BCH) data format that will be transmitted on the physical common control physical channel (PCCPCH).

TRANspch This choice selects a dedicated transport channel data pattern.

"<file name>" This variable specifies a data pattern that has been stored in memory.

***RST** FIX4**Key Entry** **PN9 PN15 FIX4 User File Transport CH**

:DLINK:PCCPch:BCHData:FIX4**Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:PCCPch:BCHData:FIX4 <val>

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:PCCPch:BCHData:FIX4?

This command sets a fixed 4-bit binary data pattern for the primary common control physical channel (PCCPCH).

While the variable <val> can be entered in binary, hexadecimal, or decimal formats, the query returns only binary values.

RST** #B0000**Range** 0–15**Key Entry** **FIX4*:DLINK:PCCPch:CCODE****Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:PCCPch:CCODE <val>

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:PCCPch:CCODE?

This command sets the primary common control physical channel (PCCPCH) code to the desired code number.

RST** +1**Range** 0–255**Field Entry** Channel Code**:DLINK:PCCPch:POWER*Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:PCCPch:POWER <val>

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:PCCPch:POWER?

This command sets the power level for the primary common control physical channel (PCCPCH). The variable <val> is expressed in units of decibels (dB).

***RST** -5.30000000E+000**Range** -40 to 0**Field Entry** Power

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADio:WCDMa:TGPP[:BBG])**:DLINK:PCCPch[:STATE]****Supported** E4438C with Option 400

```
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:PCCPch[:STATE] ON|OFF|1|0
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:PCCPch[:STATE] ?
```

This command enables or disables the primary common control physical channel (PCCPCH).

RST** 1**Key Entry** Channel State Off On**:DLINK:PICH:CCODE*Supported** E4438C with Option 400

```
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:PICH:CCODE <val>
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:PICH:CCODE?
```

This command sets the paging indicator channel (PICH) code to the desired code number.

RST** +3**Range** 0–255**Field Entry** Channel Code**:DLINK:PICH:DATA*Supported** E4438C with Option 400

```
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:PICH:DATA PN9|PN15|FIX4|
"<file name>"
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:PICH:DATA?
```

This command configures the data pattern for the downlink paging indicator channel (PICH).

"<file name>" This variable specifies a data pattern that has been stored in memory.

***RST** PN9**Key Entry** **PN9** **PN15** **FIX4** **User File**

:DLINK:PICH:DATA:FIX4

Supported E4438C with Option 400

[:SOURCE] :RADIO:WCDMA:TGPP [:BBG] :DLINK:PICH:DATA:FIX4 <val>

[:SOURCE] :RADIO:WCDMA:TGPP [:BBG] :DLINK:PICH:DATA:FIX4?

This command sets a fixed 4-bit data pattern to be transmitted on a paging indicator channel (PICH).

While the variable <val> can be entered in binary, hexadecimal, or decimal formats, the query returns only binary values.

***RST** #B0000

Range 0–15

Key Entry **FIX4**

:DLINK:PICH:PIBits

Supported E4438C with Option 400

[:SOURCE] :RADIO:WCDMA:TGPP [:BBG] :DLINK:PICH:PIBits?

This query returns the number of bits in the paging indicator field.

***RST** +288

Field Entry PI Bits

:DLINK:PICH:PINDicator

Supported E4438C with Option 400

[:SOURCE] :RADIO:WCDMA:TGPP [:BBG] :DLINK:PICH:PINDicator?

This query returns the number of paging indicator fields per frame.

***RST** +144

Field Entry Paging Indicator

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADio:WCDMa:TGPP[:BBG])**:DLINK:PICH:POWer****Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:PICH:POWer <val>

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:PICH:POWer?

This command sets the power level of the paging indicator channel (PICH). The variable <val> is expressed in units of decibels (dB)

RST** -8.300000000E+000**Range** -40 to 0**Field Entry** Power**:DLINK:PICH[:STATe]*Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:PICH[:STATe] ON|OFF|1|0

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:PICH[:STATe]?

This command enables or disables the paging indicator channel (PICH).

RST** 0**Key Entry** Channel State Off On**:DLINK:POLarity*Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:POLarity NORMAL|INVERTed

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:POLarity?

This command selects the phase polarity of the downlink signal.

NORMAL This choice selects normal polarity.

INVERTed This choice inverts the internal Q signal.

***RST** NORM**Key Entry** Phase Polarity Normal Invert

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADio:WCDMa:TGPP[:BBG])**:DLINK:PSCH:POWer**

Supported E4438C with Option 400

[:SOURCE] :RADio:WCDMa:TGPP [:BBG] :DLINK:PSCH:POWer <val>

[:SOURCE] :RADio:WCDMa:TGPP [:BBG] :DLINK:PSCH:POWer?

This command sets the power level for the primary synchronization physical channel (PSCH).

The variable <val> is expressed in units of decibels (dB).

***RST** -8.30000000E+000

Range -40 to 0

Field Entry Power

:DLINK:PSCH[:STATe]

Supported E4438C with Option 400

[:SOURCE] :RADio:WCDMa:TGPP [:BBG] :DLINK:PSCH [:STATe] ON | OFF | 1 | 0

[:SOURCE] :RADio:WCDMa:TGPP [:BBG] :DLINK:PSCH [:STATe] ?

This command enables or disables the primary synchronization physical channel (PSCH).

***RST** 1

Field Entry PSCH State

:DLINK:RPANel:INPut:ALTPower

Supported E4438C with Option 400

[:SOURCE] :RADio:WCDMa:TGPP [:BBG] :DLINK:RPANel:INPut:ALTPower?

This query returns the type of signal at the alternate power input (Alt power in AUX I/O connector pin#16) for the dedicated physical channel (DPCH) mode.

***RST** NONE

Remarks When **Compressed Mode Off On** is set to On, Compressed-mode stop-trigger Compressed-mode stop-trigger signal is assigned to pin 16 of the rear panel AUX I/O connector. For more information about the rear panel AUX I/O connector configuration, refer to "Signal Generator Overview" in the *E4428C/38C ESG Signal Generators User's Guide*.

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADIO:WCDMA:TGPP[:BBG])

:DLINK:RPANel:INPut:BBGRef**Supported** E4438C with Option 400

[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:DLINK:RPANel:INPut:BBGRef?

This query returns the type of signal at the baseband generator reference input (BASEBAND GEN REF IN, rear panel connector) for the dedicated physical channel (DPCH) mode.

***RST** CCL

Remarks The signal name is baseband generator chip clock (CCL). For more information about the rear panel connector configuration, refer to "Signal Generator Overview" in the *E4428C/38C ESG Signal Generators User's Guide*.

:DLINK:RPANel:INPut:BGATe**Supported** E4438C with Option 400

[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:DLINK:RPANel:INPut:BGATe?

This query returns the type of signal at the gate burst (BURST GATE IN, rear panel connector) for the dedicated physical channel (DPCH) mode.

***RST** SFNR

Remarks System Frame Number Reset (SFNR) is used for synchronization in a two ESG setup. This signal is used to tell where the frame starts.

:DLINK:RPANel:INPut:PTRigger1**Supported** E4438C with Option 400

[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:DLINK:RPANel:INPut:PTRigger1?

This query returns the type of signal at the pattern trigger input 1 (PATT TRIG IN, rear panel connector) for the dedicated physical channel (DPCH) mode.

***RST** MSTI

Remarks When **Compressed Mode Off On** is set to On, Compressed-mode start-trigger (CSTT) signal is assigned to the rear panel PATT TRIG IN connector; when **Out-of-Sync Test Off On** is set to On, DPCH1 DTX-Gate (DDTX) signal is assigned to the rear panel PATT TRIG IN connector.

Multiple ESG Synchronization Trigger In (MSTI) signal is used to synchronize signals from two ESGs that have different coding to simulate transmit diversity.

:DLINK:RPANel:INPut:PTRigger2**Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:RPANel:INPut:PTRigger2?

This query returns the type of signal at the pattern trigger input 2 (PATT TRIG IN 2, AUX I/O connector pin#17) for the dedicated physical channel (DPCH) mode.

RST** TPCB**Remarks** Transmit Power Control Bit (TPCB) signal is used to control the DPCH TPC bit.**:DLINK:RPANel:OUTPut:DCLock*Supported** E4438C with Option 400

```
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:RPANel:OUTPut:DCLock
DRPS0|DRPS4|DRPS5|DRPS6|DRPS10|DRPS11|DRPS13|DRPS20|DRPS21|DRPS22|
DRPS23|DRPS24|DRPS25|DRPS26|DRPS28|DRPS30|DRPS32|DRPS33|DRPS34|DRPS35|
DRPS36|DRPS37|DRPS38|DRPS39|DRPS40|DRPS41|DRPS42
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:RPANel:OUTPut:DCLock?
```

This command assigns a signal to the data clock output at the selected rear panel AUX I/O connector pin#6. Refer to [Table 9-2 on page 964](#) for command parameters for the variable and output signal names.

Table 9-2 Downlink Rear Panel Signal (DRPS) Output Type

Command Parameter	Signal Out
DRPS0	NONE
DRPS4	3.84 MHz chip clock
DRPS5	SFN reset signal
DRPS6	SFN sync pulse
DRPS10	SCH slot pulse
DRPS11	10ms Frame pulse
DRPS13	80ms Frame pulse
DRPS20	DPCH data clock with DTX
DRPS21	DPCCH TPC data clock

Table 9-2 Downlink Rear Panel Signal (DRPS) Output Type

Command Parameter	Signal Out
DRPS22	DPCCH TFCI data clock
DRPS23	DPCCH Pilot data clock
DRPS24	DPCH data stream
DRPS25	DPCH TimeSlot pulse
DRPS26	DPCH 10ms Frame Pulse
DRPS28	DPCH data clock
DRPS30	DPDCH data clock w/oDTX
DRPS32	DPCH comp Frm Indicator
DRPS33	DPCH Gap Indicator
DRPS34	PICH data clock
DRPS35	PICH data
DRPS36	PICH TimeSlot pulse
DRPS37	PICH 10ms FramePulse
DRPS38	P-CCPCH data clock
DRPS39	P-CCPCH data
DRPS40	DPCH Chip-ARB-frame-pulse
DRPS41	DPCH TPC-bits-out
DRPS42	Multi-ESG Sync Trigger Out

*RST

RPS0

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADio:WCDMa:TGPP[:BBG])

Key Entry	NONE	3.84MHz chip-clk (DRPS4)	SFN reset-signal (DRPS5)
	SFN sync-pulse (DRPS6)	SCH slot-pulse (DRPS10)	
	10ms Frame Pulse (DRPS11)	80ms Frame Pulse (DRPS13)	
	DPDCH data-clk with DTX (DRPS20)	DPCCH TPC data-clk (DRPS21)	
	DPCCH TFC I data-clk (DRPS22)	DPCCH Pilot data-clk (DRPS23)	
	DPCH data stream (DRPS24)	DPCH TimeSlot pulse (DRPS25)	
	DPCH 10ms Frame-Pulse (DRPS26)	DPCH data-clk (0) (DRPS28)	
	DPDCH data-clk withoutDTX (DRPS30)		
	DPCH Compressed Frame Indicator (DRPS32)		
	DPCH Gap Indicator (DRPS33)	PICH data-clk (DRPS34)	
	PICH data (DRPS35)	PICH TimeSlot Pulse (DRPS36)	
	PICH 10ms FramePulse (DRPS37)	P-CCPCH data-clk (DRPS38)	
	P-CCPCH data (DRPS39)	DPCH ChipARB FramePulse (DRPS40)	
	DPCH TPC-Bit Out (DRPS41)	Mlt-ESG-Sync Trigger-Out (DRPS42)	
	Remarks	For more information about the rear panel connector configurations, refer to "Signal Generator Overview" in the <i>E4428C/38C ESG Signal Generators User's Guide</i> .	

:DLINK:RPANel:OUTPut:DOUT

Supported E4438C with Option 400

```
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:RPANel:OUTPut:DOUT
DRPS0|DRPS4|DRPS5|DRPS6|DRPS10|DRPS11|DRPS13|DRPS20|DRPS21|DRPS22|
DRPS23|DRPS24|DRPS25|DRPS26|DRPS28|DRPS30|DRPS32|DRPS33|DRPS34|DRPS35|
DRPS36|DRPS37|DRPS38|DRPS39|DRPS40|DRPS41|DRPS42
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:RPANel:OUTPut:DOUT?
```

This command assigns a signal to the data output at the selected rear panel AUX I/O connector pin#7. Refer to [Table 9-2 on page 964](#) for command parameters and output signal names.

***RST** RPS0

Key Entry Refer to **Key Entry** on [page 966](#).

Remarks For more information about the rear panel connector configurations, refer to "Signal Generator Overview" in the *E4428C/38C ESG Signal Generators User's Guide*.

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADIO:WCDMA:TGPP[:BBG])

:DLINK:RPANel:OUTPut:EVENT1**Supported** E4438C with Option 400

```
[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:DLINK:RPANel:OUTPut:EVENT1
DRPS0|DRPS4|DRPS5|DRPS6|DRPS10|DRPS11|DRPS13|DRPS20|DRPS21|DRPS22|
DRPS23|DRPS24|DRPS25|DRPS26|DRPS28|DRPS30|DRPS32|DRPS33|DRPS34|DRPS35|
DRPS36|DRPS37|DRPS38|DRPS39|DRPS40|DRPS41|DRPS42
```

```
[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:DLINK:RPANel:OUTPut:EVENT1?
```

This command assigns a signal to the EVENT 1 rear panel output connector. Refer to [Table 9-2 on page 964](#) for command parameters and output signal names.

***RST** RPS0**Key Entry** Refer to **Key Entry** on [page 966](#).

Remarks For more information about the rear panel connector configurations, refer to "Signal Generator Overview" in the *E4428C/38C ESG Signal Generators User's Guide*.

:DLINK:RPANel:OUTPut:EVENT2**Supported** E4438C with Option 400

```
[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:DLINK:RPANel:OUTPut:EVENT2
DRPS0|DRPS4|DRPS5|DRPS6|DRPS10|DRPS11|DRPS13|DRPS20|DRPS21|DRPS22|
DRPS23|DRPS24|DRPS25|DRPS26|DRPS28|DRPS30|DRPS32|DRPS33|DRPS34|DRPS35|
DRPS36|DRPS37|DRPS38|DRPS39|DRPS40|DRPS41|DRPS42
```

```
[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:DLINK:RPANel:OUTPut:EVENT2?
```

This command assigns a signal to the EVENT 2 rear panel output connector. Refer to [Table 9-2 on page 964](#) for command parameters and output signal names.

***RST** RPS0**Key Entry** Refer to **Key Entry** on [page 966](#).

Remarks For more information about the rear panel connector configurations, refer to "Signal Generator Overview" in the *E4428C/38C ESG Signal Generators User's Guide*.

:DLINK:RPANel:OUTPut:EVENT3**Supported** E4438C with Option 400

```
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:RPANel:OUTPut:EVENT3
DRPS0|DRPS4DRPS5|DRPS6|DRPS10|DRPS11|DRPS13|DRPS20|DRPS21|DRPS22|
DRPS23|DRPS24|DRPS25|DRPS26|DRPS28|DRPS30|DRPS32|DRPS33|DRPS34|DRPS35|
DRPS36|DRPS37|DRPS38|DRPS39|DRPS40|DRPS41|DRPS42
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:RPANel:OUTPut:EVENT3?
```

This command assigns a signal to the EVENT 3 at the selected rear panel AUX I/O connector pin#19. Refer to [Table 9-2 on page 964](#) for command parameters and output signal names.

RST** RPS0**Key Entry** Refer to **Key Entry** on [page 966](#).**Remarks** For more information about the rear panel connector configurations, refer to "Signal Generator Overview" in the *E4428C/38C ESG Signal Generators User's Guide*.**:DLINK:RPANel:OUTPut:EVENT4*Supported** E4438C with Option 400

```
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:RPANel:OUTPut:EVENT4
DRPS0|DRPS4|DRPS5|DRPS6|DRPS10|DRPS11|DRPS13|DRPS20|DRPS21|DRPS22|
DRPS23|DRPS24|DRPS25|DRPS26|DRPS28|DRPS30|DRPS32|DRPS33|DRPS34|DRPS35
DRPS36|DRPS37|DRPS38|DRPS39|DRPS40|DRPS41|DRPS42
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:RPANel:OUTPut:EVENT4?
```

This command assigns a signal to the EVENT 4 at the selected rear panel AUX I/O connector pin#18. Refer to [Table 9-2 on page 964](#) for command parameters and output signal names.

***RST** RPS0**Key Entry** Refer to **Key Entry** on [page 966](#).**Remarks** For more information about the rear panel connector configurations, refer to "Signal Generator Overview" in the *E4428C/38C ESG Signal Generators User's Guide*.

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADIO:WCDMA:TGPP[:BBG])

:DLINK:RPANel:OUTPut:SSYNc**Supported** E4438C with Option 400

```
[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:DLINK:RPANel:OUTPut:SSYNc
DRPS0|DRPS4|DRPS5|DRPS6|DRPS10|DRPS11|DRPS13|DRPS20|DRPS21|DRPS22|
DRPS23|DRPS24|DRPS25|DRPS26|DRPS28|DRPS30|DRPS32|DRPS33|DRPS34|DRPS35|
DRPS36|DRPS37|DRPS38|DRPS39|DRPS40|DRPS41|DRPS42
[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:DLINK:RPANel:OUTPut:SSYNc?
```

This command assigns a signal to the SYM SYNC OUT at the selected rear panel AUX I/O connector pin#5. Refer to [Table 9-2 on page 964](#) for command parameters and output signal names.

RST** RPS0**Key Entry** Refer to **Key Entry** on [page 966](#).**Remarks** For more information about the rear panel connector configurations, refer to "Signal Generator Overview" in the *E4428C/38C ESG Signal Generators User's Guide*.**:DLINK:SCH[:STATe]*Supported** E4438C with Option 400

```
[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:DLINK:SCH[:STATe] ON|OFF|1|0
```

This command enables or disables the primary and secondary synchronization channel (SSCH).

RST** 1**Key Entry** **Channel State Off On*Remarks** To query the state of the individual channel, refer to “:DLINK:PSCH[:STATe]” on [page 962](#) and “:DLINK:SSCH[:STATe]” on [page 971](#).**:DLINK:SCRamblecode****Supported** E4438C with Option 400

```
[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:DLINK:SCRamblecode <val>
[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:DLINK:SCRamblecode?
```

This command selects the scramble code number.

***RST** +0**Range** 0–511**Field Entry** Scrambling Code

:DLINK:SDElay**Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:SDElay <val>

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:SDElay?

This command sets the delay of the system frame number (SFN) synchronization when a Multi-ESG-Sync Trigger-In signal is received. The variable <val> is expressed in unit of chips.

***RST** +0.00000000E+000**Range** 0–38399**Field Entry** Sync Delay

Remarks This function provides the capability of Inter-Cell Soft Handover test as described in TS.34.121 7.7.1 of the 3GPP standard. The test requires two basestations that generate the same signal but have a 10 chip timing offset. The two basestations are simulated by two ESGs and Sync Delay is the synchronization delay between the ESGs.

:DLINK:SSCH:POWer**Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:SSCH:POWer <val>

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:SSCH:POWer?

This command sets the power level for the secondary synchronization channel (SSCH). The variable <val> is expressed in units of decibels (dB).

RST** –8.30000000E+000**Range** –40 to 0**Field Entry** SSCH Power**:DLINK:SSCH:SSGRoup*Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:SSCH:SSGRoup?

This command query returns the secondary scramble code group for the secondary synchronization channel (SSCH).

***RST** +0**Field Entry** SSCH 2nd Scramble Group

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADIO:WCDMA:TGPP[:BBG])

:DLINK:SSCH[:STATe]**Supported** E4438C with Option 400

[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:DLINK:SSCH[:STATe] ON|OFF|1|0

This command enables or disables the secondary synchronization channel (SSCH).

RST** 1**Field Entry** SSCH State**:DLINK:TGAP:FSTRUCT*Supported** E4438C with Option 400

[:SOURCE]:RADIO[1]|2|3|4:WCDMA:TGPP[:BBG]:DLINK:TGAP:FSTRUCT A|B

[:SOURCE]:RADIO[1]|2|3|4:WCDMA:TGPP[:BBG]:DLINK:TGAP:FSTRUCT?

This command selects the compressed frame structure for the transmission gaps.

A The pilot field of the last slot in the transmission gap is transmitted and transmission is turned off during the rest of the transmission gap.

B The TPC field of the first slot and the pilot field of the last slot in the transmission gap are transmitted and transmission is turned off during the rest of the transmission gap.

RST** A**Field Entry** Frame Struct**:DLINK:TGAP:POFFset*Supported** E4438C with Option 400

[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:DLINK:TGAP:POFFset <val>

[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:DLINK:TGAP:POFFset?

This command specifies the amount of power to be increased when the data is being compressed for the transmission gap power offset.

The variable <val> is expressed in units of decibels (dB).

***RST** +0.00000000E+000**Range** 0–6**Field Entry** PwrOffs

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADio:WCDMa:TGPP[:BBG])**:DLINK:TGAP:PSI[1]:CFN****Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:TGAP:PSI[1]:CFN <val>

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:TGAP:PSI[1]:CFN?

This command sets the connection frame number (CFN) for the first radio of the first pattern 1.

RST** 0**Range** 1–255**Field Entry** TGCFN**Remarks** The connection frame number (CFN) is counted internally relative to the system sync signal.**:DLINK:TGAP:PSI[1]:CMMethod*Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:TGAP:PSI[1]:CMMehtod SF2|PUNcture

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:TGAP:PSI[1]:CMMethod?

This command selects the compressed mode (CM) method.

SF2 This choice selects a compressed mode method that reduces the spread factor (SF) by 2. This is done by reducing the spreading factor in half. When the dedicated physical data channel's (DPDCH) symbol rate is 960 kbps, the frame is not compressed because it uses the lowest SF value and cannot be reduced.

PUNcture This choice selects a compressed mode method that punctures the convolutional encoder to a lower rate which reduces the number of symbols to be transmitted.

RST** SF2**Key Entry** **SF2** **Puncture*Remarks** To edit the parameters for this command using the ESG front panel keys, highlight the **CM Method** field and select either **SF2** or **Puncture** softkeys.

If the parameter is changed, the apply command must be executed after the change. Refer to “:DLINK:APPLY” on page 935.

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADIO:WCDMA:TGPP[:BBG])

:DLINK:TGAP:PSI[1]:D**Supported** E4438C with Option 400

[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:DLINK:TGAP:PSI[1]:D <val>

[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:DLINK:TGAP:PSI[1]:D?

This command sets the transmission gap distance.

RST** +0**Range** 0, 15–269**Field Entry** TGD**Remarks** This command specifies the number of slots between the starting slot of two consecutive transmission gaps within a gap pattern.**:DLINK:TGAP:PSI[1]:L1*Supported** E4438C with Option 400

[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:DLINK:TGAP:PSI[1]:L1 3|4|5|7|10|14

[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:DLINK:TGAP:PSI[1]:L1?

This command specifies the length of the first transmission gap (TGL1).

The length is expressed in number of slots.

RST** 7**Field Entry** TGL1**:DLINK:TGAP:PSI[1]:L2*Supported** E4438C with Option 400

[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:DLINK:TGAP:PSI[1]:L2 3|4|5|7|10|14|OMITted

[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:DLINK:TGAP:PSI[1]:L2?

This command specifies the length of the second transmission gap (TGL2).

The length is expressed in number of slots.

RST** OMIT**Field Entry** TGL2**Key Entry** **Omitted*Remarks** When OMITted is selected, TGL2 = TGL1.

:DLINK:TGAP:PSI[1]:PL1**Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:TGAP:PSI[1]:PL1 <val>

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:TGAP:PSI[1]:PL1?

This command specifies the duration of the transmission gap pattern length 1 (TGPL1).

The variable <val> is expressed in number of frames.

RST** +2**Range** 1–144**Field Entry** TGPL1**:DLINK:TGAP:PSI[1]:PL2*Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:TGAP:PSI[1]:PL2 <val>|OMITted

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:TGAP:PSI[1]:PL2?

This command specifies the duration of the transmission gap pattern length 2 (TGPL2).

The variable is expressed in number of frames.

RST** OMIT**Range** 1–144**Key Entry** **Omitted*Remarks** When OMITted is selected, TGPL2 = TGPL1.

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADIo:WCDMa:TGPP[:BBG])**:DLINK:TGAP:PSI[1]:PRC****Supported** E4438C with Option 400

```
[:SOURCE]:RADIo:WCDMa:TGPP[:BBG]:DLINK:TGAP:PSI[1]:PRC <val>|INFINITY
[:SOURCE]:RADIo:WCDMa:TGPP[:BBG]:DLINK:TGAP:PSI[1]:PRC?
```

This command sets the transmission gap pattern repetition count.

RST** 1**Range** 1–511**Key Entry** **Infinity*Field Entry** TGPRC

Remarks The pattern repetition count (PRC) sets the number of transmission gap patterns within the transmission gap pattern sequence. When `INFINITY` is selected, the PRC will continue indefinitely.

:DLINK:TGAP:PSI[1]:PS**Supported** E4438C with Option 400

```
[:SOURCE]:RADIo:WCDMa:TGPP[:BBG]:DLINK:TGAP:PSI[1]:PS ACTIVE|INACTIVE
[:SOURCE]:RADIo:WCDMa:TGPP[:BBG]:DLINK:TGAP:PSI[1]:PS?
```

This command sets the transmission gap pattern status.

ACTIVE This choice activates the compressed mode.

INACTIVE This choice sets the compressed mode to inactive.

RST** INAC**Key Entry** **Active Inactive*:DLINK:TGAP:PSI[1]:SN****Supported** E4438C with Option 400

```
[:SOURCE]:RADIo:WCDMa:TGPP[:BBG]:DLINK:TGAP:PSI[1]:SN <val>
[:SOURCE]:RADIo:WCDMa:TGPP[:BBG]:DLINK:TGAP:PSI[1]:SN?
```

This command specifies the timeslot number of the first transmission gap within the first radio frame.

***RST** +11**Range** 0–14**Field Entry** TGSN

:DLINK:TGAP:RPARAmeter**Supported** E4438C with Option 400

[:SOURCE]:RADIo:WCDMa:TGPP[:BBG]:DLINK:TGAP:RPARAmeter DREF11 | DREF12 | DREF21 | DREF22

[:SOURCE]:RADIo:WCDMa:TGPP[:BBG]:DLINK:TGAP:RPARAmeter?

This command sets the downlink reference compressed mode parameters as defined in 3GPP standard.

DREF11 This choice sets the reference parameter to 1.1.

DREF12 This choice sets the reference parameter to 1.2.

DREF21 This choice sets the reference parameter to 2.1.

DREF22 This choice sets the reference parameter to 2.2.

RST** CUST**Key Entry** **DL Reference 1.1** **DL Reference 1.2** **DL Reference 2.1** **DL Reference 2.2*Remarks** The query returns CUSTom when the parameters are set individually.**:DLINK:TGAP:SCFN****Supported** E4438C with Option 400

[:SOURCE]:RADIo:WCDMa:TGPP[:BBG]:DLINK:TGAP:SCFN <val>

[:SOURCE]:RADIo:WCDMa:TGPP[:BBG]:DLINK:TGAP:SCFN?

This command sets the stop connection frame number (CFN) when the stop trigger is used.

When the stop trigger is received at the signal generator, the compressed mode will finish even if the transmission gap pattern repetition count (TGPRC) is still remaining.

***RST** +0**Range** 0–255**Field Entry** SCFN**Remarks** The compressed mode stop trigger must be executed for this command to work. Refer to, “[:DLINK:TGAP:STOP:TRIGger](#)” on page 977.

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADIO:WCDMA:TGPP[:BBG])**:DLINK:TGAP:START:TRIGGER****Supported** E4438C with Option 400

[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:DLINK:TGAP:START:TRIGGER

This command starts the signal generator compressed pattern transmission. Compressed pattern transmission begins with the specified transmission gap connection frame number (TGCFN).

Key Entry **Compressed Mode Start Trigger****:DLINK:TGAP:START:TRIGGER:POLARITY****Supported** E4438C with Option 400[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:DLINK:TGAP:START:TRIGGER:POLARITY
POSITIVE|NEGATIVE

[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:DLINK:TGAP:START:TRIGGER:POLARITY?

This command sets the compressed mode start trigger polarity. The compressed pattern transmission begins when this trigger is received.

POSITIVE This choice sets the trigger to start when the trigger signal is high.

NEGATIVE This choice sets the trigger to start when the trigger signal is low.

RST** POS**Key Entry** **Comp Mode Start Trigger Polarity Pos Neg*:DLINK:TGAP:STOP:TRIGGER****Supported** E4438C with Option 400

[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:DLINK:TGAP:STOP:TRIGGER

This command stops the signal generator compressed pattern transmission. Compressed pattern transmission begins with the specified transmission gap connection frame number (TGCFN).

Key Entry **Compressed Mode Stop Trigger**

:DLINK:TGAP:STOP:TRIGger:POLarity**Supported** E4438C with Option 400[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:TGAP:STOP:TRIGger:POLarity
POSitive|NEGative

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:TGAP:STOP:TRIGger:POLarity?

This command sets the compressed mode stop trigger polarity. The compressed pattern transmission stops when this trigger is received.

POSitive This choice sets the trigger to stop when the trigger signal is high.

NEGative This choice sets the trigger to stop when the trigger signal is low.

***RST** POS

Key Entry **Comp Mode Stop Trigger Polarity Pos Neg**

:DLINK:TGAP[:STATe]**Supported** E4438C with Option 400[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:TGAP[:STATe] 1|0|ON|OFF
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:TGAP[:STATe]?

This command enables or disables the transmission gap compressed mode.

***RST** 0

Key Entry **Compressed Mode On Off**

Remarks When compressed mode is enabled, DPCH2 is automatically disabled and can't be enabled.

If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to “:DLINK:APPLY” on page 935.

:DLINK:TSEUp

Supported E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:TSEUp REFSensitiv|MAXinput|ACS|BLOCKing|SPURious|INTErmod|PERFReq

This command configures the test setup for the downlink channels.

REFSensitivity	This choice selects reference sensitivity. This is the minimum receiver input power measured at the antenna connector.
MAXinput	This choice selects maximum input interference. The receiver is stressed with high-levels of interference from unwanted signals.
ACS	This choice selects adjacent channel selectivity (ACS). This is the receiver ability to receive a wanted signal at the assigned channel frequency with the presence of adjacent signals. ACS is the ratio of the receiver filter attenuation (on the assigned channel) to the receive filter attenuation on the adjacent channel(s).
BLOCKing	This choice selects the blocking characteristics. This is a measure of the receiver ability to receive a wanted signal at the assigned channel frequency in the presence of an unwanted interferer on frequencies other than those of the adjacent channels.
SPURious	This choice selects spurious emission power. The emissions are generated or amplified by a receiver.
INTErmod	This choice selects intermodulation. Third order intermodulation (TIO) or higher mixing of the two interfering RF signals signal in the band of the desired channel.
PERFReq	This choice selects the performance requirement of the dedicated channel. This is a static propagation conditions that is determined by the maximum block error rate (BLER) allowed when the receiver input signal is at a specified Eb/No limit.

Key Entry	Ref Sensitivity	Max Input	ACS	Blocking
	Spurious Response	Intermod	Performance Req	

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADio:WCDMa:TGPP[:BBG])**:DLINK:TXDV****Supported** E4438C with Option 400

```
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:TXDV NONE|OANT1|OANT2|OANTO1|OANTO2
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK:TXDV?
```

This command selects the transmit diversity mode of the downlink signal.

NONE This choice disables the transmit diversity mode.

OANT1 This choice selects a Transmit Diversity Openloop Antenna 1 mode.

OANT2 This choice selects a Transmit Diversity Openloop Antenna 2 mode.

OANTO1 This choice selects a Transmit Diversity Openloop Antenna 1 mode with the SCH TSTD (Synchronization Channel Transmit Switched Time Diversity) off.

OANTO2 This choice selects a Transmit Diversity Openloop Antenna 2 mode with the SCH TSTD (Synchronization Channel Transmit Switched Time Diversity) off.

***RST** NONE

Field Entry TX Diversity

Key Entry **None** **OpenLoop Ant1** **OpenLoop Ant2**
OpenLoop Ant1 SCH TSTD OFF **OpenLoop Ant2 SCH TSTD OFF**

:DLINK[:TGRoup [A]|B]:DCH[1]|2|3|4|5|6:BLKSize**Supported** E4438C with Option 400

```
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK[:TGRoup[A]|B]:DCH[1]|2|3|4|5|6:
BLKSize <val>
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK[:TGRoup[A]|B]:DCH[1]|2|3|4|5|6:
BLKSSize?
```

This command sets the coupling block size for the selected dedicated transport channel (DCH).

With transportation position in fixed mode, block size is limited to 0 or equal to the block set size. Refer to, “[:DLINK\[:TGRoup \[A\]|B\]:DCH\[1\]|2|3|4|5|6:POSition](#)” on page 985 for more information.

***RST** 20

Range 0–5000

Field Entry Blk Size

Remarks If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to “[:DLINK:APPLY](#)” on page 935.

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADIO:WCDMA:TGPP[:BBG])

:DLINK[:TGRoup [A] | B]:DCH[1] | 2 | 3 | 4 | 5 | 6:BPFramE**Supported** E4438C with Option 400[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:DLINK[:TGRoup [A] | B]:DCH [1] | 2 | 3 | 4 | 5 | 6 :
BPFramE?

This query returns the block per frame for the selected dedicated transport channel (DCH).

RST** 20**:DLINK[:TGRoup [A] | B]:DCH[1] | 2 | 3 | 4 | 5 | 6:BRATe*Supported** E4438C with Option 400[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:DLINK[:TGRoup [A] | B]:DCH [1] | 2 | 3 | 4 | 5 | 6 :
BRATe?

This query returns the block rate for the selected dedicated transport channel (DCH).

RST** 20**:DLINK[:TGRoup [A] | B]:DCH[1] | 2 | 3 | 4 | 5 | 6:BSSize*Supported** E4438C with Option 400[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:DLINK[:TGRoup [A] | B]:DCH [1] | 2 | 3 | 4 | 5 | 6 :
BSSize?

This query returns the block set size for the selected dedicated transport channel (DCH).

Block set size is a multiple of block size and number of blocks. Changing the block size value will also change the value for block set size. The value for number of blocks does not change when changing block size.

***RST** 20**Range** 0–200000**Field Entry** Blk Set Size**Remarks** This field is grayed out for the transport position flexible and fixed modes.To change the DCH positioning, refer to “[:DLINK\[:TGRoup \[A\] | B\]:DCH\[1\] | 2 | 3 | 4 | 5 | 6:POSITION](#)” on page 985.

:DLINK[:TGRoup [A] | B]:DCH[1] | 2 | 3 | 4 | 5 | 6:CODE**Supported** E4438C with Option 400

```
[:SOURCE]:RADIo:WCDMa:TGPP[:BBG]:DLINK[:TGRoup[A] | B]:DCH[1] | 2 | 3 | 4 | 5 | 6:
CODE HCONv | TCONv | TURBo | NONE
[:SOURCE]:RADIo:WCDMa:TGPP[:BBG]:DLINK[:TGRoup[A] | B]:DCH[1] | 2 | 3 | 4 | 5 | 6:
CODE?
```

This command selects the encoder type.

HCONv This choice selects coding with the 1/2 rate convolutional encoder.

TCONv This choice selects coding with the 1/3 rate convolutional encoder.

TURBo This choice selects coding with the turbo coder.

NONE This choice selects no coding.

***RST** HCON**Key Entry** 1/2 Conv 1/3 Conv Turbo None

Remarks If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to [“:DLINK:APPLY” on page 935](#).

:DLINK[:TGRoup [A] | B]:DCH[1] | 2 | 3 | 4 | 5 | 6:CRC**Supported** E4438C with Option 400

```
[:SOURCE]:RADIo:WCDMa:TGPP[:BBG]:DLINK[:TGRoup[A] | B]:DCH[1] | 2 | 3 | 4 | 5 | 6:
CRC <val>
[:SOURCE]:RADIo:WCDMa:TGPP[:BBG]:DLINK[:TGRoup[A] | B]:DCH[1] | 2 | 3 | 4 | 5 | 6:
CRC?
```

This command sets the number of cyclic redundancy check (CRC) bits for the dedicated transport channel (DCH).

***RST** 8**Field Entry** CRC Size

Remarks If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to [“:DLINK:APPLY” on page 935](#).

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADIo:WCDMa:TGPP[:BBG])

:DLINK[:TGRoup [A] | B]:DCH[1] | 2 | 3 | 4 | 5 | 6:DATA

Supported E4438C with Option 400

```
[ :SOURCE ] :RADIo:WCDMa:TGPP [ :BBG ] :DLINK [ :TGRoup [A] | B ] :DCH [1] | 2 | 3 | 4 | 5 | 6 :
DATA PN9 | FIX4 | "<file name>"
[ :SOURCE ] :RADIo:WCDMa:TGPP [ :BBG ] :DLINK [ :TGRoup [A] | B ] :DCH [1] | 2 | 3 | 4 | 5 | 6 :
DATA?
```

This command configures the data for the downlink dedicated transport channel (DCH) selected.

"<file name>" This variable specifies a data pattern that has been stored in memory.

***RST** PN9

Key Entry **PN9** **FIX4** "**<User File>**"

Remarks If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to [“:DLINK:APPLY” on page 935](#).

:DLINK[:TGRoup [A] | B]:DCH[1] | 2 | 3 | 4 | 5 | 6:DATA:EINSert

Supported E4438C with Option 400

```
[ :SOURCE ] :RADIo:WCDMa:TGPP [ :BBG ] :DLINK [ :TGRoup [A] | B ] :DCH [1] | 2 | 3 | 4 | 5 | 6 :
DATA:EINSert BLER | BER | NONE
[ :SOURCE ] :RADIo:WCDMa:TGPP [ :BBG ] :DLINK [ :TGRoup [A] | B ] :DCH [1] | 2 | 3 | 4 | 5 | 6 :
DATA:EINSert?
```

This command selects the error insertion mode.

BLER This choice selects a block error rate (BLER) mode.

BER This choice selects a bit error rate (BER) mode.

NONE This choice selects no BLER or BER mode (no error blocks or bit are inserted)

***RST** NONE

Key Entry **BLER** **BER** **None**

:DLINK[:TGRoup [A] | B]:DCH[1] | 2 | 3 | 4 | 5 | 6:DATA:FIX4**Supported** E4438C with Option 400

```
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK[:TGRoup[A] | B]:DCH[1] | 2 | 3 | 4 | 5 | 6:
DATA:FIX4 <val>
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK[:TGRoup[A] | B]:DCH[1] | 2 | 3 | 4 | 5 | 6:
DATA:FIX4?
```

This command sets a fixed data type to be transmitted on the selected downlink dedicated transport channel (DCH).

While the variable <val> can be entered in binary, hexadecimal, or decimal formats, the query returns only binary values.

***RST** #B0000**Range** 0–15**Key Entry** **FIX4**

Remarks If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to [“:DLINK:APPLY” on page 935](#).

:DLINK[:TGRoup [A] | B]:DCH[1] | 2 | 3 | 4 | 5 | 6:NBLocks**Supported** E4438C with Option 400

```
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK[:TGRoup[A] | B]:DCH[1] | 2 | 3 | 4 | 5 | 6:
NBLocks <val>
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK[:TGRoup[A] | B]:DCH[1] | 2 | 3 | 4 | 5 | 6:
NBLocks?
```

This command sets the number of blocks transmitted by the active downlink dedicated transport channel (DCH).

Number of blocks and block size are multiplied to equal the value in the block set size field. Refer to, [“:DLINK\[:TGRoup \[A\]|B\]:DCH\[1\]|2|3|4|5|6:BSSize” on page 981](#) for more information.

***RST** 1**Range** 1–64**Field Entry** # of Blocks

Remarks If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to [“:DLINK:APPLY” on page 935](#).

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADio:WCDMa:TGPP[:BBG])

:DLINK[:TGRoup [A] | B]:DCH[1] | 2 | 3 | 4 | 5 | 6:POSITION**Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK[:TGRoup [A] | B]:DCH[1] | 2 | 3 | 4 | 5 | 6:POSITION FLEXible|FIXed

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK[:TGRoup [A] | B]:DCH[1] | 2 | 3 | 4 | 5 | 6:POSITION?

This command selects the coupling mode.

FLEXible This choice sets the block set size (BSSize) and tracks the block size.**FIXed** Allows editing of the block set size (BSSize) and block size. The values are limited to two values equal to BSSize or 0. An error message is generated if a value other than these is entered and the setting will default to the BSSize.***RST** FLEX**Key Entry** Transp Position Flexible Fixed**:DLINK[:TGRoup [A] | B]:DCH[1] | 2 | 3 | 4 | 5 | 6:PPERcentage****Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK[:TGRoup [A] | B]:DCH[1] | 2 | 3 | 4 | 5 | 6:PPERcentage?

This query returns the percentage of the total bits removed from or added to the fully coded channel.

:DLINK[:TGRoup [A] | B]:DCH[1] | 2 | 3 | 4 | 5 | 6:RMATCh**Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK[:TGRoup [A] | B]:DCH[1] | 2 | 3 | 4 | 5 | 6:RMATCh <val>

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK[:TGRoup [A] | B]:DCH[1] | 2 | 3 | 4 | 5 | 6:RMATCh?

This command sets the rate matching attribute.

***RST** 1**Range** 1–256**Field Entry** Rate Match Attr**Remarks** If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to “:DLINK:APPLY” on page 935.

:DLINK[:TGRoup [A] | B]:DCH[1] | 2 | 3 | 4 | 5 | 6:TTI**Supported** E4438C with Option 400

```
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK[:TGRoup[A] | B]:DCH[1] | 2 | 3 | 4 | 5 | 6:
TTI 10000 | 20000 | 40000 | 80000
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK[:TGRoup[A] | B]:DCH[1] | 2 | 3 | 4 | 5 | 6:
TTI?
```

This command sets the transmission time interval (TTI) allowed for the dedicated channel (DCH) to transmit.

The choices are expressed in units of milliseconds (msec) where 20000=20 msec.

***RST** 10000**Field Entry** TTI

Remarks If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to [“:DLINK:APPLY” on page 935](#).

:DLINK[:TGRoup [A] | B]:DCH[1] | 2 | 3 | 4 | 5 | 6[:STATe]**Supported** E4438C with Option 400

```
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK[:TGRoup[A] | B]:DCH[1] | 2 | 3 | 4 | 5 |
6[:STATe] ON | OFF | 1 | 0
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:DLINK[:TGRoup[A] | B]:DCH[1] | 2 | 3 | 4 | 5 |
6[:STATe]?
```

This command enables or disables the selected dedicated transport channel (DCH).

***RST** DCH 1: 1 DCH 2–6: 0**Key Entry** **TrCH State Off On**

Remarks DCH1 reset value cannot be turned off. The channels must be turned on sequentially. If one channel is turned off then all higher numbered channels will automatically be turned off.

If the parameter is changed, the apply command must be executed after the change. Refer to [“:DLINK:APPLY” on page 935](#).

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADIo:WCDMa:TGPP[:BBG])**:LINK****Supported** E4438C with Option 400[:SOURCE]:RADIo:WCDMa:TGPP[:BBG]:LINK DOWN|UP
[:SOURCE]:RADIo:WCDMa:TGPP[:BBG]:LINK?

This command sets the uplink or downlink mode.

RST** DOWN**Key Entry** **Link Down Up*:POLarity[:ALL]****Supported** E4438C with Option 400[:SOURCE]:RADIo:WCDMa:TGPP[:BBG]:POLarity[:ALL] NORMAl|INVert
[:SOURCE]:RADIo:WCDMa:TGPP[:BBG]:POLarity[:ALL]?

This command selects the polarity for the Q channel.

NORMAl This choice selects normal phase polarity.

INVert This choice inverts the internal Q signal.

RST** NORM**Key Entry** **Phase Polarity Normal Invert*:ULINK:APPLY****Supported** E4438C with Option 400[:SOURCE]:RADIo:WCDMa:TGPP[:BBG]:ULINK:APPLY
[:SOURCE]:RADIo:WCDMa:TGPP[:BBG]:ULINK:APPLY?

This command immediately starts the channel coding generation process according to the channel setup and data for the uplink physical and transport channels.

The query returns a response that determines whether or not the execution of the command is necessary. The response from the query is as follows:

1 This response is returned if the execution of the command is required.

0 This response is returned if the execution of the command is not required.

***RST** +0**Key Entry** **Apply Channel Setup**

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADio:WCDMa:TGPP[:BBG])**:ULINK:AWGN:CN**

Supported E4438C with Option 400 and 403

```
[ :SOURCE ] :RADio:WCDMa:TGPP [ :BBG ] :ULINK:AWGN:CN <val>
```

```
[ :SOURCE ] :RADio:WCDMa:TGPP [ :BBG ] :ULINK:AWGN:CN?
```

This command sets the in band carrier to noise ratio. The noise is the total noise level of the in-channel.

The variable <val> is expressed in units of decibels (dB).

***RST** -1.80000000E+001

Range -30 to 30

Field Entry C/N value

Remarks In compressed mode, carrier power means normal frame power. A change in the C/N value will change the Eb/No value and vice versa.

:ULINK:AWGN:CPOWer

Supported E4438C with Option 400 and 403

```
[ :SOURCE ] :RADio:WCDMa:TGPP [ :BBG ] :ULINK:AWGN:CPOWer?
```

This query returns the carrier power level when the additive white gaussian noise (AWGN) is on.

The power value is expressed in units of decibels (dBm/3.84 MHz).

***RST** -1.56957537E+002

Field Entry C Power

Remarks In compressed mode, carrier power means normal frame power.

:ULINK:AWGN:DRATe

Supported E4438C with Option 400 and 403

```
[ :SOURCE ] :RADio:WCDMa:TGPP [ :BBG ] :ULINK:AWGN:DRATe?
```

This query returns the data rate of the Eb reference channel.

***RST** +1.22000000E+004

Field Entry Ref Data Rate

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADIo:WCDMa:TGPP[:BBG])**:ULINk:AWGN:EBNO**

Supported E4438C with Option 400 and 403

[:SOURCE] :RADIo:WCDMa:TGPP [:BBG] :ULINk:AWGN:EBNO <val>

[:SOURCE] :RADIo:WCDMa:TGPP [:BBG] :ULINk:AWGN:EBNO?

This command sets the Eb/No ratio. The Eb is defined as the carrier power divided by the bit rate. No is noise power divided by the bandwidth (3.84MHz).

The variable <val> setting is affected by the carrier to noise ratio (C/N) and the data rate. A change to either of these values will affect your Eb/No setting. Use the formula in the range field to determine a correct Eb/No value.

***RST** +6.97971394E+000

Range Eb/No = C/N x 3.84MHz/Data Rate

Field Entry Eb/No value (dB)

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADIo:WCDMa:TGPP[:BBG])**:ULINK:AWGN:EBRef**

Supported E4438C with Option 400 and 403

[:SOURCE] :RADIo:WCDMa:TGPP [:BBG] :ULINK:AWGN:EBRef DPCCh | DPDCh | DCH1 |
DCH2 | DCH3 | DCH4 | DCH5 | DCH6

[:SOURCE] :RADIo:WCDMa:TGPP [:BBG] :ULINK:AWGN:EBRef?

This command selects the Eb reference and it is used in the Eb/No value.

DPCCh This choice selects a dedicated physical control channel.

DPDCh This choice selects a dedicated physical data channel.

DCH1 This choice select dedicated transport channel 1.

DCH2 This choice select dedicated transport channel 2.

DCH3 This choice select dedicated transport channel 3.

DCH4 This choice select dedicated transport channel 4.

DCH5 This choice select dedicated transport channel 5.

DCH6 This choice select dedicated transport channel 6.

***RST** DCH1

Key Entry **DPCCH** **DPDCH** **DCH1** **DCH2**
DCH3 **DCH4** **DCH5** **DCH6**

Remarks If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to “:ULINK:APPLY” on page 987.

:ULINK:AWGN:FNBW

Supported E4438C with Option 400 and 403

[:SOURCE] :RADIo:WCDMa:TGPP [:BBG] :ULINK:AWGN:FNBW?

This query returns the flat noise bandwidth (BW). Flat noise bandwidth is calculated by $BW=(1.6) \times$ (Chip rate) and the result is close to the 0 dB roll-off point.

***RST** +6.14400000E+006

Field Entry Flat Noise BW

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADIo:WCDMa:TGPP[:BBG])

:ULINK:AWGN:NPOWer**Supported** E4438C with Option 400 and 403

[:SOURCE]:RADIo:WCDMa:TGPP[:BBG]:ULINK:AWGN:NPOWer?

This query returns the in-channel noise level when the additive white gaussian noise (AWGN) is on.

The power value is expressed in units of decibels (dBm/3.84 MHz).

RST** -1.38957537E+002**Field Entry** N Power**:ULINK:AWGN:TICPower*Supported** E4438C with Option 400 and 403

[:SOURCE]:RADIo:WCDMa:TGPP[:BBG]:ULINK:AWGN:TICPower?

This query returns the total in-channel power (carrier with noise) as defined by the 3GPP standard.

Field Entry TotalPwr**Remarks** The total in-channel power is a sum of carrier power and in-channel noise power. Changing the noise related parameters such as C/N, Eb/No, and Eb Ref will cause a recalculation of the total in-channel power.

The maximum value returned by this query depends on the power option that is installed in the signal generator.

:ULINK:AWGN[:STATe]**Supported** E4438C with Option 400 and 403

[:SOURCE]:RADIo:WCDMa:TGPP[:BBG]:ULINK:AWGN:STATe ON|OFF|1|0

[:SOURCE]:RADIo:WCDMa:TGPP[:BBG]:ULINK:AWGN:STATe?

This command enables or disables the additive white gaussian noise (AWGN). AWGN can only be turned on when DPCCH is selected as the physical channel. Refer to “:ULINK:PHYSical[1]:TYPE” on page 1013.

***RST** 0**Key Entry** Channel State Off On**Remarks** If the parameter is changed, the apply command must be executed after the change. Refer to “:ULINK:APPLY” on page 987.

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADio:WCDMa:TGPP[:BBG])**:ULINK:CRATE****Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:CRATE <val>

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:CRATE?

This command sets the chip rate for the uplink configuration. The variable <val> is expressed in cycles per second (cps).

RST** +3.84000000E+006**Range** 1E3–4.25E6**Field Entry** Chip Rate**Remarks** The chip rate is equivalent to the spreading rate of the channel.**:ULINK:DPCCh:BETA*Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:DPCCh:BETA <val>

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:DPCCh:BETA?

This command sets the beta value for the uplink dedicated physical control channel (DPCCH). The beta value and the power ratio are coupled. When the power ratio is updated, the beta value is converted to the beta ratio (amplitude ratio).

***RST** +11**Range** 0–15**Field Entry** Beta**Remarks** After this command is sent, the channel power level for the DPCCH is re-calculated. If the channel power is set directly, the beta value of this command becomes invalid and is reset to –1.

If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to “:ULINK:APPLY” on page 987.

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADio:WCDMa:TGPP[:BBG])**:ULINK:DPCCh:CCODE****Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:DPCCh:CCODE <val>

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:DPCCh:CCODE?

This command sets the channelization code for the uplink dedicated physical control channel (DPCCH).

***RST** 0**Range** 0–255**Field Entry** Channel Code

Remarks If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to [“:ULINK:APPLY” on page 987](#).

:ULINK:DPCCh:DATA**Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:DPCCh:DATA PN9 | PN15 | FIX4 |

"<file name>" | STD

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:DPCCh:DATA?

This command configures the data pattern for the uplink dedicated physical control channel (DPCCH).

STD This choice sets the DPCCH to use the bits field as defined by the slot format.

"<file name>" This variable specifies a data pattern that has been stored in memory.

***RST** STD**Key Entry** **PN9** **PN15** **FIX4** **User File** **3GPP STD**

Remarks If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to [“:ULINK:APPLY” on page 987](#).

:ULINK:DPCCh:DATA:FIX4

Supported E4438C with Option 400

```
[ :SOURCE ] :RADIo:WCDMa:TGPP [ :BBG ] :ULINK:DPCCh:DATA:FIX4 <val>
```

```
[ :SOURCE ] :RADIo:WCDMa:TGPP [ :BBG ] :ULINK:DPCCh:DATA:FIX4?
```

This command sets the 4-bit data pattern of the uplink dedicated physical control channel (DPCCH).

While the variable <val> can be entered in binary, hexadecimal, or decimal formats, the query returns only binary values.

***RST** #B0000

Range 0–15

Key Entry **FIX4**

Remarks If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to [“:ULINK:APPLY” on page 987](#).

:ULINK:DPCCh:FBI:PATtern

Supported E4438C with Option 400

```
[ :SOURCE ] :RADIo:WCDMa:TGPP [ :BBG ] :ULINK:DPCCh:FBI:PATtern PN9 | PN15 | FIX |  
"<file name>"
```

```
[ :SOURCE ] :RADIo:WCDMa:TGPP [ :BBG ] :ULINK:DPCCh:FBI:PATtern?
```

This command configures the pattern of the feedback information (FBI) for the uplink dedicated physical control channel (DPCCH).

"<file name>" This variable specifies a data pattern that has been stored in memory.

***RST** FIX

Key Entry **PN9 PN15 FIX User File**

Remarks If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to [“:ULINK:APPLY” on page 987](#).

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADio:WCDMa:TGPP[:BBG])**:ULINK:DPCCh:FBI:PATtern:FIX**

Supported E4438C with Option 400

[:SOURCE] :RADio:WCDMa:TGPP [:BBG] :ULINK:DPCCh:FBI:PATtern:FIX <val>

[:SOURCE] :RADio:WCDMa:TGPP [:BBG] :ULINK:DPCCh:FBI:PATtern:FIX?

This command sets the 30-bit feedback information (FBI) pattern for the uplink dedicated physical control channel (DPCCH).

While the variable <val> can be entered in binary, hexadecimal, or decimal formats, the query returns only decimal values.

***RST** +0

Range 0–10737418235

Key Entry **FIX**

Remarks If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to “:ULINK:APPLY” on page 987.

:ULINK:DPCCh:FBI[:STATe]

Supported E4438C with Option 400

[:SOURCE] :RADio:WCDMa:TGPP [:BBG] :ULINK:DPCCh:FBI [:STATe] ?

This query returns whether or not the feedback information (FBI) bits are included in the uplink dedicated physical control channel (DPCCH). The FBI is included when a status of one is returned. A zero indicates no FBI.

***RST** 0

Range N/A

Field Entry FBI State

:ULINK:DPCCh:POWer

Supported E4438C with Option 400

[:SOURCE] :RADio:WCDMa:TGPP [:BBG] :ULINK:DPCCh:POWer <val>

[:SOURCE] :RADio:WCDMa:TGPP [:BBG] :ULINK:DPCCh:POWer?

This command sets the power level for the uplink dedicated physical control channel (DPCCH).

The variable <val> is expressed in units of decibels (dB).

***RST** -2.69000000E+000

Range -40 to 0

Field Entry DPCCH Power

Remarks If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to [“:ULINK:APPLY” on page 987](#).

:ULINK:DPCCh:RATE

Supported E4438C with Option 400

[:SOURCE] :RADio:WCDMa:TGPP [:BBG] :ULINK:DPCCh:RATE?

This query returns the symbol rate for the uplink dedicated physical control channel (DPCCH).

***RST** +1.50000000E+004

Field Entry Symbol Rate

:ULINK:DPCCh:SLOTformat

Supported E4438C with Option 400

[:SOURCE] :RADio:WCDMa:TGPP [:BBG] :ULINK:DPCCh:SLOTformat <val>

[:SOURCE] :RADio:WCDMa:TGPP [:BBG] :ULINK:DPCCh:SLOTformat?

This command sets the slot format for the uplink dedicated physical control channel (DPCCH). The variable <val> is expressed in unit of bits.

***RST** +0

Range 0–5

Field Entry Slot Format

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADIO:WCDMA:TGPP[:BBG])

Remarks If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to “:ULINK:APPLY” on page 987.

:ULINK:DPCCh:TFCI:PATtern

Supported E4438C with Option 400

```
[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:ULINK:DPCCh:TFCI:PATtern PN9|PN15|FIX|
"<file name>"
```

```
[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:ULINK:DPCCh:TFCI:PATtern?
```

This command configures the transport format combination indicator (TFCI) bit pattern for the uplink dedicated physical control channel (DPCCH).

"<file name>" This variable specifies a data pattern that has been stored in memory.

***RST** FIX

Key Entry **PN9 PN15 FIX User File**

Remarks If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to “:ULINK:APPLY” on page 987.

:ULINK:DPCCh:TFCI:PATtern:FIX

Supported E4438C with Option 400

```
[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:ULINK:DPCCh:TFCI:PATtern:FIX <val>
```

```
[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:ULINK:DPCCh:TFCI:PATtern:FIX?
```

This command sets the transport format combination indicator (TFCI) 10-bit data pattern for the uplink dedicated physical control channel (DPCCH).

While the variable <val> can be entered in binary, hexadecimal, or decimal formats, the query returns only decimal values.

***RST** +0

Range 0–1023

Field Entry TFCI Pattern

Remarks If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to “:ULINK:APPLY” on page 987.

:ULINK:DPCCh:TFCI[:STATe]**Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:DPCCh:TFCI[:STATe]?

This query returns the status of the transport format combination indicator (TFCI) for the uplink dedicated physical control channel (DPCCH).

RST** 1**Range** N/A**Field Entry** TFCI State**:ULINK:DPCCh:TPC:NSTeps*Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:DPCCh:TPC:NSTeps <val>

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:DPCCh:TPC:NSTeps?

This command sets the number of steps to increase or decrease the transmit power control (TPC) for the uplink dedicated physical control channel (DPCCH).

The variable <val> is expressed in units of decibels (dB).

***RST** +1**Range** 1–80**Field Entry** TPC Pat Steps**Remarks** Refer to “:ULINK:DPCCh:TPC:PATtern” on page 999.

If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to “:ULINK:APPLY” on page 987.

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADio:WCDMa:TGPP[:BBG])**:ULINK:DPCCh:TPC:PATtern**

Supported E4438C with Option 400

```
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:DPCCh:TPC:PATtern PN9|PN15|FIX4|
"<file name>"|UDOW|DUP|UALL|DALL
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:DPCCh:TPC:PATtern?
```

This command configures the transmit power control (TPC) pattern for the uplink dedicated physical control channel (DPCCH).

"<file name>" This variable specifies a data pattern that has been stored in memory.

UDOW This choice repetitively steps up and down the TPC pattern.

DUP This choice repetitively steps down and up the TPC pattern.

UALL This choice consecutively steps up the TPC pattern.

DALL This choice consecutively steps down the TPC pattern.

***RST** PN9

Key Entry **PN9 PN15 FIX4 "<file name>" Up/Down Down/Up All Up**

All Down

Remarks Refer to [“:ULINK:DPCCh:TPC:NSTeps” on page 998](#).

If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to [“:ULINK:APPLY” on page 987](#).

:ULINK:DPCCh:TPC:PATtern:FIX4

Supported E4438C with Option 400

```
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:DPCCh:TPC:PATtern:FIX4 <val>
```

```
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:DPCCh:TPC:PATtern:FIX4?
```

This command sets the transmit power control (TPC) 4 bit data pattern for the uplink dedicated physical control channel (DPCCH).

While the variable <val> can be entered in binary, hexadecimal, or decimal formats, the query returns only binary values.

***RST** #B0000

Range 0–15

Field Entry TPC Pattern

Remarks If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to [“:ULINK:APPLY” on page 987](#).

:ULINK:DPCCh:TPC:PATtern:TRIGger:POLarity

Supported E4438C with Option 400

```
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:DPCCh:TPC:PATtern:TRIGger:POLarity POSitive|NEGative
```

```
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:DPCCh:TPC:PATtern:TRIGger:POLarity?
```

This command sets the transmit power control (TPC) pattern trigger polarity for the uplink dedicated physical control channel (DPCCH).

POSitive This choice sets the pattern signal to trigger when the signal is high.

NEGative This choice sets the pattern signal to trigger when the signal is low.

***RST** POS

Key Entry **TPC Pat Trig Polarity Neg Pos**

Remarks If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to [“:ULINK:APPLY” on page 987](#).

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADio:WCDMa:TGPP[:BBG])

:ULINK:DPCCh:TPC:PATtern:TRIGger[:STATe]**Supported** E4438C with Option 400[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:DPCCh:TPC:PATtern:
TRIGger[:STATe] ON|OFF|1|0[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:DPCCh:TPC:PATtern:
TRIGger[:STATe]?

This command enables or disables the transmit power control (TPC) pattern trigger state for the uplink dedicated physical control channel (DPCCH).

***RST** 0**Field Entry** TPC UserFile Trig

Remarks The TPC pattern trigger input is located on the AUX I/O connector (ALT PWR IN, pin#16). For more information about the rear panel AUX I/O connector, refer to "Signal Generator Overview" in the *E4428C/38C ESG Signal Generators User's Guide*. If the parameter is changed, the apply command must be executed after the change. Refer to "**:ULINK:APPLY**" on page 987.

:ULINK:DPCCh:TPOWer**Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:DPCCh:TPOWer?

This query returns the "Total Power" value displayed on the user interface (UI). The power value is the relative power difference between the total in-channel signal power and the active channel reference power (0dB).

***RST** +0.00000000E+000

Remarks If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to "**:ULINK:APPLY**" on page 987.

:ULINK:DPCCh[:STATe]**Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:DPCCh[:STATe] ON|OFF|1|0

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:DPCCh[:STATe] ?

This command enables or disables the operating state for the uplink dedicated physical control channel (DPCCH).

***RST** 1**Field Entry** Channel State

Remarks If the parameter is changed, the apply command must be executed after the change. Refer to “:ULINK:APPLY” on page 987.

:ULINK:DPDCh:BETA**Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:DPDCh:BETA <val>

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:DPDCh:BETA?

This command sets the beta value for uplink dedicated physical data channel (DPDCH).

***RST** +15**Range** 0–15**Field Entry** Beta

Remarks The beta value and power ratio are coupled. After this command is sent, the value of the channel power level of the DPDCH is re-calculated.

If the channel power is set directly, the value of this command becomes invalid and is set to –1.

If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to “:ULINK:APPLY” on page 987.

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADIO:WCDMA:TGPP[:BBG])

:ULINK:DPDCh:CCODE

Supported E4438C with Option 400

```
[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:ULINK:DPDCh:CCODE <val>
```

```
[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:ULINK:DPDCh:CCODE?
```

This command sets the channelization code for the uplink dedicated physical data channel (DPDCH). There are commands that are associated with the channelization code and they are the slot format and the symbol rate.

If the slot format is changed, so will the symbol rate. If the symbol rate is changed, so will the slot format. In addition, the channelization code will change. If current channelization code exceed the new maximum value for the specified slot format or symbol rate, a setting conflict error is generated and the value is clipped to the maximum value. Refer to [Table 9-3 on page 1003](#).

Table 9-3 Channelization Code Maximum Value

Channelization Code	Slot Format	Symbol Rate
255	0	15
127	1	30
63	2	60
31	3	120
15	4	240
7	5	780
3	6	960

***RST** +16

Range 0–255

Field Entry Channel Code

Remarks Refer to “:ULINK:DPDCh:SLOTformat” on page 1007 and “:ULINK:DPDCh:RATE” on page 1005. If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to “:ULINK:APPLY” on page 987.

:ULINK:DPDCh:DATA

Supported E4438C with Option 400

```
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:DPDCh:DATA PN9 | PN15 | FIX4 |
"<file name>" | TRANspch
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:DPDCh:DATA?
```

This command configures the data pattern of the uplink dedicated physical data channel (DPDCH).

TRANspch This choice sets the data that is generated from the transport channel setup.

"<file name>" This variable specifies a data pattern that has been stored in memory.

***RST** TRAN

Key Entry **PN9 PN15 FIX4 User File Transport CH**

Remarks If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to [“:ULINK:APPLY” on page 987](#).

:ULINK:DPDCh:DATA:FIX4

Supported E4438C with Option 400

```
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:DPDCh:DATA:FIX4 <val>
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:DPDCh:DATA:FIX4?
```

This command sets the fixed 4-bit binary data for the uplink dedicated physical data channel (DPDCH).

While the variable <val> can be entered in binary, hexadecimal, or decimal formats, the query returns only binary values.

***RST** #B0000

Range 0–15

Field Entry Data

Remarks If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to [“:ULINK:APPLY” on page 987](#).

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADio:WCDMa:TGPP[:BBG])

:ULINK:DPDCh:POWer**Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:DPDCh:POWer <val>

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:DPDCh:POWer?

This command sets the power level for the uplink dedicated physical data channel (DPDCH).

The variable <val> is expressed in units of decibels (dB).

***RST** +0.00000000E+000**Range** -40 to 0**Field Entry** DPDCH Power

Remarks The power ratio and the beta value are coupled. After the beta value is specified and sent, the value of the channel power level of the DPDCH is re-calculated.

If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to [“:ULINK:APPLY” on page 987](#).

:ULINK:DPDCh:RATE**Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:DPDCh:RATE <val>

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:DPDCh:RATE?

This command sets the symbol rate for the uplink dedicated physical data channel (DPDCH). There are commands that are associated with the symbol rate and they are the channelization code and the slot format.

If the slot format is changed, so will the symbol rate. If the symbol rate is changed, so will the slot format. In addition, the channelization code will change. If current channelization code exceed the new maximum value for the specified slot format or symbol rate, a setting conflict error is generated and the value is clipped to the maximum value. Refer to [Table 9-4](#).

Table 9-4 Channelization Code Maximum Value

Channelization Code	Slot Format	Symbol Rate
255	0	15
127	1	30

Table 9-4 Channelization Code Maximum Value

Channelization Code	Slot Format	Symbol Rate
63	2	60
31	3	120
15	4	240
7	5	780
3	6	960

The variable <val> is expressed in units of kilo symbols per second (ksps).

***RST** +6.00000000E+004

Range 15000–960000

Field Entry Symbol Rate

Remarks Refer to “:ULINK:DPDCh:CCODE” on page 1003 and “:ULINK:DPDCh:RATE” on page 1005. If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to “:ULINK:APPLY” on page 987.

:ULINK:DPDCh:RBER

Supported E4438C with Option 400

[:SOURCE] :RADio:WCDMa:TGPP [:BBG] :ULINK:DPDCh:RBER?

This query returns inserted error bit rate which is specified by the transport channel cycle length and transport channel error length commands.

Inserted error bit rate is calculated by the following formula: $\text{TrCH BER ErrLen} / \text{TrCH BER Cycle}$. Refer to “:ULINK:DPDCh:TBER[:CLENGTH]” on page 1008 and “:ULINK:DPDCh:TBER:ELENGTH” on page 1008.

***RST** 0.0

Field Entry TrCH BER

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADIO:WCDMA:TGPP[:BBG])

:ULINK:DPDCh:SLOTformat

Supported E4438C with Option 400

```
[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:ULINK:DPDCh:SLOTformat <val>
```

```
[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:ULINK:DPDCh:SLOTformat?
```

This command sets the slot format for the uplink dedicated physical data channel (DPDCH).

There are commands that are associated with the slot format and they are the channelization code and the symbol rate.

If the slot format is changed, so will the symbol rate. If the symbol rate is changed, so will the slot format. In addition, the channelization code will change. If current channelization code exceed the new maximum value for the specified slot format or symbol rate, a setting conflict error is generated and the value is clipped to the maximum value. Refer to [Table 9-5 on page 1007](#).

Table 9-5 Channelization Code Maximum Value

Channelization Code	Slot Format	Symbol Rate
255	0	15
127	1	30
63	2	60
31	3	120
15	4	240
7	5	780
3	6	960

***RST** +2

Range 0–6

Field Entry Slot Format

Remarks Refer to “:ULINK:DPDCh:CCODE” on page 1003 and “:ULINK:DPDCh:RATE” on page 1005. If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to “:ULINK:APPLY” on page 987.

:ULINK:DPDCh:TBER[:CLENgth]**Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:DPDCh:TBER[:CLENgth] <val>

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:DPDCh:TBER[:CLENgth] ?

This command sets the cycle length of the Transport Channel BER insertion of dedicated physical channel (DPCH).

***RST** 0**Range** 0–65535**Field Entry** TrCH BER Cycle

Remarks A zero in the TrCH BER Cycle field, disables the error insertion function (error rate equals 0%).

:ULINK:DPDCh:TBER:ELENgth**Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:DPDCh:TBER:ELENgth <val>

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:DPDCh:TBER:ELENgth?

This command sets the error length of the Transport Channel BER.

***RST** 0**Range** 0–4095**Field Entry** TrCH BER ErrLen

Remarks The Transport Channel BER error length must be smaller than or equal to the Transport Channel BER cycle length.

The TrCH ELEN (transport channel error length) is truncated by the TrCH CLEN (transport channel cycle length) when the TrCH BER cycle length is smaller than TrCH BER length.

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADio:WCDMa:TGPP[:BBG])**:ULINK:DPDCh:TPOWer****Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:DPDCh:TPOWer?

This query returns the “Total Power” value displayed on the user interface (UI). The power value is the relative power difference between the total in-channel signal power and the active channel reference power (0dB).

RST** +0**:ULINK:DPDCh[:STATe]*Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:DPDCh[:STATe] ON|OFF|1|0

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:DPDCh[:STATe] ?

This command enables or disables the operating state for the uplink dedicated physical data channel (DPDCH).

***RST** 1**Field Entry** Channel State

Remarks If the parameter is changed, the apply command must be executed after the change. Refer to “:ULINK:APPLY” on page 987.

:ULINK:FCLock:INTerval**Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:FCLock:INTerval FCL10|FCL20|FCL40|FCL80|FCL2560

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:FCLock:INTerval ?

This command selects the frame clock interval supplied to the source.

The frame clock interval is set in units of milliseconds (msec).

***RST** FCL80**Key Entry** 10 msec 20 msec 40 msec 80 msec 2560 msec

Remarks This command is not used when the sync source is set to ESG. Refer to “:ULINK:SYNC[:SOURCE]” on page 1070.

:ULINK:FClock:POLarity**Supported** E4438C with Option 400

```
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:FClock:POLarity POSitive|NEGative
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:FClock:POLarity?
```

This command sets the polarity of the frame clock for the uplink synchronization source.

POSitive This choice sets the clock gate to trigger when the signal is high.

NEGative This choice sets the clock gate to trigger when the signal is low.

***RST** POS

Key Entry **Frame Clock Polarity Neg Pos**

Remarks This command is not used when the sync source is set to ESG. Refer to “:ULINK:SYNC[:SOURCE]” on page 1070.

:ULINK:FILTer**Supported** E4438C with Option 400

```
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:FILTer RNYQuist|NUQuist|GAUSSian|
RECTangle|IS95|IS95_EQ|IS95_MOD|IS95_MOD_EQ|AC4Fm| UGGaussian|
"<user FIR>"
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:FILTer?
```

This command selects the filter type for the uplink configuration.

IS95 This choice selects a filter that meets the criteria of the IS-95 standard.

IS95_EQ This choice selects a filter which is a combination of the IS-95 filter (above) and the equalizer filter described in the IS-95 standard. This filter is only used for IS-95 baseband filtering.

IS95_MOD This choice selects a filter that meets the criteria of the IS-95 error function (for improved adjacent channel performance) with lower passband rejection than the filter specified in the IS-95 standard.

IS95_MOD_EQ This choice selects a filter which is a combination of the equalizer filter described in the IS-95 standard and a filter that meets the criteria of the IS-95 error function (for improved adjacent channel performance), with lower passband rejection.

AC4Fm This choice selects a predefined Association of Public Safety Communications Officials (APCO) specified compatible 4-level frequency modulation (C4FM) filter.

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADio:WCDMa:TGPP[:BBG])

UGGaussian	This choice selects a backwards compatible GSM Gaussian filter (Gaussian filter with a fixed BbT value of 0.300) for the ESG E44xxB Option UN3 or UN4.					
"<user FIR>"	This variable is any filter file that you have stored into memory.					
*RST	RNYQ					
Key Entry	Root Nyquist	Nyquist	Gaussian	Rectangle	IS-95	IS-95 w/EQ
	IS-95 Mod	IS-95 Mod w/EQ	APCO 25 C4FM	UN3/4 GSM Gaussian		
	User FIR					
Remarks	Refer to “File Name Variables” on page 13 for information on the file name syntax.					

:ULINK:FILTer:ALPHa

Supported E4438C with Option 400

[:SOURCE] :RADio:WCDMa:TGPP [:BBG] :ULINK:FILTer:ALPHa <val>

[:SOURCE] :RADio:WCDMa:TGPP [:BBG] :ULINK:FILTer:ALPHa?

This command changes the alpha value for the Nyquist or root Nyquist filter.

***RST** +2.20000000E-001

Range 0.000–1.000

Key Entry **Filter Alpha**

Remarks This command is effective only after a root Nyquist or Nyquist filter is selected; it does not affect other types of filters.

To change the current filter type, refer to [“:ULINK:FILTer” on page 1010](#).

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADio:WCDMa:TGPP[:BBG])**:ULINK:FILTer:BBT****Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:FILTer:BBT <value>

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:FILTer:BBT?

This command changes the bandwidth-multiplied-by-bit-time filter parameter value for the Gaussian filter.

RST** +5.00000000E-001**Range** **0.000–1.000*Key Entry** **Filter BbT**

Remarks This command is effective only after a Gaussian filter is selected; it does not affect other types of filters.

To change the current filter type, refer to “[:ULINK:FILTer](#)” on page 1010.

:ULINK:FILTer:CHANnel**Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:FILTer:CHANnel EVM|ACP

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:FILTer:CHANnel?

This command optimizes a filter for minimized error vector magnitude (EVM) or for minimized adjacent channel power (ACP).

EVM This choice provides the most ideal passband.

ACP This choice improves stopband rejection. This feature only applies to root Nyquist and Nyquist filters.

***RST** EVM**Key Entry** **Optimize FIR For EVM ACP**

Remarks To change the current filter type, refer to “[:ULINK:FILTer](#)” on page 1010.

:ULINK:FOFFset**Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:FOFFset <val>

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:FOFFset?

This command sets the SFN-CFN frame number offset. The command adds in delays of the internal

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADio:WCDMa:TGPP[:BBG])

frame counter by specifying the starting frame number count.

When the FOFFset is set to “0,” the frame number starts at the system sync trigger.

An example of specifying a frame number count: Set the FOFFset to 2. This makes the signal generator to trigger 2 frames after the SFN RST.

*RST	0
Range	0–255
Key Entry	SFN-CFN Frame Offset
Remarks	For additional information, refer to 3GPP TS25.402 for SFN and CFN relationship.

:ULINK:PADJust

Supported E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PADJust EQUal|SCALe

This command adjusts the code domain power levels of all uplink channels.

EQUal This choice will adjust all channel powers to equal power settings.

SCALe This choice will scale the channel power levels so that the sum of the powers are equal to 0 dB.

Key Entry **Equal Powers** **Scale To 0dB**

:ULINK:PHYSical[1]:TYPE

Supported E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PHYSical[1]:TYPE PRACH|DPCCh

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PHYSical[1]:TYPE?

This command sets the physical channel type.

PRACH This choice selects a physical random access channel type.

DPCCh This choice selects a dedicated physical control channel type.

***RST** DPCC

Key Entry **PRACH** **DPCCH**

:ULINK:PMODE:TPControl:HOLD**Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PMODE:TPControl:HOLD 1|0|ON|OFF

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PMODE:TPControl:HOLD?

This command sets the transmission power control of the dedicated physical channel (DPCH).

ON This choice enables the power hold mode.

OFF This choice disables the power hold mode and enables the dynamic power control

RST** 1**Key Entry** **Power Hold** **Off** **On*Remarks** The power hold mode is automatically enabled when the dedicated physical channel (DPCH) **Power Mode Norm TPC** is set to **TPC** (refer to “:ULINK:PMODE[:SElect]” on page 1017).**:ULINK:PMODE:TPControl:POWer:INITial****Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PMODE:TPControl:POWer:

INITial <val>

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PMODE:TPControl:POWer:INITial?

This command sets the initial power (in dB; relative to Max Power: 0.00 dB) of the DPCH power control.

***RST** +0.00000000E+000**Range** 0 to -40**Field Entry** Init Power**Remarks** If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to “:ULINK:APPLY” on page 987.

The value of <val> must be smaller or equal to the value use for the command: “:ULINK:PMODE:TPControl:POWer:MINimum” on page 1015. Init Power is relative to Max Power (the amplitude set on the signal generator). For more information refer to “:ULINK:PMODE:TPControl:POWer:MAXimum” on page 1015.

:ULINK:PMODE:TPControl:POWer:MAXimum**Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PMODE:TPControl:POWer:MAXimum?

This query returns the maximum power (in dB; relative to Max Power) of the dedicated physical channel (DPCH).

Max Power is a grayed out field that will always be 0.00 dB. The value of this field is a relative value to the maximum amplitude set for the signal generator. For example, if the signal generator amplitude is set to -20 dBm, the Min Power set to -40 dB, and the Init Power is set to -10 dB, then the absolute initial power level will be -30 dBm (10 dBm below the signal generator amplitude) and the absolute minimum power will be -60 dBm (40 dBm below the signal generator amplitude).

RST** +0.00000000E+000**Field Entry** Max Power**Remarks** The value of this query will always be zero. The maximum power is mapped to the actual RF output power.**:ULINK:PMODE:TPControl:POWer:MINimum*Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PMODE:TPControl:POWer:MINimum <val>

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PMODE:TPControl:POWer:MINimum?

This command sets the minimum power of the dedicated physical channel (DPCH). The variable <val> is expressed in units of dB.

***RST** -4.00000000E+001**Range** -40 to 0**Field Entry** Min Power**Remarks** If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to [“:ULINK:APPLY” on page 987](#).

The minimum power is decreased in increments determined by the value set for the Power Step. Refer to [“:ULINK:PMODE:TPControl:POWer:STEP” on page 1016](#). Minimum power is limited by the amplitude set on the signal generator. The signal generator amplitude must be set to -96 dBm or lower for the minimum power to be set to -40 dB. For more information, refer to [“:ULINK:PMODE:TPControl:POWer:MAXimum” on page 1015](#).

:ULINK:PMODE:TPControl:POWer:RESet**Supported** E4438C with Option 400[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PMODE:TPControl:POWer:RESet
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PMODE:TPControl:POWer:MINimum?

This command resets the transmit power of the dedicated physical channel (DPCH) to the initial power.

Key Entry **Reset to Initial Power****Remarks** When the DPCH power mode is changed to TPControl, this command is performed. Refer to “:ULINK:PMODE[:SElect]” on page 1017 to select the power mode. Any time the power mode is changed, the start power is always set to the initial power.**:ULINK:PMODE:TPControl:POWer:STEP****Supported** E4438C with Option 400[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PMODE:TPControl:POWer:
STEP DB0_5|DB1_0|DB2_0|DB3_0
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PMODE:TPControl:POWer:STEP?

This command set the power step of the dedicated physical channel (DPCH) power control. Initial power can only be increased in steps set by the power step.

***RST** DB0_5**Key Entry** Power Step**Remarks** If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to “:ULINK:APPLY” on page 987.

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADio:WCDMa:TGPP[:BBG])**:ULINK:PMODE:TPControl:TRIGger:POLarity****Supported** E4438C with Option 400[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PMODE:TPControl:TRIGger:
POLarity POSitive|NEGative

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PMODE:TPControl:TRIGger:POLarity?

This command sets the uplink dedicated physical channel (DCPH) transmit power control signal polarity.

RST** POS**Key Entry** **Power Control Signal Polarity Neg Pos*:ULINK:PMODE[:SElect]****Supported** E4438C with Option 400[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PMODE[:SElect] NORMal|TPControl
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PMODE[:SElect]?

This command sets the dedicated physical channel (DPCH) power control mode.

NORMal This choice selects the normal power mode. Compressed frames are available.

TPC This choice selects the TPC power mode. Compressed gaps are not available.

***RST** NORM**Key Entry** **Power Mode Norm TPC**

:ULINK:PRACH:AICH:NUMBER

Supported E4438C with Option 400

[:SOURCE] :RADio:WCDMa:TGPP [:BBG] :ULINK:PRACH:AICH:NUMBER?

This query returns the number of received acquisition indication channel (AICH) trigger during one configured physical random access channel (PRACH) signal generation.

The result value can be queried after the PRACH signal generation is completed and until the next PRACH generation trigger is received.

The signal begins when the PRACH start trigger and ends when the specified number of signals are generated.

To specify a number of PRACHs, refer to “:ULINK:PRACH[:SINGLE]:PREAmble:NUMBER” on [page 1050](#).

***RST** -1

Field Entry Number of AICH

Remarks A -1 status represents a PRACH generation is on going.

:ULINK:PRACH:AICH:POLarity

Supported E4438C with Option 400

[:SOURCE] :RADio:WCDMa:TGPP [:BBG] :ULINK:PRACH:AICH:
POLarity POSition|NEGative
[:SOURCE] :RADio:WCDMa:TGPP [:BBG] :ULINK:PRACH:AICH:POLarity?

This command sets the trigger signal polarity for the acquisition indication channel (AICH).

POSitive This choice sets the signal polarity to trigger when the signal goes high.

NEGative This choice sets the signal polarity to trigger when the signal goes low.

***RST** POS

Key Entry **AICH Trigger Polarity Pos Neg**

Remarks If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to “:ULINK:APPLY” on [page 987](#)

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADIo:WCDMa:TGPP[:BBG])**:ULINK:PRACH:AWGN:CN**

Supported E4438C with Option 400 and 403

[:SOURCE] :RADIo:WCDMa:TGPP [:BBG] :ULINK:PRACH:AWGN:CN <val>

[:SOURCE] :RADIo:WCDMa:TGPP [:BBG] :ULINK:PRACH:AWGN:CN?

This command sets the in band carrier to noise ratio.

The variable <val> is expressed in units of decibels (dB).

***RST** -2.25005194E+001

Range -30 to 30

Field Entry C/N value

Remarks A change in the C/N value will change the Eb/No value and vice versa.

:ULINK:PRACH:AWGN:CPOWer

Supported E4438C with Option 400 and 403

[:SOURCE] :RADIo:WCDMa:TGPP [:BBG] :ULINK:PRACH:AWGN:CPOWer?

This query returns the carrier power level when the physical random access channel's (PRACH) additive white gaussian noise (AWGN) is on.

***RST** -1.61435521E+002

Field Entry C Power

:ULINK:PRACH:AWGN:DRATe

Supported E4438C with Option 400 and 403

[:SOURCE] :RADIo:WCDMa:TGPP [:BBG] :ULINK:PRACH:AWGN:DRATe?

This query returns the data rate of the Eb reference channel.

***RST** +1.22000000E+004

Field Entry Ref Data Rate

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADio:WCDMa:TGPP[:BBG])**:ULINK:PRACH:AWGN:EBNO**

Supported E4438C with Option 400 and 403

[:SOURCE] :RADio:WCDMa:TGPP [:BBG] :ULINK:PRACH:AWGN:EBNO <val>

[:SOURCE] :RADio:WCDMa:TGPP [:BBG] :ULINK:PRACH:AWGN:EBNO?

This command sets the Eb/No value. The Eb is defined as carrier divided by the bit rate. No is noise power divided by the bandwidth (3.84 MHz). This ratio is only referred when EREF is CONTROL or DATA.

The variable <val> setting is affected by the carrier to noise ratio (C/N) and the data rate. A change to either of these values will affect your Eb/No setting. Use the formula in the range field to determine a correct Eb/No value.

***RST** +4.10000000E+000

Range $E_b/N_o = C/N \times 3.84\text{MHz}/\text{DataRate}$

Field Entry Eb/No

:ULINK:PRACH:AWGN:ECNO

Supported E4438C with Option 400 and 403

[:SOURCE] :RADio:WCDMa:TGPP [:BBG] :ULINK:PRACH:AWGN:ECNO <val>

[:SOURCE] :RADio:WCDMa:TGPP [:BBG] :ULINK:PRACH:AWGN:ECNO?

This command sets the Ec/No value. The Ec is defined as carrier divided by the chip rate. No is the noise power divided by the bandwidth (3.84 MHz). This ratio is only referred when EREF is PREAMBLE.

***RST** -2.05000000E+001

Range -30 to 30

Field Entry Ec/No value

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADIO:WCDMA:TGPP[:BBG])

:ULINK:PRACH:AWGN:EREF

Supported E4438C with Option 400 and 403

```
[ :SOURCE ] :RADIO:WCDMA:TGPP [ :BBG ] :ULINK:PRACH:AWGN:EREF PReAmble |
CONTRol | DATA | RACH
[ :SOURCE ] :RADIO:WCDMA:TGPP [ :BBG ] :ULINK:PRACH:AWGN:EREF?
```

This command selects the Eb (Ec) reference. It is used for specifying the bit (chip) rate of physical/transport channel.

PREAmble This choice selects a preamble part as the Eb/No reference.

CONTRol This choice selects a message control part as the Eb/No reference.

DATA This choice selects a message data part as the Eb/No reference.

RACH This choice selects a random access channel as the Eb/No reference.

***RST** RACH

Key Entry **Preamble** Msg Ctrl Msg Data **RACH TrCH**

Remarks If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to “:ULINK:APPLY” on page 987.

:ULINK:PRACH:AWGN:NPOWER

Supported E4438C with Option 400 and 403

```
[ :SOURCE ] :RADIO:WCDMA:TGPP [ :BBG ] :ULINK:PRACH:AWGN:NPOWER?
```

This query returns the in-channel noise level when the additive white gaussian noise (AWGN) is on.

***RST** -1.38935002E+002

Field Entry N Power

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADio:WCDMa:TGPP[:BBG])**:ULINK:PRACH:AWGN:TICPower**

Supported E4438C with Option 400 and 403

[:SOURCE] :RADio:WCDMa:TGPP [:BBG] :ULINK:PRACH:AWGN:TICPower?

This query returns the in-channel power within the 3.84 MHz bandwidth.

***RST** **DPCH:** -1.38924800E+002
 Single PRACH: -1.38924800E+002
 Multiple PRACH: -1.56970651E+002

Field Entry TotalPwr

:ULINK:PRACH:AWGN[:STATE]

Supported E4438C with Option 400 and 403

[:SOURCE] :RADio:WCDMa:TGPP [:BBG] :ULINK:PRACH:AWGN [:STATE] ON|OFF|1|0

[:SOURCE] :RADio:WCDMa:TGPP [:BBG] :ULINK:PRACH:AWGN [:STATE] ?

This command enables or disables the additive white gaussian noise (AWGN) for the physical random access channel (PRACH). The AWGN can only be turned on when PRACH is selected as the physical channel.

***RST** 0

Key Entry **Channel State Off On**

Remarks Refer to “:ULINK:PHYSical[1]:TYPE” on page 1013.

If the parameter is changed, the apply command must be executed after the change. Refer to “:ULINK:APPLY” on page 987.

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADIO:WCDMA:TGPP[:BBG])

:ULINK:PRACH:MESSAgE:CPARt:BETA

Supported E4438C with Option 400

```
[ :SOURCE ] :RADIo:WCDMa:TGPP [ :BBG ] :ULINK:PRACH:MESSAgE:CPARt:BETA <val>
```

```
[ :SOURCE ] :RADIo:WCDMa:TGPP [ :BBG ] :ULINK:PRACH:MESSAgE:CPARt:BETA?
```

This command sets the beta ratio (amplitude ratio) for the physical random access channel (PRACH) message control part. The variable <val> is an integer value.

Changing the control power value (see “:ULINK:PRACH:MESSAgE:CPARt:POWEr” on page 1024 for information on setting PRACH control power) changes the beta to power ratio, and the ESG may not be able to compute a proper control beta value. If this occurs, the query will return a minus one (-1).

***RST** +11

Range 0–15

Field Entry Ctrl Beta

Remarks A change to the beta value will also cause a change to the control power setting.

If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to “:ULINK:APPLY” on page 987.

:ULINK:PRACH:MESSAgE:CPARt:DATA

Supported E4438C with Option 400

```
[ :SOURCE ] :RADIo:WCDMa:TGPP [ :BBG ] :ULINK:PRACH:MESSAgE:CPARt:DATA PN9 |
PN15 | FIX4 | "<file name>" | STD
```

```
[ :SOURCE ] :RADIo:WCDMa:TGPP [ :BBG ] :ULINK:PRACH:MESSAgE:CPARt:DATA?
```

This command selects the data type to be inserted into the physical random access channel (PRACH) message control part.

STD This choice selects a slot format defined in the 3GPP standard.

"<file name>" This variable specifies a data pattern that has been stored in memory.

***RST** STD

Key Entry **PN9** **PN15** **FIX4** **User File** **3GPP STD**

Remarks If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to “:ULINK:APPLY” on page 987.

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADio:WCDMa:TGPP[:BBG])**:ULINK:PRACH:MESSAge:CPARt:DATA:FIX4**

Supported E4438C with Option 400

```
[ :SOURCE ] :RADio:WCDMa:TGPP [ :BBG ] :ULINK:PRACH:MESSAge:CPARt:DATA:
FIX4 <val>
```

```
[ :SOURCE ] :RADio:WCDMa:TGPP [ :BBG ] :ULINK:PRACH:MESSAge:CPARt:DATA:FIX4?
```

This command sets a fixed 4 bit pattern for use as physical random access channel (PRACH) message part data.

While the variable <val> can be entered in binary, hexadecimal, or decimal formats, the query returns only binary values.

***RST** #B0000

Range 0–15

Key Entry **Fix4**

Remarks If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to [“:ULINK:APPLY” on page 987](#).

:ULINK:PRACH:MESSAge:CPARt:POWer

Supported E4438C with Option 400

```
[ :SOURCE ] :RADio:WCDMa:TGPP [ :BBG ] :ULINK:PRACH:MESSAge:CPARt:POWer <val>
```

```
[ :SOURCE ] :RADio:WCDMa:TGPP [ :BBG ] :ULINK:PRACH:MESSAge:CPARt:POWer?
```

This command sets the power level for the physical random access channel (PRACH) message control part.

The variable <val> is expressed in units of decibels (dB).

***RST** -2.69000000E+000

Range -40 to 0

Field Entry Ctrl Pwr

Remarks Changing the control power changes the beta to power ratio. Refer to [“:ULINK:PRACH:MESSAge:CPARt:BETA” on page 1023](#) for more information.

If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to [“:ULINK:APPLY” on page 987](#)

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADio:WCDMa:TGPP[:BBG])**:ULINK:PRACH:MESSAge:CPARt:RATE****Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PRACH:MESSAge:CPARt:RATE?

This query returns the message data part symbol rate for the physical random access channel (PRACH).

***RST** +1.50000000E+004**Key Entry** **Symbol Rate**

Remarks The symbol rate of 15 kbps is the only supported rate per the 3GPP standards, TS 25.211 v3.10 (2002-03).

:ULINK:PRACH:MESSAge:CPARt:SLOTformat**Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PRACH:MESSAge:CPARt:SLOTformat?

This query returns the message control part slot format for the physical random access channel (PRACH).

***RST** 0**Range** 0–3**Field Entry** Slot Format

Remarks The slot format is a static value set to zero in accordance with the 3GPP standards, TS 25.211 v3.10 (2002-03).

:ULINK:PRCh:MESSAge:CPARt:TFCI:PATtern**Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PRCh:MESSAge:CPARt:TFCI:PATtern PN9|PN15|FIX|"<file name>"

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PRCh:MESSAge:CPARt:TFCI:PATtern?

This command selects data type to be inserted into the transport format combination indicator (TFCI) of the message control part located in the physical random access channel (PRACH).

"<file name>" This variable specifies a data pattern that has been stored in memory.

***RST** FIX**Key Entry** **PN9** **PN15** **FIX** **User File**

Remarks If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to [“:ULINK:APPLY” on page 987](#).

:ULINK:PRCh:MESSAge:CPARt:TFCI:PATtern:FIX**Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PRCh:MESSAge:CPARt:TFCI:PATtern:FIX <val>

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PRCh:MESSAge:CPARt:TFCI:PATtern:FIX?

This command sets a fixed bit pattern to be inserted into the transport format combination indicator (TFCI).

While the variable <val> can be entered in binary, hexadecimal, or decimal formats, the query returns only decimal values.

***RST** +0**Range** 0–1023**Field Entry** TFCI Pattern

Remarks If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to [“:ULINK:APPLY” on page 987](#).

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADio:WCDMa:TGPP[:BBG])

:ULINK:PRACH:MESSAge:CPARt:TFCI[:STATe]**Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PRACH:MESSAge:CPARt:TFCI[:STATe]?

This query returns the transport format combination indicator (TFCI) bits to determine if they exist or not in the currently specified slot format. A query returned with a “1” determines a TFCI exists and a “0,” no bits exist.

RST** 1**Field Entry** TFCI State**:ULINK:PRACH:MESSAge:DPARt:BETA*Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PRACH:MESSAge:DPARt:BETA <val>

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PRACH:MESSAge:DPARt:BETA?

This command sets the beta ratio (amplitude ratio) for the message data part of the physical random access channel (PRACH).

The variable <val> is an integer value. Changing the data power value (refer to, “:ULINK:PRACH:MESSAge:DPARt:POWer” on page 1029 for more information on setting PRACH data power) changes the beta to power ratio, and the signal generator may not be able to compute a proper data beta value. If this occurs, the query will return a minus one (-1).

***RST** +15**Range** 0–15**Field Entry** Data Beta**Remarks** A change to the beta value will also cause a change to the data power setting.

If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to “:ULINK:APPLY” on page 987.

:ULINK:PRACH:MESSAge:DPART:DATA**Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PRACH:MESSAge:DPART:DATA PN9 | PN15 | FIX4 | "<file name>" | TRANSpch

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PRACH:MESSAge:DPART:DATA?

This command sets the data type to be inserted into physical random access channel (PRACH) message data part.

TRANSpch This choice sets the data that is generated from the transport channel setup.

"<file name>" This variable specifies a data pattern that has been stored in memory.

***RST** TRAN**Key Entry** **PN9 PN15 FIX4 User File Transport CH**

Remarks If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to [“:ULINK:APPLY” on page 987](#).

:ULINK:PRACH:MESSAge:DPART:DATA:FIX4**Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PRACH:MESSAge:DPART:DATA: FIX4 <val>

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PRACH:MESSAge:DPART:DATA:FIX4?

This command sets a pseudo-random pattern as output data type in the message data part of the physical random access channel (PRACH).

While the variable <val> is expressed in binary or decimal formats, the query returns only binary values.

***RST** #B0000**Range** 0∠15**Key Entry** **FIX4**

Remarks If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to [“:ULINK:APPLY” on page 987](#).

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADio:WCDMa:TGPP[:BBG])**:ULINK:PRACH:MESSAge:DPART:POWer****Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PRACH:MESSAge:DPART:POWer <val>

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PRACH:MESSAge:DPART:POWer?

This command sets the power level for the physical random access channel (PRACH) message data part.

The variable <val> is expressed in units of decibels (dB).

***RST** +0.00000000E+000**Range** -40 to 0**Field Entry** Data Pwr

Remarks Changing the data power changes the beta to power ratio. Refer to [“:ULINK:PRACH:MESSAge:DPART:BETA” on page 1027](#) for more information.

If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to [“:ULINK:APPLY” on page 987](#)

:ULINK:PRACH:MESSAge:DPART:RATE**Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PRACH:MESSAge:DPART:RATE <val>

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PRACH:MESSAge:DPART:RATE?

This command sets the symbol rate for the message data part of the physical random access channel (PRACH).

There are commands that are associated with the symbol rate and they are the channelization code and the slot format.

If the slot format is changed, so will the symbol rate. If the symbol rate is changed, so will the slot format. In addition, the channelization code will change. If current channelization code exceed the new maximum value for the specified slot format or symbol rate, a setting conflict error is generated and the value is clipped to the maximum value. Refer to [Table 9-6](#).

Table 9-6 Channelization Code Maximum Value

Channelization Code	Slot Format	Symbol Rate
255	0	15
127	1	30
63	2	60
31	3	120

The variable <val> is expressed in units of kilo symbols per second (ksps).

***RST** 60**Range** 15–120**Field Entry** Symbol Rate

Remarks Channel code value is determined by slot format choice. Refer to “:ULINK:PRACH:MESSAge:DPART:SLOTformat” on page 1031 and “:ULINK:PRACH[:SINGLE]:MESSAge:DPART:CCODE” on page 1048.

If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to “:ULINK:APPLY” on page 987.

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADio:WCDMa:TGPP[:BBG])

:ULINK:PRACH:MESSAge:DPART:SLOTformat**Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PRACH:MESSAge:DPART:SLOTformat <val>

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PRACH:MESSAge:DPART:SLOTformat?

This command sets the slot format value for the message data part of the physical random access channel (PRACH).

There are commands that are associated with the slot format and they are the channelization code and the symbol rate.

If the slot format is changed, so will the symbol rate. If the symbol rate is changed, so will the slot format. In addition, the channelization code will change. If current channelization code exceed the new maximum value for the specified slot format or symbol rate, a setting conflict error is generated and the value is clipped to the maximum value. Refer to [Table 9-7](#).

Table 9-7 Channelization Code Maximum Value

Channelization Code	Slot Format	Symbol Rate
255	0	15
127	1	30
63	2	60
31	3	120

The variable <val> is expressed in units of kilo symbols per second (ksps).

***RST** 2**Range** 0–3**Field Entry** Slot Format

Remarks Refer to “:ULINK:PRACH:MESSAge:DPART:RATE” on page 1030 and “:ULINK:PRACH[:SINGle]:MESSAge:DPART:CCODE” on page 1048.

If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to “:ULINK:APPLY” on page 987.

:ULINK:PRACH:MODE[:SElect]**Supported** E4438C with Option 400[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PRACH:MODE[:SElect] SINGLE|MULTi
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PRACH:MODE[:SElect]?

This command sets the channel mode of the physical random access channel (PRACH).

SINGLE This choice generates a single PRACH.**MULTi** This choice generates up to eight PRACHes.***RST** SING**Key Entry** **PRACH Mode** **Single** **Multi****:ULINK:PRACH:MULTi:MESSAge:TPOWer****Supported** E4438C with Option 400[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PRACH:MULTi:MESSAge:TPOWer <val>
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PRACH:MULTi:MESSAge:TPOWer?

This command sets the message total power value in the physical random access channel (PRACH). The total power indicates a power of one PRACH.

***RST** -1.54060000E+002**Range** -1.00 to 1.94**Field Entry** Msg Pwr**Remarks** This value is used only when POWER:MODE is set to TOTAL. Refer to [“:ULINK:PRACH:PREAmble:POWer:MODE” on page 1039](#).

The maximum power for this command is limited by the power of the signal generator (ESG maximum power – 18.06 dBm). If the signal generator power is set to +20 dBm, the maximum value of this command is +1.94 dBm.

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADio:WCDMa:TGPP[:BBG])

:ULINK:PRACH:MULTi:MESSAge[:STATe]**Supported** E4438C with Option 400[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PRACH:MULTi:MESSAge[:STATe]
ON|OFF

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PRACH:MULTi:MESSAge[:STATe]?

This command enables or disables the message part of the physical random access channel (PRACH) for the multiple PRACH mode.

RST** ON**Field Entry** Message Part**:ULINK:PRACH:MULTi:NUMBer*Supported** E4438C with Option 400[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PRACH:MULTi:NUMBer <val>|INFinity
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PRACH:MULTi:NUMBer?

This command specifies the number of the physical random access channel (PRACH) 80 ms configuration patterns to be transmitted after the PRACH start trigger has been received.

INFinity This choice means the repeating number will continue while the PRACH mode is selected and the start trigger is ignored.

***RST** 1**Range** 1–2147447836**Field Entry** Number of 80ms

Remarks If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to “:ULINK:APPLY” on page 987.

:ULINK:PRACH:MULTi:PREamble:NUMBER**Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PRACH:MULTi:PREamble:NUMBER?

This query returns the number of Preambles on the multiple physical random access channel (PRACH) mode. This number is fixed to 1 in the current version.

RST** 1**Field Entry** Num of Pre**:ULINK:PRACH:MULTi:PREamble:POWER:INITial*Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PRACH:MULTi:PREamble:POWER:INITial?

This query returns the initial power of PRACH preambles on the multiple physical random access channel (PRACH) mode.

RST** -1.54060000E+002**Range** -154.06 to 10**Field Entry** Init Pwr**Remarks** For the multiple PRACH mode, the initial power is the same as the maximum power for the PRACH preamble.**:ULINK:PRACH:MULTi:PREamble:POWER:MAX*Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PRACH:MULTi:PREamble:POWER:Max<val>

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PRACH:MULTi:PREamble:POWER:Max?

This command sets the power of the preamble on the multiple physical random access channel (PRACH) mode.

***RST** -1.54060000E+002**Range** -1.0 to 1.94**Field Entry** Max Pwr

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADio:WCDMa:TGPP[:BBG])

Remarks The maximum power for this command is limited by the power of the signal generator (ESG maximum power – 18.06 dBm). If the signal generator power is set to +20 dBm, the maximum value of this command is +1.94 dBm.

:ULINK:PRACH:MULTi:PREAmble:POWer:RSTep

Supported E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PRACH:MULTi:PREAmble:POWer:RSTep?

This query will always return zero for the multiple physical random access channel (PRACH) mode. Power ramping is not supported for the multiple PRACH mode.

***RST** +0

Field Entry Ramp Step

:ULINK:PRACH:MULTi:PREAmble:PPM

Supported E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PRACH:MULTi:PREAmble:PPM <val>

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PRACH:MULTi:PREAmble:PPM?

This command sets the difference between the preamble and the message control part in the physical random access channel (PRACH).

***RST** -4.56000000E+000

Range -20 to 10

Field Entry Pp-m

:ULINK:PRACH:MULTi:UE[1]|2|3|4|5|6|7|8:MESSAge:CPARt:CCODE

Supported E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PRACH:MULTi:UE[1]|2|3|4|5|6|7|8:MESSAge:CPARt:CCODE?

This query returns the channel code of the message control part of physical random access channel (PRACH) on the multiple PRACH mode.

***RST** 255

Range 0–255

Field Entry CHCode Ct1

Remarks This command affects the PRACH setting on the multiple PRACH mode only.

:ULINK:PRACH:MULTi:UE[1] | 2 | 3 | 4 | 5 | 6 | 7 | 8:MESSAge:DPARt:CCODE**Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PRACH:MULTi:UE[1] | 2 | 3 | 4 | 5 | 6 | 7 | 8:MESSAge:DPARt:CCODE?

This query returns the channel code of the message data part of physical random access channel (PRACH) on the multiple PRACH mode.

RST** 245**Range** 0–255**Field Entry** ChCode Dat**Remarks** This command affects the PRACH setting on the multiple PRACH mode only.**:ULINK:PRACH:MULTi:UE[1] | 2 | 3 | 4 | 5 | 6 | 7 | 8:PREAmble:SIGNature*Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PRACH:MULTi:UE[1] | 2 | 3 | 4 | 5 | 6 | 7 | 8:PREAmble:SIGNature <val>

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PRACH:MULTi:UE[1] | 2 | 3 | 4 | 5 | 6 | 7 | 8:PREAmble:SIGNature?

This command sets the signature encoded in the multiple physical random access channel's (PRACH) preamble.

***RST**

		Signature
UE	1	0
	2	1
	3	2
	4	3
	5	4
	6	5
	7	6
	8	7

Field Entry Pre Sig

Remarks If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to “:ULINK:APPLY” on page 987.

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADIO:WCDMA:TGPP[:BBG])

:ULINK:PRACH:MULTi:UE[1]|2|3|4|5|6|7|8:SPOSITION[1]|2|3|4|5|6|7|8[:ASLot]

Supported E4438C with Option 400

[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:ULINK:PRACH:MULTi:UE[1]|2|3|4|5|6|7|8:SPOSITION[1]|2|3|4|5|6|7|8[:ASLot] <val>|OFF

[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:ULINK:PRACH:MULTi:UE[1]|2|3|4|5|6|7|8:SPOSITION[1]|2|3|4|5|6|7|8[:ASLot]?

This command sets each physical random access channel (PRACH) start access slot position within 80ms.

*RST

		Start Access Slot Pos							
		1	2	3	4	5	6	7	8
UE	1	0	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	2	0	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	3	0	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	4	0	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	5	0	OFF	OFF	OFF	OFF	OFF	OFF	OFF
UE	6	0	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	7	0	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	8	0	OFF	OFF	OFF	OFF	OFF	OFF	OFF

Range 0–59

Field Entry Start Access Slot Position in 80ms Period

Remarks This command can only be executed while in the PRACH Mode is set to Multi. Refer to “:ULINK:PRACH:MODE[:SElect]” on page 1032.

If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to “:ULINK:APPLY” on page 987.

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADio:WCDMa:TGPP[:BBG])**:ULINK:PRACH:MULTi:UE[1] | 2 | 3 | 4 | 5 | 6 | 7 | 8[:STATe]****Supported** E4438C with Option 400

```
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PRACH:MULTi:UE[1] | 2 | 3 | 4 | 5 | 6 | 7 | 8
[:STATe] 0 | 1 | ON | OFF
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PRACH:MULTi:UE[1] | 2 | 3 | 4 | 5 | 6 | 7 | 8
[:STATe] ?
```

This command enables or disables each physical random access channel (PRACH) individually on the multiple PRACH mode.

***RST**

		State
UE	1	ON
	2	OFF
	3	OFF
	4	OFF
	5	OFF
	6	OFF
	7	OFF
	8	OFF

Field Entry On/Off

Remarks This command will not run if the power of all assigned physical random access channels exceed the power of the signal generator.

If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to “:ULINK:APPLY” on page 987.

:ULINK:PRACH:PREamble:POWer:AVERAge**Supported** E4438C with Option 400

```
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PRACH:PREamble:POWer:AVERAge?
```

This query returns the average power of preambles that were sent before the acquisition indication channel (AICH) trigger was received.

***RST** -999**Field Entry** Preamble power average

Remarks The average power value can be queried after the physical random access channel’s (PRACH) signal generation is completed. Refer to “:ULINK:PRACH[:SINGLE]:PREamble:NUMBer” on page 1050.

:ULINK:PRACH:PREamble:POWer:MODE**Supported** E4438C with Option 400[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:ULINK:PRACH:PREamble:POWer:MODE PPM|
TOTAl

[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:ULINK:PRACH:PREamble:POWer:MODE?

This command sets the message power calculation mode for the physical random access channel (PRACH).

PPM This choice calculates the message power based on the power differences between the preamble and the message control part. The difference is specified by the PPM command. This is based on 3GPP standards.

TOTAL This choice calculates message power based on power differences between preamble and message total part. The message total power is specified by the MESSage:TPOWer command. Refer to [“:ULINK:PRACH\[:SINGLE\]:MESSAge:TPOWer”](#) on page 1049.

***RST** PPM**Key Entry** **PRACH Power Setup Mode Pp-m Total**

Remarks If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to [“:ULINK:APPLY”](#) on page 987.

:ULINK:PRACH:RPARAmeter**Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PRACH:RPARAmeter TB168|TB360

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PRACH:RPARAmeter?

This command sets a set of parameters as defined in 3GPP Standard (TS25.104) Reference Measurement Channel for the uplink (UL) physical random access channel (PRACH).

TB168 This choice sets the parameters for the transport block size = 168.

TB360 This choice sets the parameters for the transport block size = 360.

RST** TB168**Key Entry** **TrCh BlkSize 168** **TrCh BlkSize 360*Remarks** When parameters are sets individually, CUSTom is returned for the query.

If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to [“:ULINK:APPLY” on page 987](#).

:ULINK:PRACH:SCRamblecode**Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PRACH:SCRamblecode <val>

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PRACH:SCRamblecode?

This command sets the physical random access channel’s (PRACH) scrambling code.

***RST** +0**Range** 0–8191**Field Entry** PRACH Scrambling Code**Remarks** The signature data is scrambled against a 4096 chip segment of the 225 complex gold code generator.

If the parameter set by this command is changed while the signal is

active, the apply command must be executed for the change to occur. Refer to [“:ULINK:APPLY” on page 987](#).

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADIo:WCDMa:TGPP[:BBG])

:ULINK:PRACH:SDElay

Supported E4438C with Option 400

```
[:SOURCE]:RADIo:WCDMa:TGPP[:BBG]:ULINK:PRACH:SDElay <val>
```

```
[:SOURCE]:RADIo:WCDMa:TGPP[:BBG]:ULINK:PRACH:SDElay?
```

This command sets the number of timeslots to be delayed from the uplink synchronization source. One timeslot is equivalent to 2560 chips.

The variable <val> range is dependent on the Tp-a setting.

***RST** +0

Range	Tp-a Setting	<val>
	0	-14 to 119
	7680	-11 to 119
	12800	-9 to 119

Key Entry **Timeslot Offset**

Remarks The actual amount of timing difference is $(TOFFset + SDElay * 2560) - (Tp-a)$.

If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to [“:ULINK:APPLY” on page 987](#).

To set the Tp-a value, refer to [“:ULINK:PRACH:TPA” on page 1042](#).

:ULINK:PRACH:SUBChannel

Supported E4438C with Option 400

```
[:SOURCE]:RADIo:WCDMa:TGPP[:BBG]:ULINK:PRACH:SUBChannel <val>
```

```
[:SOURCE]:RADIo:WCDMa:TGPP[:BBG]:ULINK:PRACH:SUBChannel?
```

This command sets the sub-channel number to send the first preamble of the physical random access channel's (PRACH).

***RST** +0

Range 0–11

Field Entry Start Sub-Channel#

Remarks If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to [“:ULINK:APPLY” on page 987](#).

:ULINK:PRACH:TOFFset**Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PRACH:TOFFset <val>

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PRACH:TOFFset?

This command sets additional timing offset for the physical random access channel (PRACH).

The timing offset is to adjust the time distance from the uplink PRACH frame timing which is the downlink's AICH framing timing minus the T_{p-a} to the actual uplink PRACH signal frame timing from the signal generator.

The downlink's AICH frame timing is provided by the synchronization signal. The

The variable <val> is expressed in chips.

***RST** +0**Range** -512 to 2560**Key Entry** **Timing Offset**

Remarks The actual timing offset is the timing difference from the synchronization signal from the signal generator's RF signal
 $(TOFFset + SDElay * 2560) - (T_{p-a})$.

If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to [":ULINK:APPLY" on page 987](#).

:ULINK:PRACH:TPA**Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PRACH:TPA 0|7680|12800

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PRACH:TPA?

This command sets the time period (distance) between the physical random access channel's (PRACH) preamble to the acquisition indication channel's (AICH) frame.

The variable <val> is expressed in units of "chip".

***RST** 7680**Key Entry** **Base Delay T_{p-a}**

Remarks The actual timing offset is $(TOFFset + SDElay * 2560) - (T_{p-a})$.

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADIO:WCDMA:TGPP[:BBG])

If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to “:ULINK:APPLY” on page 987.

This command is not used when the sync source is set to ESG. Refer to “:ULINK:SYNC[:SOURCE]” on page 1070.

:ULINK:PRACH:TPM

Supported E4438C with Option 400

```
[ :SOURCE ] : RADIO : WCDMA : TGPP [ : BBG ] : ULINK : PRACH : TPM <val>
```

```
[ :SOURCE ] : RADIO : WCDMA : TGPP [ : BBG ] : ULINK : PRACH : TPM?
```

This command sets the time period between the preamble and the message part.

The variable <val> is expressed in access slot units.

***RST** +3

Range 1–15

Field Entry Tp-m

Remarks If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to “:ULINK:APPLY” on page 987.

This command is used for single and multiple physical random access channel (PRACH) modes.

:ULINK:PRACH:TPOWer

Supported E4438C with Option 400

```
[ :SOURCE ] : RADIO : WCDMA : TGPP [ : BBG ] : ULINK : PRACH : TPOWer?
```

This query returns the total power value of the physical random access channels (PRACH).

The value is the relative power difference between the total in-channel signal power of the PRACH message part and the active channel reference power (0dB) in the message part.

***RST** +0

Remarks This command is used for single and multiple physical random access channel (PRACH) modes.

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADio:WCDMa:TGPP[:BBG])

:ULINK:PRACH:TPP

Supported E4438C with Option 400

[:SOURCE] :RADio:WCDMa:TGPP [:BBG] :ULINK:PRACH:TPP <val>

[:SOURCE] :RADio:WCDMa:TGPP [:BBG] :ULINK:PRACH:TPP?

This command sets the time period between the preamble and another preamble before the message part.

The variable <val> is expressed in access slot units.

***RST** +3

Range 1–60

Field Entry Tp-p

Remarks If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to [“:ULINK:APPLY” on page 987](#).

This command is used for single and multiple physical random access channel (PRACH) modes.

:ULINK:PRACH:TRIGger

Supported E4438C with Option 400

[:SOURCE] :RADio:WCDMa:TGPP [:BBG] :ULINK:PRACH:TRIGger

This command specifies the start of the physical random access channel’s (PRACH) pattern.

Key Entry **PRACH Trigger**

Remarks The PRACH trigger source must be set to “Trigger” before executing this command. Refer to [“:ULINK:PRACH:TRIGger:SOURCE” on page 1045](#).

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADio:WCDMa:TGPP[:BBG])

:ULINK:PRACH:TRIGger:POLarity

Supported E4438C with Option 400

```
[ :SOURCE ] :RADio:WCDMa:TGPP [ :BBG ] :ULINK:PRACH:TRIGger:
POLarity POSitive|NEGative
```

```
[ :SOURCE ] :RADio:WCDMa:TGPP [ :BBG ] :ULINK:PRACH:TRIGger:POLarity?
```

This command sets the trigger polarity of the physical random access channel type (PRACH).

POSitive This choice sets the signal to trigger when the trigger signal is high.

NEGative This choice sets the signal to trigger when the trigger signal is low.

***RST** POS

Key Entry **PRACH Trigger Polarity Neg Pos**

Remarks If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to [“:ULINK:APPLY” on page 987](#).

:ULINK:PRACH:TRIGger:SOURce

Supported E4438C with Option 400

```
[ :SOURCE ] :RADio:WCDMa:TGPP [ :BBG ] :ULINK:PRACH:TRIGger:
SOURce IMMEDIATE|TRIGger
```

```
[ :SOURCE ] :RADio:WCDMa:TGPP [ :BBG ] :ULINK:PRACH:TRIGger:SOURce?
```

This command sets the trigger source of the physical random access channel (PRACH).

IMMEDIATE This choice resets the waveform and immediately replays it from the start.

TRIGger This choice plays the waveform after receiving the trigger command.

***RST** IMMEDIATE

Key Entry **PRACH Trigger Source Immedi Trigger**

Remarks Refer to [“:ULINK:PRACH:TRIGger:POLarity” on page 1045](#) and [“:ULINK:PRACH:TRIGger” on page 1044](#) for additional information.

If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to [“:ULINK:APPLY” on page 987](#).

:ULINK:PRACH:TTI**Supported** E4438C with Option 400

[:SOURCE]:RADIo:WCDMa:TGPP[:BBG]:ULINK:PRACH:TTI 10000|20000

[:SOURCE]:RADIo:WCDMa:TGPP[:BBG]:ULINK:PRACH:TTI?

This command sets the transmission time interval (TTI) period of the message part.

The choices are expressed in units of milliseconds (msec) where 20000=20 msec.

RST** +20000**Field Entry** TTI**Remarks** If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to “:ULINK:APPLY” on page 987.**:ULINK:PRACH[:SINGLE]:MESSAge[:STATe]*Supported** E4438C with Option 400

[:SOURCE]:RADIo:WCDMa:TGPP[:BBG]:ULINK:PRACH[:SINGLE]:MESSAge[:STATe]

ON|OFF|AICH

[:SOURCE]:RADIo:WCDMa:TGPP[:BBG]:ULINK:PRACH[:SINGLE]:MESSAge[:STATe]?

This command enables or disables the message part of the physical random access channel (PRACH).

ON This choice enables the message part to be generated after the number of preambles are generated. The “Number of Preamble” must be specified.**OFF** This choice does not allow the message part to be generated. Only the preambles are transmitted.**AICH** This choice enables the acquisition indication channel preamble power ramping mode.***RST** ON**Key Entry** **On Off AICH****Remarks** For more information about the rear panel AUX I/O connector, refer to "Signal Generator Overview" in the *E4428C/38C ESG Signal Generators User's Guide*.

If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to “:ULINK:APPLY” on page 987.

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADio:WCDMa:TGPP[:BBG])

:ULINK:PRACH[:SINGLE]:NUMBER**Supported** E4438C with Option 400[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PRACH[:SINGLE]:NUMBER <val>|
INFinity

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PRACH[:SINGLE]:NUMBER?

This command specifies the number of the physical random access channel (PRACH) patterns to repeat after the PRACH start trigger has been received.

INFinity This choice means the repeating number will continue while the PRACH mode is selected and the start trigger is ignored.

***RST** 1**Range** 1–2147483647**Field Entry** Number of PRACH

Remarks If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to [“:ULINK:APPLY” on page 987](#).

:ULINK:PRACH[:SINGLE]:MESSAGE:CPART:CCODE**Supported** E4438C with Option 400[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PRACH[:SINGLE]:MESSAGE:CPART:
CCODE <val>[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PRACH[:SINGLE]:MESSAGE:CPART:
CCODE?

This command sets the channelization code for the physical random access channel (PRACH) message control part.

***RST** +15**Range** 0–255**Field Entry** Channel Code

Remarks If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to [“:ULINK:APPLY” on page 987](#).

:ULINK:PRACH[:SINGLE]:MESSAge:DPARt:CCODE**Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PRACH[:SINGLE]:MESSAge:DPARt:CCODE <val>

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PRACH[:SINGLE]:MESSAge:DPARt:CCODE?

This command sets the channelization code for the physical random access channel (PRACH) message data part.

There are commands that are associated with the channelization code and they are the slot format and the symbol rate.

If the slot format is changed, so will the symbol rate. If the symbol rate is changed, so will the slot format. In addition, the channelization code will change. If current channelization code exceed the new maximum value for the specified slot format or symbol rate, a setting conflict error is generated and the value is clipped to the maximum value. Refer to [Table 9-8](#).

Table 9-8 Channelization Code Maximum value

Channelization Code	Slot Format	Symbol Rate
255	0	15
127	1	30
63	2	60
31	3	120

***RST** +0**Range** 0–255**Field Entry** Channel Code

Remarks Channel code value is determined by slot format choice. Refer to “:ULINK:PRACH:MESSAge:DPARt:SLOTformat” on page 1031 and “:ULINK:PRACH:MESSAge:DPARt:RATE” on page 1030.

If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to “:ULINK:APPLY” on page 987.

:ULINK:PRACH[:SINGLE]:MESSAGE:TPOWER**Supported** E4438C with Option 400[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:ULINK:PRACH[:SINGLE]:MESSAGE:
TPOWER <val>

[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:ULINK:PRACH[:SINGLE]:MESSAGE:TPOWER?

This command sets the message total power value for the single physical random access channel (PRACH) and multiple PRACH modes. The variable <val> is expressed in units of decibels (dB). The RF output power is limited to the signal generator's specifications

***RST** -1.36000000E+002**Range** -136 to 20**Field Entry** Msg Pwr

Remarks This value is used only when POWER:MODE is set to TOTAL. Refer to [“:ULINK:PRACH:PREamble:POWER:MODE” on page 1039](#).

If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to [“:ULINK:APPLY” on page 987](#).

:ULINK:PRACH[:SINGLE]:NUMBER**Supported** E4438C with Option 400[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:ULINK:PRACH[:SINGLE]:
NUMBER <val>|INFINITY

[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:ULINK:PRACH[:SINGLE]:NUMBER?

This command specifies the number of the physical random access channel (PRACH) patterns to repeat after the PRACH start trigger has been received.

INFINITY This choice means the repeating number will continue while the PRACH mode is selected and the start trigger is ignored.

***RST** 1**Range** 1–2147447836**Field Entry** Number of PRACH

Remarks If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to [“:ULINK:APPLY” on page 987](#).

:ULINK:PRACH[:SINGLE]:PREamble:NUMBER**Supported** E4438C with Option 400[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PRACH[:SINGLE]:PREamble:
NUMBER <val>|INfInity

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PRACH[:SINGLE]:PREamble:NUMBER?

This command specifies the number of preambles to repeat in one physical random access channel (PRACH) pattern.

INfInity This choice means the repeating preamble will play continuously while the PRACH mode is selected.

***RST** 1**Range** 1–8388607

Field Entry PRACH Timing Setup: Number of Preamble
PRACH Power Setup: Num of Pre

:ULINK:PRACH[:SINGLE]:PREamble:POWER:INITial**Supported** E4438C with Option 400[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PRACH[:SINGLE]:PREamble:
POWER:INITial?

This query returns the initial preamble power from POWER:Max value, RSTep (ramp step) and PREamble:NUMBER commands.

RST** -1.36000000E+002**Field Entry** Init Pwr**:ULINK:PRACH[:SINGLE]:PREamble:POWER:MAX*Supported** E4438C with Option 400[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PRACH[:SINGLE]:PREamble:
POWER:MAX <val>[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:PRACH[:SINGLE]:PREamble:
POWER:MAX?

This command sets the maximum preamble power for the physical random access channel (PRACH).

In power ramping mode (RSTep is a non-zero value), the preamble power can go up until the acquisition indication channel's (AICH) signal is not received (maximum power).

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADio:WCDMa:TGPP[:BBG])

The variable <val> is expressed in units of decibels (dB).

***RST** -1.36000000E+002

Range -136 to 20

Field Entry Max Pwr

Remarks The actual RF output is limited to the signal generator’s specifications although the value can be entered up to 20 dBm.

If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to “:ULINK:APPLY” on page 987.

:ULINK:PRACH[:SINGLE]:PREamble:POWER:RSTep

Supported E4438C with Option 400

[:SOURCE] :RADio:WCDMa:TGPP [:BBG] :ULINK:PRACH [:SINGLE] :PREamble:POWER:RSTep <val>

[:SOURCE] :RADio:WCDMa:TGPP [:BBG] :ULINK:PRACH [:SINGLE] :PREamble:POWER:RSTep?

This command sets the power ramping steps for the single physical random access channel (PRACH) preamble.

The variable <val> is expressed in units of decibels (dB).

***RST** 0

Range 0–10

Field Entry Ramp Step

Remarks If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to “:ULINK:APPLY” on page 987.

This command is used for single and multiple physical random access channel (PRACH) modes.

:ULINK:PRACH[:SINGLE]:PREamble:PPM

Supported E4438C with Option 400

```
[ :SOURCE ] :RADio:WCDMa:TGPP [ :BBG ] :ULINK:PRACH [ :SINGLE ] :PREamble:PPM <val>
```

```
[ :SOURCE ] :RADio:WCDMa:TGPP [ :BBG ] :ULINK:PRACH [ :SINGLE ] :PREamble:PPM?
```

This command sets the power difference between the preamble and the message control part in the single physical random access channel (PRACH).

The variable <val> is expressed in units of decibels (dB).

***RST** -4.56032509E+000

Range -20 to 10

Field Entry Pp-m

Remarks If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to [“:ULINK:APPLY” on page 987](#).

:ULINK:PRACH[:SINGLE]:PREamble:SIGNature

Supported E4438C with Option 400

```
[ :SOURCE ] :RADio:WCDMa:TGPP [ :BBG ] :ULINK:PRACH [ :SINGLE ] :PREamble:SIGNature <val>
```

```
[ :SOURCE ] :RADio:WCDMa:TGPP [ :BBG ] :ULINK:PRACH [ :SINGLE ] :PREamble:SIGNature?
```

This command sets the signature encoded in the single physical random access channel's (PRACH) preamble.

***RST** +0

Range 0–15

Field Entry Signature

Remarks If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to [“:ULINK:APPLY” on page 987](#).

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADio:WCDMa:TGPP[:BBG])**:ULINK:RMCHannel**

Supported E4438C with Option 400

[:SOURCE] :RADio:WCDMa:TGPP [:BBG] :ULINK:RMCHannel RMC122 | RMC64 | RMC144 | RMC384 | UDI64 | AMR122

[:SOURCE] :RADio:WCDMa:TGPP [:BBG] :ULINK:RMCHannel?

This command configures the uplink reference measurement channel by providing a one command access to a typical service channel configuration.

RMC122	This choice selects a reference measurement channel with a 12.2 kbps rate (25.141 v3.9).	
RMC64	This choice selects a reference measurement channel with a 64.0 kbps rate (25.141 v3.9).	
RMC144	This choice selects a reference measurement channel with a 144.0 kbps rate (25.141 v3.9).	
RMC384	This choice selects a reference measurement channel with a 384.0 kbps rate (25.141 v3.9).	
ARM122	This choice selects an adaptive multiple rate of 12.2 kbps (25.141 v3.4).	
UDI64	This choice selects an ISDN unrestricted digital information 1B with a 64.0 kbps rate (25.141 v3.4).	
*RST	RMC122	
Key Entry	RMC122 kbps (25.141 v3.9)	RMC64 kbps (25.141 v3.9)
	RMC144 kbps (25.141 v3.9)	RMC384 kbps (25.141 v3.9)
	ARM122 kbps (25.141v3.4)	UDI64 kbps(25.141v3.4)

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADio:WCDMa:TGPP[:BBG])

:ULINK:RPANel:DPCH:INPut:ALTPower

Supported E4438C with Option 400

[:SOURCE] :RADio:WCDMa:TGPP [:BBG] :ULINK:RPANel :DPCH: INPut :ALTPower?

This query returns the type of signal at the alternate power input (ALT PWR IN, AUX I/O connector pin#16) for the dedicated physical channel (DPCH) mode.

***RST** USER

Remarks The signal name is TPC user file trigger (USER). For more information about the rear panel connector configurations, refer to "Signal Generator Overview" in the *E4428C/38C ESG Signal Generators User's Guide*.

:ULINK:RPANel:DPCH:INPut:BBGRef

Supported E4438C with Option 400

[:SOURCE] :RADio:WCDMa:TGPP [:BBG] :ULINK:RPANel :DPCH: INPut :BBGRef?

This query returns the type of signal at the baseband generator reference input (BASEBAND GEN REF IN, rear panel connector) for the dedicated physical channel (DPCH) mode.

***RST** CCL

Remarks The signal name is baseband generator chip clock (CCL). For more information about the rear panel connector configurations, refer to "Signal Generator Overview" in the *E4428C/38C ESG Signal Generators User's Guide*.

:ULINK:RPANel:DPCH:INPut:BGATe

Supported E4438C with Option 400

[:SOURCE] :RADio:WCDMa:TGPP [:BBG] :ULINK:RPANel :DPCH: INPut :BGATe?

This query returns the type of signal at the gate burst (BURST GATE IN, rear panel connector) for the dedicated physical channel (DPCH) mode.

***RST** CSTT

Remarks In compressed mode the signal name is compressed mode start trigger (CSST). In power control mode, the signal name is DPCH power control signal (DPCS). For more information about the rear panel connector configurations, refer to "Signal Generator Overview" in the *E4428C/38C ESG Signal Generators User's Guide*

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADio:WCDMa:TGPP[:BBG])

:ULINK:RPANel:DPCH:INPut:PTRigger1**Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:RPANel:DPCH:INPut:PTRigger1?

This query returns the type of signal at the pattern trigger input 1 (PATT TRIG IN 1, rear panel) for the dedicated physical channel (DPCH) mode.

***RST** FSYN

Remarks The signal name is frame synchronization (FSYN). For more information about the rear panel connector configurations, refer to "Signal Generator Overview" in the *E4428C/38C ESG Signal Generators User's Guide*.

:ULINK:RPANel:DPCH:INPut:PTRigger2**Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:RPANel:DPCH:INPut:PTRigger2?

This query returns the type of signal at the pattern trigger input 2 (PATT TRIG IN 2, AUX I/O connector pin#17) for the dedicated physical channel (DPCH) mode.

***RST** CSPT

Remarks The signal name is compress mode stop trigger (CSPT). For more information about the rear panel connector configurations, refer to "Signal Generator Overview" in the *E4428C/38C ESG Signal Generators User's Guide*.

:ULINK:RPANel:DPCH:OUTPut:DCLock**Supported** E4438C with Option 400

```
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:RPANel:DPCH:OUTPut:DCLock RPS0 |
RPS1 | RPS2 | RPS3 | RPS4 | RPS5 | RPS6 | RPS7 | RPS8 | RPS9 | RPS10
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:RPANel:DPCH:OUTPut:DCLock?
```

This command assigns a signal to the data clock output at the selected rear panel AUX I/O connector pin#6. Refer to [Table 9-9 on page 1055](#) for command parameters and output signal type.

Table 9-9 Rear Panel Signal (RPS) Output Type

Command Parameter	Signal Out
RPS0	None

Table 9-9 Rear Panel Signal (RPS) Output Type

Command Parameter	Signal Out
RPS1	Chip Clock
RPS2	DPDCH raw data
RPS3	DPDCH raw data clock
RPS4	DPCCH raw data
RPS5	DPCCH raw data clock
RPS6	10ms frame pulse
RPS7	Trigger sync reply
RPS8	Compressed frame
RPS9	TTI frame pulse
RPS10	CFN #0 frame pulse

***RST**

RPS1

Key Entry

NONE (RPS0) Chip Clock (RPS1) DPDCH Raw Data (RPS2)
DPDCH Data Raw Clock (RPS3) DPCCH Raw Data (RPS4)
DPCCH Raw Data Clock (RPS5) 10 ms Frame Pulse (RPS6)
Trigger Sync Reply (RPS7) Compressed Frame (RPS8)
TTI Frame Clock (RPS9) CFN #0 Frame Pulse (RPS10)

Remarks

For more information about the rear panel connector configurations, refer to "Signal Generator Overview" in the *E4428C/38C ESG Signal Generators User's Guide*.

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADIO:WCDMA:TGPP[:BBG])

:ULINK:RPANel:DPCH:OUTPut:DOUT

Supported E4438C with Option 400

```
[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:ULINK:RPANel:DPCH:OUTPut:DOUT RPS0 |
RPS1 | RPS2 | RPS3 | RPS4 | RPS5 | RPS6 | RPS7 | RPS8 | RPS9 | RPS10
[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:ULINK:RPANel:DPCH:OUTPut:DOUT?
```

This command assigns a signal to the data output at the selected rear panel AUX I/O connector pin#7. Refer to [Table 9-9 on page 1055](#) for command parameters and output signal type.

***RST** RPS4

Key Entry	NONE (RPS0)	Chip Clock (RPS1)	DPDCH Raw Data (RPS2)
	DPDCH Data Raw Clock (RPS3)		DPCCH Raw Data (RPS4)
	DPCCH Raw Data Clock (RPS5)		10 ms Frame Pulse (RPS6)
	Trigger Sync Reply (RPS7)		Compressed Frame (RPS8)
	TTI Frame Clock (RPS9)		CFN #0 Frame Pulse (RPS10)

Remarks For more information about the rear panel connector configurations, refer to "Signal Generator Overview" in the *E4428C/38C ESG Signal Generators User's Guide*.

:ULINK:RPANel:DPCH:OUTPut:EVENT1

Supported E4438C with Option 400

```
[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:ULINK:RPANel:DPCH:OUTPut:
EVENT1 RPS0 | RPS1 | RPS2 | RPS3 | RPS4 | RPS5 | RPS6 | RPS7 | RPS8 | RPS9 | RPS10
[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:ULINK:RPANel:DPCH:OUTPut:EVENT1?
```

This command assigns a signal to the EVENT 1 at the rear panel output connector. Refer to [Table 9-9 on page 1055](#) for command parameters and output signal type.

***RST** RPS2

Key Entry	NONE (RPS0)	Chip Clock (RPS1)	DPDCH Raw Data (RPS2)
	DPDCH Data Raw Clock (RPS3)		DPCCH Raw Data (RPS4)
	DPCCH Raw Data Clock (RPS5)		10 ms Frame Pulse (RPS6)
	Trigger Sync Reply (RPS7)		Compressed Frame (RPS8)
	Frame Clock (RPS9)		CFN #0 Frame Pulse (RPS10)

Remarks For more information about the rear panel connector configurations, refer to "Signal Generator Overview" in the *E4428C/38C ESG Signal Generators User's Guide*.

:ULINK:RPANel:DPCH:OUTPut:EVENT2**Supported** E4438C with Option 400

```
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:RPANel:DPCH:OUTPut:
EVENT2 RPS0|RPS1|RPS2|RPS3|RPS4|RPS5|RPS6|RPS7|RPS8|RPS9|RPS10
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:RPANel:DPCH:OUTPut:EVENT2?
```

This command assigns a signal to the EVENT 2 at the rear panel output connector. Refer to [Table 9-9 on page 1055](#) for command parameters and output signal types.

***RST** RPS3

Key Entry	NONE (RPS0)	Chip Clock (RPS1)	DPDCH Raw Data (RPS2)
	DPDCH Data Raw Clock (RPS3)		DPCCH Raw Data (RPS4)
	DPCCH Raw Data Clock (RPS5)		10 ms Frame Pulse (RPS6)
	Trigger Sync Reply (RPS7)		Compressed Frame (RPS8)
	TTI Frame Clock (RPS9)		CFN #0 Frame Pulse (RPS10)

Remarks For more information about the rear panel connector configurations, refer to "Signal Generator Overview" in the *E4428C/38C ESG Signal Generators User's Guide*.

:ULINK:RPANel:DPCH:OUTPut:EVENT3**Supported** E4438C with Option 400

```
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:RPANel:DPCH:OUTPut:
EVENT3 RPS0|RPS1|RPS2|RPS3|RPS4|RPS5|RPS6|RPS7|RPS8|RPS9|RPS10
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:RPANel:DPCH:OUTPut:EVENT3?
```

This command assigns a signal to the EVENT 3 output at the selected rear panel AUX I/O connector pin#19. Refer to [Table 9-9 on page 1055](#) for command parameters and output signal type.

***RST** RPS0

Key Entry	NONE (RPS0)	Chip Clock (RPS1)	DPDCH Raw Data (RPS2)
	DPDCH Data Raw Clock (RPS3)		DPCCH Raw Data (RPS4)
	DPCCH Raw Data Clock (RPS5)		10 ms Frame Pulse (RPS6)
	Trigger Sync Reply (RPS7)		Compressed Frame (RPS8)
	TTI Frame Clock (RPS9)		CFN #0 Frame Pulse (RPS10)

Remarks For more information about the rear panel connector configurations, refer to "Signal Generator Overview" in the *ESG E4428C/38C Signal Generators E4428C/38C ESG Signal Generators User's Guide*.

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADIO:WCDMA:TGPP[:BBG])

:ULINK:RPANel:DPCH:OUTPut:EVENT4

Supported E4438C with Option 400

```
[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:ULINK:RPANel:DPCH:OUTPut:
EVENT4 RPS0|RPS1|RPS2|RPS3|RPS4|RPS5|RPS6|RPS7|RPS8|RPS9|RPS10
[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:ULINK:RPANel:DPCH:OUTPut:EVENT4?
```

This command assigns a signal to the EVENT 4 output at the selected rear panel AUX I/O connector pin#18. Refer to [Table 9-9 on page 1055](#) for command parameters and output signal type.

***RST** RPS0

Key Entry	NONE (RPS0)	Chip Clock (RPS1)	DPDCH Raw Data (RPS2)
	DPDCH Data Raw Clock (RPS3)		DPCCH Raw Data (RPS4)
	DPCCH Raw Data Clock (RPS5)		10 ms Frame Pulse (RPS6)
	Trigger Sync Reply (RPS7)		Compressed Frame (RPS8)
	TTI Frame Clock (RPS9)		CFN #0 Frame Pulse (RPS10)

Remarks For more information about the rear panel connector configurations, refer to "Signal Generator Overview" in the *ESG E4428C/38C Signal Generators E4428C/38C ESG Signal Generators User's Guide*.

:ULINK:RPANel:DPCH:OUTPut:SSYNc

Supported E4438C with Option 400

```
[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:ULINK:RPANel:DPCH:OUTPut:SSYNc RPS0|
RPS1|RPS2|RPS3|RPS4|RPS5|RPS6|RPS7|RPS8|RPS9|RPS10
[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:ULINK:RPANel:DPCH:OUTPut:SSYNc?
```

This command assigns a signal to SYM SYNC OUT at the selected rear panel AUX I/O connector pin#5. Refer to [Table 9-9 on page 1055](#) for command parameters and output signal type.

***RST** RPS6

Key Entry	NONE (RPS0)	Chip Clock (RPS1)	DPDCH Raw Data (RPS2)
	DPDCH Data Raw Clock (RPS3)		DPCCH Raw Data (RPS4)
	DPCCH Raw Data Clock (RPS5)		10 ms Frame Pulse (RPS6)
	Trigger Sync Reply (RPS7)		Compressed Frame (RPS8)
	TTI Frame Clock (RPS9)		CFN #0 Frame Pulse (RPS10)

Remarks For more information about the rear panel connector configurations, refer to "Signal Generator Overview" in the *ESG E4428C/38C Signal Generators E4428C/38C ESG Signal Generators User's Guide*.

:ULINK:RPANel:PRACH:INPut:ALTPower**Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:RPANel:PRACH:INPut:ALTPower?

This query returns the signal type at the ALT PWR IN (alternate power in) connector pin for the physical random access channel (PRACH) mode.

***RST** NONE**Field Entry** Alt power in

Remarks For more information about the rear panel AUX I/O connector pin configuration, refer to "Signal Generator Overview" in the *E4428C/38C ESG Signal Generators User's Guide*.

:ULINK:RPANel:PRACH:INPut:BBGRef**Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:RPANel:PRACH:INPut:BBGRef?

This query returns the type of signal at the baseband generator reference input (BASEBAND GEN REF IN, rear panel connector) for the physical random access channel (PRACH) mode.

***RST** CCL

Remarks The signal name is baseband generator chip clock (CCL). For more information about the rear panel connector configurations, refer to "Signal Generator Overview" in the *E4428C/38C ESG Signal Generators User's Guide*.

:ULINK:RPANel:PRACH:INPut:BGATe**Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:RPANel:PRACH:INPut:BGATe?

This query returns the signal type at the BURST GATE IN connector for the physical random access channel (PRACH) mode.

***RST** PSTR**Field Entry** Burst gate in

Remarks The signal name is PRACH start trigger (PSTR). For more information about the rear panel connector configurations, refer to "Signal Generator Overview" in the *E4428C/38C ESG Signal Generators User's Guide*.

:ULINK:RPANel:PRACH:INPut:PTRigger1**Supported** E4438C with Option 400

[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:ULINK:RPANel:PRACH:INPut:PTRigger1?

This query returns the signal type at the pattern trigger in 1 (PATT TRIG IN) connector for the physical random access channel (PRACH) mode.

***RST** FSYN**Field Entry** Pattern trigger in 1

Remarks The signal name is frame synchronization (FSYN). For more information about the rear panel I/O connectors' configuration, refer to "Signal Generator Overview" in the *E4428C/38C ESG Signal Generators User's Guide*.

:ULINK:RPANel:PRACH:INPut:PTRigger2**Supported** E4438C with Option 400

[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:ULINK:RPANel:PRACH:INPut:PTRigger2?

This query returns the signal type at the pattern trigger input 2 (PATT TRIG IN 2 AUX I/O connector pin#17) for the physical random access channel (PRACH) mode.

***RST** AITR**Field Entry** Pattern trigger in 2

Remarks The signal name is AICH trigger (AITR). For more information about the rear panel connector configurations, refer to "Signal Generator Overview" in the *E4428C/38C ESG Signal Generators User's Guide*.

:ULINK:RPANel:PRACH:OUTPut:DCLock

Supported E4438C with Option 400

```
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:RPANel:PRACH:OUTPut:DCLock RPS0 |
RPS1 | RPS6 | RPS7 | RPS11 | RPS12 | RPS13 | RPS14 | RPS15 | RPS16 |
RPS17 | RPS19 | RPS20 | RPS21 | RPS22 | RPS23 | RPS24 | RPS25
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:RPANel:PRACH:OUTPut:DCLock?
```

This command assigns a signal at the data clock output for the selected rear panel AUX I/O connector pin#6.

RPS0	none
RPS1	This choice assigns the chip clock signal.
RPS6	This choice assigns the 10ms frame pulse signal.
RPS7	This choice assigns the trigger sync reply signal.
RPS11	This choice assigns the message-data raw data signal. In the multiple PRACH mode, RPS11 outputs the message-data raw data signal of PRACH#1. If the PRACH#1 is not “on”, no signal output is output.
RPS12	This choice assigns the message-data raw clock signal. In the multiple PRACH mode, RPS12 outputs the message-data raw clock signal of PRACH#1. If the PRACH#1 is not “on”, no signal output is output.
RPS14	This choice assigns the message-ctrl raw data clock signal. In the multiple PRACH mode, RPS14 outputs the message-control raw data clock signal of PRACH#1. If the PRACH#1 is not “on”, no signal output is output.
RPS15	This choice assigns the preamble raw data signal. In the multiple PRACH mode, RPS15 outputs the preamble raw data signal of PRACH#1. If the PRACH#1 is not “on”, no signal output is output.
RPS16	This choice assigns the preamble raw data clock signal. In the multiple PRACH mode, RPS16 outputs the preamble raw data clock signal of PRACH#1. If the PRACH#1 is not “on”, no signal output is output.
RPS17	This choice assigns the sub channel timing signal. Sub channel timing is used on the single PRACH mode.
RPS19	This choice assigns the PRACH processing signal. This signal indicates the PRACH is generating.
RPS20	This choice assigns the 80ms frame pulse signal.
RPS21	This choice assigns the preamble pulse signal. This signal indicates the preamble timing of all configured PRACHes. One pulse for one preamble. In the multiple

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADio:WCDMa:TGPP[:BBG])

	PRACH mode, this output relates to PRACH#1. If the PRACH#1 in not “on”, no signal is output.
RPS22	This choice assigns the message pulse signal. This signal indicates the message part timing of all configured PRACHes. In the multiple PRACH mode, this output relates to PRACH#1. If the PRACH#1 in not “on”, no signal is output.
RPS23	This choice assigns the PRACH pulse signal. This signal indicates the start timing of all configured PRACHes. In the multiple PRACH mode, this output relates to PRACH#1. If the PRACH#1 in not “on”, no signal is output.
RPS24	This choice assigns the ESG synchronization signal. This signal is used for the multiple EAG synchronization on the multiple PRACH mode.
RPS25	This choice assigns the PRACH start trigger echo back signal. The PRACH start trigger echo back signal is used for the multiple ESG connection on the multiple PRACH mode.
*RST	RPS0
Key Entry	NONE (RPS0) Chip Clock (RPS1) Message-Data Raw Data (RPS11) 10ms Frame Pulse (RPS6) Trigger Sync Reply (RPS7) Message-Data Raw Clock (RPS12) Message-Control Raw Data (RPS13) Message-Control Raw Data Clock(RPS14) Preamble Raw Data(RPS15) Preamble Raw Data Clock(RPS16) Sub Channel Timing(RPS17) PRACH Processing(RPS19) 80ms Frame Pulse(RPS20) Preamble Pulse(RPS21) Message Pulse(RPS22) PRACH Pulse(RPS23) ESG-Sync Sig(RPS24) Start-Trigger EchoBack(RPS25)
Remarks	For more information about the rear panel connector configurations, refer to "Signal Generator Overview" in the <i>E4428C/38C ESG Signal Generators User's Guide</i> .

:ULINK:RPANel:PRACH:OUTPut:DOUT**Supported** E4438C with Option 400

```
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:RPANel:PRACH:OUTPut:DOUT RPS0 |
RPS1 | RPS6 | RPS7 | RPS11 | RPS12 | RPS13 | RPS14 | RPS14 | RPS15 | RPS16 | RPS17 | RPS19 |
RPS20 | RPS21 | RPS22 | RPS23 | RPS24 | RPS25
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:RPANel:PRACH:OUTPut:DOUT?
```

This command assigns a signal to the data output at the selected rear panel AUX I/O connector pin#7.

For parameter descriptions refer to “[:ULINK:RPANel:PRACH:OUTPut:DCLock](#)” on page 1062.

***RST** RPS0

Key Entry	NONE (RPS0)	Chip Clock (RPS1)	Message-Data Raw Data (RPS11)
	10ms Frame Pulse (RPS6)	Trigger Sync Reply (RPS7)	
	Message-Data Raw Clock (RPS12)	Message-Control Raw Data (RPS13)	
	Message-Control Raw Data Clock(RPS14)		
	Preamble Raw Data(RPS15)	Preamble Raw Data Clock(RPS16)	
	Sub Channel Timing(RPS17)	PRACH Processing(RPS19)	
	80ms Frame Pulse(RPS20)	Preamble Pulse(RPS21)	
	Message Pulse(RPS22)	PRACH Pulse(RPS23)	
	ESG-Sync Sig(RPS24)	Start-Trigger EchoBack(RPS25)	

Remarks For more information about the rear panel connector configurations, refer to "Signal Generator Overview" in the *E4428C/38C ESG Signal Generators User's Guide*.

:ULINK:RPANel:PRACH:OUTPut:EVENT1**Supported** E4438C with Option 400

```
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:RPANel:PRACH:OUTPut:EVENT1 RPS0 |
RPS1 | RPS6 | RPS7 | RPS11 | RPS12 | RPS13 | RPS14 | RPS14 | RPS15 | RPS16 | RPS17 | RPS19 |
RPS20 | RPS21 | RPS22 | RPS23 | RPS24 | RPS25
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:RPANel:PRACH:OUTPut:EVENT1?
```

This command assigns a signal to the EVENT 1 at the selected rear panel connector.

For parameter descriptions refer to “[:ULINK:RPANel:PRACH:OUTPut:DCLock](#)” on page 1062.

***RST** RPS0

Key Entry	NONE (RPS0)	Chip Clock (RPS1)	Message-Data Raw Data (RPS11)
------------------	--------------------	--------------------------	--------------------------------------

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURce]:RADio:WCDMa:TGPP[:BBG])

	10ms Frame Pulse (RPS6)	Trigger Sync Reply (RPS7)
	Message-Data Raw Clock (RPS12)	Message-Control Raw Data (RPS13)
	Message-Control Raw Data Clock(RPS14)	
	Preamble Raw Data(RPS15)	Preamble Raw Data Clock(RPS16)
	Sub Channel Timing(RPS17)	PRACH Processing(RPS19)
	80ms Frame Pulse(RPS20)	Preamble Pulse(RPS21)
	Message Pulse(RPS22)	PRACH Pulse(RPS23)
	ESG-Sync Sig(RPS24)	Start-Trigger EchoBack(RPS25)
Remarks	For more information about the rear panel connector configurations, refer to "Signal Generator Overview" in the <i>E4428C/38C ESG Signal Generators User's Guide</i> .	

:ULINK:RPANel:PRACH:OUTPut:EVENT2

Supported E4438C with Option 400

```
[ :SOURce ] :RADio:WCDMa:TGPP [ :BBG ] :ULINK:RPANel :PRACH:OUTPut :EVENT2 RPS0|
RPS1|RPS6|RPS7|RPS11|RPS12|RPS13|RPS14|RPS14|RPS15|RPS16|RPS17|RPS19|RPS20|RPS21|
RPS22|RPS23|RPS24|RPS25
[ :SOURce ] :RADio:WCDMa:TGPP [ :BBG ] :ULINK:RPANel :PRACH:OUTPut :EVENT2?
```

This command assigns a signal to the EVENT 2 at the rear panel connector.

For parameter descriptions refer to “:ULINK:RPANel:PRACH:OUTPut:DCLock” on page 1062.

***RST** RPS0

Key Entry	NONE (RPS0)	Chip Clock (RPS1)	Message-Data Raw Data (RPS11)
	10ms Frame Pulse (RPS6)	Trigger Sync Reply (RPS7)	
	Message-Data Raw Clock (RPS12)	Message-Control Raw Data (RPS13)	
	Message-Control Raw Data Clock(RPS14)		
	Preamble Raw Data(RPS15)	Preamble Raw Data Clock(RPS16)	
	Sub Channel Timing(RPS17)	PRACH Processing(RPS19)	
	80ms Frame Pulse(RPS20)	Preamble Pulse(RPS21)	
	Message Pulse(RPS22)	PRACH Pulse(RPS23)	
	ESG-Sync Sig(RPS24)	Start-Trigger EchoBack(RPS25)	

Remarks For more information about the rear panel connector configurations, refer to "Signal Generator Overview" in the *E4428C/38C ESG Signal Generators User's Guide*.

:ULINK:RPANel:PRACH:OUTPut:EVENT3**Supported** E4438C with Option 400

```
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:RPANel:PRACH:OUTPut:EVENT3 RPS0 |
RPS1 | RPS6 | RPS7 | RPS11 | RPS12 | RPS13 | RPS14 | RPS14 | RPS15 | RPS16 | RPS17 | RPS19 |
RPS20 | RPS21 | RPS22 | RPS23 | RPS24 | RPS25
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:RPANel:PRACH:OUTPut:EVENT3?
```

This command assigns a signal to the EVENT 3 output at the selected rear panel AUX I/O connector pin#19.

For parameter descriptions refer to “[:ULINK:RPANel:PRACH:OUTPut:DCLock](#)” on page 1062.

***RST** RPS0

Key Entry	NONE (RPS0)	Chip Clock (RPS1)	Message-Data Raw Data (RPS11)
	10ms Frame Pulse (RPS6)	Trigger Sync Reply (RPS7)	
	Message-Data Raw Clock (RPS12)	Message-Control Raw Data (RPS13)	
	Message-Control Raw Data Clock(RPS14)		
	Preamble Raw Data(RPS15)	Preamble Raw Data Clock(RPS16)	
	Sub Channel Timing(RPS17)	PRACH Processing(RPS19)	
	80ms Frame Pulse(RPS20)	Preamble Pulse(RPS21)	
	Message Pulse(RPS22)	PRACH Pulse(RPS23)	
	ESG-Sync Sig(RPS24)	Start-Trigger EchoBack(RPS25)	

Remarks For more information about the rear panel connector configurations, refer to "Signal Generator Overview" in the *E4428C/38C ESG Signal Generators User's Guide*.

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADIo:WCDMa:TGPP[:BBG])

:ULINK:RPANel:PRACH:OUTPut:EVENT4**Supported** E4438C with Option 400

```
[:SOURCE]:RADIo:WCDMa:TGPP[:BBG]:ULINK:RPANel:PRACH:OUTPut:EVENT4 4RPS0|
RPS1|RPS6|RPS7|RPS11|RPS12|RPS13|RPS14|RPS14|RPS15|RPS16|RPS17|RPS19|
RPS20|RPS21|RPS22|RPS23|RPS24|RPS25
[:SOURCE]:RADIo:WCDMa:TGPP[:BBG]:ULINK:RPANel:PRACH:OUTPut:EVENT4?
```

This command assigns a signal to the EVENT 4 output at the selected rear panel AUX I/O connector pin#18.

For parameter descriptions refer to “[:ULINK:RPANel:PRACH:OUTPut:DCLock](#)” on page 1062.

***RST** RPS0

Key Entry	NONE (RPS0)	Chip Clock (RPS1)	Message-Data Raw Data (RPS11)
	10ms Frame Pulse (RPS6)	Trigger Sync Reply (RPS7)	
	Message-Data Raw Clock (RPS12)	Message-Control Raw Data (RPS13)	
	Message-Control Raw Data Clock(RPS14)		
	Preamble Raw Data(RPS15)	Preamble Raw Data Clock(RPS16)	
	Sub Channel Timing(RPS17)	PRACH Processing(RPS19)	
	80ms Frame Pulse(RPS20)	Preamble Pulse(RPS21)	
	Message Pulse(RPS22)	PRACH Pulse(RPS23)	
	ESG-Sync Sig(RPS24)	Start-Trigger EchoBack(RPS25)	

Remarks For more information about the rear panel connector configurations, refer to "Signal Generator Overview" in the *E4428C/38C ESG Signal Generators User's Guide*.

:ULINK:RPANel:PRACH:OUTPut:SSYNc**Supported** E4438C with Option 400

```
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:RPANel:PRACH:OUTPut:SSYNc RPS0 |
RPS1 | RPS6 | RPS7 | RPS11 | RPS12 | RPS13 | RPS14 | RPS14 | RPS15 | RPS16 | RPS17 | RPS19 |
RPS20 | RPS21 | RPS22 | RPS23 | RPS24 | RPS25
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:RPANel:PRACH:OUTPut:SSYNc?
```

This command assigns a signal to SYM SYNC OUT at the selected rear panel AUX I/O connector pin#5.

For parameter descriptions refer to “[:ULINK:RPANel:PRACH:OUTPut:DCLock](#)” on page 1062.

***RST** RPS0

Key Entry	NONE (RPS0)	Chip Clock (RPS1)	Message-Data Raw Data (RPS11)
	10ms Frame Pulse (RPS6)	Trigger Sync Reply (RPS7)	
	Message-Data Raw Clock (RPS12)	Message-Control Raw Data (RPS13)	
	Message-Control Raw Data Clock(RPS14)		
	Preamble Raw Data(RPS15)	Preamble Raw Data Clock(RPS16)	
	Sub Channel Timing(RPS17)	PRACH Processing(RPS19)	
	80ms Frame Pulse(RPS20)	Preamble Pulse(RPS21)	
	Message Pulse(RPS22)	PRACH Pulse(RPS23)	
	ESG-Sync Sig(RPS24)	Start-Trigger EchoBack(RPS25)	

Remarks For more information about the rear panel connector configurations, refer to "Signal Generator Overview" in the *E4428C/38C ESG Signal Generators User's Guide*.

:ULINK:SCRamblecode**Supported** E4438C with Option 400

```
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:SCRamblecode <val>
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:SCRamblecode?
```

This command sets the uplink scramble code.

***RST** +0**Range** 0–16777215**Field Entry** Scrambling Code

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADio:WCDMa:TGPP[:BBG])

:ULINK:SDElay**Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:SDElay <val>

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:SDElay?

This command sets the number of timeslots to be delayed for the dedicated physical channel (DPCH).

***RST** +0**Range** 0–119**Key Entry** **Timeslot Offset**

Remarks The actual amount of timing offset is $(T0) + (TOFFset) + (SDElay) * 2560$ chips, where $T0 = 1024$ chips.

This command is not used when the sync source is set to ESG. Refer to “:ULINK:SYNC[:SOURCE]” on page 1070.

:ULINK:SFNRst:POLarity**Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:SFNRst:POLarity POSitive|NEGative

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:SFNRst:POLarity?

This command sets the polarity of the system frame number reset signal for the uplink synchronization source.

POSitive This choice sets the signal to trigger when the trigger signal is high.

NEGative This choice sets the signal to trigger when the trigger signal is low.

***RST** POS**Key Entry** **SFN RST Polarity Neg Pos**

Remarks This command is not used when the sync source is set to ESG. Refer to “:ULINK:SYNC[:SOURCE]” on page 1070.

:ULINK:SYNC:MODE

Supported E4438C with Option 400

```
[ :SOURCE ] :RADio:WCDMa:TGPP [ :BBG ] :ULINK:SYNC:MODE SINGLE | CONTinuous
```

```
[ :SOURCE ] :RADio:WCDMa:TGPP [ :BBG ] :ULINK:SYNC:MODE?
```

This command selects the uplink frame synchronization triggering mode.

SINGLE This choice sets the signal generator, once triggered, to generate frames based on the reference clock.

CONTinuous This choice sets the signal generator to continuously align the frame sync trigger signal and the frame timing.

***RST** SING

Key Entry **Frame Sync Trigger Mode Single Cont**

:ULINK:SYNC[:SOURCE]

Supported E4438C with Option 400

```
[ :SOURCE ] :RADio:WCDMa:TGPP [ :BBG ] :ULINK:SYNC [ :SOURCE ] SFN_RST | FCLock | ESG
```

```
[ :SOURCE ] :RADio:WCDMa:TGPP [ :BBG ] :ULINK:SYNC [ :SOURCE ] ?
```

This command selects the uplink frame synchronization source type.

SFN_RST This choice sets the signal to trigger on the system frame number reset signal.

FCLock This choice sets the signal to trigger on the frame clock.

ESG This choice sets the signal to trigger on the synchronization signal of a primary ESG.

***RST** FCL

Key Entry **Sync Source SFN FClk ESG**

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADio:WCDMa:TGPP[:BBG])**:ULINK:TGAP:POFFset****Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:TGAP:POFFset <val>|AUTO

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:TGAP:POFFset?

This command specifies the amount of power to be increased when the data is being compressed for the transmission gap power offset.

AUTO This choice sets the power to increase using the gap pattern parameters calculation based on 3GPP standard. When AUTO is selected, the query returns “AUTO” as the value.

The variable <val> is expressed in units of decibels (dB).

***RST** AUTO**Range** 0–6**Field Entry** PwrOffs

Remarks If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to “:ULINK:APPLY” on page 987.

:ULINK:TGAP:PSI[1]|2|3|4|5|6:CFN**Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:TGAP:PSI[1]|2|3|4|5|6:CFN <val>

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:TGAP:PSI[1]|2|3|4|5|6:CFN?

This command sets the connection frame number (CFN) for the first radio frame of the first pattern 1.

***RST** 0**Range** 1–255**Field Entry** TGCFN

Remarks In the signal generator, CFN is counted internally relative to the system sync signal.

:ULINK:TGAP:PSI[1]:CMMethod

Supported E4438C with Option 400

```
[ :SOURCE ] :RADio:WCDMa:TGPP [ :BBG ] :ULINK:TGAP:PSI [1] :CMMethod SF2 | HIGHer
[ :SOURCE ] :RADio:WCDMa:TGPP [ :BBG ] :ULINK:TGAP:PSI [1] :CMMethod?
```

This command selects the compressed mode (CM) method.

SF2 This choice selects a compressed mode method that reduced the spread factor (SF) by 2. This is done by increasing the data rate by reducing the spreading factor in half. When the dedicated physical data channel's (DPDCH) symbol rate is 960 kbps, the frame is not compressed because it uses the lowest SF value and it cannot be reduced.

HIGHer This choice selects a higher layer scheduling method. The emulated higher layer scheduling method mode keeps the same physical layer data rate even when a transmission gap is created.

***RST** SF2

Key Entry **SF/2 Higher Layer**

Remarks If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to [“:ULINK:APPLY” on page 987](#).

The ULINK:APPLY command will fail if the CM method is higher layer and DPDCH data is TrCH. CM method should be SF/2 if the DPDCH data is TrCH.

:ULINK:TGAP:PSI[1]|2|3|4|5|6:D

Supported E4438C with Option 400

```
[ :SOURCE ] :RADio:WCDMa:TGPP [ :BBG ] :ULINK:TGAP:PSI [1] | 2 | 3 | 4 | 5 | 6 :D
<val> | UNDeFined
[ :SOURCE ] :RADio:WCDMa:TGPP [ :BBG ] :ULINK:TGAP:PSI [1] | 2 | 3 | 4 | 5 | 6 :D?
```

This command sets the transmission gap distance. The command specifies the number of slots between the starting slots of two consecutive transmission gaps within a transmission gap pattern.

UNDeFined This choice sets one transmission gap. When UNDeFined is selected, then there is only one transmission gap within the transmission gap pattern.

***RST** UND

Range 15–269

Field Entry TGD

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADIO:WCDMA:TGPP[:BBG])

:ULINK:TGAP:PSI[1]|2|3|4|5|6:L1**Supported** E4438C with Option 400[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:ULINK:TGAP:PSI[1]|2|3|4|5|6
:L1 3|4|5|7|10|14

[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:ULINK:TGAP:PSI[1]|2|3|4|5|6:L1?

This command specifies the length of the first transmission gap (TGL1). The length is expressed in number of slots.

RST** +7**Field Entry** TGL1**:ULINK:TGAP:PSI[1]|2|3|4|5|6:L2*Supported** E4438C with Option 400[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:ULINK:TGAP:PSI[1]|2|3|4|5|6
:L2 3|4|5|7|10|14|OMITted

[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:ULINK:TGAP:PSI[1]|2|3|4|5|6:L2?

This command specifies the length of the second transmission gap (TGL2). When OMITted is selected, TGL2=TGL1.

RST** OMIT**Field Entry** TGL2**:ULINK:TGAP:PSI[1]|2|3|4|5|6:PL1*Supported** E4438C with Option 400[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:ULINK:TGAP:PSI[1]|2|3|4|5|6:PL1 <val>
[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:ULINK:TGAP:PSI[1]|2|3|4|5|6:PL1?

This command specifies the duration of the transmission gap pattern length 1 (TGPL1). The pattern length is expressed in number of frames.

***RST** +2**Range** 1–144**Field Entry** TGPL1

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADio:WCDMa:TGPP[:BBG])

:ULINK:TGAP:PSI[1]|2|3|4|5|6:PL2

Supported E4438C with Option 400

[:SOURCE] :RADio:WCDMa:TGPP [:BBG] :ULINK:TGAP:PSI [1] |2|3|4|5|6:PL2 <val> |
OMITted

[:SOURCE] :RADio:WCDMa:TGPP [:BBG] :ULINK:TGAP:PSI [1] |2|3|4|5|6:PL2?

This command specifies the duration of the transmission gap pattern length 2 (TGPL2).

The variable <val> is expressed in number of frames. When OMITted is selected, TGPL2=TGPL1.

***RST** OMIT

Range 1–144

Field Entry TGPL2

Key Entry **Omitted**

:ULINK:TGAP:PSI[1]|2|3|4|5|6:POWer

Supported E4438C with Option 400

[:SOURCE] :RADio:WCDMa:TGPP [:BBG] :ULINK:TGAP:PSI [1] |2|3|4|5|6:POWer?

This query returns each power level for a compressed slot.

The return string has five real numbers followed by dBm (for normal power) or dB (for before/after gap power) separated by a single space character. When a value does not exist because of a specified compressed pattern (Example: Gap2 does not exist when TGD is “UNDEFINED”), it returns “–dB.”

Normal power value represents an actual power level in dBm and relative power is represented in dB.

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADio:WCDMa:TGPP[:BBG])**:ULINK:TGAP:PSI[1]|2|3|4|5|6:PRC****Supported** E4438C with Option 400[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:TGAP:PSI[1]|2|3|4|5|6:PRC <val>|
INFIInity

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:TGAP:PSI[1]|2|3|4|5|6:PRC?

This command sets the transmission gap pattern repetition count. The pattern repetition count (PRC) sets the number of transmission gap patterns within the transmission gap pattern sequence.

RST** INF**Range** 1–511**Field Entry** TGPRC**Key Entry** **Infinity*Remarks** When INFIInity is selected, the PRC will continue indefinitely.**:ULINK:TGAP:PSI[1]|2|3|4|5|6:PS****Supported** E4438C with Option 400[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:TGAP:PSI[1]|2|3|4|5|6:PS ACTive|
INACTive

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:TGAP:PSI[1]|2|3|4|5|6:PS?

This command sets the transmission gap pattern status.

ACTive This choice sets the compressed mode active.**INACTive** This choice sets the compressed mode inactive.***RST** INAC**Key Entry** **TGPS Active Inactive**

:ULINK:TGAP:PSI[1]|2|3|4|5|6:SN**Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:TGAP:PSI[1]|2|3|4|5|6:SN <val>

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:TGAP:PSI[1]|2|3|4|5|6:SN?

This command specifies the timeslot number of the first transmission gap within the first radio frame.

RST** +11**Range** 0–14**Field Entry** TGSN**:ULINK:TGAP:RPARAMeter*Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:TGAP:RPARAMeter DREF11|DREF12|DREF21|DREF22

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:TGAP:RPARAMeter?

This command sets the downlink reference compressed mode parameters as defined in 3GPP Standard TS25.101.

DREF11 This choice sets the reference parameter to 1.1.

DREF12 This choice sets the reference parameter to 1.2.

DREF21 This choice sets the reference parameter to 2.1.

DREF22 This choice sets the reference parameter to 2.2.

***RST** CUST**Key Entry** **DL Reference 1.1** **DL Reference 1.2** **DL Reference 2.1**
DL Reference 2.2**Remarks** The query returns CUSTom when the parameters are set individually.**:ULINK:TGAP:SCFN****Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:TGAP:SCFN <val>

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:TGAP:SCFN?

This command sets the stop connection frame number (CFN) when the stop trigger is used.

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADIO:WCDMA:TGPP[:BBG])

When the stop trigger is received at the signal generator, the next stop CFN, the compressed mode will finish even if the transmission gap pattern repetition count (TGPRC) is still remaining.

***RST** +0

Range 0–255

Field Entry SCFN

Remarks The compressed mode stop trigger must be used for this command to executed. Refer to “:ULINK:TGAP:STOP:TRIGGER” on page 1078.

If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to “:ULINK:APPLY” on page 987.

This command is not used when the sync source is set to ESG. Refer to “:ULINK:SYNC[:SOURCE]” on page 1070.

:ULINK:TGAP[:STATE]

Supported E4438C with Option 400

[:SOURCE] :RADIO:WCDMA:TGPP [:BBG] :ULINK:TGAP [:STATE] ON | OFF | 1 | 0

[:SOURCE] :RADIO:WCDMA:TGPP [:BBG] :ULINK:TGAP [:STATE] ?

This command enables or disables the uplink transmission gap pattern.

***RST** 1

Key Entry **Compress Mode Off On**

:ULINK:TGAP:START:TRIGGER

Supported E4438C with Option 400

[:SOURCE] :RADIO:WCDMA:TGPP [:BBG] :ULINK:TGAP:START:TRIGGER

This command starts the compressed mode trigger.

Key Entry **Compressed Mode Start Trigger**

:ULINK:TGAP:START:TRIGGER:POLARITY

Supported E4438C with Option 400

[:SOURCE] :RADIO:WCDMA:TGPP [:BBG] :ULINK:TGAP:START:TRIGGER:
POLARITY POSITIVE|NEGATIVE

[:SOURCE] :RADIO:WCDMA:TGPP [:BBG] :ULINK:TGAP:START:TRIGGER:POLARITY?

This command sets the compressed mode start trigger signal polarity.

POSITIVE This choice sets the trigger to start when the trigger signal is high.

NEGATIVE This choice sets the trigger to start when the trigger signal is low.

***RST** POS

Key Entry **Comp Mode Start Trigger Polarity Neg Pos**

:ULINK:TGAP:STOP:TRIGGER

Supported E4438C with Option 400

[:SOURCE] :RADIO:WCDMA:TGPP [:BBG] :ULINK:TGAP:STOP:TRIGGER

This command stops the compressed mode trigger.

Key Entry **Compressed Mode Stop Trigger**

:ULINK:TGAP:STOP:TRIGGER:POLARITY

Supported E4438C with Option 400

[:SOURCE] :RADIO:WCDMA:TGPP [:BBG] :ULINK:TGAP:STOP:TRIGGER:
POLARITY POSITIVE|NEGATIVE

[:SOURCE] :RADIO:WCDMA:TGPP [:BBG] :ULINK:TGAP:STOP:TRIGGER:POLARITY?

This command sets the compressed mode stop trigger signal polarity.

POSITIVE This choice sets the trigger to stop when the trigger signal is high.

NEGATIVE This choice sets the trigger to stop when the trigger signal is low.

***RST** POS

Key Entry **Comp Mode Stop Trigger Polarity Neg Pos**

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADio:WCDMa:TGPP[:BBG])**:ULINK:TOFFset****Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:TOFFset <val>

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:TOFFset?

This command sets additional timing offset for the dedicated physical channel (DPCH). Timing offset is the time delay between the downlink signal and the uplink signal. The downlink signal timing is provided by the synchronization signal.

***RST** +0**Range** -512 to 2560**Key Entry** **Timing Offset**

Remarks The actual amount of timing offset is (T0) + (TOFFset) + (SDElay) where T0 = 1024 chips.

:ULINK:TStatus:COMPRESSED**Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:TStatus:COMPRESSED?

This query returns the status of compressed pattern generation. A “0” response indicates the compressed mode pattern signal is not generating. A “1” response indicates that the compressed mode pattern signal is generating.

RST** 0**:ULINK:TStatus:RACH*Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:TStatus:RACH?

This query returns the status of the physical random access channel (PRACH). A “0” response indicates the PRACH signal is not generating. A “1” response indicates that the PRACH signal is generating.

***RST** 0

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADio:WCDMa:TGPP[:BBG])**:ULINK:TSTATUS:RECEIVE****Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:TSTATUS:RECEIVE?

This query returns the frame synchronization signal reception status.

When the frame synchronization signal is received after synchronization configuration, the received value becomes “1.” If the signal is not received, the value is “0.”

RST** 0**:ULINK:TSTATUS:SYNC*Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:TSTATUS:SYNC?

This query returns the frame synchronization status. A “0” status indicates frame synchronization is fine or no frame synchronization signal is received). A “1” indicates frame synchronization is out sync and the synchronization signal does not match with the signal generator’s timing. The signal generator will generate incorrect data

RST** 0**:ULINK:[TGRoup[1]]:DCH[1]|2|3|3|5|6:BLKSize*Supported** E4438C with Option 400[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:[TGRoup[1]]:DCH[1]|
2|3|4|5|6:BLKSize <val>
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:[TGRoup[1]]:DCH[1]|
2|3|4|5|6:BLKSize?

This command sets the block size for the selected uplink dedicated channel (DCH).

***RST** DCH1: 244 DCH2: 100 DCH3,4,5,6: 20**Range** 0–5000**Key Entry** Blk Size**Remarks** If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to [“:ULINK:APPLY” on page 987](#).

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADIo:WCDMa:TGPP[:BBG])

:ULINK[:TGRoup[1]]:DCH[1]|2|3|4|5|6:BPFRame**Supported** E4438C with Option 400

[:SOURCE]:RADIo:WCDMa:TGPP[:BBG]:ULINK[:TGRoup[1]]:DCH[1]|2|3|4|5|6:BPFRame?

This query returns the block per frame for the selected dedicated transport channel (DCH).

RST** DCH1: 490 DCH2: 110 DCH3,4,5,6: 60**Range** 0–5000**:ULINK[:TGRoup[1]]:DCH[1]|2|3|4|5|6:BRATe*Supported** E4438C with Option 400

[:SOURCE]:RADIo:WCDMa:TGPP[:BBG]:ULINK[:TGRoup[1]]:DCH[1]|2|3|4|5|6:BRATe?

This query returns the bit rate for the selected dedicated transport channel (DCH)

RST** DCH1: 12200 DCH2: 2500 DCH3,4,5,6: 2000**Range** 0–5000**:ULINK[:TGRoup[1]]:DCH[1]|2|3|3|5|6:CODE*Supported** E4438C with Option 400[:SOURCE]:RADIo:WCDMa:TGPP[:BBG]:ULINK[:TGRoup[1]]:DCH[1]|2|3|4|5|6:CODE HCONv|TCONv|TURBo|NONE
[:SOURCE]:RADIo:WCDMa:TGPP[:BBG]:ULINK[:TGRoup[1]]:DCH[1]|2|3|4|5|6:CODE?

This command sets the encoder type for the uplink dedicated channel (DCH) selected.

HCONv This choice selects a coding with the 1/2 rate convolutional encoder.**TCONv** This choice selects a coding with the 1/3 rate convolutional encoder.**TURBo** This choice selects a coding with the turbo coder.**NONE** This choice selects no coding type.***RST** DCH1,2: TCONv DCH3,4,5,6: HCONv**Key Entry** 1/2 Conv 1/3 Conv Turbo NONE**Remarks** If the choice, set by this command, is changed while the signal is active, the apply command must be sent to set the change. See “:ULINK:APPLY” on page 987.

:ULINK:[TGRoup[1]]:DCH[1]|2|3|3|5|6:CRc**Supported** E4438C with Option 400

```
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:[TGRoup[1]]:DCH[1]|
2|3|4|5|6:CRc 0|8|12|16|24
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:[TGRoup[1]]:DCH[1]|
2|3|4|5|6:CRc?
```

This command specifies the number of cyclic redundancy code (CRC) bits to be added to each transport channel block.

***RST** DCH1: 16 DCH2: 12 DCH3,4,5,6: 8**Field Entry** CRC Size

Remarks If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to [“:ULINK:APPLY” on page 987](#).

:ULINK:[TGRoup[1]]:DCH[1]|2|3|3|5|6:DATA**Supported** E4438C with Option 400

```
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:[TGRoup[1]]:DCH[1]|
2|3|4|5|6:DATA PN9|FIX4|"<file name>"
[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:[TGRoup[1]]:DCH[1]|
2|3|4|5|6:DATA?
```

This command configures the data type to be inserted into the selected uplink dedicated channel (DCH).

"<file name>" This variable specifies a data pattern that has been stored in memory.

***RST** PN9**Key Entry** **PN9** **FIX4** **User File**

Remarks If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to [“:ULINK:APPLY” on page 987](#).

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADIO:WCDMA:TGPP[:BBG])**:ULINK[:TGRoup[1]]:DCH[1] | 2 | 3 | 4 | 5 | 6:DATA:BER:ACTual****Supported** E4438C with Option 400[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:ULINK[:TGRoup[1]]:DCH[1] |
2 | 3 | 4 | 5 | 6:DATA:BER:ACTual?

This query returns the actual inserted error ratio in the uplink dedicated channel (DCH) selected.

RST** +0.0000000E+000**Remarks** The actual bit error rate can be different from the specified bit error rate due to the internal bit generation.**:ULINK[:TGRoup[1]]:DCH[1] | 2 | 3 | 4 | 5 | 6:DATA:BER:ERRor:BIT*Supported** E4438C with Option 400[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:ULINK[:TGRoup[1]]:DCH[1] | 2 | 3 | 4 | 5 | 6:
DATA:BER:ERRor:BIT?

This query returns the actual error bits inserted in total number of bits.

RST** +0**Field Entry** Error Bits**:ULINK[:TGRoup[1]]:DCH[1] | 2 | 3 | 4 | 5 | 6:DATA:BER:TOTal:BIT*Supported** E4438C with Option 400[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:ULINK[:TGRoup[1]]:DCH[1] | 2 | 3 | 4 | 5 | 6:
DATA:BER:TOTal:BIT?

This query returns the total number of bits inserted for the bit error ratio calculation.

***RST** 0**Field Entry** Total Bits

:ULINK[:TGRoup[1]]:DCH[1] | 2 | 3 | 4 | 5 | 6:DATA:BER[:VALue]

Supported E4438C with Option 400

```
[ :SOURCE ] :RADio:WCDMa:TGPP [ :BBG ] :ULINK [ :TGRoup [ 1 ] ] :DCH [ 1 ] | 2 | 3 | 4 | 5 | 6 :
DATA:BER [ :VALue ] <val>
```

```
[ :SOURCE ] :RADio:WCDMa:TGPP [ :BBG ] :ULINK [ :TGRoup [ 1 ] ] :DCH [ 1 ] | 2 | 3 | 4 | 5 | 6 :
DATA:BER [ :VALue ] ?
```

This command specifies the bit error rate (BER) value to be inserted into the selected uplink dedicated channel (DCH). The variable <val> is expressed in decimal form as a percent ratio (1.0=100%).

***RST** 0.0000000+000

Range 0.0001–1.0

Field Entry BER

Remarks If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to [“:ULINK:APPLY” on page 987](#).

:ULINK[:TGRoup[1]]:DCH[1] | 2 | 3 | 4 | 5 | 6:DATA:BLER:ACTual

Supported E4438C with Option 400

```
[ :SOURCE ] :RADio:WCDMa:TGPP [ :BBG ] :ULINK [ :TGRoup [ 1 ] ] :DCH [ 1 ] |
2 | 3 | 4 | 5 | 6 :DATA:BLER:ACTual?
```

This query returns the actual block error ratio inserted.

***RST** 0.0000000E+000

Remarks The actual block error rate can be different from the specified block error rate due to the internal bit generation.

:ULINK[:TGRoup[1]] | 2:DCH[1] | 2 | 3 | 4 | 5 | 6:DATA:BLER:ERRor:BLOCK

Supported E4438C with Option 400

```
[ :SOURCE ] :RADio:WCDMa:TGPP [ :BBG ] :ULINK [ :TGRoup [ 1 ] | 2 :DCH [ 1 ] | 2 | 3 | 4 | 5 | 6 :
DATA:BLER:ERRor:BLOCK?
```

This query returns the number of error blocks inserted.

***RST** +0

Field Entry Error Blocks

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADIO:WCDMA:TGPP[:BBG])

:ULINK[:TGRoup[1] | 2:DCH[1] | 2 | 3 | 4 | 5 | 6:DATA:BLER:TOTal:BLOCK**Supported** E4438C with Option 400

[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:ULINK[:TGRoup[1] | 2:DCH[1] | 2 | 3 | 4 | 5 | 6:DATA:BLER:TOTal:BLOCK?

This query returns the error blocks actually inserted in total number of blocks.

RST** +0**Field Entry** Total Blocks**:ULINK[:TGRoup[1]]:DCH[1] | 2 | 3 | 4 | 5 | 6:DATA:BLER[:VALue]*Supported** E4438C with Option 400

[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:ULINK[:TGRoup[1]]:DCH[1] | 2 | 3 | 4 | 5 | 6:DATA:BLER[:VALue] <val>

[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:ULINK[:TGRoup[1]]:DCH[1] | 2 | 3 | 4 | 5 | 6:DATA:BLER[:VALue]?

This command specifies the block error rate (BLER) value to be inserted into the selected uplink dedicated channel (DCH).

The variable <val> is expressed in decimal form as a percent ratio (1.0=100%).

***RST** +0.00000000E+000**Range** 0.0–1.00**Field Entry** BLER**Remarks** If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to [“:ULINK:APPLY” on page 987](#).

:ULINK[:TGRoup[1]]:DCH[1]|2|3|4|5|6:DATA:EINSert**Supported** E4438C with Option 400[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK[:TGRoup[1]]:DCH[1]|2|3|4|5|6:
DATA:EINSert BLER|BER|NONE[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK[:TGRoup[1]]:DCH[1]|2|3|4|5|6:
DATA:EINSert?

This command selects the error insertion mode.

BLER This choice selects a block error rate (BLER) mode.**BER** This choice selects a bit error rate (BER) mode.**NONE** This choice selects no BLER or BER mode (no error blocks or bits inserted).***RST** NONE**Key Entry** **BLER** **BER** **None****:ULINK[:TGRoup[1]]:DCH[1]|2|3|4|5|6:DATA:FIX4****Supported** E4438C with Option 400[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK[:TGRoup[1]]:DCH[1]|2|3|4|5|6:
DATA:FIX4 <val>[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK[:TGRoup[1]]:DCH[1]|2|3|4|5|6:
DATA:FIX4?

This command sets the 4 bit data pattern for the selected uplink dedicated channel (DCH).

While the variable <val> can be entered in binary, hexadecimal, or decimal formats, the query returns only binary values.

***RST** #B0000**Range** 0–15**Key Entry** **FIX4**

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADio:WCDMa:TGPP[:BBG])**:ULINK[:TGRoup[1]]:DCH[1]|2|3|4|5|6:NBLock****Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK[:TGRoup[1]]:DCH[1]|2|3|4|5|6:NBLock <val>

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK[:TGRoup[1]]:DCH[1]|2|3|4|5|6:NBLock?

This command specifies the number of transport blocks coded on to the selected dedicated channel (DCH).

RST** +1**Range** 0–4095**Field Entry** Num of Blk**:ULINK[:TGRoup [1]]:DCH[1]|2|3|4|5|6:PPERcentage*Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK[:TGRoup[1]]:DCH[1]|2|3|4|5|6:PPERcentage?

This query returns the percentage of the total bits removed from or added to the fully coded channel.

The value is returned in the unit of percent and a negative value means repetition.

Field Entry Puncture**:ULINK[:TGRoup[1]]:DCH[1]|2|3|4|5|6:RMATch****Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK[:TGRoup[1]]:DCH[1]|2|3|4|5|6:RMATch <val>

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK[:TGRoup[1]]:DCH[1]|2|3|4|5|6:RMATch?

This command specifies the rate matching parameters of each dedicated channel (DCH) selected.

***RST** DCH1: 2 DCH2: 12 DCH3,4,5,6: 1**Range** 1–256**Field Entry** Rate Match Attr

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADio:WCDMa:TGPP[:BBG])**:ULINK[:TGRoup[1]]:DCH[1]|2|3|4|5|6:TTI****Supported** E4438C with Option 400[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK[:TGRoup[1]]:DCH[1]|2|3|4|5|6:
TTI 10000|20000|40000|80000

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK[:TGRoup[1]]:DCH[1]|2|3|4|5|6:TTI?

This command sets the transmission time interval (TTI) period for the dedicated channel (DCH) selected. TTI is the time interval of the amount of data to be transmitted.

The choices are expressed in units of milliseconds (msec) where 20000 = 20 msec.

RST** DCH1: 20000 DCH2: 40000 DCH3,4,5,6: 10000**Field Entry** TTI**Remarks** The data amount equals the block size (BLKsize) times the number of transport blocks (NBlock).**:ULINK[:TGRoup[1]]:DCH[1]|2|3|4|5|6[:STATe]*Supported** E4438C with Option 400[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK[:TGRoup[1]]:DCH[1]|
2|3|4|5|6[:STATe] ON|OFF|1|0[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK[:TGRoup[1]]:DCH[1]|
2|3|4|5|6[:STATe]?

This command enables or disables the operating state of the dedicated channel (DCH) selected.

***RST** DCH1,2: 1 DCH3,4,5,6: 0**Key Entry** TrCH State Off On

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADIO:WCDMA:TGPP[:BBG])**:ULINK[:TGRoup[1]]:RACH[1]:BLKSize****Supported** E4438C with Option 400

[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:ULINK[:TGRoup[1]]:RACH[1]:BLKSize <val>

[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:ULINK[:TGRoup[1]]:RACH[1]:BLKSize?

This command sets the transport block size for the random access channel (RACH) coding where the input data is carried.

***RST** +168**Range** 0–5000**Field Entry** Blk Size

Remarks If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to [“:ULINK:APPLY” on page 987](#).

:ULINK[:TGRoup [1]]:RACH[1]:BPFRame**Supported** E4438C with Option 400

[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:ULINK[:TGRoup[1]]:RACH[1]:BPFRame?

This query returns the bits per frame for the selected random access channel (RACH).

RST** +600**:ULINK[:TGRoup [1]]:RACH[1]:BRATe*Supported** E4438C with Option 400

[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:ULINK[:TGRoup[1]]:RACH[1]:BRATe?

This query returns the bit rate for the random access transport channel (RACH).

***RST** +8400

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADio:WCDMa:TGPP[:BBG])**:ULINK[:TGRoup[1]]:RACH[1]:CODE****Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK[:TGRoup[1]]:RACH[1]:CODE?

This query returns the type of channel coding for error protection.

RST** HCON**:ULINK[:TGRoup[1]]:RACH[1]:CRC*Supported** E4438C with Option 400[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK[:TGRoup[1]]:RACH[1]:
CRC 0|8|12|16|24

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK[:TGRoup[1]]:RACH[1]:CRC?

This command specifies the number of cyclic redundancy code (CRC) bits that are to be added to each transport channel block.

RST** +16**Field Entry** CRC Size**Remarks** If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to [“:ULINK:APPLY” on page 987](#).**:ULINK[:TGRoup[1]]:RACH[1]:DATA*Supported** E4438C with Option 400[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK[:TGRoup[1]]:RACH[1]:DATA PN9|
FIX4|"<file name>"

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK[:TGRoup[1]]:RACH[1]:DATA?

This command sets the type of data to be inserted into the random access channel (RACH).

"<file name>" This variable specifies a data pattern that has been stored in memory.

RST** PN9**Key Entry** **PN9** **FIX4** **User File*Remarks** If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to [“:ULINK:APPLY” on page 987](#).

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADIo:WCDMa:TGPP[:BBG])**:ULINK[:TGRoup[1]]:RACH[1]:DATA:BER:ACTual****Supported** E4438C with Option 400

[:SOURCE]:RADIo:WCDMa:TGPP[:BBG]:ULINK[:TGRoup[1]]:RACH[1]:DATA:BER:ACTual?

This query returns the actual error ratio inserted.

RST** +0**Range** 0–5000**Key Entry** **Actual BER*Remarks** The specified error ratio and actual ratio will not match when the internal bit generation goes into “pre-computing” mode.**:ULINK[:TGRoup[1]]:RACH[1]:DATA:BER:ERRor:BIT****Supported** E4438C with Option 400

[:SOURCE]:RADIo:WCDMa:TGPP[:BBG]:ULINK[:TGRoup[1]]:RACH[1]:DATA:BER:ERRor:BIT?

This query returns the actual error bits inserted for the total number of bits.

RST** 0**:ULINK[:TGRoup[1]]:RACH[1]:DATA:BER:TOTal:BIT*Supported** E4438C with Option 400

[:SOURCE]:RADIo:WCDMa:TGPP[:BBG]:ULINK[:TGRoup[1]]:RACH[1]:DATA:BER:TOTal:BIT?

This query returns the total number of bits inserted for the bit error ratio calculation.

***RST** 0**Remarks** The specified error ratio and actual ratio will not match when the internal bit generation goes into “pre-computing” mode.

:ULINK[:TGRoup[1]]:RACH[1]:DATA:BER[:VALue]**Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK[:TGRoup[1]]:RACH[1]:DATA:BER[:VALue] <val>

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK[:TGRoup[1]]:RACH[1]:DATA:BER[:VALue]?

This command sets the bit error rate value for the random access channel (RACH).

RST** +0.00000000E+000**Range** 0.0000–1.0**Field Entry** BER**Remarks** If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to [“:ULINK:APPLY” on page 987](#).**:ULINK[:TGRoup[1]]:RACH[1]:DATA:BLER:ACTual*Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK[:TGRoup[1]]:RACH[1]:DATA:BLER:ACTual?

This query returns the actual error ratio inserted.

RST** 0.00000000E+000**Remarks** The specified error ratio and actual error ratio will not match when the internal bit generation goes into “pre-computing” mode.**:ULINK[:TGRoup[1]]:RACH[1]:DATA:BLER:ERRor:BLOCK*Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK[:TGRoup[1]]:RACH[1]:DATA:BLER:ERRor:BLOCK?

This query returns the actual block errors inserted in the total number of blocks.

***RST** +0**Remarks** The specified error ratio and actual error ratio will not match when the internal bit generation goes into “pre-computing” mode.

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADIO:WCDMA:TGPP[:BBG])

:ULINK[:TGRoup[1]]:RACH[1]:DATA:BLER:TOTal:BLOCK**Supported** E4438C with Option 400[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:ULINK[:TGRoup[1]]:RACH[1]:DATA:
BLER:TOTal:BLOCK?

This query returns the total blocks inserted for the block error ratio calculation.

RST** +0**Remarks** The specified error ratio and actual error ratio will not match when the internal bit generation goes into “pre-computing” mode.**:ULINK[:TGRoup[1]]:RACH[1]:DATA:BLER[:VALue]*Supported** E4438C with Option 400[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:ULINK[:TGRoup[1]]:RACH[1]:DATA:
BLER[:VALue] <val>[:SOURCE]:RADIO:WCDMA:TGPP[:BBG]:ULINK[:TGRoup[1]]:RACH[1]:DATA:
BLER[:VALue]?

This command sets the inserted block error rate value. The variable <val> is expressed in decimal form, but it is a percent ratio (1.0=100%).

***RST** 0**Range** 0.0001–1.0**Field Entry** BLER**Remarks** If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to “:ULINK:APPLY” on page 987.

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADio:WCDMa:TGPP[:BBG])**:ULINK[:TGRoup[1]]:RACH[1]:DATA:EINSert****Supported** E4438C with Option 400[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK[:TGRoup[1]]:RACH[1]:DATA:
EINSert BLER|BER|NONE

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK[:TGRoup[1]]:RACH[1]:DATA:EINSert?

This command selects an error mode or no error insertion.

BLER This choice selects block error rate (BLER) mode.**BER** This choice selects a bit error rate (BER) mode.**NONE** This choice selects no BLER or BER mode (no error blocks or bits inserted).***RST** NONE**Key Entry** **BLER** **BER** **None****Remarks** If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to [“:ULINK:APPLY” on page 987](#).**:ULINK[:TGRoup[1]]:RACH[1]:DATA:FIX4****Supported** E4438C with Option 400[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK[:TGRoup[1]]:RACH[1]:DATA:
FIX4 <val>

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK[:TGRoup[1]]:RACH[1]:DATA:FIX4?

This command sets a fixed 4 bit pattern for use as a data pattern.

While the variable <val> can be entered in binary, hexadecimal, or decimal formats, the query returns only binary values.

***RST** #B0000**Range** 0–15**Field Entry** Data**Remarks** If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to [“:ULINK:APPLY” on page 987](#).

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADio:WCDMa:TGPP[:BBG])**:ULINK[:TGRoup[1]]:RACH[1]:NBLOCK****Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK[:TGRoup[1]]:RACH[1]:NBLOCK <val>

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK[:TGRoup[1]]:RACH[1]:NBLOCK?

This command sets the number of transport blocks coded into one random access channel (RACH).

***RST** +1**Range** 0–4095**Field Entry** Num of Blk**Remarks** The total input data into one RACH is the block size (BLKsize) multiplied by the number of transport blocks (NBLOCK).

If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to [“:ULINK:APPLY” on page 987](#)

:ULINK[:TGRoup [1]]:RACH[1]:PPERcentage**Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK[:TGRoup[1]]:RACH[1]:PPERcentage?

This query returns the percentage of the total bits removed from or added to the fully coded channel.

RST** –2.12500000E+002**Field Entry** Puncture**:ULINK[:TGRoup[1]]:RACH[1]:RMArch*Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK:RACH[1]:RMArch?

This query returns the rate match parameters of each random access channel (RACH).

***RST** +1

Wideband CDMA Base Band Generator Subsystem—Option 400 ([:SOURCE]:RADio:WCDMa:TGPP[:BBG])**:ULINK[:TGRoup[1]]:RACH[1]:TTI****Supported** E4438C with Option 400[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK[:TGRoup[1]]:RACH[1]:
TTI 10000|20000

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK[:TGRoup[1]]:RACH[1]:TTI?

This command sets the transmission time interval (TTI) period for the random access channel (RACH).

The choices are expressed in units of milliseconds (msec) where 20000=20 msec.

***RST** 20000**Field Entry** TTI

Remarks If the parameter set by this command is changed while the signal is active, the apply command must be executed for the change to occur. Refer to “:ULINK:APPLY” on page 987.

:ULINK[:TGRoup[1]]:RACH[1][:STATe]**Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG]:ULINK[:TGRoup[1]]:RACH[1][:STATe]?

This query returns the state of the random access channel (RACH).

RST** 1**[:STATe]*Supported** E4438C with Option 400

[:SOURCE]:RADio:WCDMa:TGPP[:BBG][:STATe] ON|OFF|1|0

[:SOURCE]:RADio:WCDMa:TGPP[:BBG][:STATe]?

This command enables or disables W-CDMA functionality.

***RST** 0**Key Entry** **W-CDMA Off On**

Symbols

of Blocks field, [984](#)
 # of Carriers softkey, [285](#), [287](#)
 # Points softkey, [56](#)
 # Skipped Points softkey, [304](#)
 ΦM Dev, [199](#)
 ΦM Dev Couple Off On, [199](#)
 FM ΦM Normal High BW, [194](#)
 ΦM Off On, [198](#)
 ΦM Path 1 2, [193](#)
 ΦM Stop Rate, [196](#)
 ΦM Sweep Time, [197](#)
 ΦM Tone 2 Ampl Percent of Peak, [196](#)

Numerics

0.7V,1.4V,1.65V,2.5V softkey, [417](#)
 1 DPCH softkey, [342](#), [347](#)
 1.23 MHz softkey, [266](#)
 1.25 MHz softkey, [266](#)
 1/2 Conv softkey, [982](#), [983](#), [1081](#)
 1/3 Conv softkey, [982](#), [983](#), [1081](#)
 10 msec softkey, [1009](#)
 1048576 softkey, [213](#)
 10ms Frame Pulse (DRPS11) softkey, [964](#), [966](#),
 [967](#), [968](#), [969](#)
 10ms Frame Pulse (RPS6) softkey
 See wideband CDMA base band generator
 subsystem keys and fields
 12.2 kbps (34.121 v3.8) softkey, [947](#)
 128QAM softkey
 See custom subsystem keys
 See DECT subsystem keys
 See Dmodulation subsystem keys
 See EDGE subsystem keys
 See GSM subsystem keys
 See NADC subsystem keys
 See PDC subsystem keys
 See PHS subsystem keys
 See TETRA subsystem keys
 131072 softkey, [213](#)
 144 kbps (34.121 v3.8) softkey, [947](#)
 16 1's & 16 0's softkey
 See custom subsystem keys
 See DECT subsystem keys

16 1's & 16 0's softkey (continued)
 See EDGE subsystem keys
 See GSM subsystem keys
 See NADC subsystem keys
 See PDC subsystem keys
 See PHS subsystem keys
 See TETRA subsystem keys
 16384 softkey, [213](#)
 16-Lvl FSK softkey
 See DECT subsystem keys
 See PHS subsystem keys
 16PSK softkey
 See custom subsystem keys
 See DECT subsystem keys
 See Dmodulation subsystem keys
 See EDGE subsystem keys
 See GSM subsystem keys
 See NADC subsystem keys
 See PDC subsystem keys
 See PHS subsystem keys
 See TETRA subsystem keys
 16QAM softkey
 See custom subsystem keys
 See DECT subsystem keys
 See Dmodulation subsystem keys
 See EDGE subsystem keys
 See GSM subsystem keys
 See NADC subsystem keys
 See PDC subsystem keys
 See PHS subsystem keys
 See TETRA subsystem keys
 2 Carriers softkey, [343](#)
 2 SR3 Carriers softkey, [251](#)
 2.100 MHz softkey, [31](#), [210](#), [224](#), [249](#), [279](#), [302](#),
 [324](#), [340](#), [471](#)
 20 msec softkey, [1009](#)
 2560 msec softkey, [1009](#)
 256QAM softkey
 See custom subsystem keys
 See DECT subsystem keys
 See Dmodulation subsystem keys
 See EDGE subsystem keys
 See GSM subsystem keys
 See NADC subsystem keys
 See PDC subsystem keys

Index

- 256QAM softkey (*continued*)
 - See PHS subsystem keys
 - See TETRA subsystem keys
- 262144 softkey, [213](#)
- 2-Lvl FSK softkey
 - See custom subsystem keys
 - See DECT subsystem keys
 - See Dmodulation subsystem keys
 - See EDGE subsystem keys
 - See GSM subsystem keys
 - See NADC subsystem keys
 - See PDC subsystem keys
 - See PHS subsystem keys
 - See TETRA subsystem keys
- 2nd Scr Offset field, [948](#), [955](#)
- 3 Carriers softkey, [231](#), [251](#), [343](#)
- 3 DPCH softkey, [342](#), [347](#)
- 3.84MHz chip-clk (DRPS4) softkey, [964](#), [966](#), [967](#), [968](#), [969](#)
- 32 1's & 32 0's softkey
 - See custom subsystem keys
 - See DECT subsystem keys
 - See EDGE subsystem keys
 - See GSM subsystem keys
 - See NADC subsystem keys
 - See PDC subsystem keys
 - See PHS subsystem keys
 - See TETRA subsystem keys
- 32 Ch Fwd softkey, [229](#), [232](#)
- 32768 softkey, [213](#)
- 32QAM softkey
 - See custom subsystem keys
 - See DECT subsystem keys
 - See Dmodulation subsystem keys
 - See EDGE subsystem keys
 - See GSM subsystem keys
 - See NADC subsystem keys
 - See PDC subsystem keys
 - See PHS subsystem keys
 - See TETRA subsystem keys
- 384 kbps (34.121 v3.8) softkey, [947](#)
- 4 1's & 4 0's softkey
 - See custom subsystem keys
 - See DECT subsystem keys
 - See EDGE subsystem keys
- 4 1's & 4 0's softkey (*continued*)
 - See GSM subsystem keys
 - See NADC subsystem keys
 - See PDC subsystem keys
 - See PHS subsystem keys
 - See TETRA subsystem keys
- 4 Carriers softkey, [231](#), [251](#), [343](#)
- 40 msec softkey, [1009](#)
- 40.000 MHz softkey, [31](#), [207](#), [210](#), [219](#), [224](#), [244](#), [249](#), [274](#), [279](#), [300](#), [302](#), [322](#), [324](#), [338](#), [340](#), [464](#), [471](#)
- 4-Lvl FSK softkey
 - See custom subsystem keys
 - See DECT subsystem keys
 - See Dmodulation subsystem keys
 - See EDGE subsystem keys
 - See GSM subsystem keys
 - See NADC subsystem keys
 - See PDC subsystem keys
 - See PHS subsystem keys
 - See TETRA subsystem keys
- 4QAM softkey
 - See custom subsystem keys
 - See DECT subsystem keys
 - See Dmodulation subsystem keys
 - See EDGE subsystem keys
 - See GSM subsystem keys
 - See NADC subsystem keys
 - See PDC subsystem keys
 - See PHS subsystem keys
 - See TETRA subsystem keys
- 5 Channel softkey, [257](#)
- 524288 softkeys, [213](#)
- 64 1's & 64 0's softkey
 - See custom subsystem keys
 - See DECT subsystem keys
 - See EDGE subsystem keys
 - See GSM subsystem keys
 - See NADC subsystem keys
 - See PDC subsystem keys
 - See PHS subsystem keys
 - See TETRA subsystem keys
- 64 Ch Fwd softkey, [229](#), [232](#)
- 64 kbps (34.121 v3.8) softkey, [947](#)

- 64QAM softkey
 See custom subsystem keys
 See DECT subsystem keys
 See Dmodulation subsystem keys
 See EDGE subsystem keys
 See GSM subsystem keys
 See NADC subsystem keys
 See PDC subsystem keys
 See PHS subsystem keys
 See TETRA subsystem keys
- 65536 softkey, [213](#)
- 8 1's & 8 0's softkey
 See custom subsystem keys
 See DECT subsystem keys
 See EDGE subsystem keys
 See GSM subsystem keys
 See NADC subsystem keys
 See PDC subsystem keys
 See PHS subsystem keys
 See TETRA subsystem keys
- 8 Bit Pattern softkey, [463](#)
- 8 Channel softkey, [257](#)
- 80 msec softkey, [1009](#)
- 80ms Frame Pulse (DRPS13) softkey, [964](#), [966](#),
[967](#), [968](#), [969](#)
- 80ms Frame Pulse (RPS20) softkey
 See wideband CDMA base band generator
 subsystem keys and fields
- 8648A/B/C/D softkey, [157](#), [159](#)
- 8656B,8657A/B softkey, [157](#), [159](#)
- 8657D NADC softkey, [157](#), [159](#)
- 8657D PDC softkey, [157](#), [159](#)
- 8657J PHS softkey, [157](#), [159](#)
- 8-Lvl FSK softkey
 See DECT subsystem keys
 See PHS subsystem keys
- 8PSK softkey
 See custom subsystem keys
 See DECT subsystem keys
 See Dmodulation subsystem keys
 See EDGE subsystem keys
 See GSM subsystem keys
 See NADC subsystem keys
 See PDC subsystem keys
 See PHS subsystem keys
- 8PSK softkey (continued)
 See TETRA subsystem keys
- 9 Ch Fwd softkey, [229](#), [232](#)
- 9 Channel softkey, [250](#)
- ## A
- A field softkey
 See DECT subsystem keys
- A softkey, [939](#)
- abort list/step sweep, [168](#)
- Access denied, [114](#), [125](#)
- Access softkey, [707](#)
- ACS softkey, [979](#)
- Activate Secure Display softkey, [162](#)
- Active softkey, [975](#)
- Actual BER softkey, [1091](#)
- Actual BLER field, [1084](#), [1092](#)
- Add Comment To Seq[n] Reg[nn] softkey, [121](#)
- Adjust Gain softkey, [433](#)
- Adjust Phase softkey, [47](#)
- AICH softkey, [1046](#)
- AICH Trigger Polarity Pos Neg softkey, [1018](#)
- ALC BW Normal Narrow, [57](#)
- ALC BW Normal Narrow softkey, [21](#)
- ALC BW softkey, [57](#)
- ALC level, [58](#)
- ALC Off On softkey, [60](#)
- All Down softkey, [950](#), [999](#)
- All softkey, [104](#), [120](#)
- All Timeslots softkey
 See DECT subsystem keys
 See EDGE subsystem keys
 See GSM subsystem keys
 See NADC subsystem keys
 See PDC subsystem keys
 See PHS subsystem keys
 See TETRA subsystem keys
- All Up softkey, [950](#), [999](#)
- Alt Amp Delta softkey, [61](#)
- Alt Ampl Off On softkey, [62](#)
- Alt power in field, [1060](#)
- AM softkeys
 AM Depth, [179](#)
 AM Depth Couple Off On, [180](#)
 AM Off On, [179](#)

Index

- AM softkeys (*continued*)
 - AM Off On softkey, 175
 - AM Path 1 2, 174
 - AM Stop Rate, 176
 - AM Sweep Rate, 177
 - AM Tone 2 Ampl Percent Of Peak, 176
 - AM Tone 2 Rate, 176
- AM_ADDR softkey, 462
- Ampl softkeys
 - Ampl, 48, 65
 - Ampl Offset, 67
 - Ampl Ref Off On, 66
 - Ampl Ref Set, 65
 - Ampl Start, 48, 66
 - Ampl Stop, 48, 67
- Amplitude hardkey, 65, 68
- amplitude modulation subsystem keys
 - AM Depth, 179
 - AM Depth Couple Off On, 180
 - AM Off On, 175, 179
 - AM Path 1 2, 174
 - AM Stop Rate, 176
 - AM Sweep Rate, 177
 - AM Tone 2 Ampl Percent Of Peak, 176
 - AM Tone 2 Rate, 176
 - Bus, 178
 - Dual-Sine, 177
 - Ext, 178
 - Ext Coupling DC AC, 175
 - Ext1, 178
 - Ext2, 178
 - Free Run softkey, 178
 - Incr Set, 174, 180
 - Internal, 178
 - Noise, 177
 - Ramp, 177
 - Sine, 177
 - Square, 177
 - Swept-Sine, 177
 - Triangle, 177
 - Trigger Key, 178
- AMR 12.2 kbps softkey, 947, 1053
- APCO 25 C4FM softkey
 - See* CDMA ARB subsystem keys
 - See* CDMA2000 ARB subsystem keys
- APCO 25 C4FM softkey (*continued*)
 - See* CDMA2000 BBG subsystem keys and fields
 - See* custom subsystem keys
 - See* DECT subsystem keys
 - See* Dmodulation subsystem keys
 - See* EDGE subsystem keys
 - See* GPS subsystem keys
 - See* GSM subsystem keys
 - See* NADC subsystem keys
 - See* PDC subsystem keys
 - See* PHS subsystem keys
 - See* TETRA subsystem keys
 - See* wideband CDMA ARB subsystem keys
 - See* wideband CDMA base band generator subsystem keys and fields
- APCO 25 w/C4FM softkey, 284, 285, 286
- APCO 25 w/C4QPSK softkey, 284, 285, 286
- APCO 25 w/CQPSK softkey, 565
- Apply Channel Setup softkey, 254, 258, 350, 359, 935, 987
- Arb AWGN Off On softkey, 215
- ARB Off On softkey, 320
- ARB Reference Ext Int softkey
 - See* AWGN subsystem keys
 - See* bluetooth subsystem keys
 - See* CDMA ARB subsystem keys
 - See* CDMA2000 ARB subsystem keys
 - See* Dmodulation subsystem keys
 - See* dual ARB subsystem keys
 - See* multitone subsystem keys
 - See* wideband CDMA ARB subsystem keys
- ARB Sample Clock softkey, 214, 229, 264, 284, 311, 329, 366, 476
- Atten Hold Off On softkey, 63
- automatic leveling control, 60
- Aux I/O Trigger Polarity Pos Neg softkey, 457
- Aux softkey
 - See* sense subsystem keys
- Auxiliary Software Options softkey, 82
- AWGN Off On softkey, 466
- AWGN subsystem keys
 - 1048576, 213
 - 131072, 213
 - 16384, 213
 - 2.100 MHz, 210

- AWGN subsystem keys (*continued*)
- 262144, 213
 - 32768, 213
 - 40.000 MHz, 207, 210
 - 524288, 213
 - 65536, 213
 - Arb AWGN Off On, 215
 - ARB Reference Ext Int, 214
 - ARB Sample Clock, 214
 - Bandwidth, 207
 - Clear Header, 208
 - I/Q Mod Filter Manual Auto, 210
 - I/Q Output Filter Manual Auto, 208
 - Marker 1, 211
 - Marker 1 Polarity Neg Pos, 212
 - Marker 2, 211
 - Marker 2 Polarity Neg Pos, 212
 - Marker 3, 211
 - Marker 3 Polarity Neg Pos, 212
 - Marker 4, 211
 - Marker 4 Polarity Neg Pos, 212
 - Modulator Atten Manual Auto, 209
 - Noise Seed Fixed Random, 215
 - None, 211
 - Reference Freq, 213
 - Save Setup To Header, 208
 - Through, 207, 210
 - Waveform Length, 213
- B**
- B softkey, 911, 917, 939
 - B1 softkey, 909, 914
 - B2 softkey, 910, 915
 - Bandwidth softkey, 207, 461
 - Base Delay Tp-a softkey, 1042
 - BBG Chip Clock Ext Int softkey
 - See* wideband CDMA base band generator subsystem keys and fields
 - BBG Data Clock Ext Int softkey
 - See* custom subsystem keys
 - See* DECT subsystem keys
 - See* GSM subsystem keys
 - See* NADC subsystem keys
 - See* PHS subsystem keys
 - See* TETRA subsystem keys
 - BBG Data Clock field, 478
 - BBG Ref Ext Int softkey
 - See* custom subsystem keys
 - See* DECT subsystem keys
 - See* EDGE subsystem keys
 - See* GSM subsystem keys
 - See* NADC subsystem keys
 - See* PDC subsystem keys
 - See* PHS subsystem keys
 - See* TETRA subsystem keys
 - BBG1 softkey, 23, 35
 - BD_ADDR softkey, 462
 - Begin Data Format Pattern Framed softkey
 - See* DECT subsystem keys
 - See* EDGE subsystem keys
 - See* GSM subsystem keys
 - See* NADC subsystem keys
 - See* PDC subsystem keys
 - See* PHS subsystem keys
 - See* TETRA subsystem keys
 - Begin Frame softkey
 - See* DECT subsystem keys
 - See* EDGE subsystem keys
 - See* GSM subsystem keys
 - See* NADC subsystem keys
 - See* PDC subsystem keys
 - See* PHS subsystem keys
 - See* TETRA subsystem keys
 - Begin Timeslot # softkey
 - See* DECT subsystem keys
 - See* EDGE subsystem keys
 - See* GSM subsystem keys
 - See* NADC subsystem keys
 - See* PDC subsystem keys
 - See* PHS subsystem keys
 - See* TETRA subsystem keys
 - BER Display % Exp softkey, 403
 - BER field, 1084, 1092
 - BER Mode Off On softkey
 - See* sense subsystem keys
 - BER softkey, 1086, 1094
 - BERT Off On softkey, 454
 - BERT Resync Off On softkey, 454
 - Beta field, 992, 1002
 - Binary softkey, 94, 122

Index

- binary values, 16
- Bit Count softkey
 - See sense subsystem keys
- Bit Delay Off On softkey, 456
- Bit Rate field
 - See CDMA2000 BBG subsystem keys and fields
- Bit softkey, 94
- BLER field, 1085, 1093
- BLER softkey, 1086, 1094
- Blk Set Size field, 981
- Blk Size field, 980, 1080, 1089
- Block Count softkey
 - See calculate subsystem keys
 - See sense subsystem keys
- Block Erasure softkey
 - See sense subsystem keys
- Blocking softkey, 979
- Bluetooth Off On softkey, 476
- Bluetooth softkey, 565
- bluetooth subsystem keys
 - 2.100 MHz, 471
 - 40.000 MHz, 464, 471
 - 8 Bit Pattern, 463
 - AM_ADDR, 462
 - ARB Reference Ext Int, 475
 - ARB Sample Clock, 476
 - AWGN Off On, 466
 - BD_ADDR, 462
 - Bluetooth Off On, 476
 - Burst Off On, 462
 - Burst Power Ramp, 476
 - C/N[1 MHz], 466
 - Clear Header, 465
 - Clock/Gate Delay, 463
 - Continuous PN9, 463
 - Drift Deviation, 467
 - Freq Drift Type Linear Sine, 468
 - Freq Offset, 469
 - I/Q Mod Filter Manual Auto, 472
 - I/Q Output Filter Manual Auto, 464
 - Impairments Off On, 465
 - Marker 1, 472, 473
 - Marker 1 Polarity Neg Pos, 473
 - Marker 2, 472, 473
 - Marker 2 Polarity Neg Pos, 473
 - bluetooth subsystem keys (*continued*)
 - Marker 3, 472, 473
 - Marker 3 Polarity Neg Pos, 474
 - Marker 4, 472, 473
 - Marker 4 Polarity Neg Pos, 474
 - Mod Index, 469
 - Modulator Atten Manual Auto, 470, 471
 - Noise Seed, 467
 - None, 472, 473
 - Packet (DH1), 474
 - Reference Freq, 475
 - Save Setup To Header, 465
 - Symbol Timing Err, 470
 - Through, 464, 471
 - Truncated PN9, 463
- boolean SCPI parameters, 10
- boolean, numeric response data, 11
- BPSK softkey
 - See custom subsystem keys
 - See DECT subsystem keys
 - See Dmodulation subsystem keys
 - See EDGE subsystem keys
 - See GSM subsystem keys
 - See NADC subsystem keys
 - See PDC subsystem keys
 - See PHS subsystem keys
 - See TETRA subsystem keys
- Brightness softkey, 86
- Build New Waveform Sequence softkey, 312
- Burst Envelope Int Ext Off softkey, 20
- Burst gate in field, 1060
- Burst Gate In Polarity Neg Pos softkey, 131, 132
- Burst Off On softkey, 462
- Burst Power Ramp softkey, 476
- Bus softkey
 - list trigger source, 53
 - See amplitude modulation subsystem keys
 - See CDMA ARB subsystem keys
 - See CDMA2000 ARB subsystem keys
 - See DECT subsystem keys
 - See Dmodulation subsystem keys
 - See dual ARB subsystem keys
 - See EDGE subsystem keys
 - See frequency modulation subsystem keys
 - See GSM subsystem keys

Bus softkey (continued)

- See low frequency output subsystem keys
- See NADC subsystem keys
- See PDC subsystem keys
- See phase modulation subsystem keys
- See PHS subsystem keys
- See sense subsystem keys
- See TETRA subsystem keys
- See trigger subsystem keys
- See wideband CDMA ARB subsystem keys

C

- C Power field, 988, 1019
- C/N softkey, 504, 516
- C/N value field, 935, 988, 1019
- C/N[1 MHz] softkey, 466
- C4FM softkey, 873
- calculate subsystem keys
 - BER Display % Exp, 403
 - Block Count, 421
 - Class II RBER, 400, 401
 - Class Ib RBER, 400, 401
 - Cycle End, 401
 - Error Rate, 394, 395, 396, 397, 398, 399
 - Exceeds Any Limit, 401
 - Fail Hold, 401
 - Frame Erasure, 400, 401
 - No Limits, 395, 398, 399, 401
 - Pass/Fail Limits, 402
 - Pass/Fail Off On, 402
 - Update Display Cycle End Cont, 403
- calibration subsystem keys
 - DCFM/DCΦM Cal, 72
 - Execute Cal, 72, 73
 - I/Q Calibration, 72
 - Revert to Default Cal Settings, 73
 - Start Frequency, 74
 - Stop Frequency, 74
- Carrier Bandwidth, 308
- Carrier Phases Fixed Random softkey, 286
- Carrier to Noise Ratio, 309
- CC softkey, 834, 838, 840
- CDL softkey, 799
- CDMA ARB subsystem keys
 - 2.100 MHz, 224
 - CDMA ARB subsystem keys (*continued*)
 - 3 Carriers, 231
 - 32 Ch Fwd, 229, 232
 - 4 Carriers, 231
 - 40.000 MHz, 219, 224
 - 64 Ch Fwd, 229, 232
 - 9 Ch Fwd, 229, 232
 - APCO 25 C4FM, 220
 - ARB Reference Ext Int, 228
 - ARB Sample Clock, 229
 - Bus, 236
 - CDMA Off On, 241
 - Chip Rate, 218
 - Clear Header, 222
 - Clip |I+jQ| To, 218
 - Clip |I| To, 216
 - Clip |Q| To, 217
 - Clip At PRE POST FIR Filter, 216
 - Clipping Type |I+jQ| |I|,|Q|, 217
 - Continuous, 234, 266
 - CPICH, 352
 - Custom CDMA Multicarrier, 231
 - Custom CDMA State, 229, 232
 - Equal Powers, 230
 - Ext, 236
 - Ext Delay Off On, 238
 - Ext Delay Time, 238
 - Ext Polarity Neg Pos, 239
 - Filter Alpha, 221
 - Filter BbT, 221
 - Free Run, 235
 - Gate Active Low High, 236
 - Gated, 234, 266
 - Gaussian, 220
 - I/Q Mapping Normal Invert, 223
 - I/Q Mod Filter Manual Auto, 224
 - I/Q Output Filter Manual Auto, 219
 - Immediate, 228
 - IS-2000 SR3 DS, 220
 - IS-95, 220
 - IS-95 Mod, 220
 - IS-95 Mod w/EQ, 220
 - IS-95 w/EQ, 220
 - IS-97 Levels, 230
 - Marker 1, 225

Index

CDMA ARB subsystem keys (*continued*)

- Marker 1 Polarity Neg Pos, [226](#)
- Marker 2, [225](#)
- Marker 2 Polarity Neg Pos, [226](#)
- Marker 3, [225](#)
- Marker 3 Polarity Neg Pos, [226](#)
- Marker 4, [225](#)
- Marker 4 Polarity Neg Pos, [226](#)
- Modulator Atten Manual Auto, [223](#)
- Multicarrier Off On, [229](#)
- None, [225](#)
- Nyquist, [220](#)
- Off, [228](#)
- On, [228](#)
- Optimize FIR For EVM ACP, [222](#)
- Oversample Ratio, [227](#)
- Paging, [230](#)
- Patt Trig In 1, [239](#)
- Patt Trig In 2, [239](#)
- Pilot, [229](#), [230](#), [232](#)
- Rectangle, [220](#)
- Reference Freq, [227](#)
- Reset & Run, [235](#)
- Reverse, [229](#)
- Root Nyquist, [220](#)
- Save Setup To Header, [222](#)
- Scale to 0dB, [230](#)
- Single, [234](#), [266](#)
- Store Custom CDMA State, [233](#)
- Store Custom Multicarrier, [232](#)
- Sync, [230](#)
- Through, [219](#), [224](#)
- Traffic, [230](#)
- Trigger & Run, [235](#)
- Trigger Key, [236](#)
- UN3/4 GSM Gaussian, [220](#)
- User FIR, [220](#)
- Waveform Length, [240](#)
- WCDMA, [220](#)

CDMA Freq field, [498](#)

CDMA Off On softkey, [241](#)

CDMA softkey, [95](#)

CDMA2000 ARB subsystem keys

- 1.23 MHz, [266](#)
- 1.25 MHz, [266](#)

CDMA2000 ARB subsystem keys (*continued*)

- 2 SR3 Carriers, [251](#)
- 2.100 MHz, [249](#)
- 3 Carriers, [251](#)
- 4 Carriers, [251](#)
- 40.000 MHz, [244](#), [249](#)
- 5 Channel, [257](#)
- 8 Channel, [257](#)
- 9 Channel, [250](#)
- APCO 25 C4FM, [245](#)
- Apply Channel Setup, [254](#), [258](#)
- ARB Reference Ext Int, [263](#)
- ARB Sample Clock, [264](#)
- Bus, [269](#)
- CDMA2000 Off On, [273](#)
- Clear Header, [247](#)
- Clip $|I+jQ|$ To, [244](#)
- Clip $|I|$ To, [242](#)
- Clip $|Q|$ To, [243](#)
- Clip At PRE POST FIR Filter, [242](#)
- Clipping Type $|I+jQ|$ $|I|$, $|Q|$, [243](#)
- Config, [255](#), [259](#)
- Continuous, [266](#)
- Custom CDMA2000 Carrier, [250](#), [252](#)
- Custom CDMA2000 Multicarrier, [251](#)
- Custom CDMA2000 State, [257](#)
- Edit Channel Setup, [255](#), [259](#)
- Equal Powers, [256](#), [260](#)
- Ext, [269](#)
- Ext Delay Off On, [271](#)
- Ext Delay Time, [270](#)
- Ext Polarity Neg Pos, [271](#)
- Filter Alpha, [246](#)
- Filter BbT, [246](#)
- Free Run, [268](#)
- Gate Active Low High, [268](#)
- Gated, [266](#)
- Gaussian, [245](#)
- I/Q Mapping Normal Invert, [250](#)
- I/Q Mod Filter Manual Auto, [249](#)
- I/Q Output Filter Manual Auto, [244](#)
- Immediate, [264](#)
- Insert Row, [255](#), [259](#)
- IS-2000 SR3 DS, [245](#)
- IS-95, [245](#)

CDMA2000 ARB subsystem keys (*continued*)

IS-95 Mod, 245
IS-95 Mod w/EQ, 245
IS-95 w/EQ, 245
Link Forward Reverse, 250
Marker 1, 260, 261
Marker 1 Polarity Neg Pos, 261
Marker 2, 260, 261
Marker 2 Polarity Neg Pos, 262
Marker 3, 260, 261
Marker 3 Polarity Neg Pos, 262
Marker 4, 260, 261
Marker 4 Polarity Neg Pos, 262
Modulator Atten Manual Auto, 248
Multicarrier Off On, 250
None, 260, 261
Nyquist, 245
Off, 264
On, 264
Optimize FIR For EVM ACP, 247
Patt Trig In 1, 272
Patt Trig In 2, 272
Pilot, 250, 257
PN Offset, 255, 259
Radio Config, 256
Rate, 255, 259
Rectangle, 245
Reference Freq, 263
Reset & Run, 268
Root Nyquist, 245
Save Setup To Header, 247
Scale to 0dB, 256, 260
Single, 266
Spread Rate 1, 250, 257, 265
Spread Rate 3, 250, 257, 265
Spreading Type Direct Mcarrier, 250, 265
SR1 9 Channel, 252
SR1 Pilot, 252
SR3 Direct 9 Channel, 252
SR3 Direct Pilot, 252
SR3 Mcarrier 9 Channel, 252
SR3 MCarrier Pilot, 252
Store Custom CDMA State, 254, 258
Store Custom Multicarrier, 252
Through, 244, 249

CDMA2000 ARB subsystem keys (*continued*)

Trigger & Run, 268
Trigger Key, 269
UN3/4 GSM Gaussian, 245
User FIR, 245
Walsh Code, 255, 259
WCDMA, 245

CDMA2000 BBG subsystem keys and fields

APCO 25 C4FM, 479, 513
BBG Data Clock, 478
Bit Rate, 487, 491, 496, 510, 520, 522, 526, 531, 536, 540, 544
C/N, 504, 516
CDMA Freq, 498
CDMA2000 Off On, 547
Change, 508
Chip Rate, 478, 512
DAYLT, 498
EbNo, 483, 488, 494, 499, 505, 508, 518, 524, 526, 530, 534, 538, 542
EcNo, 492, 527, 532
Equal Powers, 507, 516
Even Second Delay, 479, 512
Ext, 482, 493, 521
Ext CDMA Freq, 499
External, 511
Falling, 546
Field 1, 489
Field 2, 489
Field 3, 490
Filter Alpha, 480, 514
Filter BbT, 481, 484, 514
FIX4, 482, 493, 517, 518, 521, 523, 524, 529, 534, 538, 541, 542
Frame Length, 519, 521, 525, 535, 539, 543
Frame Offset, 494, 519, 522, 525, 530, 536, 539, 543
FSYNCH Type, 503
Full, 528, 533
Gaussian, 479, 513
Half, 528, 533
Header, 485, 495
Internal, 511
Inverted, 516
IS-95, 479, 513

Index

CDMA2000 BBG subsystem keys and fields

(continued)

IS-95 MOD, 513
IS-95 Mod, 479
IS-95 MOD w/EQ, 513
IS-95 Mod w/EQ, 479
IS-95 w/EQ, 479, 513
Leap Seconds, 500
Link Forward Reverse, 477
Long Code Mask, 515
Long Code State, 482, 515
LTM OFF, 500
Message Type, 501
Network ID, 501
Noise Off On, 505, 517
Normal, 516
Nyquist, 479, 513
Optimize FIR For EVM ACP, 481, 515
P Rev, 502
P Rev Min, 500
Paging Indicator, 509
Permuted ESN, 484, 495
Phase Polarity, 508
PN Offset, 511
PN15, 482, 493, 517, 521, 523, 529, 534, 538, 541
PN9, 482, 493, 517, 521, 523, 529, 534, 538, 541
Power, 485, 490, 492, 496, 501, 506, 509, 519,
522, 525, 528, 531, 533, 536, 540, 543
PRAT, 502
QOF, 486, 496
Quarter, 528, 533
Radio Config, 487, 497, 520, 523, 531, 537, 540,
544
RadioConfig 1/2 Access, 477
RadioConfig 1/2 Traffic, 477
RadioConfig 3/4 Common Control, 477
RadioConfig 3/4 Enhanced Access, 477
RadioConfig 3/4 Traffic, 477
Ramp, 485
Ramp Time, 486
Rectangle, 479, 513
Reserved, 502
Rising, 546
Root Nyquist, 479, 513
Scale to 0dB, 507, 516

CDMA2000 BBG subsystem keys and fields

(continued)

Spread Rate, 510
State, 491, 493, 498, 504, 507, 510, 520, 523, 527,
529, 532, 534, 537, 541, 545
State field, 488
System ID, 503
Time, 503
Trigger Advance, 546
Turbo Coding, 497, 544
UN3/4 GSM Gaussian, 479, 513
User File, 482, 488, 493, 517, 521, 523, 529, 534,
538, 541
User FIR, 479, 513
Walsh, 491, 497, 504, 507, 510, 526, 528, 532,
533, 537, 541, 545
Walsh field, 487
CDMA2000 Off On softkey, 273, 547
CDPD softkey, 284, 285, 286, 565
CDVCC softkey, 800, 803
CFN #0 Frame Pulse (RPS10) softkey
See wideband CDMA base band generator
subsystem keys and fields
Chan Code field, 945, 954
Chan Code softkey, 944
Change field, 508
Channel Code field, 1003, 1047
See wideband CDMA base band generator
subsystem keys and fields
Channel Number softkey, 39
Channel softkey, 351, 359
Channel State field, 1002, 1009
Channel State Off On softkey, 1022
See wideband CDMA base band generator
subsystem keys and fields
ChCode Ctl field, 1035
ChCode Dat field, 1036
Chip Clock (RPS1) softkey
See wideband CDMA base band generator
subsystem keys and fields
Chip Rate field, 478, 512, 943, 992
Chip Rate softkey, 218, 335
Class Ib Bit Error softkey, 448, 449
Class II Bit Error softkey, 449
Class II RBER softkey, 400, 401

- Class Ib RBER softkey, [400](#), [401](#)
- Clear Header softkey, [208](#), [222](#), [247](#), [277](#), [298](#), [321](#), [338](#), [465](#)
- Clip |I+jQ| To softkey, [218](#), [244](#)
- Clip |I| To softkey, [216](#), [242](#), [333](#), [345](#)
- Clip |Q| To softkey, [217](#), [243](#), [334](#), [345](#)
- Clip At PRE POST FIR Filter, [216](#)
- Clip At PRE POST FIR Filter softkey, [242](#), [333](#)
- Clip Type |I+jQ| To softkey, [335](#), [346](#)
- Clipping Type |I+jQ| |I|,|Q| softkey, [217](#), [243](#), [297](#), [334](#), [346](#)
- Clock Delay Off On softkey, [415](#)
- Clock Polarity Neg Pos softkey, [416](#)
- Clock Time Delay softkey, [415](#)
- Clock/Gate Delay softkey, [463](#)
- command tree, SCPI, [6](#), [7](#)
- Common Mode I/Q Offset softkey, [24](#)
- communication subsystem keys
 - Default Gateway, [75](#)
 - GPIB Address, [75](#)
 - Hostname, [76](#)
 - IP Address, [76](#)
 - Meter Address, [77](#)
 - Meter Channel A B, [77](#)
 - Meter Timeout, [78](#)
 - Power Meter, [78](#)
 - Reset RS-232, [79](#)
 - RS-232 Baud Rate, [79](#)
 - RS-232 ECHO Off On, [79](#)
 - RS-232 Timeout, [80](#)
 - Subnet Mask, [76](#)
- Comp Mode Start Trigger Polarity Neg Pos softkey, [1078](#)
- Comp Mode Start Trigger Polarity Pos Neg softkey, [977](#), [978](#)
- Comp Mode Stop Trigger Polarity Neg Pos softkey, [1078](#)
- Comp Mode Stop Trigger Polarity Pos Neg softkey, [978](#)
- Compressed Frame (RPS8) softkey
 - See* wideband CDMA base band generator subsystem keys and fields
- Compressed Mode Off On softkey, [1077](#)
- Compressed Mode Start Trigger softkey, [953](#), [977](#), [1077](#)
- Compressed Mode Stop Trigger softkey, [977](#), [1078](#)
- Config softkey, [255](#), [259](#)
- Configure Cal Array softkey, [18](#)
- Continuous PN9 softkey, [463](#)
- Continuous softkey
 - See* CDMA ARB subsystem keys
 - See* CDMA2000 ARB subsystem keys
 - See* custom subsystem keys
 - See* DECT subsystem keys
 - See* Dmodulation subsystem keys
 - See* dual ARB subsystem keys
 - See* EDGE subsystem keys
 - See* GSM subsystem keys
 - See* NADC subsystem keys
 - See* PDC subsystem keys
 - See* PHS subsystem keys
 - See* TETRA subsystem keys
 - See* wideband CDMA ARB subsystem keys
- Copy File softkey, [105](#), [113](#), [124](#)
- correction subsystem keys
 - Configure Cal Array, [18](#)
 - Flatness Off On, [19](#)
 - Load From Selected File, [18](#)
 - Preset List, [19](#)
 - Store To File, [19](#)
- CPICH softkey, [352](#)
- CRC Size field, [982](#), [1082](#), [1090](#)
- creating a waveform, multitone, [321](#)
- CS-1 softkey, [642](#), [643](#), [699](#)
- CS-4 softkey, [642](#), [644](#), [703](#)
- CSID softkey, [863](#), [884](#)
- Ctrl Beta field, [1023](#)
- Ctrl Pwr field, [1024](#)
- Custom CDMA Multicarrier softkey, [231](#)
- Custom CDMA State softkey, [229](#), [232](#)
- Custom CDMA2000 Carrier softkey, [250](#), [252](#)
- Custom CDMA2000 Multicarrier softkey, [251](#)
- Custom CDMA2000 State softkey, [257](#)
- Custom Digital Mod State softkey, [285](#), [286](#)
- Custom Off On softkey, [570](#)
- Custom softkey, [588](#), [600](#), [658](#), [707](#), [867](#)
- custom subsystem keys
 - 128QAM, [563](#)
 - 16 1's & 16 0's, [556](#)
 - 16PSK, [563](#)

Index

custom subsystem keys (*continued*)

- 16QAM, [563](#)
- 256QAM, [563](#)
- 2-Lvl FSK, [563](#)
- 32 1's & 32 0's, [556](#)
- 32QAM, [563](#)
- 4 1's & 4 0's, [556](#)
- 4-Lvl FSK, [563](#)
- 4QAM, [563](#)
- 64 1's & 64 0's, [556](#)
- 64QAM, [563](#)
- 8 1's & 8 0's, [556](#)
- 8PSK, [563](#)
- APCO 25 C4FM, [560](#)
- APCO 25 w/CQPSK, [565](#)
- BBG Data Clock Ext Int, [548](#)
- BBG Ref Ext Int, [559](#)
- Bluetooth, [565](#)
- BPSK, [563](#)
- Bus, [567](#)
- CDPD, [565](#)
- Continuous, [566](#)
- Custom Off On, [570](#)
- D8PSK, [563](#)
- Diff Data Encode Off On, [558](#)
- Ext, [556](#), [567](#)
- Ext BBG Ref Freq, [559](#)
- Ext Data Clock Normal Symbol, [558](#)
- Ext Delay Bits, [568](#)
- Ext Delay Off On, [569](#)
- Ext Polarity Neg Pos, [569](#)
- Fall Delay, [551](#), [552](#)
- Fall Time, [551](#), [552](#)
- Filter Alpha, [548](#)
- Filter BbT, [549](#)
- FIX4, [556](#), [557](#)
- Free Run, [566](#)
- Freq Dev, [561](#)
- Gate Active Low High, [567](#)
- Gated, [566](#)
- Gaussian, [560](#)
- Gray Coded QPSK, [563](#)
- I/Q Scaling, [561](#)
- IS-95, [560](#)
- IS-95 Mod, [560](#)

custom subsystem keys (*continued*)

- IS-95 Mod w/EQ, [560](#)
- IS-95 OQPSK, [563](#)
- IS-95 QPSK, [563](#)
- IS-95 w/EQ, [560](#)
- MSK, [563](#)
- None, [565](#)
- Nyquist, [560](#)
- Optimize FIR For EVM ACP, [556](#)
- OQPSK, [563](#)
- $\pi/4$ DQPSK, [563](#)
- Patt Trig In 1, [570](#)
- Patt Trig In 2, [570](#)
- Phase Dev, [562](#)
- Phase Polarity Normal Invert, [563](#)
- PN11, [556](#)
- PN15, [556](#)
- PN20, [556](#)
- PN23, [556](#)
- PN9, [556](#)
- PRAM Files, [557](#)
- QPSK, [563](#)
- Rectangle, [560](#)
- Reset & Run, [566](#)
- Rise Delay, [553](#), [554](#)
- Rise Time, [554](#), [555](#)
- Root Nyquist, [560](#)
- Single, [566](#)
- Symbol Rate, [564](#)
- Trigger & Run, [566](#)
- Trigger Key, [567](#)
- UN3/4 GSM Gaussian, [560](#)
- User File, [556](#)
- User FIR, [560](#)
- User FSK, [562](#), [563](#)
- User I/Q, [562](#), [563](#)
- Custom TS softkey, [646](#), [657](#), [698](#), [705](#)
- Custom WCDMA State softkey, [357](#)
- Cycle Count softkey, [457](#)
- Cycle End softkey, [401](#)

D

- D8PSK softkey
 - See* custom subsystem keys
 - See* DECT subsystem keys

- D8PSK softkey (continued)*
See Dmodulation subsystem keys
See EDGE subsystem keys
See GSM subsystem keys
See NADC subsystem keys
See PDC subsystem keys
See PHS subsystem keys
See TETRA subsystem keys
- Data Beta field, 1027
- data block, 113
- Data Clock Out Neg Pos softkey, 134
- Data Clock Polarity Neg Pos softkey, 131, 133, 135
- Data field, 1004, 1094
- Data Mode Raw Enc TLM softkey, 670, 671
- Data Out Polarity Neg Pos softkey, 134, 136
- Data Polarity Neg Pos softkey, 132, 133, 416
- Data Pwr field, 1029
- Data Rate field, 955
- data subsystem keys
Error Out, 409
PN9, 409
Reference Out, 409
- DATA/CLK/SYNC Rear Outputs Off On softkey, 136
- DAYLT field, 498
- dBm softkey, 172
- dBuV softkey, 172
- dBuVemf softkey, 172
- DC softkey, 191
- DCFM/DCΦM Cal softkey, 72
- DCH1 softkey, 990
- DCH2 softkey, 990
- DCH3 softkey, 990
- DCH4 softkey, 990
- DCH5 softkey, 990
- DCH6 softkey, 990
- decimal values, 16
- Dect Off On softkey, 622
- DECT softkey, 284, 285, 286
- DECT subsystem keys
128QAM, 587
16 1's & 16 0's, 580, 588, 591, 594, 596, 599, 600, 604, 607, 610, 612
16-Lvl FSK, 580
16PSK, 587
- DECT subsystem keys (*continued*)
16QAM, 587
256QAM, 587
2-Lvl FSK, 587
32 1's & 32 0's, 580, 588, 591, 594, 596, 599, 600, 604, 607, 610, 612
32QAM, 587
4 1's & 4 0's, 580, 588, 591, 594, 596, 599, 600, 604, 607, 610, 612
4-Lvl FSK, 587
4QAM, 587
64 1's & 64 0's, 580, 588, 591, 594, 596, 599, 600, 604, 607, 610, 612
64QAM, 587
8 1's & 8 0's, 580, 588, 591, 594, 596, 599, 600, 604, 607, 610, 612
8-Lvl FSK, 580
8PSK, 587
A field, 589, 592, 595, 597, 601, 602, 603, 606, 608, 611
All Timeslots, 614
APCO 25 C4FM, 584
BBG Data Clock Ext Int, 571
BBG Ref Ext Int, 583
Begin Frame, 614
Begin Timeslot #, 614, 615
BPSK, 587
Bus, 613, 619
Continuous, 617
Custom, 588, 600
D8PSK, 587
Data Format Pattern Framed, 579
Dect Off On, 622
DM0, 588, 591, 594, 596, 599, 600, 604, 607, 610, 612
DM1, 588, 591, 594, 596, 599, 600, 604, 607, 610, 612
Dummy Bearer 1, 600
Dummy Bearer 2, 600
Ext, 580, 588, 591, 594, 596, 599, 600, 604, 607, 610, 612, 613, 619
Ext Data Clock Normal Symbol, 582
Ext Delay Bits, 620
Ext Delay Off On, 622
Ext Polarity Neg Pos, 620

Index

DECT subsystem keys (*continued*)

FACC, 588, 591, 594, 596, 599, 600, 604, 607, 610, 612
Fall Delay, 574, 575
Fall Time, 575, 576
FDEV1_FS, 588, 591, 594, 596, 599, 600, 604, 607, 610, 612
FDEV1_HS, 588, 591, 594, 596, 599, 600, 604, 607, 610, 612
FDEV2_FS, 588, 591, 594, 596, 599, 600, 604, 607, 610, 612
Filter Alpha, 571
Filter BbT, 572
FIX4, 580, 581, 588, 589, 591, 594, 596, 597, 599, 600, 601, 604, 605, 607, 608, 610, 612
Free Run, 618
Freq Dev, 585
Gate Active Low High, 618
Gated, 617
Gaussian, 584
Gray Coded QPSK, 587
I/Q Scaling, 585
IS-95, 584
IS-95 Mod, 584
IS-95 Mod w/EQ, 584
IS-95 OQPSK, 587
IS-95 QPSK, 587
IS-95 w/EQ, 584
Low Capacity, 588, 600
Low Capacity with Z field, 588, 600
MSK, 587
Nyquist, 584
Optimize FIR For EVM ACP, 580
OQPSK, 587
P, 590, 593, 595, 598, 602, 603, 604, 606, 609, 611
 $\pi/4$ DQPSK, 587
Patt Trig In 1, 621
Patt Trig In 2, 621
Phase Dev, 586
Phase Polarity Normal Invert, 587
PN11, 580, 588, 591, 594, 596, 599, 600, 607, 610, 612
PN15, 580, 588, 591, 594, 596, 599, 600, 604, 607, 610, 612

DECT subsystem keys (*continued*)

PN20, 580, 588, 591, 594, 596, 599, 600, 607, 610, 612
PN23, 580, 588, 591, 594, 596, 599, 600, 607, 610, 612
PN9, 580, 588, 591, 594, 596, 599, 600, 604, 607, 610, 612
PN9 Mode Normal Quick, 574
QPSK, 587
Recall Secondary Frame State, 613
Rectangle, 584
Reset & Run, 618
Restore DECT Factory Default, 582
Rise Delay, 576, 577
Rise Time, 578
Root Nyquist, 584
S, 590, 593, 596, 598, 602, 603, 604, 607, 609, 611
Save Secondary Frame State, 613
Secondary Frame Off On, 614
Sine, 555, 579
Single, 617
Symbol Rate, 616
Sync Out Offset, 615
Timeslot Ampl Main Delta, 592, 605
Timeslot Off On, 592, 606
Traffic Bearer, 588, 600
Traffic Bearer with Z field, 588, 600
Trigger & Run, 618
Trigger Key, 613, 619
UN3/4 GSM Gaussian, 584
User File, 555, 579, 580, 588, 591, 594, 596, 599, 600, 604, 607, 610, 612
User FIR, 584
User FSK, 586, 587
User I/Q, 586, 587
dect subsystem keys
PRAM File, 581
Default Gateway softkey, 75
Delay Bits softkey, 456
Delete All NVWFM Files softkey, 126
Delete All WFM Files softkey, 126
Delete All WFM1 Files softkey, 127
Delete File softkey, 127
Delete softkeys
Delete All ARB CDMA Files, 116

- Delete softkeys (*continued*)
 - Delete All ARB DMOD Files, [116](#)
 - Delete All ARB DWCDMA Files, [116](#)
 - Delete All ARB FCDMA Files, [117](#)
 - Delete All ARB MCDMA Files, [118](#)
 - Delete All ARB MDMOD Files, [118](#)
 - Delete All ARB MDWCDMA Files, [118](#)
 - Delete All ARB MFCDMA Files, [118](#)
 - Delete All ARB MTONE Files, [118](#)
 - Delete All ARB RCDMA Files, [119](#)
 - Delete All ARB UWCDMA Files, [120](#)
 - Delete All Binary Files, [116](#)
 - Delete All Bit Files, [116](#)
 - Delete All Files, [115](#)
 - Delete All FIR Files, [117](#)
 - Delete All FSK Files, [117](#)
 - Delete All I/Q Files, [117](#)
 - Delete All List Files, [117](#)
 - Delete All SEQ Files, [119](#)
 - Delete All SHAPE Files, [119](#)
 - Delete All State Files, [119](#)
 - Delete All UFLT Files, [119](#)
 - Delete File, [120](#)
- Diagnostic Info softkey, [81](#), [82](#), [84](#), [90](#)
- diagnostic subsystem keys
 - Auxiliary Software Options, [82](#)
 - Diagnostic Info, [81](#), [82](#), [84](#)
 - Installed Board Info, [81](#)
 - license value, [84](#)
 - Options Info, [83](#)
 - Waveform Licenses, [83](#)
- Diff Data Encode Off On softkey, [558](#), [688](#)
- Diff. Mode I Offset softkey, [24](#)
- Diff. Mode Q Offset softkey, [25](#)
- Digital Modulation Off On softkey, [296](#)
- digital modulation subsystem keys
 - 2.100 MHz, [31](#)
 - 40.000 MHz, [31](#)
 - ALC BW Normal Narrow, [21](#)
 - BBG1, [23](#), [35](#)
 - Burst Envelope Int Ext Off, [20](#)
 - Common Mode I/Q Offset, [24](#)
 - Diff. Mode I Offset, [24](#)
 - Diff. Mode Q Offset, [25](#)
 - Ext 50 Ohm, [23](#), [35](#)
 - digital modulation subsystem keys (*continued*)
 - Ext 600 Ohm, [23](#), [35](#)
 - Ext In 600 Ohm I Offset, [26](#)
 - Ext In 600 Ohm Q Offset, [27](#)
 - High Crest Mode Off On, [21](#)
 - I Offset, [28](#)
 - I/Q Adjustments Off On, [31](#)
 - I/Q Gain Balance Source 1, [27](#)
 - I/Q Mod Filter Manual Auto, [32](#)
 - I/Q Off On, [36](#)
 - I/Q Out Gain Balance, [25](#)
 - I/Q Output Atten, [26](#)
 - I/Q Timing Skew, [29](#)
 - I/Q Timing Skew Path softkey, [30](#)
 - Int I/Q Skew Corrections RF BB Off, [34](#)
 - Int Phase Polarity Normal Invert, [23](#), [33](#)
 - Modulator Atten Manual Auto, [32](#), [33](#)
 - Off, [23](#), [35](#)
 - Q Offset, [28](#)
 - Quadrature Skew, [29](#)
 - Sum, [23](#)
 - Summing Ratio (SRC1/SRC2) x.xx dB, [35](#)
 - Through, [31](#)
- digital signal interface module
 - N5102A, [376](#)
- digital subsystem
 - clock cps, [376](#)
 - clock phase, [376](#)
 - clock polarity, [377](#)
 - clock rate, [378](#)
 - data alignment, [380](#)
 - data border, [380](#)
 - direction, [381](#)
 - frame, [383](#)
 - igain, [381](#)
 - inagate, [382](#)
 - IQ polarity, [384](#)
 - iqswap, [383](#)
 - logic type, [389](#)
 - loopback, [389](#)
 - N5102A, [376](#)
 - nformat, [383](#)
 - pconfig, [390](#)
 - pthrough, [391](#)
 - qgain, [384](#)

Index

- digital subsystem (*continued*)
 - qnegate, 385
 - qoffset, 386
 - reference frequency, 378
 - rotation, 386
 - scaling, 387
 - size, 387
 - skew, 379
 - source, 379
 - state, 391
 - Stype, 388
 - type, 388
- digital subsystem
 - inegate, 382
- discrete response data, 11
- discrete SCPI parameters, 9
- display
 - secure mode, 162
- display contrast hardkeys, 87
- display subsystem keys
 - Brightness, 86
 - display contrast, 87
 - Inverse Video Off On, 87
 - Update in Remote Off On, 88
- DL Reference 1.1 softkey, 1076
 - wideband CDMA base band generator subsystem softkeys
 - DL Reference 1.1, 976
- DL Reference 1.2 softkey, 1076
 - wideband CDMA base band generator subsystem softkeys
 - DL Reference 1.2, 976
- DL Reference 2.1 softkey, 1076
 - wideband CDMA base band generator subsystem softkeys
 - DL Reference 2.1, 976
- DL Reference 2.2 softkey, 1076
 - wideband CDMA base band generator subsystem softkeys
 - DL Reference 2.2, 976
- DM0 softkey
 - See DECT subsystem keys
- DM1 softkey
 - See DECT subsystem keys
- DMOD softkey, 95
- Dmodulation subsystem keys
 - # of Carriers, 285, 287
 - 128QAM, 281
 - 16PSK, 281
 - 16QAM, 281
 - 2.100 MHz, 279
 - 256QAM, 281
 - 2-Lvl FSK, 281
 - 32QAM, 281
 - 40.000 MHz, 274, 279
 - 4-Lvl FSK, 281
 - 4QAM, 281
 - 64QAM, 281
 - 8PSK, 281
 - APCO 25 C4FM, 275
 - APCO 25 w/C4FM, 284, 285, 286
 - APCO 25 w/C4QPSK, 284, 285, 286
 - ARB Reference Ext Int, 283
 - ARB Sample Clock, 284
 - BPSK, 281
 - Bus, 292
 - Carrier Phases Fixed Random, 286
 - CDPD, 284, 285, 286
 - Clear Header, 277
 - Continuous, 289
 - Custom Digital Mod State, 285, 286
 - D8PSK, 281
 - DECT, 284, 285, 286
 - Digital Modulation Off On, 296
 - EDGE, 284, 285, 286
 - Ext, 292
 - Ext Delay Off On, 294
 - Ext Delay Time, 293
 - Ext Polarity Neg Pos, 294
 - Filter Alpha, 276
 - Filter BbT, 276
 - Free Run, 291
 - Freq Dev, 280
 - Freq Spacing, 285
 - Gate Active Low High, 291
 - Gated, 289
 - Gaussian, 275
 - Gray Coded QPSK, 281
 - GSM, 284, 285, 286
 - I/Q Mod Filter Manual Auto, 279

Dmodulation subsystem keys (*continued*)

I/Q Output Filter Manual Auto, [274](#)
 Immediate, [283](#)
 Initialize Table, [286](#)
 Insert Row, [252](#), [286](#)
 IS-2000 SR3 DS, [275](#)
 IS-95, [275](#)
 IS-95 Mod, [275](#)
 IS-95 Mod w/EQ, [275](#)
 IS-95 OQPSK, [281](#)
 IS-95 QPSK, [281](#)
 IS-95 w/EQ, [275](#)
 Load/Store, [286](#)
 Marker 1, [280](#)
 Marker 1 Polarity Neg Pos, [281](#)
 Marker 2, [280](#)
 Marker 2 Polarity Neg Pos, [282](#)
 Marker 3, [280](#)
 Marker 3 Polarity Neg Pos, [282](#)
 Marker 4, [280](#)
 Marker 4 Polarity Neg Pos, [282](#)
 Modulator Atten Manual Auto, [278](#)
 MSK, [281](#)
 Multicarrier Off On, [284](#)
 NADC, [284](#), [285](#), [286](#)
 None, [280](#)
 Nyquist, [275](#)
 Off, [283](#)
 On, [283](#)
 Optimize FIR For EVM ACP, [277](#)
 OQPSK, [281](#)
 $\pi/4$ DQPSK, [281](#)
 Patt Trig In 1, [295](#)
 Patt Trig In 2, [295](#)
 PDC, [284](#), [285](#), [286](#)
 PHS, [284](#), [285](#), [286](#)
 PWT, [284](#), [285](#), [286](#)
 QPSK, [281](#)
 Rectangle, [275](#)
 Reference Freq, [213](#), [282](#)
 Reset & Run, [291](#)
 Root Nyquist, [275](#)
 Save Setup To Header, [277](#)
 Select File, [252](#), [284](#)
 Single, [289](#)

Dmodulation subsystem keys (*continued*)

Store Custom Dig Mod State, [288](#)
 Symbol Rate, [288](#)
 TETRA, [284](#), [285](#), [286](#)
 Through, [274](#), [279](#)
 Trigger & Run, [291](#)
 Trigger Key, [292](#)
 UN3/4 GSM Gaussian, [275](#)
 User FIR, [275](#)
 WCDMA, [275](#)
 Dn Custom Cont softkey, [924](#)
 Dn Normal Cont softkey, [924](#)
 Dn Normal Disc softkey, [924](#)
 Dn Sync Cont softkey, [924](#)
 Dn Sync Disc softkey, [924](#)
 Do Power Search softkey, [58](#), [59](#), [60](#)
 Doppler Shift softkey, [671](#)
 Down Custom softkey, [805](#), [841](#)
 Down TCH All softkey, [805](#), [841](#)
 Down TCH softkey, [805](#), [841](#)
 Down/Up softkey, [950](#), [999](#)
 Downlink MCS-1 softkey, [642](#), [644](#), [699](#)
 Downlink MCS-5 softkey, [648](#)
 Downlink MCS-9 softkey, [648](#)
 downloading files, [114](#), [125](#)
 DPCCH + 1 DPDCH softkey, [357](#)
 DPCCH + 2 DPDCH softkey, [357](#)
 DPCCH + 3 DPCCH softkey, [357](#)
 DPCCH + 4 DPDCH softkey, [357](#)
 DPCCH + 5 DPDCH softkey, [357](#)
 DPCCH Pilot data-clk (DRPS23) softkey, [964](#), [966](#),
 [967](#), [968](#), [969](#)
 DPCCH Power field, [996](#)
 DPCCH Raw Data (RPS4) softkey
 See wideband CDMA base band generator
 subsystem keys and fields
 DPCCH Raw Data Clock (RPS5) softkey
 See wideband CDMA base band generator
 subsystem keys and fields
 DPCCH softkey, [357](#), [990](#), [1013](#)
 DPCCH TFC I data-clk (DRPS22) softkey, [964](#),
 [966](#), [967](#), [968](#), [969](#)
 DPCCH TPC indicator (DRPS21) softkey, [964](#), [966](#),
 [967](#), [968](#), [969](#)
 DPCH + 1 softkey, [936](#), [937](#)

Index

- DPCH + 2 softkey, [936](#), [937](#)
- DPCH Channel Balance softkey, [944](#)
- DPCH Compressed Frame Indicator (DRPS32) softkey, [964](#), [966](#), [967](#), [968](#), [969](#)
- DPCH data stream (DRPS24) softkey, [964](#), [966](#), [967](#), [968](#), [969](#)
- DPCH data-clk (0) (DRPS28) softkey, [964](#), [966](#), [967](#), [968](#), [969](#)
- DPCH Gap Indicator (DRPS33) softkey, [964](#), [966](#), [967](#), [968](#), [969](#)
- DPCH softkey, [352](#)
- DPCH TimeSlot pulse (DRPS25) softkey, [964](#), [966](#), [967](#), [968](#), [969](#)
- DPCH10ms Frame-Pulse (DRPS26) softkey, [964](#), [966](#), [967](#), [968](#), [969](#)
- DPDCH data-clk withDTX (DRPS20) softkey, [964](#), [966](#), [967](#), [968](#), [969](#)
- DPDCH data-clk WithOutDTX (DRPS30) softkey, [964](#), [966](#), [967](#), [968](#), [969](#)
- DPDCH Power field, [1005](#)
- DPDCH Raw Data (RPS2) softkey
 - See wideband CDMA base band generator subsystem keys and fields
- DPDCH Raw DataClock (RPS3) softkey
 - See wideband CDMA base band generator subsystem keys and fields
- DPDCH softkey, [990](#)
- Drift Deviation softkey, [467](#)
- dual ARB subsystem
 - Through, [300](#)
- dual ARB subsystem keys
 - # Skipped Points, [304](#)
 - 2.100 MHz, [302](#)
 - 40.000 MHz, [300](#), [302](#)
 - ARB Off On, [320](#)
 - ARB Reference Ext Int, [22](#), [310](#)
 - ARB Sample Clock, [311](#)
 - Build New Waveform Sequence, [312](#)
 - Bus, [315](#)
 - Carrier Bandwidth, [308](#)
 - Carrier to Noise Ratio, [309](#)
 - Clear Header, [298](#)
 - Clipping Type |I+jQ| |I|,|Q|, [297](#)
 - Continuous, [315](#)
 - Edit Repetitions, [312](#)
 - dual ARB subsystem keys (*continued*)
 - Edit Selected Waveform Sequence, [312](#)
 - Ext, [315](#)
 - Ext Delay Off On, [317](#)
 - Ext Delay Time, [316](#)
 - Ext Polarity Neg Pos, [317](#)
 - First Mkr Point, [303](#), [304](#)
 - Free Run, [314](#)
 - Gate Active Low High, [314](#)
 - Gated, [312](#)
 - Header RMS, [298](#)
 - I/Q Mod Filter Manual Auto, [302](#)
 - I/Q Output Filter Manual Auto, [299](#), [300](#)
 - Immediate, [310](#)
 - Last Mkr Point, [303](#), [304](#)
 - Marker 1, [305](#), [306](#)
 - Marker 1 2, [303](#), [304](#)
 - Marker 1 Polarity Neg Pos, [306](#)
 - Marker 2, [305](#), [306](#)
 - Marker 2 Polarity Neg Pos, [306](#)
 - Marker 3, [305](#), [306](#)
 - Marker 3 Polarity Neg Pos, [307](#)
 - Marker 4, [305](#), [306](#)
 - Marker 4 Polarity Neg Pos, [307](#)
 - Modulator Atten Manual Auto, [301](#)
 - Noise Bandwidth Factor, [308](#)
 - None, [305](#), [306](#)
 - Off, [310](#)
 - On, [310](#)
 - Patt Trig In 1, [318](#)
 - Patt Trig In 2, [318](#)
 - Real-time Noise Off On, [307](#)
 - Reference Freq, [309](#)
 - Reset & Run, [314](#)
 - Save Setup To Header, [299](#)
 - Scaling, [311](#)
 - Segment Advance, [312](#)
 - Select Waveform, [318](#), [319](#)
 - Set Marker Off All Points, [303](#)
 - Single, [312](#), [315](#)
 - Through, [300](#), [302](#)
 - Toggle Marker 1, [312](#)
 - Trigger & Run, [314](#)
 - Trigger Key, [315](#)
 - Waveform Runtime Scaling, [311](#)

Dual-Sine softkey, 177, 184, 191, 197
Dummy Bearer 1 softkey, 600
Dummy Bearer 2 softkey, 600
Dummy softkey, 707
DWCDMA softkey, 96
Dwell Type List Step softkey, 50

E

Eb/No field, 1020
Eb/No value (dB) field, 989
EbNo field, 505
 See CDMA2000 BBG subsystem keys and fields
Ec/No value field, 936, 1020
EcNo field, 492, 527, 532
EDGE BERT Off On softkey, 438
EDGE Off On softkey, 667
EDGE softkey, 284, 285, 286, 635
EDGE subsystem keys
 128QAM, 638
 16 1's & 16 0's, 631, 640, 642, 648
 16PSK, 638
 16QAM, 638
 256QAM, 638
 2-Lvl FSK, 638
 32 1's & 32 0's, 631, 640, 642, 648
 32QAM, 638
 4 1's & 4 0's, 631, 640, 642, 648
 4-Lvl FSK, 638
 4QAM, 638
 64 1's & 64 0's, 631, 640, 642, 648
 64QAM, 638
 8 1's & 8 0's, 631, 640, 642, 648
 8PSK, 638
 All Timeslots, 658
 APCO 25 C4FM, 635
 BBG Ref Ext Int, 634
 Begin Frame, 658
 Begin Timeslot #, 658, 660
 BPSK, 638
 Bus, 639, 663
 Continuous, 662
 CS-1, 642, 643
 CS-4, 642, 644
 Custom, 658
 Custom TS, 646, 657

EDGE subsystem keys (*continued*)
 D8PSK, 638
 Data Format Pattern Framed, 630
 Downlink MCS-1, 642, 644
 Downlink MCS-5, 648
 Downlink MCS-9, 648
 EDGE, 635
 EDGE Off On, 667
 E-TCH/F43.2, 648
 Ext, 631, 639, 640, 648, 663
 Ext BBG Ref Freq, 634
 Ext Data Clock Ext Int, 623
 Ext Data Clock Normal Symbol, 633
 Ext Delay Bits, 664
 Ext Delay Off On, 666
 Ext Polarity Neg Pos, 666
 Fall Delay, 624, 625
 Fall Time, 626
 Filter Alpha, 623
 Filter BbT, 624
 FIX4, 631, 632, 640, 641, 642, 644, 648, 654
 Free Run, 662
 Freq Dev, 636
 G, 641, 656
 Gate Active Low High, 663
 Gated, 662
 Gaussian, 635
 GMSK, 658
 Gray Coded QPSK, 638
 I/Q Scaling, 636
 IS-95, 635
 IS-95 Mod, 635
 IS-95 Mod w/EQ, 635
 IS-95 OQPSK, 638
 IS-95 QPSK, 638
 IS-95 w/EQ, 635
 MSK, 638
 Multislot Off On, 647
 Normal, 658
 Normal All, 658
 Nyquist, 635
 Optimize FIR For EVM ACP, 631
 OQPSK, 638
 $\pi/4$ DQPSK, 638
 Patt Trig In 1, 666

Index

EDGE subsystem keys (*continued*)

Patt Trig In 2, [666](#)
Phase Dev, [637](#)
Phase Polarity Normal Invert, [638](#)
PN11, [631](#), [640](#), [648](#)
PN15, [631](#), [640](#), [642](#), [643](#), [644](#), [645](#), [648](#), [652](#), [653](#),
[654](#), [655](#)
PN20, [631](#), [640](#), [648](#)
PN23, [631](#), [640](#), [648](#)
PN9, [631](#), [640](#), [642](#), [643](#), [644](#), [645](#), [648](#), [652](#), [653](#),
[654](#), [655](#)
QPSK, [638](#)
Recall Secondary Frame State, [638](#)
Rectangle, [635](#)
Reset & Run, [662](#)
Restore EDGE Factory Default, [633](#)
Rise Delay, [627](#), [628](#)
Rise Time, [628](#), [629](#)
Root Nyquist, [635](#)
S, [646](#)
Save Secondary Frame State, [639](#)
Secondary Frame Off On, [640](#)
Sine, [630](#)
Single, [662](#)
Symbol Rate, [660](#)
Sync Out Offset, [659](#)
T1, [656](#)
T2, [657](#)
TCH/FS, [642](#), [645](#)
Timeslot Ampl Main Delta, [657](#)
Timeslot Off On, [658](#)
Trigger & Run, [662](#)
Trigger Key, [639](#), [663](#)
TSC0, [646](#), [657](#)
TSC1, [646](#), [657](#)
TSC2, [646](#), [657](#)
TSC3, [646](#), [657](#)
TSC4, [646](#), [657](#)
TSC5, [646](#), [657](#)
TSC6, [646](#), [657](#)
TSC7, [646](#), [657](#)
UN3/4 GSM Gaussian, [635](#)
Uncoded, [648](#)
Uplink MCS-1, [642](#), [645](#)
Uplink MCS-5, [648](#)

EDGE subsystem keys (*continued*)

Uplink MCS-9, [648](#)
User File, [630](#), [631](#), [640](#), [642](#), [648](#)
User FIR, [635](#)
User FSK, [637](#), [638](#)
User I/Q, [637](#), [638](#)
edge subsystem keys
PRAM File, [632](#)
Edit Channel Setup softkey, [255](#), [259](#)
Edit Repetitions softkey, [312](#)
Edit Selected Waveform Sequence softkey, [312](#)
Enter Secure Mode softkey, [164](#)
Equal Energy per Symbol softkey, [356](#)
Equal Powers softkey
See CDMA ARB subsystem keys
See CDMA2000 ARB subsystem keys
See CDMA2000 BBG subsystem keys and fields
See wideband CDMA base band generator
subsystem keys and fields
Erase All softkey, [162](#)
Erase and Overwrite All softkey, [164](#)
Erase and Sanitize All softkey, [165](#)
Erase softkey, [163](#)
ERROR
[221](#), [114](#), [125](#)
Error BER softkey, [1091](#)
Error Bits softkey, [1083](#)
Error Blocks field, [1084](#)
Error Count softkey, [438](#)
See sense subsystem keys
Error Info softkey, [156](#)
error messages, resolving, [719](#)
Error Out softkey, [409](#)
Error Rate softkey
See calculate subsystem keys
See calculate subsystem keys
ESG file overview, [717](#)
ET softkey, [697](#)
E-TCH/F43.2 softkey, [648](#)
Even Second Delay field, [479](#), [512](#)
Exceeds Any Limit softkey, [401](#)
Exceeds Any Thresholds softkey
See sense subsystem keys
Execute Cal softkey, [72](#), [73](#)
Ext 50 Ohm softkey, [23](#), [35](#)

- Ext 600 Ohm softkey, [23](#), [35](#)
- Ext BBG Ref Freq softkey
 - See custom subsystem keys
 - See EDGE subsystem keys
 - See GSM subsystem keys
 - See NADC subsystem keys
 - See PDC subsystem keys
 - See PHS subsystem keys
 - See TETRA subsystem keys
- Ext CDMA Freq field, [499](#)
- Ext Clock Rate x1 x2 x4 softkey, [934](#)
- Ext Data Clock Ext Int softkey
 - See EDGE subsystem keys
 - See PDC subsystem keys
- Ext Data Clock Normal Symbol softkey
 - See custom subsystem keys
 - See DECT subsystem keys
 - See EDGE subsystem keys
 - See GSM subsystem keys
 - See NADC subsystem keys
 - See PDC subsystem keys
 - See PHS subsystem keys
 - See TETRA subsystem keys
- Ext Delay Bits softkey
 - See custom subsystem keys
 - See DECT subsystem keys
 - See EDGE subsystem keys
 - See GSM subsystem keys
 - See NADC subsystem keys
 - See PDC subsystem keys
 - See PHS subsystem keys
 - See TETRA subsystem keys
- Ext Delay Off On softkey
 - See CDMA ARB subsystem keys
 - See CDMA2000 ARB subsystem keys
 - See custom subsystem keys
 - See DECT subsystem keys
 - See Dmodulation subsystem keys
 - See dual ARB subsystem keys
 - See EDGE subsystem keys
 - See GSM subsystem keys
 - See NADC subsystem keys
 - See PDC subsystem keys
 - See PHS subsystem keys
 - See TETRA subsystem keys
- Ext Delay Off On softkey (continued)
 - See wideband CDMA ARB subsystem keys
- Ext Delay Time softkey, [238](#), [270](#), [293](#), [316](#), [370](#)
- Ext Frame Trigger Delay softkey, [423](#)
- Ext In 600 Ohm I Offset softkey, [26](#)
- Ext In 600 Ohm Q Offset softkey, [27](#)
- Ext Polarity Neg Pos softkey
 - See CDMA ARB subsystem keys
 - See CDMA2000 ARB subsystem keys
 - See custom subsystem keys
 - See DECT subsystem keys
 - See Dmodulation subsystem keys
 - See dual ARB subsystem keys
 - See EDGE subsystem keys
 - See GSM subsystem keys
 - See NADC subsystem keys
 - See PDC subsystem keys
 - See PHS subsystem keys
 - See TETRA subsystem keys
 - See wideband CDMA ARB subsystem keys
- Ext softkey
 - List/Sweep subsystem, [53](#)
 - See amplitude modulation subsystem keys
 - See CDMA ARB subsystem keys
 - See CDMA2000 ARB subsystem keys
 - See CDMA2000 BBG subsystem keys and fields
 - See custom subsystem keys
 - See DECT subsystem keys
 - See Dmodulation subsystem keys
 - See dual ARB subsystem keys
 - See EDGE subsystem keys
 - See frequency modulation subsystem keys
 - See GSM subsystem keys
 - See low frequency output subsystem keys
 - See NADC subsystem keys
 - See PDC subsystem keys
 - See phase modulation subsystem keys
 - See PHS subsystem keys
 - See sense subsystem keys
 - See TETRA subsystem keys
 - See trigger subsystem keys
 - See wideband CDMA ARB subsystem keys
 - See wideband CDMA base band generator subsystem keys and fields

Index

Ext softkeys

Ext Coupling DC AC, [175](#), [182](#), [195](#)

Ext Detector, [61](#)

Ext Pulse, [204](#)

Ext1, [178](#), [186](#), [198](#)

Ext2, [178](#), [186](#), [198](#)

extended numeric SCPI parameter, [8](#)

External Frame Trigger Polarity Neg Pos softkey, [423](#)

External softkey, [511](#)

F

FACC softkey

See DECT subsystem keys

Fail Hold softkey, [401](#)

Fall Delay softkey

See custom subsystem keys

See DECT subsystem keys

See EDGE subsystem keys

See GSM subsystem keys

See NADC subsystem keys

See PDC subsystem keys

See PHS subsystem keys

See TETRA subsystem keys

Fall Time softkey

See custom subsystem keys

See DECT subsystem keys

See EDGE subsystem keys

See GSM subsystem keys

See NADC subsystem keys

See PDC subsystem keys

See PHS subsystem keys

See TETRA subsystem keys

Falling softkey, [546](#)

FBI State field, [995](#)

FCDMA softkey, [96](#)

FCOR softkey, [912](#), [917](#)

FCorr softkey, [707](#)

FDEV1_FS softkey

See DECT subsystem keys

FDEV1_HS softkey

See DECT subsystem keys

FDEV2_FS softkey

See DECT subsystem keys

Field 1 field, [489](#)

Field 2 field, [489](#)

Field 3 field, [490](#)

file

retrieval, [114](#), [125](#)

systems, [122](#)

types, [122](#)

file overview, HDSPA, [717](#)

Filter Alpha softkey, [1011](#)

See CDMA ARB subsystem keys

See CDMA2000 ARB subsystem keys

See CDMA2000 BBG subsystem keys and fields

See custom subsystem keys

See DECT subsystem keys

See Dmodulation subsystem keys

See EDGE subsystem keys

See GPS subsystem keys

See GSM subsystem keys

See NADC subsystem keys

See PDC subsystem keys

See PHS subsystem keys

See TETRA subsystem keys

See wideband CDMA ARB subsystem keys

See wideband CDMA base band generator
subsystem keys and fields

Filter BbT softkey, [1012](#)

See CDMA ARB subsystem keys

See CDMA2000 ARB subsystem keys

See CDMA2000 BBG subsystem keys and fields

See custom subsystem keys

See DECT subsystem keys

See Dmodulation subsystem keys

See EDGE subsystem keys

See GPS subsystem keys

See GSM subsystem keys

See NADC subsystem keys

See PDC subsystem keys

See PHS subsystem keys

See TETRA subsystem keys

See wideband CDMA ARB subsystem keys

See wideband CDMA base band generator
subsystem keys and fields

FIR softkey, [97](#)

First Mkr Point softkey, [303](#), [304](#)

First Spread Code softkey, [351](#), [359](#)

FIX softkey, [995](#)

- FIX4 softkey, [644](#), [994](#), [1024](#), [1028](#)
See CDMA2000 BBG subsystem keys and fields
See custom subsystem keys
See DECT subsystem keys
See EDGE subsystem keys
See GPS subsystem keys
See GSM subsystem keys
See NADC subsystem keys
See PDC subsystem keys
See PHS subsystem keys
See TETRA subsystem keys
See wideband CDMA baseband generator
 subsystem keys and fields
- Flat Noise BW field, [990](#)
- Flatness Off On softkey, [19](#)
- FM softkeys
 FM Dev, [187](#)
 FM Dev Couple Off On, [187](#)
 FM Off On, [186](#)
 FM Path 1 2, [181](#)
 FM Stop Rate, [183](#)
 FM Sweep Rate, [185](#)
 FM Tone 2 Amp Percent of Peak, [184](#)
 FM Tone 2 Rate, [183](#)
- forgiving listening and precise talking, [7](#)
- Frame Clock Polarity Neg Pos softkey, [1010](#)
- Frame Count softkey
See sense subsystem keys
- Frame Erasure softkey, [449](#)
See calculate subsystem keys
- Frame Length field
See CDMA2000 BBG subsystem keys and fields
- Frame Offset field
See CDMA2000 BBG subsystem keys and fields
- Frame offset field, [536](#)
- Frame Repeat Single Cont softkey, [796](#)
- Frame Struct field, [971](#)
- Frame Sync Trigger Mode Single Cont softkey,
[1070](#)
- Frame Trigger Source Int Ext softkey, [424](#)
- Free Run softkey
 list trigger source, [53](#)
See amplitude modulation subsystem keys
See CDMA ARB subsystem keys
See CDMA2000 ARB subsystem keys
- Free Run softkey (continued)*
See custom subsystem keys
See DECT subsystem keys
See Dmodulation subsystem keys
See dual ARB subsystem keys
See EDGE subsystem keys
See frequency modulation subsystem keys
See GSM subsystem keys
See low frequency output subsystem keys
See NADC subsystem keys
See PDC subsystem keys
See phase modulation subsystem keys
See PHS subsystem keys
See TETRA subsystem keys
See trigger subsystem keys
See wideband CDMA ARB subsystem keys
- Freq Dev softkey
See custom subsystem keys
See DECT subsystem keys
See Dmodulation subsystem keys
See EDGE subsystem keys
See GSM subsystem keys
See NADC subsystem keys
See PDC subsystem keys
See TETRA subsystem keys
- Freq softkeys
 Freq, [41](#), [48](#)
 Freq & Ampl, [48](#)
 Freq Channels Off On, [40](#)
 Freq Drift Type Linear Sine, [468](#)
 Freq Multiplier, [41](#)
 Freq Offset, [42](#), [469](#)
 Freq Ref Off On, [43](#)
 Freq Ref Set, [43](#)
 Freq Spacing, [285](#), [330](#)
 Freq Start, [44](#), [48](#)
 Freq Stop, [44](#), [48](#)
- Frequency hardkey, [37](#), [40](#), [41](#), [45](#), [46](#)
 frequency modulation subsystem keys
 Bus, [185](#)
 Dual-Sine, [184](#)
 Ext, [185](#)
 Ext Coupling DC AC, [182](#)
 Ext1, [186](#)
 Ext2, [186](#)

Index

frequency modulation subsystem keys (*continued*)

FM Dev, [187](#)
FM Dev Couple Off On, [187](#)
FM Off On, [186](#)
FM Path 1 2, [181](#)
FM Stop Rate, [183](#)
FM Sweep Rate, [185](#)
FM Tone 2 Amp Percent of Peak, [184](#)
FM Tone 2 Rate, [183](#)
Free Run, [185](#)
Incr Set, [182](#)
Internal 1, [186](#)
Internal 2, [186](#)
Noise, [184](#)
Ramp, [184](#)
Sine, [184](#)
Square, [184](#)
Swept-Sine, [184](#)
Triangle, [184](#)
Trigger Key, [185](#)

frequency subsystem keys

Adjust Phase, [47](#)
Channel Number, [39](#)
Freq, [41](#), [48](#)
Freq Channels Off On, [40](#)
Freq Multiplier, [41](#)
Freq Offset, [42](#)
Freq Ref Off On, [43](#)
Freq Ref Set, [43](#)
Freq Start, [44](#), [48](#)
Freq Stop, [44](#), [48](#)
Frequency, [37](#), [40](#), [41](#), [45](#), [46](#)
Off, [41](#), [48](#)
Phase Ref Set, [46](#)
Ref Oscillator Source Auto Off On, [47](#)

FSK softkey, [97](#)

FSYNCH Type field, [503](#)

Full softkey, [528](#), [533](#)

Function Generator softkey, [192](#)

G

G softkey, [641](#), [656](#)

Gain Unit dB Lin Index softkey, [360](#)

Gate Active Low High softkey

See CDMA ARB subsystem keys

Gate Active Low High softkey (continued)

See CDMA2000 ARB subsystem keys
See custom subsystem keys
See DECT subsystem keys
See Dmodulation subsystem keys
See dual ARB subsystem keys
See EDGE subsystem keys
See GSM subsystem keys
See NADC subsystem keys
See PDC subsystem keys
See PHS subsystem keys
See TETRA subsystem keys
See wideband CDMA ARB subsystem keys

Gate Clk Delay softkey, [412](#)

Gate Delay Off On softkey, [413](#)

Gate Mode Time Clk softkey, [412](#)

Gate Off On softkey, [414](#)

Gate Polarity Neg Pos softkey, [414](#)

Gate Time Delay softkey, [413](#)

Gated softkey

See CDMA ARB subsystem keys
See CDMA2000 ARB subsystem keys
See custom subsystem keys
See DECT subsystem keys
See Dmodulation subsystem keys
See dual ARB subsystem keys
See EDGE subsystem keys
See GSM subsystem keys
See NADC subsystem keys
See PDC subsystem keys
See PHS subsystem keys
See TETRA subsystem keys
See wideband CDMA ARB subsystem keys

Gaussian softkey

See CDMA ARB subsystem keys
See CDMA2000 ARB subsystem keys
See CDMA2000 BBG subsystem keys and fields
See custom subsystem keys
See DECT subsystem keys
See Dmodulation subsystem keys
See EDGE subsystem keys
See GPS subsystem keys
See GSM subsystem keys
See NADC subsystem keys
See PDC subsystem keys

- Gaussian softkey (continued)*
 See PHS subsystem keys
 See TETRA subsystem keys
 See wideband CDMA ARB subsystem keys
 See wideband CDMA base band generator
 subsystem keys and fields
- GMSK softkey, [658](#)
- Goto Row softkey, [328](#)
- GPIB Address softkey, [75](#)
- GPS Ref (f0) softkey, [675](#)
- GPS Ref Clk Ext Int softkey, [675](#)
- GPS subsystem
 Data Mode Raw Enc TLM, [671](#)
- GPS subsystem keys
 APCO 25 C4FM, [671](#)
 Data Mode Raw Enc TLM, [670](#)
 Doppler Shift, [671](#)
 Filter Alpha, [672](#)
 Filter BbT, [673](#)
 FIX4, [670](#)
 Gaussian, [671](#)
 GPS Ref (f0), [675](#)
 GPS Ref Clk Ext Int, [675](#)
 IQ Phase Normal Invert, [674](#)
 IS-95, [671](#)
 IS-95 Mod, [671](#)
 IS-95 Mod w/EQ, [671](#)
 IS-95 w/EQ, [671](#)
 Nyquist, [671](#)
 Optimize FIR For EVM ACP, [673](#)
 P Code Pwr, [674](#)
 PN15, [670](#)
 PN9, [670](#)
 Ranging Code C/A P C/A+P, [674](#)
 Real-time GPS Off On, [676](#)
 Rectangle, [671](#)
 Root Nyquist, [671](#)
 Satellite ID, [676](#)
 UN3/4 GSM Gaussian, [671](#)
 User File, [670](#)
 User FIR, [671](#)
- Gray Coded QPSK softkey
 See custom subsystem keys
 See DECT subsystem keys
 See Dmodulation subsystem keys
- Gray Coded QPSK softkey (continued)*
 See EDGE subsystem keys
 See GSM subsystem keys
 See NADC subsystem keys
 See PDC subsystem keys
 See PHS subsystem keys
 See TETRA subsystem keys
- GSM BERT Off On softkey, [452](#)
- GSM Off On softkey, [716](#)
- GSM softkey, [284](#), [285](#), [286](#)
- GSM subsystem keys
 128QAM, [694](#)
 16 1's & 16 0's, [687](#), [696](#), [697](#), [699](#), [706](#)
 16PSK, [694](#)
 16QAM, [694](#)
 256QAM, [694](#)
 2-Lvl FSK, [694](#)
 32 1's & 32 0's, [687](#), [696](#), [697](#), [699](#), [706](#)
 32QAM, [694](#)
 4 1's & 4 0's, [687](#), [696](#), [697](#), [699](#), [706](#)
 4-Lvl FSK, [694](#)
 4QAM, [694](#)
 64 1's & 64 0's, [687](#), [696](#), [697](#), [699](#), [706](#)
 64QAM, [694](#)
 8 1's & 8 0's, [687](#), [696](#), [697](#), [699](#), [706](#)
 8PSK, [694](#)
 Access, [707](#)
 All Timeslots, [708](#)
 APCO 25 C4FM, [691](#)
 BBG Data Clock Ext Int, [677](#)
 BBG Ref Ext Int, [690](#)
 Begin Frame, [708](#)
 Begin Timeslot #, [708](#), [709](#)
 BPSK, [694](#)
 Bus, [695](#), [712](#)
 Continuous, [711](#)
 CS-1, [699](#)
 CS-4, [703](#)
 Custom, [707](#)
 Custom TS, [698](#), [705](#)
 D8PSK, [694](#)
 Data Format Pattern Framed, [686](#)
 Diff Data Encode Off On, [688](#)
 Downlink MCS-1, [699](#)
 Dummy, [707](#)

Index

GSM subsystem keys (*continued*)

ET, 697
Ext, 687, 695, 696, 697, 706, 712
Ext BBG Ref Freq, 583, 690
Ext Data Clock Normal Symbol, 689
Ext Delay Bits, 713
Ext Delay Off On, 714
Ext Polarity Neg Pos, 714
Fall Delay, 680, 681
Fall Time, 681, 682
FCorr, 707
Filter Alpha, 677
Filter BbT, 678
FIX4, 687, 688, 696, 697, 698, 699, 704, 706, 707
Free Run, 711
Freq Dev, 692
Gate Active Low High, 712
Gated, 711
Gaussian, 691
Gray Coded QPSK, 694
GSM Off On, 716
I/Q Scaling, 692
IS-95, 691
IS-95 Mod, 691
IS-95 Mod w/EQ, 691
IS-95 OQPSK, 694
IS-95 QPSK, 694
IS-95 w/EQ, 691
MSK, 694
Multislot Off On, 699
Normal, 707
Normal All, 707
Nyquist, 691
Optimize FIR For EVM ACP, 686
OQPSK, 694
 $\pi/4$ DQPSK, 694
Patt Trig In 1, 715
Patt Trig In 2, 715
Phase Dev, 693
Phase Polarity Normal Invert, 694
PN11, 687, 706
PN15, 687, 696, 697, 699, 703, 704, 706
PN20, 687, 706
PN23, 687, 706
PN9, 687, 696, 697, 699, 703, 704, 706

GSM subsystem keys (*continued*)

PN9 Mode Normal Quick, 680
QPSK, 694
Recall Secondary Frame State, 695
Rectangle, 691
Reset & Run, 711
Restore Factory Default, 688
Rise Delay, 683
Rise Time, 684, 685
Root Nyquist, 691
S, 705
Save Secondary Frame State, 695
Secondary Frame Off On, 696
Sine, 685
Single, 711
SS, 697
Symbol Rate, 709
Sync, 707
Sync Out Offset, 708
TCH/FS, 699
Timeslot Ampl Main Delta, 706
Timeslot Off On, 706
Trigger & Run, 711
Trigger Key, 695, 712
TS, 707
TSC0, 698, 705
TSC1, 698, 705
TSC2, 698, 705
TSC3, 698, 705
TSC4, 698, 705
TSC5, 698, 705
TSC6, 698, 705
TSC7, 698, 705
UN3/4 GSM Gaussian, 691
Uplink MCS-1, 699
User File, 685, 687, 696, 697, 699, 706
User FIR, 691
User FSK, 693, 694
User I/Q, 693, 694
gsm subsystem keys
PRAM Files, 687

H

Half softkey, 528, 533
Header field, 485, 495

- Help Mode Single Cont softkey, 157
- hexadecimal values, 16
- High Amplitude softkey
 - See sense subsystem keys
- High Crest Mode Off On softkey, 21
- Higher Layer softkey, 1072
- Hostname softkey, 76
- HSDPA file overview, 717
- HSDPA over W-CDMA SCPI commands, 717
- HSDPA user files, 717
- I**
- I Offset softkey, 28
- I/Q Adjustments Off On softkey, 31
- I/Q Calibration softkey, 72
- I/Q Gain Balance Source 1 softkey, 27
- I/Q Mapping Normal Invert softkey, 223, 250, 339
- I/Q Mod Filter Manual Auto softkey, 32, 210, 224, 249, 279, 302, 324, 341, 472
- I/Q Off On softkey, 36
- I/Q Out Gain Balance softkey, 25
- I/Q Output Atten softkey, 26
- I/Q Output Filter Manual Auto softkey, 208, 219, 244, 274, 299, 300, 322, 338, 464
- I/Q Scaling softkey
 - See custom subsystem keys
 - See DECT subsystem keys
 - See EDGE subsystem keys
 - See GSM subsystem keys
 - See NADC subsystem keys
 - See PDC subsystem keys
 - See PHS subsystem keys
 - See TETRA subsystem keys
- I/Q softkey, 98
- I/Q Timing Skew Path, 30
- I/Q timing Skew softkey, 29
- IDLE softkey, 863, 885
- IEEE 488.2 common command keys
 - Diagnostic Info, 90
 - RECALL Reg, 91
 - Run Complete Self Test, 93
 - Save Reg, 92
 - Save Seq[n] Reg[nn], 92
 - Select Seq, 91
- Immediate softkey, 228, 264, 283, 310
 - See sense subsystem keys
- Impairments Off On softkey, 465
- Impedance 75 Ohm High softkey, 416
- Incr Set hardkey
 - See amplitude modulation subsystem keys
 - See frequency modulation subsystem keys
 - See phase modulation subsystem keys
- Increment Scramble Code softkey, 346
- Increment Timing Offset softkey, 349
- Infinity softkey, 975, 1075
- Init Power field, 1014
- Init Pwr field, 1034, 1050
- Initial Bit Count softkey, 437
- Initial Block Count softkey, 427, 430
- Initial Frame Count softkey, 447
- Initialize Phase Fixed Random softkey, 331
- Initialize Table softkey, 286
- input subsystem keys
 - 0.7V, 417
 - 1.4V, 417
 - 1.6V, 417
 - 2.5V, 417
 - Clock Delay Off On, 415
 - Clock Polarity Neg Pos, 416
 - Clock Time Delay, 415
 - Data Polarity Neg Pos, 416
 - Gate Clk Delay, 412
 - Gate Delay Off On, 413
 - Gate Mode Time Clk, 412
 - Gate Off On, 414
 - Gate Polarity Neg Pos, 414
 - Gate Time Delay, 413
 - Impedance 75 Ohm High, 416
 - Resolution, 414
- Insert Row softkey, 252, 255, 259, 286
- Installed Board Info softkey, 81
- Int I/Q Skew Corrections RF BB Off softkey, 34
- Int softkeys
 - Int Doublet, 204
 - Int Free-Run, 204
 - Int Gated, 204
 - Int Phase Polarity Normal Invert, 23, 33
 - Int Triggered, 204
- integer response data, 10

Index

- Intermod softkey, [979](#)
- Internal softkeys
 - Internal, [61](#), [178](#), [511](#)
 - Internal 1, [186](#), [198](#)
 - Internal 2, [186](#), [198](#)
 - Internal Monitor, [192](#)
 - Internal Square, [204](#)
- Inverse Video Off On softkey, [87](#)
- Inverted softkey, [516](#)
- IP Address softkey, [76](#)
- IQ Phase Normal Invert softkey, [674](#)
- IS-2000 SR3 DS softkey
 - See* CDMA ARB subsystem keys
 - See* CDMA2000 ARB subsystem keys
 - See* Dmodulation subsystem keys
 - See* wideband CDMA ARB subsystem keys
- IS-95 Mod softkey
 - See* CDMA ARB subsystem keys
 - See* CDMA2000 ARB subsystem keys
 - See* CDMA2000 BBG subsystem keys and fields
 - See* custom subsystem keys
 - See* DECT subsystem keys
 - See* Dmodulation subsystem keys
 - See* EDGE subsystem keys
 - See* GPS subsystem keys
 - See* GSM subsystem keys
 - See* NADC subsystem keys
 - See* PDC subsystem keys
 - See* PHS subsystem keys
 - See* TETRA subsystem keys
 - See* wideband CDMA ARB subsystem keys
 - See* wideband CDMA base band subsystem keys and fields
- IS-95 Mod w/EQ softkey
 - See* CDMA ARB subsystem keys
 - See* CDMA2000 ARB subsystem keys
 - See* CDMA2000 BBG subsystem keys and fields
 - See* custom subsystem keys
 - See* DECT subsystem keys
 - See* Dmodulation subsystem keys
 - See* EDGE subsystem keys
 - See* GPS subsystem keys
 - See* GSM subsystem keys
 - See* NADC subsystem keys
 - See* PDC subsystem keys
 - See* PHS subsystem keys
 - See* TETRA subsystem keys
 - See* wideband CDMA ARB subsystem keys
 - See* wideband CDMA base band generator subsystem keys and fields
- IS-95 softkey
 - See* CDMA ARB subsystem keys
 - See* CDMA2000 ARB subsystem keys
 - See* CDMA2000 BBG subsystem keys and fields
 - See* custom subsystem keys
 - See* DECT subsystem keys
 - See* Dmodulation subsystem keys
 - See* EDGE subsystem keys
 - See* GPS subsystem keys
 - See* GSM subsystem keys
 - See* NADC subsystem keys
 - See* PDC subsystem keys
 - See* PHS subsystem keys
 - See* TETRA subsystem keys
 - See* wideband CDMA ARB subsystem keys
 - See* wideband CDMA base band generator subsystem keys and fields
- IS-95 w/EQ softkey
 - See* CDMA ARB subsystem keys
- IS-95 Mod w/EQ softkey (*continued*)
 - See* PHS subsystem keys
 - See* TETRA subsystem keys
 - See* wideband CDMA ARB subsystem keys
 - See* wideband CDMA base band generator subsystem keys and fields
- IS-95 OQPSK softkey
 - See* custom subsystem keys
 - See* DECT subsystem keys
 - See* Dmodulation subsystem keys
 - See* EDGE subsystem keys
 - See* GSM subsystem keys
 - See* NADC subsystem keys
 - See* PDC subsystem keys
 - See* PHS subsystem keys
 - See* TETRA subsystem keys
- IS-95 QPSK softkey
 - See* custom subsystem keys
 - See* DECT subsystem keys
 - See* Dmodulation subsystem keys
 - See* EDGE subsystem keys
 - See* GSM subsystem keys
 - See* NADC subsystem keys
 - See* PDC subsystem keys
 - See* PHS subsystem keys
 - See* TETRA subsystem keys

IS-95 w/EQ softkey (continued)

- See CDMA2000 ARB subsystem keys
- See CDMA2000 BBG subsystem keys and fields
- See custom subsystem keys
- See DECT subsystem keys
- See Dmodulation subsystem keys
- See EDGE subsystem keys
- See GPS subsystem keys
- See GSM subsystem keys
- See NADC subsystem keys
- See PDC subsystem keys
- See PHS subsystem keys
- See TETRA subsystem keys
- See wideband CDMA ARB subsystem keys

IS-97 Levels softkey, 230

L

- Last Mkr Point softkey, 303, 304
- Leap Seconds field, 500
- Left Alternate softkey, 351
- Left softkey, 940
- LF Out softkeys
 - LF Out Amplitude, 188
 - LF Out Off On, 192
 - LF Out Stop Freq, 188, 189, 195
 - LF Out Sweep Rate, 190
 - LF Out Sweep Time, 191
 - LF Out Tone 2 Ampl % of Peak, 189
 - LF Out Tone 2 Freq, 188, 189, 195
- license, 83
- license value, 84
- Link Down Up softkey, 341, 987
- Link Forward Reverse softkey, 250, 477
- list data, 113
- List softkey, 98, 122
- list/sweep subsystem keys
 - # Points, 56
 - Ampl, 48, 65
 - Ampl Start, 48, 66
 - Ampl Stop, 48, 67
 - Dwell Type List Step, 50
 - Freq, 41, 48
 - Freq & Ampl, 48
 - Freq Start, 44, 48
 - Freq Stop, 44, 48

list/sweep subsystem keys (continued)

- Load List From Step Sweep, 54
- Manual Mode Off On, 52
- Manual Point, 51
- Off, 41, 48, 65
- Preset List, 55
- Step Dwell, 55
- Sweep Direction Down Up, 49
- Sweep Retrace Off On, 53
- Sweep Type List Step, 54
- Load From Selected File softkey, 18, 120, 128, 329
- Load List From Step Sweep softkey, 54
- Load/Store softkey, 286
- Long Code Mask field, 515
- Long Code State field, 482, 515
- Low Amplitude softkey, 426, 429
 - See sense subsystem keys
- Low Capacity softkey, 588, 600
- Low Capacity with Z field softkey, 588, 600
- low frequency output subsystem keys
 - Bus, 191
 - DC, 191
 - Dual-Sine, 191
 - Ext, 191
 - Free Run, 191
 - Function Generator, 192
 - Internal Monitor, 192
 - LF Out Amplitude, 188
 - LF Out Off On, 192
 - LF Out Stop Freq, 188, 189, 195
 - LF Out Sweep Rate, 190
 - LF Out Sweep Time, 191
 - LF Out Tone 2 Ampl % of Peak, 189
 - LF Out Tone 2 Freq, 188, 189, 195
 - Noise, 191
 - Ramp, 191
 - Sine, 191
 - Square, 191
 - Swept-Sine, 191
 - Triangle, 191
 - Trigger Key, 191
- LTM OFF field, 500

M

- Manual Mode Off On softkey, 52

Index

- Manual Point softkey, [51](#)
- Marker 1 2 softkey, [303](#), [304](#)
- Marker 1 Polarity Neg Pos softkey, [212](#), [226](#), [261](#),
[281](#), [306](#), [326](#), [362](#), [473](#)
- Marker 1 softkey, [211](#), [225](#), [260](#), [261](#), [280](#), [305](#), [306](#),
[325](#), [361](#), [362](#), [472](#), [473](#)
- Marker 2 Polarity Neg Pos softkey, [212](#), [226](#), [262](#),
[282](#), [306](#), [326](#), [363](#), [473](#)
- Marker 2 softkey, [211](#), [225](#), [260](#), [261](#), [280](#), [305](#), [306](#),
[325](#), [361](#), [362](#), [472](#), [473](#)
- Marker 3 Polarity Neg Pos softkey, [212](#), [226](#), [262](#),
[282](#), [307](#), [326](#), [363](#), [474](#)
- Marker 3 softkey, [211](#), [225](#), [260](#), [261](#), [280](#), [305](#), [306](#),
[325](#), [361](#), [362](#), [472](#), [473](#)
- Marker 4 Polarity Neg Pos softkey, [212](#), [226](#), [262](#),
[282](#), [307](#), [326](#), [363](#), [474](#)
- Marker 4 softkey, [211](#), [225](#), [260](#), [261](#), [280](#), [305](#), [306](#),
[325](#), [361](#), [362](#), [472](#), [473](#)
- mass memory subsystem keys
 - Binary, [122](#)
 - Copy File, [124](#)
 - Delete All NVWFM Files, [126](#)
 - Delete All WFM Files, [126](#)
 - Delete All WFM1 Files, [127](#)
 - Delete File, [127](#)
 - List, [122](#)
 - Load From Selected File, [128](#)
 - Rename File, [128](#)
 - State, [122](#)
 - Store To File, [128](#)
 - User Flatness, [122](#)
- Max Input softkey, [979](#)
- Max Power field, [1015](#)
- Max Pwr field, [1034](#), [1050](#)
- MCDMA softkey, [99](#)
- MDMOD softkey, [99](#)
- MDWCDMA softkey, [100](#)
- Measurement Mode BER% Search softkey, [446](#)
- Measurement Mode BLER% Search softkey, [432](#)
- memory subsystem keys, [112](#)
 - Add Comment To Seq[n] Reg[nn], [121](#)
 - All, [104](#), [120](#)
 - Binary, [94](#)
 - Bit, [94](#)
 - CDMA, [95](#)
 - memory subsystem keys, [112](#) (*continued*)
 - Copy File, [105](#), [113](#)
 - Data PRAM, [111](#)
 - Delete All ARB CDMA Files, [116](#)
 - Delete All ARB DMOD Files, [116](#)
 - Delete All ARB DWCDMA Files, [116](#)
 - Delete All ARB FCDMA Files, [117](#)
 - Delete All ARB MCDMA Files, [118](#)
 - Delete All ARB MDWCDMA Files, [118](#)
 - Delete All ARB MTONE Files, [118](#)
 - Delete All ARB RCDMA Files, [119](#)
 - Delete All ARB UWCDMA Files, [120](#)
 - Delete All Binary Files, [116](#)
 - Delete All Bit Files, [116](#)
 - Delete All Files, [115](#)
 - Delete All FIR Files, [117](#)
 - Delete All FSK Files, [117](#)
 - Delete All I/Q Files, [117](#)
 - Delete All List Files, [117](#)
 - Delete All MDMOD Files, [118](#)
 - Delete All MFCDMA Files, [118](#)
 - Delete All SEQ Files, [119](#)
 - Delete All SHAPE Files, [119](#)
 - Delete All State Files, [119](#)
 - Delete All UFLT Files, [119](#)
 - Delete File, [120](#)
 - DMOD, [95](#)
 - DWCDMA, [96](#)
 - FCDMA, [96](#)
 - FIR, [97](#)
 - FSK, [97](#)
 - I/Q, [98](#)
 - List, [98](#)
 - Load From Selected File, [120](#)
 - MCDMA, [99](#)
 - MDMOD, [99](#)
 - MDWCDMA, [100](#)
 - MFCDMA, [100](#)
 - MTONE, [101](#)
 - Oversample Ratio, [108](#)
 - RCDMA, [101](#)
 - Rename File, [121](#)
 - SEQ, [102](#)
 - SHAPE, [102](#)
 - State, [103](#)

- memory subsystem keys, 112 (*continued*)
 - Store To File, 121
 - User Flatness, 103
 - UWCDMA, 104
 - Message Data Raw Data (RPS11) softkey
 - See wideband CDMA base band generator subsystem keys and fields
 - Message Part field, 1033
 - Message Pulse (RPS22) softkey
 - See wideband CDMA base band generator subsystem keys and fields
 - Message Type field, 501
 - Message-Control Raw Data Clock (RPS12) softkey
 - See wideband CDMA base band generator subsystem keys and fields
 - Meter Address softkeys, 77
 - Meter Channel A B softkey, 77
 - Meter Timeout softkey, 78
 - MFCDMA softkey, 100
 - Min Power field, 1015
 - Mod Index softkey, 469
 - Mod On/Off hardkey, 129
 - Modulator Atten Manual Auto softkey, 32, 33, 209, 223, 248, 278, 301, 323, 339, 340, 470, 471
 - Msg Ctrl softkey, 1021
 - Msg Data softkey, 1021
 - Msg Pwr field, 1032, 1049
 - MSK softkey
 - See custom subsystem keys
 - See DECT subsystem keys
 - See Dmodulation subsystem keys
 - See EDGE subsystem keys
 - See GSM subsystem keys
 - See NADC subsystem keys
 - See PDC subsystem keys
 - See PHS subsystem keys
 - See TETRA subsystem keys
 - MTONE softkey, 101
 - Multicarrier Off On softkey, 229, 250, 284
 - Multislot Off On softkey, 647, 699
 - Multitone Off On softkey, 332
 - multitone subsystem keys
 - 2.100 MHz, 324
 - 40.000 MHz, 322, 324
 - ARB Reference Ext Int, 327
 - multitone subsystem keys (*continued*)
 - ARB Sample Clock, 329
 - Clear Header, 321
 - Freq Spacing, 330
 - Goto Row, 328
 - I/Q Mod Filter Manual Auto, 324
 - I/Q Output Filter Manual Auto, 322
 - Initialize Phase Fixed Random, 331
 - Load From Selected File, 329
 - Marker 1, 325
 - Marker 1 Polarity Neg Pos, 326
 - Marker 2, 325
 - Marker 2 Polarity Neg Pos, 326
 - Marker 3, 325
 - Marker 3 Polarity Neg Pos, 326
 - Marker 4, 325
 - Marker 4 Polarity Neg Pos, 326
 - Modulator Atten Manual Auto, 323
 - Multitone Off On, 332
 - None, 325
 - Number Of Tones, 330, 331
 - Random Seed Fixed Random, 332
 - Reference Freq, 327
 - Save Setup To Header, 321
 - Store To File, 329
 - Through, 322, 324
 - Toggle State, 328, 330
 - mV softkey, 172
 - mVemf softkey, 172
- ## N
- N Power field, 991, 1021
 - NADC Off On softkey, 813
 - NADC softkey, 284, 285, 286
 - NADC subsystem keys
 - 128QAM, 796
 - 16 1's & 16 0's, 789, 798, 801, 802, 804
 - 16PSK, 796
 - 16QAM, 796
 - 256QAM, 796
 - 2-Lvl FSK, 796
 - 32 1's & 32 0's, 789, 798, 801, 802, 804
 - 32QAM, 796
 - 4 1's & 4 0's, 789, 798, 801, 802, 804
 - 4-Lvl FSK, 796

Index

NADC subsystem keys (*continued*)

4QAM, 796
64 1's & 64 0's, 789, 798, 801, 802, 804
64QAM, 796
8 1's & 8 0's, 789, 798, 801, 802, 804
8PSK, 796
All Timeslots, 806
APCO 25 C4FM, 793
BBG Data Clock Ext Int, 779
BBG Ref Ext Int, 792
Begin Frame, 806
Begin Timeslot #, 806, 807
BPSK, 796
Bus, 798, 810
CDL, 799
CDVCC, 800, 803
Continuous, 808
D8PSK, 796
Data Format Pattern Framed, 788
Down Custom, 805
Down TCH, 805
Down TCH All, 805
Ext, 789, 798, 801, 802, 804, 810
Ext BBG Ref Freq, 792
Ext Data Clock Normal Symbol, 791
Ext Delay Bits, 811
Ext Delay Off On, 812
Ext Polarity Neg Pos, 812
Fall Delay, 782, 784
Fall Time, 783, 784
Filter Alpha, 779
Filter BbT, 780
FIX4, 789, 790, 798, 799, 801, 802, 803, 804, 805
Frame Repeat Single Cont, 796
Free Run, 809
Freq Dev, 794
Gate Active Low High, 810
Gated, 808
Gaussian, 793
Gray Coded QPSK, 796
I/Q Scaling, 794
IS-95, 793
IS-95 Mod, 793
IS-95 Mod w/EQ, 793
IS-95 OQPSK, 796

NADC subsystem keys (*continued*)

IS-95 QPSK, 796
IS-95 w/EQ, 793
MSK, 796
NADC Off On, 813
Nyquist, 793
Optimize FIR For EVM ACP, 789
OQPSK, 796
 $\pi/4$ DQPSK, 796
Patt Trig In 1, 812
Patt Trig In 2, 812
Phase Dev, 795
PN11, 789, 798, 801, 802, 804
PN15, 789, 798, 801, 802, 804
PN20, 789, 798, 801, 802, 804
PN23, 789, 798, 801, 802, 804
PN9, 789, 798, 801, 802, 804
PN9 Mode Normal Quick, 781
Polarity Normal Invert, 797
QPSK, 796
Rate Full Half, 794
Recall Secondary Frame State, 797
Rectangle, 793
Reset & Run, 809
Restore NADC Factory Default, 790
Rise Delay, 785, 786
Rise Time, 786, 787
Root Nyquist, 793
SACCH, 800, 804
Save Secondary Frame State, 797
Secondary Frame Off On, 798
Sine, 782, 788
Single, 808
Symbol Rate, 807
SYNC, 800, 804
Sync Out Offset, 806
Timeslot Ampl Main Delta, 802
Timeslot Off On, 802
Trigger & Run, 809
Trigger Key, 798, 810
UN3/4 GSM Gaussian, 793
Up Custom, 805
Up TCH, 805
Up TCH All, 805
User File, 782, 788, 789, 798, 801, 802, 804

- NADC subsystem keys (*continued*)
 User FIR, 793
 User FSK, 795, 796
 User I/Q, 796
 nadc subsystem keys
 PRAM Files, 790
 Network ID field, 501
 No Limits softkey
 See calculate subsystem keys
 No Thresholds softkey
 See sense subsystem keys
 Noise Bandwidth Factor, 308
 Noise Off On softkey, 505, 517
 Noise Seed Fixed Random softkey, 215
 Noise Seed softkey, 467
 Noise softkey, 177, 184, 191, 197
 NONE (RPS0) softkey
 See wideband CDMA base band generator
 subsystem keys and fields
 NONE softkey, 1081
 None softkey, 163, 211, 225, 260, 261, 280, 305,
 306, 325, 361, 362, 472, 473, 565, 982, 983,
 1086, 1094
 Normal All softkey, 658, 707
 Normal softkey, 516, 658, 707, 940
 Num of Blk field, 1087, 1095
 Num of Pre field, 1034, 1050
 Number of AICH field, 1018
 Number of PRACH 80ms field, 1033
 Number of PRACH field, 1047, 1049
 Number of Preamble field, 1050
 Number Of Tones softkey, 330, 331
 numeric boolean response data, 11
 numeric SCPI parameter, 8
 numeric, extended SCPI parameter, 8
 Nyquist softkey
 See CDMA ARB subsystem keys
 See CDMA2000 ARB subsystem keys
 See CDMA2000 BBG subsystem keys and fields
 See custom subsystem keys
 See DECT subsystem keys
 See Dmodulation subsystem keys
 See EDGE subsystem keys
 See GPS subsystem keys
 See GSM subsystem keys
 Nyquist softkey (*continued*)
 See NADC subsystem keys
 See PDC subsystem keys
 See PHS subsystem keys
 See TETRA subsystem keys
 See wideband CDMA ARB subsystem keys
 See wideband CDMA base band generator
 subsystem keys and fields
- 0**
 OCNS softkey, 352
 octal values, 16
 Off softkey, 23, 35, 41, 48, 65, 228, 264, 283, 310,
 1046
 Omitted softkey, 974, 1074
 On softkey, 228, 264, 283, 310, 1046
 On/Off field, 956, 1038
 OpenLoop Ant1 SCH TSTD OFF softkey, 980
 OpenLoop Ant1 softkey, 980
 OpenLoop Ant2 SCH TSTD OFF softkey, 980
 OpenLoop Ant2 softkey, 980
 Optimize ACP ADJ ALT softkey, 342, 356
 Optimize FIR For EVM ACP softkey, 1012
 See CDMA ARB subsystem keys
 See CDMA2000 ARB subsystem keys
 See CDMA2000 BBG subsystem keys and fields
 See custom subsystem keys
 See DECT subsystem keys
 See Dmodulation subsystem keys
 See EDGE subsystem keys
 See GPS subsystem keys
 See GSM subsystem keys
 See NADC subsystem keys
 See PDC subsystem keys
 See PHS subsystem keys
 See TETRA subsystem keys
 See wideband CDMA ARB subsystem keys
 See wideband CDMA base band generator
 subsystem keys and fields
- options
 001/002
 all subsystem, 206, 460
 custom subsystem, 548
 Dmodulation subsystem, 274
 dual ARB subsystem, 297

Index

options (*continued*)

001/002

multitone subsystem, [321](#)

400

wideband CDMA ARB subsystem, [333](#)

wideband CDMA base band generator
subsystem, [934](#)

401

CDMA ARB subsystem, [216](#)

CDMA2000 ARB subsystem, [242](#)

CDMA2000 BBG subsystem, [477](#)

402

DECT subsystem, [571](#)

EDGE subsystem, [623](#)

GSM subsystem, [677](#)

NADC subsystem, [779](#)

PDC subsystem, [814](#)

PHS subsystem, [850](#)

TETRA subsystem, [889](#)

403

AWGN real-time subsystem, [461](#)

AWGN subsystem, [207](#)

406

bluetooth subsystem, [462](#)

409

GPS subsystem, [670](#)

UN7/300

calculate subsystem, [394](#)

data subsystem, [404](#)

input subsystem, [412](#), [418](#)

sense subsystem, [421](#)

Options Info softkey, [83](#)

OQPSK softkey

See custom subsystem keys

See DECT subsystem keys

See Dmodulation subsystem keys

See EDGE subsystem keys

See GSM subsystem keys

See NADC subsystem keys

See PDC subsystem keys

See PHS subsystem keys

See TETRA subsystem keys

Output Blanking Off On Auto softkey, [129](#)

output subsystem keys

Mod On/Off, [129](#)

output subsystem keys (*continued*)

Output Blanking Off On Auto, [129](#)

RF On/Off, [130](#)

Oversample Ratio softkey, [108](#), [227](#)

Overwrite softkey, [163](#)

P

P Code Pwr softkey, [674](#)

P Rev field, [502](#)

P Rev Min field, [500](#)

P softkey, [590](#)

$\pi/4$ DQPSK softkey

See custom subsystem keys

See DECT subsystem keys

See Dmodulation subsystem keys

See EDGE subsystem keys

See GSM subsystem keys

See NADC subsystem keys

See PDC subsystem keys

See PHS subsystem keys

See TETRA subsystem keys

Packet (DH1) softkey, [474](#)

Paging Indicator field, [509](#), [960](#)

Paging softkey, [230](#)

parameter types. *See* SCPI commands parameter
types

Pass Amplitude softkey, [426](#), [430](#)

See sense subsystem keys

Pass/Fail Limits softkey, [402](#)

Pass/Fail Off On softkey, [402](#)

paths, SCPI command tree, [7](#)

Patt Trig In 1 softkey

See CDMA ARB subsystem keys

See CDMA2000 ARB subsystem keys

See custom subsystem keys

See DECT subsystem keys

See Dmodulation subsystem keys

See dual ARB subsystem keys

See EDGE subsystem keys

See GSM subsystem keys

See NADC subsystem keys

See PDC subsystem keys

See PHS subsystem keys

See TETRA subsystem keys

Patt Trig In 1 softkey (continued)

See wideband CDMA ARB subsystem keys
subsystem keys

Patt Trig In 2 softkey

See CDMA ARB subsystem keys

See CDMA2000 ARB subsystem keys

See custom subsystem keys

See DECT subsystem keys

See Dmodulation subsystem keys

See dual ARB subsystem keys

See EDGE subsystem keys

See GSM subsystem keys

See NADC subsystem keys

See PDC subsystem keys

See PHS subsystem keys

See TETRA subsystem keys

See wideband CDMA ARB subsystem keys
subsystem keys

Pattern trigger in 1 field, 1061

Pattern trigger in 2 field, 1061

PCCPCH + SCH + 3 DPCH softkey, 342, 347

PCCPCH + SCH +1 DPCH softkey, 342, 347

PCCPCH + SCH softkey, 342, 347

P-CCPCH data (DRPS39) softkey, 964, 966, 967,
968, 969

P-CCPCH data-clk (DRPS38) softkey, 964, 966,
967, 968, 969

PCCPCH softkey, 936, 937

PDC Off On softkey, 849

PDC softkey, 284, 285, 286

PDC subsystem keys

128QAM, 830

16 1's & 16 0's, 824, 833, 835, 837, 839

16PSK, 830

16QAM, 830

256QAM, 830

2-Lvl FSK, 830

32 1's & 32 0's, 824, 833, 835, 837, 839

32QAM, 830

4 1's & 4 0's, 824, 833, 835, 837, 839

4-Lvl FSK, 830

4QAM, 830

64 1's & 64 0's, 824, 833, 835, 837, 839

64QAM, 830

8 1's & 8 0's, 824, 833, 835, 837, 839

PDC subsystem keys (continued)

8PSK, 830

All Timeslots, 841

APCO 25 C4FM, 827

BBG Ref Ext Int, 826

Begin Frame, 841

Begin Timeslot #, 841, 842

BPSK, 830

Bus, 832, 846

CC, 834, 838, 840

Continuous, 844

D8PSK, 830

Data Format Pattern Framed, 823

Down Custom, 841

Down TCH, 841

Down TCH All, 841

Ext, 824, 832, 833, 835, 837, 839, 846

Ext BBG Ref Freq, 827

Ext Data Clock Ext Int, 814

Ext Data Clock Normal Symbol, 826

Ext Delay Bits, 847

Ext Delay Off On, 848

Ext Polarity Neg Pos, 848

Fall Delay, 817, 818

Fall Time, 818, 819

Filter Alpha, 814

Filter BbT, 815

FIX4, 824, 825, 833, 834, 835, 836, 837, 839

Free Run, 845

Freq Dev, 829

Gate Active Low High, 846

Gated, 844

Gaussian, 827

Gray Coded QPSK, 830

I/Q Scaling, 828

IS-95, 827

IS-95 Mod, 827

IS-95 Mod w/EQ, 827

IS-95 OQPSK, 830

IS-95 QPSK, 830

IS-95 w/EQ, 827

MSK, 830

Nyquist, 827

Optimize FIR For EVM ACP, 823

OQPSK, 830

Index

ΠΑΧ συβψσψτεμ κερσ (continued)

$\pi/4$ DQPSK, 830
Patt Trig In 1, 848
Patt Trig In 2, 848
PDC Off On, 849
Phase Dev, 829
Phase Polarity Normal Invert, 831
PN11, 824, 835, 837, 839
PN15, 824, 833, 835, 837, 839
PN20, 824, 835, 837, 839
PN23, 824, 835, 837, 839
PN9, 824, 833, 835, 837, 839
PN9 Mode Normal Quick, 817
QPSK, 830
Rate Full Half, 828
Recall Secondary Frame State, 831
Rectangle, 827
Reset & Run, 845
Restore PDC Factory Default, 825
Rise Delay, 820
Rise Time, 821, 822
Root Nyquist, 827
SACCH, 834, 838, 840
Save Secondary Frame State, 832
Secondary Frame Off On, 833
Sine, 822
Single, 844
SW, 835, 838, 840
Symbol Rate, 843
Sync Out Offset, 842
Timeslot Ampl Main Delta, 836
Timeslot Off On, 836
Trigger & Run, 845
Trigger Key, 832, 846
UN3/4 GSM Gaussian, 827
Up Custom, 841
Up TCH, 841
Up TCH All, 841
Up VOX, 841
User File, 822, 824, 833, 835, 837, 839
User FIR, 827
User FSK, 830
User I/Q, 830
pdc subsystem keys
PRAM Files, 824

Performance Req softkey, 979
Permuted ESN field, 484, 495
Phase Dev softkey
 See custom subsystem keys
 See DECT subsystem keys
 See EDGE subsystem keys
 See GSM subsystem keys
 See NADC subsystem keys
 See PDC subsystem keys
 See PHS subsystem keys
 See TETRA subsystem keys
phase modulation subsystem keys
 ΦM Sweep Time softkey, 197
 FM ΦM Normal High BW softkey, 194
 ΦM Dev Couple Off On, 199
 ΦM Dev softkey, 199
 ΦM Off On softkey, 198
 ΦM Path 1 2, 193
 ΦM Tone 2 Ampl Percent of Peak, 196
 ΦM Tone 2 Rate, 196
Bus, 197
Dual-Sine, 197
Ext, 197
Ext Coupling DC AC, 195
Ext1, 198
Ext2, 198
Free Run, 197
Incr Set, 194, 200
Internal 1, 198
Internal 2, 198
Noise, 197
Ramp, 197
Sine, 197
Square, 197
Swept-Sine, 197
Triangle, 197
Trigger Key, 197
Phase Polarity field, 508
Phase Polarity Normal Invert softkey
 See custom subsystem keys
 See DECT subsystem keys
 See EDGE subsystem keys
 See GSM subsystem keys
 See PDC subsystem keys
 See PHS subsystem keys

Phase Polarity Normal Invert softkey (continued)

See TETRA subsystem keys

See wideband CDMA base band generator
subsystem keys and fields

Phase Polarity Normal Inverted softkey, 987

Phase Ref Set softkey, 46

PHS Off On softkey, 888

PHS softkey, 284, 285, 286

PHS subsystem keys

128QAM, 873

16 1's & 16 0's, 860, 862, 866, 883, 887

16-Lvl FSK, 873

16PSK, 873

16QAM, 873

256QAM, 873

2-Lvl FSK, 873

32 1's & 32 0's, 860, 862, 866, 883, 887

32QAM, 873

4 1's & 4 0's, 860, 862, 866, 883, 887

4-Lvl FSK, 873

4QAM, 873

64 1's & 64 0's, 860, 862, 866, 883, 887

64QAM, 873

8 1's & 8 0's, 860, 862, 866, 883, 887

8-Lvl FSK, 873

8PSK, 873

All Timeslots, 875

APCO 25 C4FM, 869

BBG Data Clock Ext Int, 850

BBG Ref Ext Int, 868

Begin Frame, 875

Begin Timeslot #, 875, 876

BPSK, 873

Bus, 874, 882

C4FM, 873

Continuous, 878

CSID, 863, 884

Custom, 867

D8PSK, 873

Data Format Pattern Framed, 859

Ext, 860, 862, 866, 874, 882, 883, 887

Ext BBG Ref Freq, 868

Ext Data Clock Normal Symbol, 867

Ext Delay Bits, 880

Ext Delay Off On, 881

PHS subsystem keys (continued)

Ext Polarity Neg Pos, 881

Fall Delay, 854, 855

Fall Time, 854, 856

Filter Alpha, 850

Filter BbT, 851

FIX4, 860, 861, 862, 866, 883, 884, 887

Free Run, 879

Gate Active Low High, 880

Gated, 878

Gaussian, 869

Gray Coded QPSK, 873

I/Q Scaling, 870

IDLE, 863, 885

IS-95, 869

IS-95 Mod, 869

IS-95 Mod w/EQ, 869

IS-95 OQPSK, 873

IS-95 QPSK, 873

IS-95 w/EQ, 869

MSK, 873

Nyquist, 869

Optimize FIR For EVM ACP, 860

OQPSK, 873

$\pi/4$ DQPSK, 873

Patt Trig In 1, 882

Patt Trig In 2, 882

Phase Dev, 870, 872

Phase Polarity Normal Invert, 873

PHS Off On, 888

PN11, 860, 862, 866, 883, 887

PN15, 860, 862, 866, 883, 887

PN20, 860, 862, 866, 883, 887

PN23, 860, 862, 866, 883, 887

PN9, 860, 862, 866, 883, 887

PN9 Mode Normal Quick, 852

PSID, 864, 885

QPSK, 873

Recall Secondary Frame State, 874

Rectangle, 869

Reset & Run, 879

Restore PHS Factory Default, 862

Rise Delay, 856, 857

Rise Time, 858

Root Nyquist, 869

Index

PHS subsystem keys (*continued*)

SA, 865, 886

Save Secondary Frame State, 874

Scramble Off On, 853

Scramble Seed, 853

Secondary Frame Off On, 875

Sine, 859

Single, 878

Symbol Rate, 877

SYNC, 867

Sync Out Offset, 876

TCH, 867

TCH All, 867

Timeslot Ampl Main Delta, 863, 884

Timeslot Off On, 864, 886

Timeslot Type, 888

Trigger & Run, 879

Trigger Key, 874, 882

UN3/4 GSM Gaussian, 869

User File, 859, 860, 862, 866, 883, 887

User FIR, 869

User FSK, 872, 873

User I/Q, 872, 873

UW, 864, 865, 885, 886

phs subsystem keys

PRAM Files, 861

PI Bits field, 960

PICH 10ms FramePulse (DRPS37) softkey, 964,
966, 967, 968, 969

PICH data (DRPS35) softkey, 964, 966, 967, 968,
969

PICH data-clk (DRPS34) softkey, 964, 966, 967,
968, 969

PICH softkey, 352, 936, 937

PICH TimeSlot Pulse (DRPS36) softkey, 964, 966,
967, 968, 969

Pilot softkey, 229, 230, 232, 250, 257

Playback Ratio field, 940

PN Offset field, 511

PN Offset softkey, 255, 259

PN11 softkey

See custom subsystem keys

See DECT subsystem keys

See EDGE subsystem keys

See GSM subsystem keys

PN11 softkey (*continued*)

See NADC subsystem keys

See PDC subsystem keys

See PHS subsystem keys

See sense subsystem keys

See TETRA subsystem keys

PN15 softkey

See CDMA2000 BBG subsystem keys and fields

See custom subsystem keys

See DECT subsystem keys

See EDGE subsystem keys

See GPS subsystem keys

See GSM subsystem keys

See NADC subsystem keys

See PDC subsystem keys

See PHS subsystem keys

See sense subsystem keys

See TETRA subsystem keys

See wideband CDMA base band generator
subsystem keys and fields

PN20 softkey

See custom subsystem keys

See DECT subsystem keys

See EDGE subsystem keys

See GSM subsystem keys

See NADC subsystem keys

See PDC subsystem keys

See PHS subsystem keys

See sense subsystem keys

See TETRA subsystem keys

PN23 softkey

See custom subsystem keys

See DECT subsystem keys

See EDGE subsystem keys

See GSM subsystem keys

See NADC subsystem keys

See PDC subsystem keys

See PHS subsystem keys

See sense subsystem keys

See TETRA subsystem keys

PN9 Mode Normal Quick softkey

See DECT subsystem keys

See GSM subsystem keys

See NADC subsystem keys

See PDC subsystem keys

- PN9 Mode Normal Quick softkey (continued)*
 See PHS subsystem keys
 See TETRA subsystem keys
- PN9 Mode Preset softkey, [160](#)
- PN9 softkey
 See CDMA2000 BBG subsystem keys and fields
 See custom subsystem keys
 See data subsystem keys
 See DECT subsystem keys
 See EDGE subsystem keys
 See GPS subsystem keys
 See GSM subsystem keys
 See NADC subsystem keys
 See PDC subsystem keys
 See PHS subsystem keys
 See sense subsystem keys
 See TETRA subsystem keys
 See wideband CDMA base band generator
 subsystem keys and fields
- Polarity Normal Invert softkey, [797](#)
- Power Control Signal Polarity Neg Pos softkey,
[1017](#)
- Power field
 See CDMA2000 BBG subsystem keys and fields
 See wideband CDMA baseband generator
 subsystem keys and fields
- Power Hold Off On softkey, [1014](#)
- Power Meter softkey, [78](#)
- Power Mode Norm TPC softkey, [1017](#)
- Power On Last Preset softkey, [158](#)
- Power Search Manual Auto softkey, [58](#), [59](#), [60](#)
- Power softkey, [359](#)
- power subsystem keys
 ALC BW, [57](#)
 ALC BW Normal Narrow, [57](#)
 ALC Off On, [60](#)
 Alt Amp Delta, [61](#)
 Alt Ampl Off On, [62](#)
 Ampl, [48](#), [65](#)
 Ampl Offset, [67](#)
 Ampl Ref Off On, [66](#)
 Ampl Ref Set, [65](#)
 Ampl Start, [48](#), [66](#)
 Ampl Stop, [48](#), [67](#)
 Amplitude, [65](#), [68](#)
- power subsystem keys (*continued*)
 Atten Hold Off On, [63](#)
 Do Power Search, [58](#), [59](#), [60](#)
 Ext Detector, [61](#)
 Internal, [61](#)
 Off, [48](#), [65](#)
 Power Search Manual Auto, [58](#), [59](#), [60](#)
 Set ALC Level, [58](#)
 Set Atten, [64](#)
 Source Module, [61](#)
- PPCCPCH softkey, [352](#), [353](#)
- Pp-m field, [1035](#), [1052](#)
- PRACH Mode Single Multi softkey, [1032](#)
- PRACH Power Setup Mode Pp-m Total softkey,
[1039](#)
- PRACH Processing (RPS19) softkey
 See wideband CDMA base band generator
 subsystem keys and fields
- PRACH Scrambling Code field, [1040](#)
- PRACH softkey, [1013](#)
- PRACH Trigger Polarity Neg Pos softkey, [1045](#)
- PRACH Trigger softkey, [1044](#)
- PRACH Trigger Source Immedi Trigger softkey,
[1045](#)
- PRAM
 downloads, [111](#)
 list, [112](#)
- PRAM DATA BLOCK, [113](#)
- pram files
 CUSTOM subsystem keys, [557](#)
 DECT subsystem keys, [581](#)
 EDGE subsystem keys, [632](#)
 GSM subsystem keys, [687](#)
 NADC subsystem keys, [790](#)
 PDC subsystem keys, [824](#)
 PHS subsystem keys, [861](#)
 TETRA subsystem keys, [900](#)
- PRAM LIST, [113](#)
- PRAM?, [113](#)
- PRAT field, [502](#)
- Pre Sig field, [1036](#)
- Preamble power average field, [1038](#)
- Preamble Pulse (RPS21) softkey
 See wideband CDMA base band generator
 subsystem keys and fields

Index

Preamble Raw Data (RPS15) softkey
 See wideband CDMA base band generator
 subsystem keys and fields

Preamble Raw Data Clock (RPS16) softkey
 See wideband CDMA base band generator
 subsystem keys and fields

Preamble softkey, [1021](#)

precise talking and forgiving listening, [7](#)

Preset hardkey, [159](#)

Preset List softkey, [19](#), [55](#)

Preset Normal User softkey, [161](#)

PSCH softkey, [352](#)

PSCH State field, [962](#)

PSID softkey, [864](#), [885](#)

pulse modulation subsystem keys

 Ext Pulse, [204](#)

 Int Doublet, [204](#)

 Int Free-Run, [204](#)

 Int Gated, [204](#)

 Int Triggered, [204](#)

 Internal Square, [204](#)

 Pulse Delay, [69](#)

 Pulse Off On, [204](#)

 Pulse Period, [202](#)

 Pulse Rate, [201](#)

 Pulse Width, [203](#)

Pulse softkeys

 Pulse Delay, [69](#)

 Pulse Off On, [204](#)

 Pulse Period, [202](#)

 Pulse Rate, [201](#)

 Pulse Width, [203](#)

Puncture fields, [1087](#), [1095](#)

Puncture softkey, [972](#)

PwrOffs field, [971](#), [1071](#)

PWT softkey, [284](#), [285](#), [286](#)

Q

Q Offset softkey, [28](#)

QOF field, [486](#), [496](#)

QPSK softkey

See custom subsystem keys

See DECT subsystem keys

See Dmodulation subsystem keys

See EDGE subsystem keys

QPSK softkey (continued)

See GSM subsystem keys

See NADC subsystem keys

See PDC subsystem keys

See PHS subsystem keys

See TETRA subsystem keys

Quadrature Skew softkey, [29](#)

Quarter softkey, [528](#), [533](#)

quotes, SCPI command use of, [16](#)

R

RACH TrCH softkey, [1021](#)

Radio Config field

See CDMA2000 BBG subsystem keys and fields

Radio Config softkey, [256](#)

RadioConfig 1/2 Access softkey, [477](#)

RadioConfig 1/2 Traffic softkey, [477](#)

RadioConfig 3/4 Common Control softkey, [477](#)

RadioConfig 3/4 Enhanced Access softkey, [477](#)

RadioConfig 3/4 Traffic softkey, [477](#)

Ramp field, [485](#)

Ramp softkey, [177](#), [184](#), [191](#), [197](#)

Ramp Step field, [1035](#), [1051](#)

Ramp Time field, [486](#)

Random Seed Fixed Random softkey, [332](#)

Random softkey, [351](#), [359](#)

Ranging Code C/A P C/A+P softkey, [674](#)

Rate Full Half softkey, [794](#), [828](#)

Rate Match Attr field, [985](#), [1087](#), [1095](#)

Rate softkey, [255](#), [259](#)

RCDMA softkey, [101](#)

real response data, [10](#)

Real-time AWGN Off On softkey, [461](#)

real-time AWGN subsystem keys

 Bandwidth, [461](#)

 Real-time AWGN Off On, [461](#)

Real-time GPS Off On softkey, [676](#)

Real-time Noise, [307](#)

RECALL Reg softkey, [91](#)

Recall Secondary Frame State softkey

See DECT subsystem keys

See EDGE subsystem keys

See GSM subsystem keys

See NADC subsystem keys

See PDC subsystem keys

- Recall Secondary Frame State softkey (continued)*
 See PHS subsystem keys
 See TETRA subsystem keys
- Rectangle softkey
 See CDMA ARB subsystem keys
 See CDMA2000 ARB subsystem keys
 See CDMA2000 BBG subsystem keys and fields
 See custom subsystem keys
 See DECT subsystem keys
 See Dmodulation subsystem keys
 See EDGE subsystem keys
 See GPS subsystem keys
 See GSM subsystem keys
 See NADC subsystem keys
 See PDC subsystem keys
 See PHS subsystem keys
 See TETRA subsystem keys
 See wideband CDMA ARB subsystem keys
 See wideband CDMA base band generator subsystem keys and fields
- Ref Data Rate field, [988](#), [1019](#)
- Ref Oscillator Source Auto Off On softkey, [47](#)
- Ref Sensitivity softkey, [979](#)
- Reference Freq softkey, [475](#)
 See AWGN subsystem keys
 See bluetooth subsystem keys
 See CDMA ARB subsystem keys
 See CDMA2000 ARB subsystem keys
 See Dmodulation subsystem keys
 See dual ARB subsystem keys
 See multitone subsystem keys
 See wideband CDMA ARB subsystem keys
- Reference Out softkey, [409](#)
- Rename File, [121](#)
- Rename File softkey, [128](#)
- Reserved field, [502](#)
- Reset & Run softkey
 See CDMA ARB subsystem keys
 See CDMA2000 ARB subsystem keys
 See custom subsystem keys
 See DECT subsystem keys
 See Dmodulation subsystem keys
 See dual ARB subsystem keys
 See EDGE subsystem keys
 See GSM subsystem keys
- Reset & Run softkey (continued)*
 See NADC subsystem keys
 See PDC subsystem keys
 See PHS subsystem keys
 See TETRA subsystem keys
 See wideband CDMA ARB subsystem keys
- Reset RS-232 softkey, [79](#)
- Reset to Initial Power softkey, [1016](#)
- Resolution softkey, [414](#)
- resolving error messages/setting conflicts, [719](#)
- response data types. *See* SCPI commands response types
- Restore DECT Factory Default softkey, [582](#)
- Restore EDGE Factory Default softkey, [633](#)
- Restore Factory Default softkey, [688](#)
- Restore NADC Factory Default softkey, [790](#)
- Restore PDC Factory Default softkey, [825](#)
- Restore PHS Factory Default softkey, [862](#)
- Restore Sys Defaults softkey, [160](#)
- Restore TETRA Factory Default softkey, [901](#)
- Resync Limits softkey, [454](#)
- Retrigger Mode Off On softkey, [365](#)
- Reverse softkey, [229](#)
- Revert to Default Cal Settings softkey, [73](#)
- RF On/Off hardkey, [130](#)
- Right Alternate softkey, [351](#)
- Right softkey, [940](#)
- Rise Delay softkey
 See custom subsystem keys
 See DECT subsystem keys
 See EDGE subsystem keys
 See GSM subsystem keys
 See NADC subsystem keys
 See PDC subsystem keys
 See PHS subsystem keys
 See TETRA subsystem keys
- Rise Time softkey
 See custom subsystem keys
 See DECT subsystem keys
 See EDGE subsystem keys
 See GSM subsystem keys
 See NADC subsystem keys
 See PDC subsystem keys
 See PHS subsystem keys
 See TETRA subsystem keys

Index

- Rising softkey, [546](#)
- RMC 144 kbps (25.141 v3.9) softkey, [1053](#)
- RMC 384 kbps (25.141 v3.9) softkey, [1053](#)
- RMC 64 kbps (25.141 v3.9) softkey, [1053](#)
- RMC122 kbps (25.141 v3.9) softkey, [1053](#)
- RMS header info, [298](#)
- Root Nyquist softkey
 - See* CDMA ARB subsystem keys
 - See* CDMA2000 ARB subsystem keys
 - See* CDMA2000 BBG subsystem keys and fields
 - See* custom subsystem keys
 - See* DECT subsystem keys
 - See* Dmodulation subsystem keys
 - See* EDGE subsystem keys
 - See* GPS subsystem keys
 - See* GSM subsystem keys
 - See* NADC subsystem keys
 - See* PDC subsystem keys
 - See* PHS subsystem keys
 - See* TETRA subsystem keys
 - See* wideband CDMA ARB subsystem keys
 - See* wideband CDMA base band generator subsystem keys and fields
- route subsystem keys
 - Burst Gate In Polarity Neg Pos, [131](#), [132](#)
 - Data Clock Out Neg Pos, [134](#)
 - Data Clock Polarity Neg Pos, [131](#), [133](#), [135](#)
 - Data Out Polarity Neg Pos, [134](#), [136](#)
 - Data Polarity Neg Pos, [132](#), [133](#)
 - DATA/CLK/SYNC Rear Outputs Off On, [136](#)
 - Symbol Sync Out Polarity Neg Pos, [135](#), [136](#)
 - Symbol Sync Polarity Neg Pos, [132](#), [133](#)
- RS-232 Baud Rate softkey, [79](#)
- RS-232 ECHO Off On softkeys, [79](#)
- RS-232 Timeout softkeys, [80](#)
- Run Complete Self Test softkey, [93](#)
- S**
- S softkey, [646](#), [705](#)
 - See* DECT subsystem keys
- SA softkey, [865](#), [886](#)
- SACCH softkey, [800](#), [804](#), [834](#), [838](#), [840](#)
- Sanitize softkey, [163](#)
- Satellite ID softkey, [676](#)
- Save Reg softkey, [92](#)
- Save Secondary Frame State softkey
 - See* DECT subsystem keys
 - See* EDGE subsystem keys
 - See* GSM subsystem keys
 - See* NADC subsystem keys
 - See* PDC subsystem keys
 - See* PHS subsystem keys
 - See* TETRA subsystem keys
- Save Seq[n] Reg[nn] softkey, [92](#)
- Save Setup To Header softkey, [208](#), [222](#), [247](#), [277](#), [299](#), [321](#), [338](#), [465](#)
- Save User Preset softkey, [161](#)
- Scale to 0dB softkey
 - See* CDMA ARB subsystem keys
 - See* CDMA2000 ARB subsystem keys
 - See* CDMA2000 BBG subsystem keys and fields
 - See* wideband CDMA ARB subsystem keys
 - See* wideband CDMA base band generator subsystem keys and fields
- Scaling softkey, [311](#)
- SCCPCH softkey, [352](#), [353](#)
- SCFN field, [976](#), [1076](#)
- SCH slot-pulse (DRPS10) softkey, [964](#), [966](#), [967](#), [968](#), [969](#)
- SCPI
 - errors, [156](#)
- SCPI command subsystems
 - all, [460](#)
 - amplitude modulation, [174](#)
 - AWGN, [207](#)
 - AWGN real-time, [461](#)
 - bluetooth, [462](#)
 - calculate, [394](#)
 - calibration, [72](#)
 - CDMA ARB, [216](#)
 - CDMA2000 ARB, [242](#)
 - CDMA2000 BBG, [477](#)
 - communication, [75](#)
 - correction, [18](#)
 - custom, [548](#)
 - data, [404](#)
 - DECT, [571](#)
 - diagnostic, [81](#)
 - digital modulation, [20](#)
 - digital subsystem, [376](#)

SCPI command subsystems (*continued*)

- display, 85
- Dmodulation, 274
- Dual ARB, 297
- E4438C, 206
- EDGE, 623
- frequency, 37
- frequency modulation, 181
- GPS subsystem, 670
- GSM, 677
- HSDPA over W-CDMA, 717
- IEEE 488.2 common commands, 89
- input, 412, 418
- list/sweep, 48
- low frequency output, 188
- mass memory, 122
- memory, 94
- multitone, 321
- N5102A, 376
- NADC, 779
- output, 129
- PDC, 814
- phase modulation, 193
- PHS, 850
- power, 57
- pulse, 69
- pulse modulation, 201
- route, 131
- sense, 421
- status, 137
- system, 155
- TETRA, 889
- trigger, 168
- unit, 172
- wideband CDMA ARB, 333
- wideband CDMA base band generator, 934

SCPI commands

- command tree paths, 7
- parameter and response types, 7
- parameter types
 - boolean, 10
 - discrete, 9
 - extended numeric, 8
 - numeric, 8
 - string, 10

SCPI commands (*continued*)

- response data types
 - discrete, 11
 - integer, 10
 - numeric boolean, 11
 - real, 10
 - string, 11
- root command, 6
- SCPI softkey, 157, 159
- Scramble Code softkey, 351, 357, 359
- Scramble Off On softkey, 853, 893
- Scramble Offset softkey, 351, 359
- Scramble Seed softkey, 853, 892
- Scrambling Code field, 969, 970, 1068
- Screen Saver Delay
 - 1 hr softkey, 165
- Screen Saver Mode softkeys, 166
- Screen Saver Off On softkeys, 166
- Second DPDCH I Q softkey, 357
- Secondary Frame Off On softkey
 - See* DECT subsystem keys
 - See* EDGE subsystem keys
 - See* GSM subsystem keys
 - See* NADC subsystem keys
 - See* PDC subsystem keys
 - See* PHS subsystem keys
 - See* TETRA subsystem keys
- secure wave directory, 114, 125
- security functions
 - erase, 162, 163
 - none, 163
 - overwrite, 163, 164
 - sanitize, 163, 165
 - secure display, 162
 - secure mode, 164
- Segment Advance softkey, 312
- Select File softkey, 252, 284
- Select Seq softkey, 91
- Select Waveform softkey, 318, 319
- sense subsystem keys
 - Adjust Gain, 433
 - Aux, 434, 451, 457
 - Aux I/O Trigger Polarity Pos Neg, 457
 - BER Mode Off On, 421, 425, 444
 - BERT Off On, 454

Index

sense subsystem keys (*continued*)

BERT Resync Off On, 454
Bit Count, 435, 437
Bit Delay Off On, 456
Block Count, 424, 426, 428, 440, 444
Block Erasure, 422, 427, 440, 441, 442, 444, 445
Bus, 434, 451, 457
Class Ib Bit Error, 448, 449
Class II Bit Error, 449
Cycle Count, 457
Delay Bits, 456
EDGE BERT Off On, 438
Error Count, 438, 455
Exceeds Any Thresholds, 449
Ext, 434, 451, 457
Ext Frame Trigger Delay, 423
External Frame Polarity Net Pos, 423
Frame Count, 443, 447
Frame Erasure, 449
Frame Trigger Source Int Ext, 424
GSM BERT Off On, 452
High Amplitude, 425, 429, 436
Immediate, 434, 451, 457
Initial Bit Count, 437
Initial Block Count, 427, 430
Initial Frame Count, 447
Low Amplitude, 426, 429, 436, 443
Measurement Mode BER% Search, 446
Measurement Mode BLER% Search, 432
No Thresholds, 422, 427, 442, 445, 449, 455
Pass Amplitude, 426, 430, 437
PN11, 453
PN15, 453
PN20, 453
PN23, 453
PN9, 453
Resync Limits, 454
Spcl Pattern 0's 1's, 452
Spcl Pattern Ignore Off On, 453
Spectrum Invert Off On, 433, 448
Stop Measurement, 432, 445
Sync Source BCH PDCH, 434
Sync Source BCH TCH, 451
Synchronize to BCH/PDCH, 433
Synchronize to BCH/TCH, 450

sense subsystem keys (*continued*)

Target BER %, 425, 428
Timeslot, 432, 446
Total Bits, 456
Trigger Key, 434, 451, 457
Uplink Timing Advance, 435, 452
SEQ softkey, 102
Set ALC Level softkey, 58
Set Atten softkey, 64
Set Marker Off All Points softkey, 303
setting conflicts, resolving, 719
setup sweep, 48
SF/2 softkey, 1072
SF2 softkey, 972
SFN reset-signal (DRPS5) softkey, 964, 966, 967,
968, 969
SFN RST Polarity softkey, 1069
SFN-CFN Frame Offset softkey, 1012
SHAPE softkey, 102
Signature field, 1052
Sine softkey
See amplitude modulation subsystem keys
See DECT subsystem keys
See EDGE subsystem keys
See frequency modulation subsystem keys
See GSM subsystem keys
See low frequency output subsystem keys
See NADC subsystem keys
See PDC subsystem keys
See phase modulation subsystem keys
See PHS subsystem keys
See TETRA subsystem keys
Single softkey
See CDMA ARB subsystem keys
See CDMA2000 ARB subsystem keys
See custom subsystem keys
See DECT subsystem keys
See Dmodulation subsystem keys
See dual ARB subsystem keys
See EDGE subsystem keys
See GSM subsystem keys
See NADC subsystem keys
See PDC subsystem keys
See PHS subsystem keys
See TETRA subsystem keys

Single softkey (continued)

- See* wideband CDMA ARB subsystem keys
- Single Sweep softkey, 169
- skew, 29, 30
- skew, I/Q
 - adjustment, 29
- Slot Format field, 941, 948, 996, 1007, 1025, 1031
- softkey, 121
- software options, 82
- Source Module softkey, 61
- Spcl Pattern 0's 1's softkey, 452
- Spcl Pattern Ignore Off On softkey, 453
- Spectrum Invert Off On softkey
 - See* sense subsystem keys
- Spread Rate 1 softkey, 250, 257, 265
- Spread Rate 3, 257
- Spread Rate 3 softkey, 250, 265
- Spread Rate field, 510
- Spreading Type Direct Mcarrier, 250
- Spreading Type Direct Mcarrier softkey, 265
- Spurious Response softkey, 979
- Square softkey, 177, 184, 191, 197
- square wave pulse rate
 - internally generated, 201
- SR1 9 Channel softkey, 252
- SR1 Pilot softkey, 252
- SR3 Direct 9 Channel softkey, 252
- SR3 Direct Pilot softkey, 252
- SR3 Mcarrier 9 Channel softkey, 252
- SR3 MCarrier Pilot softkey, 252
- SS softkey, 697
- SSB softkey, 912, 917
- SSCH 2nd Scramble Group field, 970
- SSCH Power field, 970
- SSCH softkey, 352
- SSCH State field, 971
- Standard softkey, 351
- Start Access Slot Position in 80ms Period field, 1037
- Start Frequency softkey, 74
- Start Sub-Channel# field, 1041
- State field
 - See* CDMA2000 BBG subsystem keys and fields
- State softkey, 103, 122
- STD softkey, 993
- Step Dwell softkey, 55
- Step Power field, 1016
- Stop Frequency softkey, 74
- Stop Measurement softkey
 - See* sense subsystem keys
- Store Custom CDMA State softkey, 233, 254, 258
- Store Custom Dig Mod State softkey, 288
- Store Custom Multicarrier softkey, 232, 252
- Store Custom W-CDMA State softkey, 347, 350
- Store To File softkey, 19, 121, 128, 329, 358
- string response data, 11
- string SCPI parameter, 10
- strings, quote usage, 16
- STS softkey, 912, 918
- Sub Channel Timing (RPS17) softkey
 - See* wideband CDMA base band generator subsystem keys and fields
- Subnet Mask softkey, 76
- subsystems, SCPI commands
 - See* SCPI command subsystems
- Sum softkey, 23
- Summing Ratio (SRC1/SRC2) x.xx dB softkey, 35
- SW softkey, 835, 838, 840
- Sweep Direction Down Up softkey, 49
- Sweep Repeat Single Cont softkey, 168
- Sweep Retrace Off On softkey, 53
- sweep setup, 48
- Sweep Type List Step softkey, 54
- Swept-Sine softkey, 177, 184, 191, 197
- Symbol Out Polarity Neg Pos softkey, 135
- Symbol Rate field, 996, 1005, 1030
- Symbol Rate softkey, 288, 351, 359, 660, 1025
- Symbol Sync Out Polarity Neg Pos softkey, 136
- Symbol Sync Polarity Neg Pos softkey, 132, 133
- Symbol Timing Err softkey, 470
- Sync Out Offset softkey, 615, 659, 708, 806, 842, 876, 925
- SYNC softkey, 800, 804, 867
- Sync softkey, 230, 707
- Sync Source BCH PDCH softkey, 434
- Sync Source BCH TCH softkey, 451
- Sync Source SFN FCIk ESG softkey, 1070
- Synchronize to BCH/PDCH softkey, 433
- Synchronize to BCH/TCH softkey, 450
- System ID field, 503

Index

system subsystem keys

8648A/B/C/D, [157](#), [159](#)
8656B,8657A/B, [157](#), [159](#)
8657D NADC, [157](#), [159](#)
8657D PDC, [157](#), [159](#)
8657J PHS, [157](#), [159](#)
Activate Secure Display, [162](#)
Enter Secure Mode, [164](#)
erase, [163](#)
Erase All, [162](#)
Erase and Overwrite All, [164](#)
Erase and Sanitize All, [165](#)
Error Info, [156](#)
Help Mode Single Cont, [157](#)
none, [163](#)
overwrite, [163](#)
PN9 Mode Preset, [160](#)
Power On Last Preset, [158](#)
Preset, [159](#)
Preset Normal User, [161](#)
Restore Sys Defaults, [160](#)
sanitize, [163](#)
Save User Preset, [161](#)
SCPI, [157](#), [159](#)
Screen Saver Delay
 1 hr, [165](#)
Screen Saver Mode, [166](#)
Screen Saver Off On, [166](#)
Time/Date, [155](#), [166](#)
View Next Error Message, [156](#)

T

T1 softkey, [656](#)
T2 softkey, [657](#)
Target BER % softkey
 See sense subsystem keys
TCH All softkey, [867](#)
TCH softkey, [867](#)
TCH/FS softkey, [642](#), [645](#), [699](#)
tDPCH Offset field, [949](#)
Test Model 1 w/16 DPCH softkey, [342](#), [347](#)
Test Model 1 w/32 DPCH softkey, [342](#), [347](#)
Test Model 1 w/64 DPCH softkey, [342](#), [347](#)
Test Model 2 softkey, [342](#), [347](#)
Test Model 3 w/16 DPCH softkey, [342](#), [347](#)

Test Model 3 w/32 DPCH softkey, [342](#), [347](#)
Test Model 4 softkey, [342](#), [347](#)
Test Model 5 w/2HSPDSCH softkey, [342](#), [347](#)
Test Model 5 w/4HSPDSCH softkey, [342](#), [347](#)
Test Model 5 w/8HSPDSCH softkey, [342](#), [347](#)
TETRA Off On softkey, [933](#)
TETRA softkey, [284](#), [285](#), [286](#)
TETRA subsystem keys
 128QAM, [906](#)
 16 1's & 16 0's, [900](#), [908](#), [910](#), [913](#), [914](#), [916](#), [918](#),
 [920](#), [921](#), [922](#), [923](#)
 16PSK, [906](#)
 16QAM, [906](#)
 256QAM, [906](#)
 2-Lvl FSK, [906](#)
 32 1's & 32 0's, [900](#), [908](#), [910](#), [913](#), [914](#), [916](#), [918](#),
 [920](#), [921](#), [922](#), [923](#)
 32QAM, [906](#)
 4 1's & 4 0's, [900](#), [908](#), [910](#), [913](#), [914](#), [916](#), [918](#),
 [920](#), [921](#), [922](#), [923](#)
 4-Lvl FSK, [906](#)
 4QAM, [906](#)
 64 1's & 64 0's, [900](#), [908](#), [910](#), [913](#), [914](#), [916](#), [918](#),
 [920](#), [921](#), [922](#), [923](#)
 64QAM, [906](#)
 8 1's & 8 0's, [900](#), [908](#), [910](#), [913](#), [914](#), [916](#), [918](#),
 [920](#), [921](#), [922](#), [923](#)
 8PSK, [906](#)
 All Timeslots, [924](#)
 APCO 25 C4FM, [903](#)
 B, [911](#), [917](#)
 B1, [909](#), [914](#)
 B2, [910](#), [915](#)
 BBG Data Clock Ext Int, [889](#)
 BBG Ref Ext Int, [902](#)
 Begin Frame, [924](#)
 Begin Timeslot #, [924](#), [926](#)
 BPSK, [906](#)
 Bus, [908](#), [930](#)
 Continuous, [928](#)
 D8PSK, [906](#)
 Data Format Pattern Framed, [899](#)
 Dn Custom Cont, [924](#)
 Dn Normal Cont, [924](#)
 Dn Normal Disc, [924](#)

TETRA subsystem keys (*continued*)

Dn Sync Cont, [924](#)
 Dn Sync Disc, [924](#)
 Ext, [900](#), [908](#), [910](#), [913](#), [914](#), [916](#), [918](#), [920](#), [921](#),
[922](#), [923](#), [930](#)
 Ext BBG Ref Freq, [903](#)
 Ext Data Clock Normal Symbol, [902](#)
 Ext Delay Bits, [931](#)
 Ext Delay Off On, [931](#)
 Ext Polarity Neg Pos, [932](#)
 Fall Delay, [893](#), [894](#)
 Fall Time, [894](#), [895](#)
 FCOR, [912](#), [917](#)
 Filter Alpha, [889](#)
 Filter BbT, [890](#)
 FIX4, [900](#), [901](#), [908](#), [909](#), [910](#), [911](#), [913](#), [914](#), [916](#),
[918](#), [920](#), [921](#), [922](#), [923](#)
 Free Run, [928](#)
 Freq Dev, [904](#)
 Gate Active Low High, [929](#)
 Gated, [928](#)
 Gaussian, [903](#)
 Gray Coded QPSK, [906](#)
 I/Q Scaling, [904](#)
 IS-95, [903](#)
 IS-95 Mod, [903](#)
 IS-95 Mod w/EQ, [903](#)
 IS-95 OQPSK, [906](#)
 IS-95 QPSK, [906](#)
 IS-95 w/EQ, [903](#)
 MSK, [906](#)
 Nyquist, [903](#)
 Optimize FIR For EVM ACP, [899](#)
 OQPSK, [906](#)
 $\pi/4$ DQPSK, [906](#)
 Patt Trig In 1, [933](#)
 Patt Trig In 2, [933](#)
 Phase Dev, [905](#)
 Phase Polarity Normal Invert, [907](#)
 PN11, [900](#), [908](#), [910](#), [913](#), [914](#), [916](#), [918](#), [920](#), [921](#),
[922](#), [923](#)
 PN15, [900](#), [908](#), [910](#), [913](#), [914](#), [916](#), [918](#), [920](#), [921](#),
[922](#), [923](#)
 PN20, [900](#), [908](#), [910](#), [913](#), [914](#), [916](#), [918](#), [920](#), [921](#),
[922](#), [923](#)

TETRA subsystem keys (*continued*)

PN23, [900](#), [908](#), [910](#), [913](#), [914](#), [916](#), [918](#), [920](#), [921](#),
[922](#), [923](#)
 PN9, [900](#), [908](#), [910](#), [913](#), [914](#), [916](#), [918](#), [920](#), [921](#),
[922](#), [923](#)
 PN9 Mode Normal Quick, [892](#)
 QPSK, [906](#)
 Recall Secondary Frame State, [907](#)
 Rectangle, [903](#)
 Reset & Run, [928](#)
 Restore TETRA Factory Default, [901](#)
 Rise Delay, [896](#)
 Rise Time, [897](#), [898](#)
 Root Nyquist, [903](#)
 Save Secondary Frame State, [907](#)
 Scramble Off On, [893](#)
 Scramble Seed, [892](#)
 Secondary Frame Off On, [908](#)
 Sine, [898](#)
 Single, [928](#)
 SSB, [912](#), [917](#)
 STS, [912](#), [918](#)
 Symbol Rate, [926](#)
 Sync Out Offset, [925](#)
 TETRA Off On, [933](#)
 Timeslot Ampl Main Delta, [919](#)
 Timeslot Off On, [919](#)
 Trigger & Run, [928](#)
 Trigger Key, [908](#), [930](#)
 TS, [910](#), [915](#), [919](#), [920](#), [922](#)
 UN3/4 GSM Gaussian, [903](#)
 Up Control 1, [924](#)
 Up Control 2, [924](#)
 Up Custom, [924](#)
 Up Normal, [924](#)
 User File, [898](#), [900](#), [908](#), [910](#), [913](#), [914](#), [916](#), [918](#),
[920](#), [921](#), [922](#), [923](#)
 User FIR, [903](#)
 User FSK, [905](#), [906](#)
 User I/Q, [906](#)
 tetra subsystem keys
 PRAM Files, [900](#)
 TFCI Field Off On softkey, [351](#), [356](#), [359](#), [361](#)
 TFCI Pat field, [949](#)
 TFCI Pattern field, [997](#), [1026](#)

Index

- TFCI State field, [998](#), [1027](#)
- Tfirst field, [942](#)
- TGCFN field, [972](#), [1071](#)
- TGD field, [973](#), [1072](#)
- Tgl field, [942](#)
- TGL1 field, [973](#), [1073](#)
- TGL2 field, [973](#), [1073](#), [1074](#)
- TGPL1 field, [974](#), [1073](#)
- TGPRC field, [1075](#)
- TGPS Inactive Active softkey, [1075](#)
- TGSN field, [975](#), [1076](#)
- Through softkey, [31](#), [207](#), [210](#), [219](#), [224](#), [244](#), [249](#),
[274](#), [279](#), [300](#), [302](#), [322](#), [324](#), [338](#), [340](#), [464](#), [471](#)
- Time field, [503](#)
- Time/Date softkey, [155](#), [166](#)
- Timeslot Ampl Main Delta softkey
 - See* DECT subsystem keys
 - See* EDGE subsystem keys
 - See* NADC subsystem keys
 - See* PDC subsystem keys
 - See* PHS subsystem keys
 - See* TETRA subsystem keys
- Timeslot Off On softkey
 - See* DECT subsystem keys
 - See* EDGE subsystem keys
 - See* GSM subsystem keys
 - See* NADC subsystem keys
 - See* PHS subsystem keys
 - See* TETRA subsystem keys
- Timeslot Offset softkey, [1041](#)
- Timeslot softkey
 - See* sense subsystem keys
- Timeslot Type softkey, [888](#)
- Timing Offset softkey, [1042](#), [1069](#), [1079](#)
- tOCNS Offset field, [956](#)
- Toggle Marker 1 softkey, [312](#)
- Toggle State softkey, [328](#), [330](#)
- Total Bits field, [1083](#)
- Total Bits softkey, [456](#)
- Total Block field, [1085](#)
- TotalPwr field, [991](#), [1022](#)
- TPC Pat Steps field, [998](#)
- TPC Pat Trig Polarity Neg Pos softkey, [1000](#)
- TPC Pattern field, [1000](#)
- TPC Steps field, [950](#)
- TPC UserFile Trig field, [1001](#)
- Tp-m field, [1043](#)
- Tp-p field, [1044](#)
- Traffic Bearer softkey, [588](#), [600](#)
- Traffic Bearer with Z field softkey, [588](#), [600](#)
- Traffic softkey, [230](#)
- Transp Chan A softkey, [945](#)
- Transp Chan B softkey, [945](#)
- Transp Position Flexible Fixed softkey, [985](#)
- Transport CH softkey, [957](#)
- TrCH BER field, [1006](#)
- TrCh BlkSize 168 softkey, [1040](#)
- TrCh BlkSize 360 softkey, [1040](#)
- TrCH State Off On softkey, [1096](#)
- TrCHI State Off On softkey, [986](#)
- Triangle softkey, [177](#), [184](#), [191](#), [197](#)
- Trigger & Run softkey
 - See* CDMA ARB subsystem keys
 - See* CDMA2000 ARB subsystem keys
 - See* custom subsystem keys
 - See* DECT subsystem keys
 - See* Dmodulation subsystem keys
 - See* dual ARB subsystem keys
 - See* EDGE subsystem keys
 - See* GSM subsystem keys
 - See* NADC subsystem keys
 - See* PDC subsystem keys
 - See* PHS subsystem keys
 - See* TETRA subsystem keys
 - See* wideband CDMA ARB subsystem keys
- Trigger Advance field, [546](#)
- Trigger In Polarity Neg Pos softkey, [170](#)
- Trigger Key softkey
 - list/sweep subsystem, [53](#)
 - See* amplitude modulation subsystem keys
 - See* CDMA ARB subsystem keys
 - See* CDMA2000 ARB subsystem keys
 - See* DECT subsystem keys
 - See* Dmodulation subsystem keys
 - See* dual ARB subsystem keys
 - See* EDGE subsystem keys
 - See* frequency modulation subsystem keys
 - See* GSM subsystem keys
 - See* low frequency output subsystem keys
 - See* NADC subsystem keys

- Trigger Key softkey (continued)*
 - See* PDC subsystem keys
 - See* phase modulation subsystem keys
 - See* PHS subsystem keys
 - See* sense subsystem keys
 - See* TETRA subsystem keys
 - See* trigger subsystem keys
 - See* wideband CDMA ARB subsystem keys
 - Trigger Out Polarity Neg Pos softkey, [169](#)
 - trigger source, list sweep, [53](#)
 - trigger subsystem keys
 - Bus, [170](#), [546](#)
 - Ext, [170](#), [546](#)
 - Free Run, [170](#), [546](#)
 - Single Sweep, [169](#)
 - Sweep Repeat Single Cont, [168](#)
 - Trigger In Polarity Neg Pos, [170](#)
 - Trigger Key, [170](#), [546](#)
 - Trigger Out Polarity Neg Pos, [169](#)
 - Trigger Sync Reply (RPS7) softkey
 - See* wideband CDMA base band generator subsystem keys and fields
 - Truncated PN9 softkey, [463](#)
 - TS softkey, [707](#), [910](#), [915](#), [919](#), [920](#), [922](#)
 - TSC0 softkey, [646](#), [657](#), [698](#), [705](#)
 - TSC1 softkey, [646](#), [657](#), [698](#), [705](#)
 - TSC2 softkey, [646](#), [657](#), [698](#), [705](#)
 - TSC3 softkey, [646](#), [657](#), [698](#), [705](#)
 - TSC4 softkey, [646](#), [657](#), [698](#), [705](#)
 - TSC5 softkey, [646](#), [657](#), [698](#), [705](#)
 - TSC6 softkey, [646](#), [657](#), [698](#), [705](#)
 - TSC7, [646](#), [698](#), [705](#)
 - TSC7 softkey, [646](#), [657](#), [698](#), [705](#)
 - TTI field, [986](#), [1046](#), [1088](#), [1096](#)
 - TTI Frame Clock (RPS9) softkey
 - See* wideband CDMA base band generator subsystem keys and fields
 - Turbo Coding field, [497](#), [544](#)
 - Turbo softkey, [982](#), [983](#), [1081](#)
 - Type softkey, [351](#), [359](#)
- U**
- UDI 64 kbps softkey, [1053](#)
 - UDI ISDN (25.101 v3.5) softkey, [947](#)
 - UN3/4 GSM Gaussian softkey
 - See* CDMA ARB subsystem keys
 - See* CDMA2000 ARB subsystem keys
 - See* CDMA2000 BBG subsystem keys and fields
 - See* custom subsystem keys
 - See* DECT subsystem keys
 - See* Dmodulation subsystem keys
 - See* EDGE subsystem keys
 - See* GPS subsystem keys
 - See* GSM subsystem keys
 - See* NADC subsystem keys
 - See* PDC subsystem keys
 - See* PHS subsystem keys
 - See* TETRA subsystem keys
 - See* wideband CDMA ARB subsystem keys
 - See* wideband CDMA base band generator subsystem keys and fields
 - Uncoded softkey, [648](#)
 - unit subsystem keys
 - dBm, [172](#)
 - dBuV, [172](#)
 - dBuVemf, [172](#)
 - mV, [172](#)
 - mVemf, [172](#)
 - uV, [172](#)
 - uVemf, [172](#)
 - unprotected
 - memory subsystem, [114](#), [125](#)
 - unspecified RMS, [298](#)
 - Up Control 1 softkey, [924](#)
 - Up Control 2 softkey, [924](#)
 - Up Custom softkey, [805](#), [841](#), [924](#)
 - Up Normal softkey, [924](#)
 - Up TCH All softkey, [805](#), [841](#)
 - Up TCH softkey, [805](#), [841](#)
 - Up VOX softkey, [841](#)
 - Up/Down softkey, [950](#), [999](#)
 - Update Display Cycle End Cont softkey, [403](#)
 - Update in Remote Off On softkey, [88](#)
 - Uplink MCS-1 softkey, [642](#), [645](#), [699](#)
 - Uplink MCS-5 softkey, [648](#)
 - Uplink MCS-9 softkey, [648](#)
 - Uplink Timing Advance softkey
 - See* sense subsystem keys
 - uploading files, [114](#), [125](#)

Index

User File softkey

- See* CDMA2000 BBG subsystem keys and fields
- See* custom subsystem keys
- See* DECT subsystem keys
- See* EDGE subsystem keys
- See* GPS subsystem keys
- See* GSM subsystem keys
- See* NADC subsystem keys
- See* PDC subsystem keys
- See* PHS subsystem keys
- See* TETRA subsystem keys
- See* wideband CDMA base band generator subsystem keys and fields

user files, HSDPA, [717](#)

User FIR softkey

- See* CDMA ARB subsystem keys
- See* CDMA2000 ARB subsystem keys
- See* CDMA2000 BBG subsystem keys and fields
- See* custom subsystem keys
- See* DECT subsystem keys
- See* Dmodulation subsystem keys
- See* EDGE subsystem keys
- See* GPS subsystem keys
- See* GSM subsystem keys
- See* NADC subsystem keys
- See* PDC subsystem keys
- See* PHS subsystem keys
- See* TETRA subsystem keys
- See* wideband CDMA ARB subsystem keys
- See* wideband CDMA base band generator subsystem keys and fields

User Flatness softkey, [103](#), [122](#)

User FSK softkey

- See* custom subsystem keys
- See* DECT subsystem keys
- See* EDGE subsystem keys
- See* GSM subsystem keys
- See* NADC subsystem keys
- See* PDC subsystem keys
- See* PHS subsystem keys
- See* TETRA subsystem keys

User I/Q softkey

- See* custom subsystem keys
- See* DECT subsystem keys
- See* EDGE subsystem keys

User I/Q softkey (continued)

- See* GSM subsystem keys
 - See* NADC subsystem keys
 - See* PDC subsystem keys
 - See* PHS subsystem keys
 - See* TETRA subsystem keys
- uV softkey, [172](#)
- uVemf softkey, [172](#)
- UW softkey, [864](#), [865](#), [885](#), [886](#)
- UWCDMA softkey, [104](#)

V

View Next Error Message softkey, [156](#)

W

Walsh Code softkey, [255](#), [259](#)

Walsh field

- See* CDMA2000 BBG subsystem keys and fields
- Waveform Length softkey, [213](#), [240](#)
- Waveform Licenses softkey, [83](#)
- Waveform Runtime Scaling softkey, [311](#)
- waveform, creating a multitone, [321](#)
- W-CDMA Off On softkey, [373](#), [1096](#)

WCDMA softkey

- See* CDMA ARB subsystem keys
 - See* CDMA2000 ARB subsystem keys
 - See* Dmodulation subsystem keys
 - See* wideband CDMA ARB subsystem keys
- wideband CDMA ARB subsystem keys
- 1 DPCH, [342](#), [347](#)
 - 2 Carriers, [343](#)
 - 2.100 MHz, [340](#)
 - 3 Carriers, [343](#)
 - 3 DPCH, [342](#), [347](#)
 - 4 Carriers, [343](#)
 - 40.000 MHz, [338](#), [340](#)
 - APCO 25 C4FM, [336](#)
 - Apply Channel Setup, [350](#), [359](#)
 - ARB Reference Ext Int, [364](#)
 - ARB Sample Clock, [366](#)
 - Bus, [369](#)
 - Channel, [351](#), [359](#)
 - Chip Rate, [335](#)
 - Clear Header, [338](#)

- wideband CDMA ARB subsystem keys (*continued*)
- Clip |I| To, 333, 345
 - Clip |Q| To, 334, 345
 - Clip At PRE POST FIR Filter, 333
 - Clip Type |I+jQ| To, 335, 346
 - Clipping Type |I+jQ| |I|,|Q|, 334, 346
 - Continuous, 366
 - Custom WCDMA State, 357
 - DPCCH, 357
 - DPCCH + 1 DPDCH, 357
 - DPCCH + 2 DPDCH, 357
 - DPCCH + 3 DPDCH, 357
 - DPCCH + 4 DPDCH, 357
 - DPCCH + 5 DPDCH, 357
 - DPCH, 352
 - Equal Energy per Symbol, 356
 - Ext Delay Off On, 371
 - Ext Delay Time, 370
 - Ext Key, 369
 - Ext Polarity Neg Pos, 372
 - Filter Alpha, 336
 - Filter BbT, 337
 - First Spread Code, 351, 359
 - Free Run, 368
 - Gain Unit dB Lin Index, 360
 - Gate Active Low High, 369
 - Gated, 366
 - Gaussian, 336
 - I/Q Mapping Norma Invert, 339
 - I/Q Mod Filter Manual Auto, 341
 - I/Q Output Filter Manual Auto, 338
 - Increment Scramble Code, 346
 - Increment Timing Offset, 349
 - IS-2000 SR3 DS, 336
 - IS-95, 336
 - IS-95 Mod, 336
 - IS-95 Mod w/EQ, 336
 - IS-95 w/EQ, 336
 - Left Alternate, 351
 - Link Down Up, 341
 - Marker 1, 361, 362
 - Marker 1 Polarity Neg Pos, 362
 - Marker 2, 361, 362
 - Marker 2 Polarity Neg Pos, 363
 - Marker 3, 361, 362
- wideband CDMA ARB subsystem keys (*continued*)
- Marker 3 Polarity Neg Pos, 363
 - Marker 4, 361, 362
 - Marker 4 Polarity Neg Pos, 363
 - Modulator Atten Manual Auto, 339, 340
 - None, 361, 362
 - Nyquist, 336
 - OCNS, 352
 - Optimize ACP ADJ ALT, 342, 356
 - Optimize FIR For EVM ACP, 337
 - Patt Trig In 1, 372
 - Patt Trig In 2, 372
 - PCCPCH + SCH, 342, 347
 - PCCPCH + SCH + 1 DPCH, 342, 347
 - PCCPCH + SCH + 3 DPCH, 342, 347
 - PICH, 352
 - Power, 359
 - PPCCPCH, 352, 353
 - PSCH, 352
 - Random, 351, 359
 - Rectangle, 336
 - Reference Freq, 364
 - Reset & Run, 368
 - Retrigger Mode Off On, 365
 - Right Alternate, 351
 - Root Nyquist, 336
 - Save Setup To Header, 338
 - Scale to 0dB, 356
 - SCCPCH, 352, 353
 - Scramble Code, 351, 357, 359
 - Scramble Offset, 351, 359
 - Second DPDCH I Q, 357
 - Single, 366
 - SSCH, 352
 - Standard, 351
 - Store Custom W-CDMA State, 347, 350
 - Store To File, 358
 - Symbol Rate, 351, 359
 - Test Model 1 w/16 DPCH, 342, 347
 - Test Model 1 w/32 DPPCH, 342, 347
 - Test Model 1 w/64 DPCH, 342, 347
 - Test Model 2, 342, 347
 - Test Model 3 w/16 DPCH, 342, 347
 - Test Model 3 w/32 DPCH, 342, 347
 - Test Model 4, 342, 347

Index

wideband CDMA ARB subsystem keys (*continued*)
Test Model 5 w/2HSPDSCH, 342, 347
Test Model 5 w/4HSPDSCH, 342, 347
Test Model 5 w/8HSPDSCH, 342, 347
TFCI Field Off On, 351, 356, 359, 361
Through, 338, 340
Trigger & Run, 368
Trigger Key, 369
Type, 351, 359
UN3/4 GSM Gaussian, 336
User FIR, 336
WCDMA, 336
W-CDMA Off On, 373

wideband CDMA base band generator subsystem
keys and fields
of Blocks, 984
1/2 Conv, 982, 983, 1081
1/3 Conv, 982, 983, 1081
10 msec, 1009
10ms Frame Pulse (DRPS11), 964, 966, 967, 968, 969
10ms Frame Pulse (RPS6), 1062, 1064, 1065, 1066, 1067, 1068
12.2 kbps (34.121 v3.8), 947
144 kbps (34.121 v3.8), 947
20 msec, 1009
2560 msec, 1009
2nd Scr Offset, 948, 955
3.84MHz chip-clk (DRPS4), 964, 966, 967, 968, 969
384 kbps (34.121 v3.8), 947
40 msec, 1009
64 kbps (34.121 v3.8), 947
80 msec, 1009
80ms Frame Pulse (DRPS13), 964, 966, 967, 968, 969
80ms Frame Pulse (RPS20), 1062, 1064, 1065, 1066, 1067, 1068
A, 939
ACS, 979
Active, 975
Actual BER, 1091
Actual BLER, 1084, 1092
AICH, 1046
AICH Trigger Polarity Pos Neg, 1018

wideband CDMA base band generator subsystem
keys and fields (*continued*)
All Down, 950, 999
All Up, 950, 999
Alt power in, 1060
AMR 12.2 kbps, 947, 1053
APCO 25 C4FM, 951, 1010
Apply Channel Setup, 935, 987
B, 939
Base Delay Tp-a, 1042
BBG Chip Clock Ext Int, 934
BBG Data Clock Ext In, 938
BER, 1084, 1086, 1092, 1094
Beta, 992, 1002
BLER, 1085, 1086, 1093, 1094
Blk Set Size, 981
Blk Size, 980, 1080, 1089
Blocking, 979
Burst gate in, 1060
C Power, 988
C Power value, 1019
C/N value, 935, 988, 1019
CFN #0 Frame Pulse (RPS10), 1055
Chan Code, 944, 945, 954
Channel Code, 959, 993, 1003, 1047, 1048
Channel Code field, 958
Channel State, 1002, 1009
Channel State Off On, 938, 942, 943, 944, 951, 953, 956, 957, 959, 961, 969, 991, 1022, 1081, 1088, 1089
ChCode Ctl, 1035
ChCode Dat, 1036
Chip Clock (RPS1), 1055, 1062, 1064, 1065, 1066, 1067, 1068
Chip Rate, 943, 992
Comp Mode Start Trigger Polarity Neg Pos, 1078
Comp Mode Start Trigger Polarity Pos Neg, 977, 978
Comp Mode Stop Trigger Polarity Neg Pos, 1078
Comp Mode Stop Trigger Polarity Pos Neg, 978
Compressed Mode Off On, 1077
Compressed Mode Start Trigger, 953, 977, 1077
Compressed Mode Stop Trigger, 977, 1078
CRC Size, 982, 1082, 1090
Ctrl Beta, 1023

- wideband CDMA base band generator subsystem
 keys and fields (*continued*)
 Ctrl Pwr, 1024
 Data, 1004
 Data Beta, 1027
 Data field, 1094
 Data Pwr, 1029
 Data Rate, 955
 DCH1, 990
 DCH2, 990
 DCH3, 990
 DCH4, 990
 DCH5, 990
 DCH6, 990
 DL Reference 1.1, 1076
 DL Reference 1.2, 1076
 DL Reference 2.1, 1076
 DL Reference 2.2, 1076
 Down/Up, 950, 999
 DPCCH, 990, 1013
 DPCCH Pilot data-clk (DRPS23), 964, 966, 967, 968, 969
 DPCCH Power, 996
 DPCCH Raw Data (RPS4), 1055
 DPCCH Raw Data Clock (RPS5), 1055
 DPCCH TFCI data-clk (DRPS22), 964, 966, 967, 968, 969
 DPCCH TPC indicator (DRPS21), 964, 966, 967, 968, 969
 DPCH + 1, 936, 937
 DPCH + 2, 936, 937
 DPCH 10ms Frame-Pulse (DRPS26), 964, 966, 967, 968, 969
 DPCH Channel Balance, 944
 DPCH Compressed Frame Indicator (DRPS32), 964, 966, 967, 968, 969
 DPCH data stream (DRPS24), 964, 966, 967, 968, 969
 DPCH data-clk (0) (DRPS28), 964, 966, 967, 968, 969
 DPCH Gap Indicator (DRPS33), 964, 966, 967, 968, 969
 DPCH TimeSlot pulse (DRPS25), 964, 966, 967, 968, 969
 DPDCH, 990
- wideband CDMA base band generator subsystem
 keys and fields (*continued*)
 DPDCH data-clk withDTX (DRPS20), 964, 966, 967, 968, 969
 DPDCH data-clk WithOutDTX (DRPS30), 964, 966, 967, 968, 969
 DPDCH Power, 1005
 DPDCH Raw Data (RPS2), 1055
 DPDCH Raw Data Clock (RPS3), 1055
 Eb/No, 1020
 Eb/No value (dB), 989
 Ec/No value, 936, 1020
 Equal Powers, 957, 1013
 Error BER, 1091
 Error Bits, 1083
 Error Blocks, 1084
 Ext, 950
 Ext Clock Rate x1 x2 x4, 934
 FBI State, 995
 Filter Alpha, 952, 1011
 Filter BbT, 952, 1012
 FIX, 995
 FIX4, 946, 957, 958, 959, 960, 983, 984, 994, 1004, 1023, 1024, 1026, 1028, 1086, 1090
 Flat Noise BW, 990
 Frame Clock Polarity Neg Pos, 1010
 Frame Struct, 971
 Frame Sync Trigger Mode Single Cont, 1070
 Gaussian, 951, 1010
 Higher Layer, 1072
 Infinity, 975, 1075
 Init Power, 1014
 Init Pwr, 1034, 1050
 Intermod, 979
 IS-95, 951, 1010
 IS-95 Mod, 951, 1010
 IS-95 Mod w/EQ, 951, 1010
 IS-95 w/EQ, 1010
 Left, 940
 Link Down Up, 987
 Max Input, 979
 Max Power, 1015
 Max Pwr, 1034, 1050
 Message Data Raw Data (RPS11), 1062, 1064, 1065, 1066, 1067, 1068

Index

wideband CDMA base band generator subsystem
 keys and fields (*continued*)
 Message Part, [1033](#)
 Message Pulse (RPS22), [1062](#), [1064](#), [1065](#), [1066](#),
 [1067](#), [1068](#)
 Message-Control Raw Data (RPS13), [1064](#), [1065](#),
 [1066](#), [1067](#), [1068](#)
 Message-Control Raw Data Clock (RPS12), [1062](#),
 [1064](#), [1065](#), [1066](#), [1067](#), [1068](#)
 Min Power, [1015](#)
 Msg Ctrl, [1021](#)
 Msg Data, [1021](#)
 Msg Pwr, [1032](#), [1049](#)
 N Power, [991](#), [1021](#)
 NONE, [1081](#)
 None, [982](#), [983](#), [1086](#), [1094](#)
 NONE (RPS0), [1055](#), [1062](#), [1064](#), [1065](#), [1066](#),
 [1067](#), [1068](#)
 Normal, [940](#)
 Num of Blk, [1087](#), [1095](#)
 Num of Pre, [1034](#), [1050](#)
 Number of AICH, [1018](#)
 Number of PRACH, [1047](#), [1049](#)
 Number of PRACH 80ms, [1033](#)
 Number of Preamble, [1050](#)
 Nyquist, [951](#), [1010](#)
 Off, [1046](#)
 Omitted, [974](#), [1074](#)
 On, [1046](#)
 On/Off, [956](#), [1038](#)
 OpenLoop Ant1, [980](#)
 OpenLoop Ant1 SCH TSTD OFF, [980](#)
 OpenLoop Ant2, [980](#)
 OpenLoop Ant2 SCH TSTD OFF, [980](#)
 Optimize FIR For EVM ACP, [953](#), [1012](#)
 Paging Indicator, [960](#)
 Pattern trigger in 1, [1061](#)
 Pattern trigger in 2, [1061](#)
 PCCPCH, [936](#), [937](#)
 P-CCPCH data (DRPS39), [964](#), [966](#), [967](#), [968](#),
 [969](#)
 P-CCPCH data-clk (DRPS38), [964](#), [966](#), [967](#), [968](#),
 [969](#)
 Performance Req, [979](#)
 Phase Polarity Normal Invert, [961](#)

wideband CDMA base band generator subsystem
 keys and fields (*continued*)
 Phase Polarity Normal Inverted, [987](#)
 PI Bits, [960](#)
 PICH, [936](#), [937](#)
 PICH 10ms FramePulse (DRPS37), [964](#), [966](#), [967](#),
 [968](#), [969](#)
 PICH data (DRPS35), [964](#), [966](#), [967](#), [968](#), [969](#)
 PICH data-clk (DRPS34), [964](#), [966](#), [967](#), [968](#), [969](#)
 PICH TimeSlot Pulse (DRPS36), [964](#), [966](#), [967](#),
 [968](#), [969](#)
 Playback Ratio, [940](#)
 PN15, [938](#), [945](#), [954](#), [957](#), [959](#), [993](#), [994](#), [997](#), [999](#),
 [1004](#), [1023](#), [1026](#), [1028](#)
 PN9, [938](#), [945](#), [954](#), [957](#), [959](#), [983](#), [993](#), [994](#), [997](#),
 [999](#), [1004](#), [1023](#), [1026](#), [1028](#), [1082](#), [1090](#)
 Power, [940](#), [943](#), [946](#), [954](#), [958](#), [961](#), [962](#)
 Power Control Signal Polarity Neg Pos, [1017](#)
 Power Hold Off On, [1014](#)
 Power Mode Norm TPC, [1017](#)
 Pp-m, [1035](#), [1052](#)
 PRACH, [1013](#)
 PRACH Mode Single Multi, [1032](#)
 PRACH Power Setup Mode Pp-m Total, [1039](#)
 PRACH Processing (RPS19), [1062](#), [1064](#), [1065](#),
 [1066](#), [1067](#), [1068](#)
 PRACH Scrambling Code, [1040](#)
 PRACH Trigger, [1044](#)
 PRACH Trigger Polarity Neg Pos, [1045](#)
 PRACH Trigger Source Immedi Trigger, [1045](#)
 Pre Sig, [1036](#)
 Preamble, [1021](#)
 Preamble power average, [1038](#)
 Preamble Pulse (RPS21), [1062](#), [1064](#), [1065](#), [1066](#),
 [1067](#), [1068](#)
 Preamble Raw Data (RPS15), [1062](#), [1064](#), [1065](#),
 [1066](#), [1067](#), [1068](#)
 Preamble Raw Data Clock (RPS16), [1062](#), [1064](#),
 [1065](#), [1066](#), [1067](#), [1068](#)
 PSCH State, [962](#)
 Puncture, [972](#), [1087](#), [1095](#)
 PwrOffs, [971](#), [1071](#)
 RACH TrCH, [1021](#)
 Ramp Step, [1035](#), [1051](#)
 Rate Match Attr, [985](#), [1087](#), [1095](#)

- wideband CDMA base band generator subsystem
 keys and fields (*continued*)
 Rectangle, 951, 1010
 Ref Data Rate, 988, 1019
 Ref Sensitivity, 979
 Reset to Initial Power, 1016
 Right, 940
 RMC 144 kbps (25.141 v3.9), 1053
 RMC 384 kbps (25.141 v3.9), 1053
 RMC 64 kbps (25.141 v3.9), 1053
 RMC122 kbps (25.141 v3.9), 1053
 Root Nyquist, 951, 1010
 Scale to 0dB, 957, 1013
 SCFN, 976, 1076
 SCH slot-pulse (DRPS10), 964, 966, 967, 968, 969
 Scrambling Code, 969, 970, 1068
 SF/2, 1072
 SF2, 972
 SFN reset-signal (DRPS5), 964, 966, 967, 968, 969
 SFN RST Polarity, 1069
 SFN-CFN Frame Offset, 1012
 Signature, 1052
 Slot Format, 941, 948, 996, 1007, 1025, 1031
 Spurious Response, 979
 SSCH 2nd Scramble Group, 970
 SSCH Power, 970
 SSCH State, 971
 Start Access Slot Position in 80ms Period, 1037
 Start Sub-Channel#, 1041
 STD, 993
 Step Power, 1016
 Sub Channel Timing (RPS17), 1062, 1064, 1065, 1066, 1067, 1068
 Symbol Rate, 996, 1005, 1025, 1030
 Sync Source SFN FCik ESG, 1070
 tDPCH Offset, 949
 TFCI Pat, 949
 TFCI Pattern, 997, 1026
 TFCI State, 998, 1027
 Tfirst, 942
 TGCFN, 972, 1071
 TGD, 973, 1072
 Tgl, 942
- wideband CDMA base band generator subsystem
 keys and fields (*continued*)
 TGL1, 973, 1073
 TGL2, 973, 1073
 TGPL1, 974, 1073
 TGPL2, 1074
 TGPRC, 1075
 TGPS Inactive Active, 1075
 TGSN, 975, 1076
 Timeslot Offset, 1041
 Timing Offset, 1042, 1069, 1079
 tOCNS Offset, 956
 Total Bits, 1083
 Total Blocks, 1085
 TotalPwr, 991, 1022
 TPC Pat Steps, 998
 TPC Pat Trig Polarity Neg Pos, 1000
 TPC Pattern, 1000
 TPC Steps, 950
 TPC UserFile Trig, 1001
 Tp-m, 1043
 Tp-p, 1044
 Transp Chan A, 945
 Transp Chan B, 945
 Transp Position Flexible Fixed, 985
 Transport CH, 957
 TrCH BER, 1006
 TrCh BlkSize 168, 1040
 TrCh BlkSize 360, 1040
 TrCH State Off On, 986, 1096
 Trigger Sync Reply (RPS7), 1062, 1064, 1065, 1066, 1067, 1068
 TTI, 986, 1046, 1088, 1096
 TTI Frame Clock (RPS9), 1055
 Turbo, 982, 983, 1081
 UDI 64 kbps, 1053
 UDI ISDN (25.101 v3.5), 947
 UN3/4 GSM Gaussian, 951
 Up/Down, 950, 999
 User File, 945, 950, 957, 959, 983, 993, 994, 997, 1004, 1023, 1026, 1028, 1082, 1090
 User FIR, 951, 1010
 W-CDMA Off On, 1096

