Installation Note

HP E4406A VSA Series Transmitter Tester Zip Drive Kit (for Operating System Update)



Notice.

The information contained in this document is subject to change without notice.

Hewlett-Packard makes no warranty of any kind with regard to this material, including but not limited to, the implied warranties of merchantability and fitness for a particular purpose. Hewlett-Packard shall not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance, or use of this material.

Description


A zip drive is required to update the HP E4406A VSA Series Transmitter Tester operating system. This installation note describes how to connect and configure the iomega zip drive to use it with the HP E4406A. See the documentation with the Operating System Update Kit to install a new operating system, update firmware, and install new options.

Zip Drive Kit (for Operating System Update) Contents:

Item Number	HP Part Number	Description
1	0950-3678	100 MB external SCSI iomega zip drive
2	0950-3679	zip universal power supply
3	8121-0053	SCSI D50m to DB25m cable
4	Depends on shipment location	Power cord
5	E4406-90114	Installation Note, HP E4406A VSA Series Transmitter Tester Zip Drive Kit (for Operating System Update)

Connecting the Zip Drive

- **Step 1.** Set the HP E4406A power switch to Standby (0).
- **Step 2.** Remove power from the zip drive.
- **Step 3.** Set the SCSI zip drive SCSI ID (address) to "5" and Termination to "on" (1).

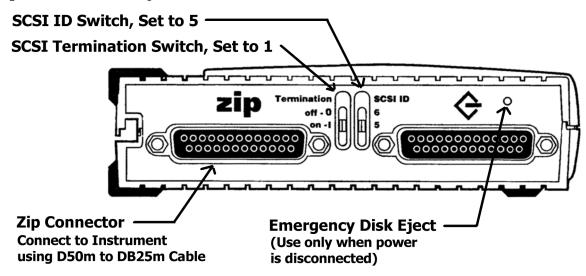

- **Step 4.** Reconnect power to the zip drive.
- **Step 5.** Connect the SCSI cable from the HP E4406A rear-panel SCSI connector to the "zip" connector on the zip drive. (See figure.)

This completes connecting the zip drive to the HP E4406A Transmitter Tester.