

**Agilent Technologies 8960 Series 10 E5515A,B Wireless Communications Test Set
Agilent Technologies E1960A GSM Mobile Test Application**

GPIB Command Syntax

Test Application Revision A.04


© Copyright Agilent Technologies 1998, 1999

Printed in U.S.A. March 2000

Agilent Part Number: E1960-90003

Revision H

<http://www.agilent.com/find/8960support/>



Agilent Technologies

Notice

Information contained in this document is subject to change without notice.

All Rights Reserved. Reproduction, adaptation, or translation without prior written permission is prohibited, except as allowed under the copyright laws.

This material may be reproduced by or for the U.S. Government pursuant to the Copyright License under the clause at DFARS 52.227-7013 (APR 1988).

Agilent Technologies, Inc.
Learning Products Department
24001 E. Mission
Liberty Lake, WA 99019-9599
U.S.A.

Contents

Diagram Conventions	7
Diagram Description	8
Developing Code	8
ABORT	10
AFGenerator	11
CALibration	12
CALL:ACTivated	13
CALL:BA	14
CALL:BAND	16
CALL:BCCode	17
CALL:BCHannel	18
CALL:BURSt	19
CALL:CONNected	20
CALL:COUNT	21
CALL:END	22
CALL:FUNction	23
CALL:IMEI	24
CALL:LACode	25
CALL:MCCode	26
CALL:MNCode	27
CALL:MS	28
CALL:NCCode	31

Contents

CALL:OPERating	32
CALL:ORIGinate	33
CALL:PAGing	34
CALL:PMNCode	35
CALL:POWer	36
CALL:RFGenerator	37
CALL:SIGNaling	40
CALL:STATus	41
CALL:TCHannel	42
DISPlay	46
FETCh:AAUDio	47
FETCh:BErRor	48
FETCh:DAUDio	51
FETCh:DPOWer	52
FETCh:FBERror	53
FETCh:IQTuning	54
FETCh:ORFSpectrum	55
FETCh:PFERror	57
FETCh:PVTTime	59
FETCh:TXPower	62
INITiate	63
READ	65

Contents

RFANalyzer	67
SETup:AAUDio	69
SETup:BERRor	71
SETup:CONTinuous	73
SETup:DAUDio	74
SETup:DPOWer	76
SETup:FBError	77
SETup:IQTuning	79
SETup:ORFSpectrum	81
SETup:PFError	85
SETup:PVTime	87
SETup:TXPower	89
STATus:OPERation	91
STATus:PRESet	97
STATus:QUEStionable	98
Status Byte Register	105
Standard Event Status Register	106
SYSTem:APPLication	107
SYSTem:BEEPer	108
SYSTem:COMMunicate	109
SYSTem:CONFigure	110
SYSTem:CORRection	111

Contents

SYSTem:CURRent:TA	112
SYSTem:ERRor?	113
SYSTem:FTRigger	114
SYSTem:MEASurement	115
SYSTem:PRESet	116
SYSTem:ROSCillator	117
SYSTem:SYNChronized	118
IEEE 488.2 Common Commands	119
Description	119

Diagram Conventions

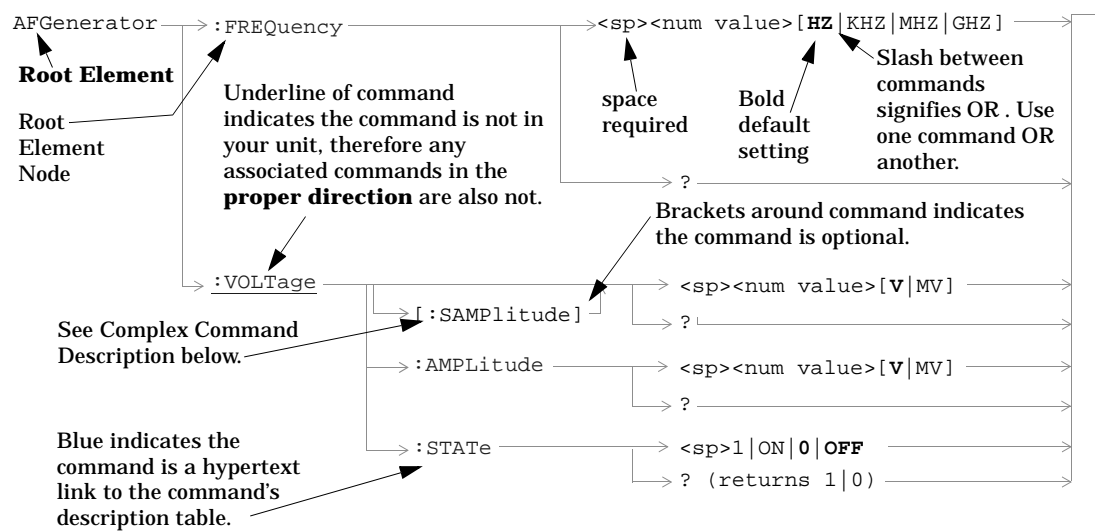


Diagram Description

Statement elements are connected by lines. Each line can be followed in only one direction, as indicated by the arrow at the end of the line. Any combination of statement elements that can be generated by starting at the **Root Element** and following the line the **proper direction** is syntactically correct. The drawings show the proper use of spaces. Where spaces are required they are indicated by <sp>, otherwise no spaces are allowed between statement elements.

Complex Command Description

A complex command sets the state of the parameter to ON, and is used to set a value for that parameter. These parameters; amplitude, frequency, gain, number, time, and value can be used as a complex command. Refer to the specific command for the parameter that applies.

Developing Code

It is recommended that you set the Test Set's operating environment to debug. To set the Test Set debug mode to "ON" use the following syntax:


```
SYSTem:COMMunicate:GPIB:DEBug ON
```


Units-of-Measure


If you do not specify units-of-measure in your code the following table indicates the default units-of-measure that will be assumed.

Amplitude (linear)	V
Frequency	HZ
Power (logarithmic)	dBm
Time	S


ABORT

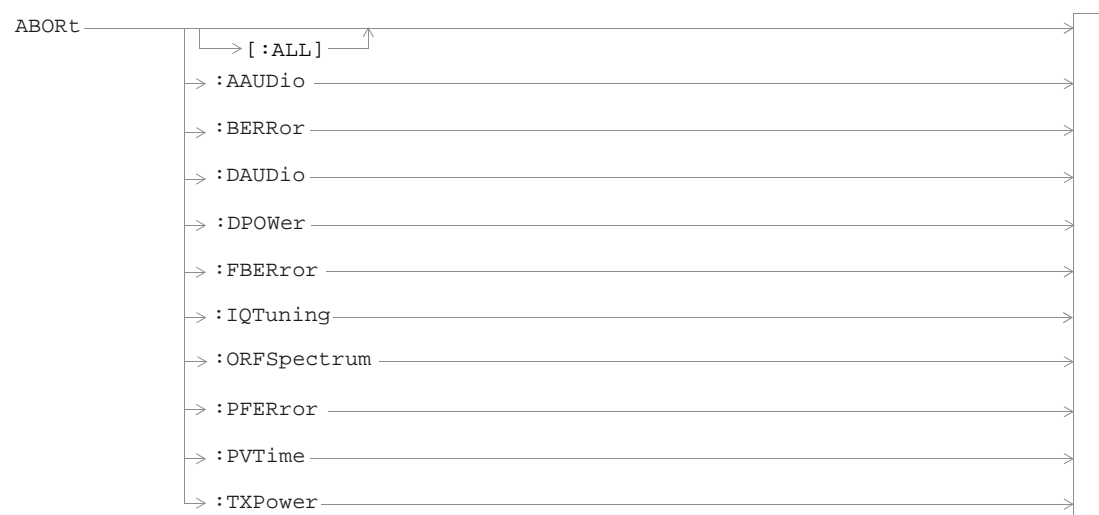


AFGenerator

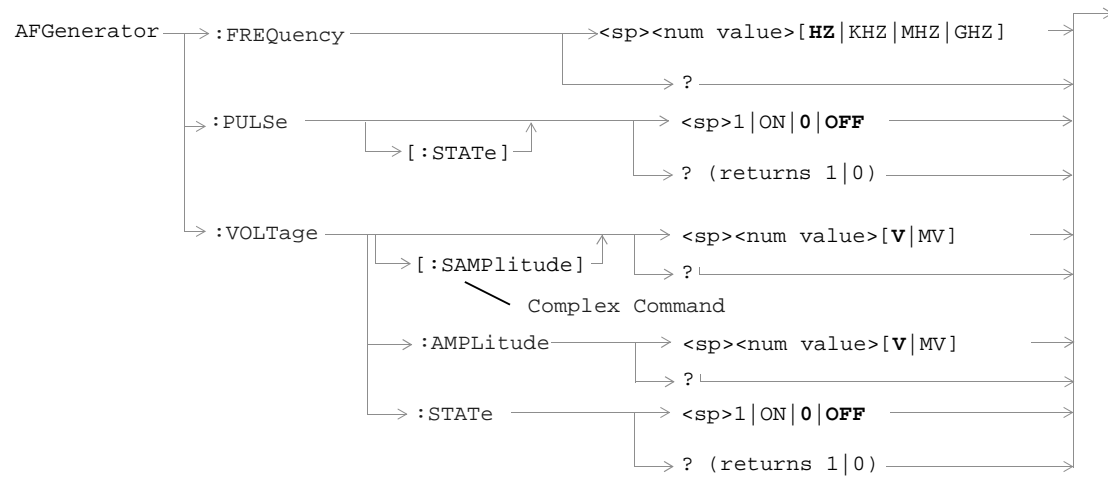


CALibration

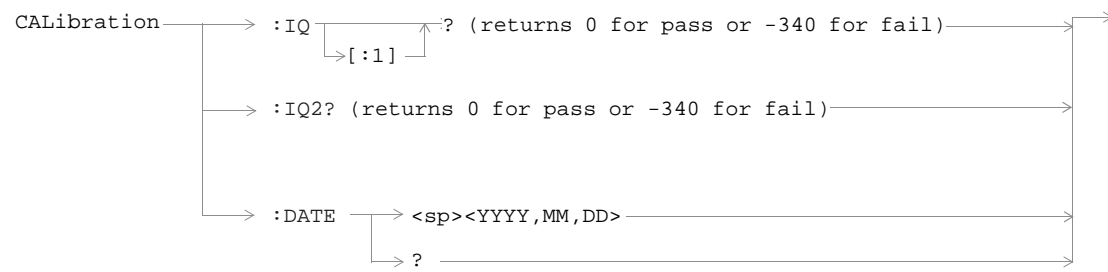


CALL:ACTivated




CALL:BA

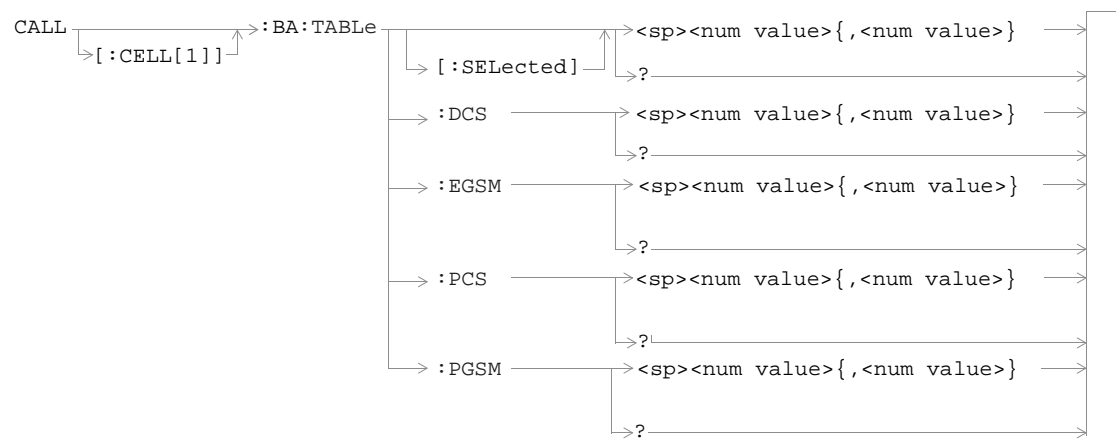

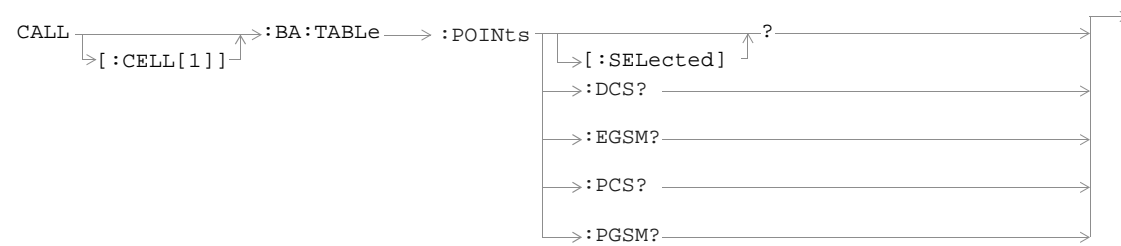


CALL:BAND



CALL:BCCode




CALL:BCHannel

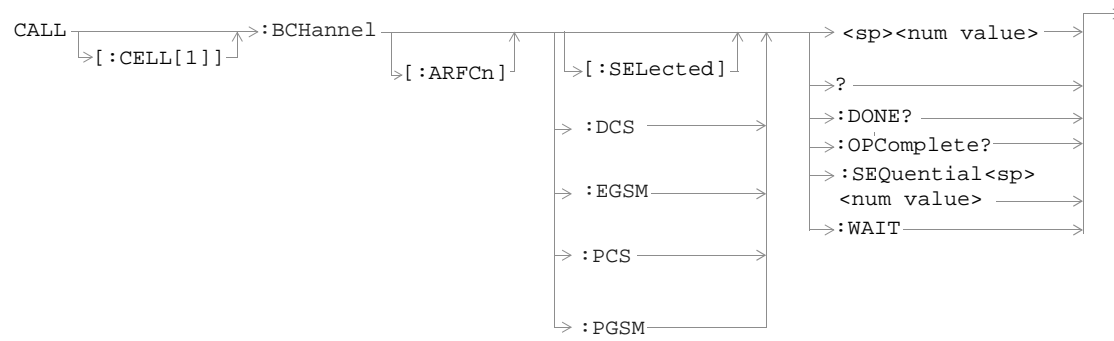


CALL:BURSt




CALL:CONNEcted

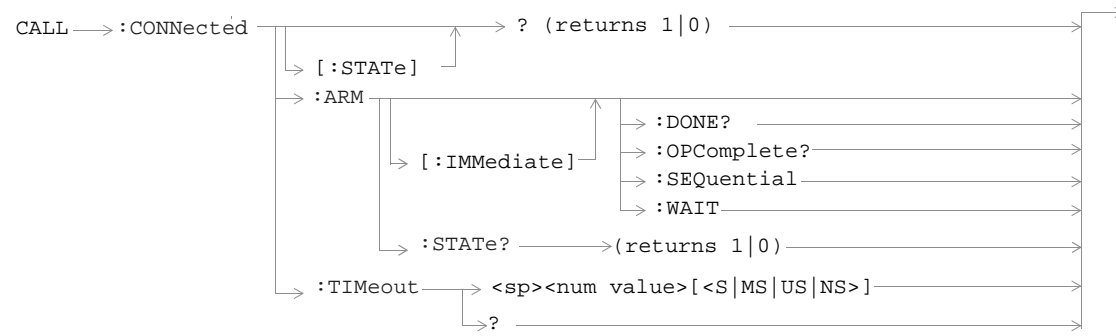

CALL:COUNT

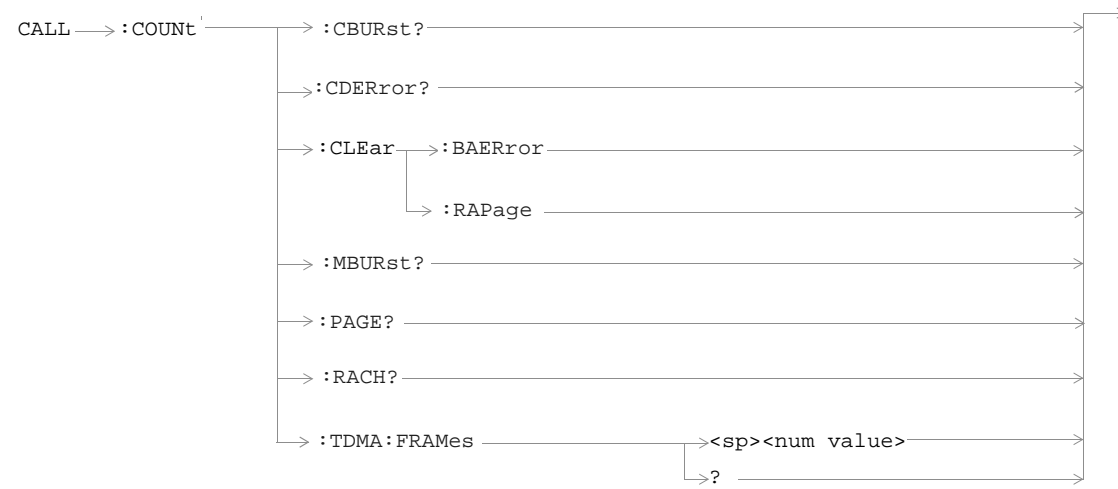

CALL:END

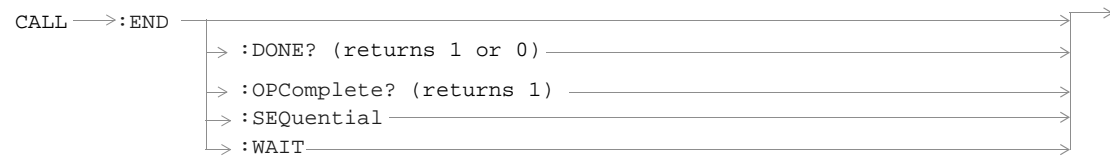


CALL:FUNCTION




CALL:IMEI




CALL:LACode




CALL:MCCode





CALL:MNCCode



CALL:MS

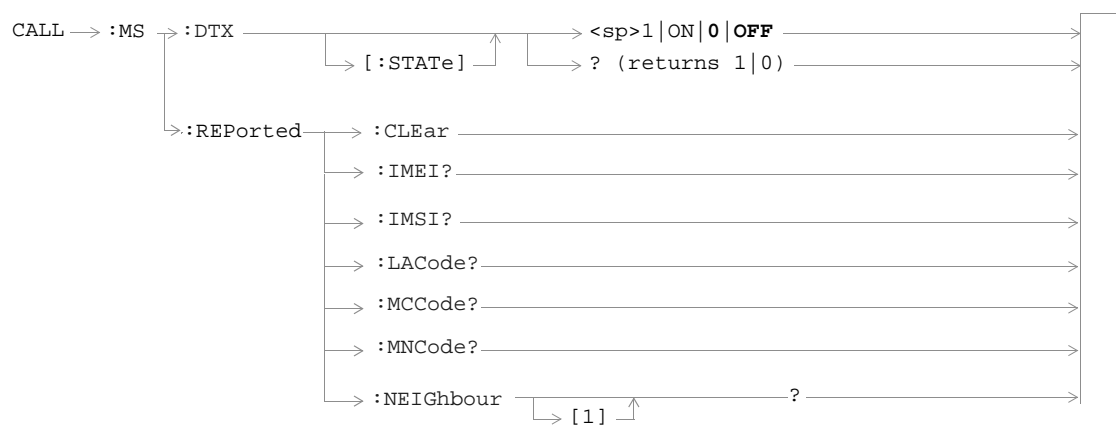

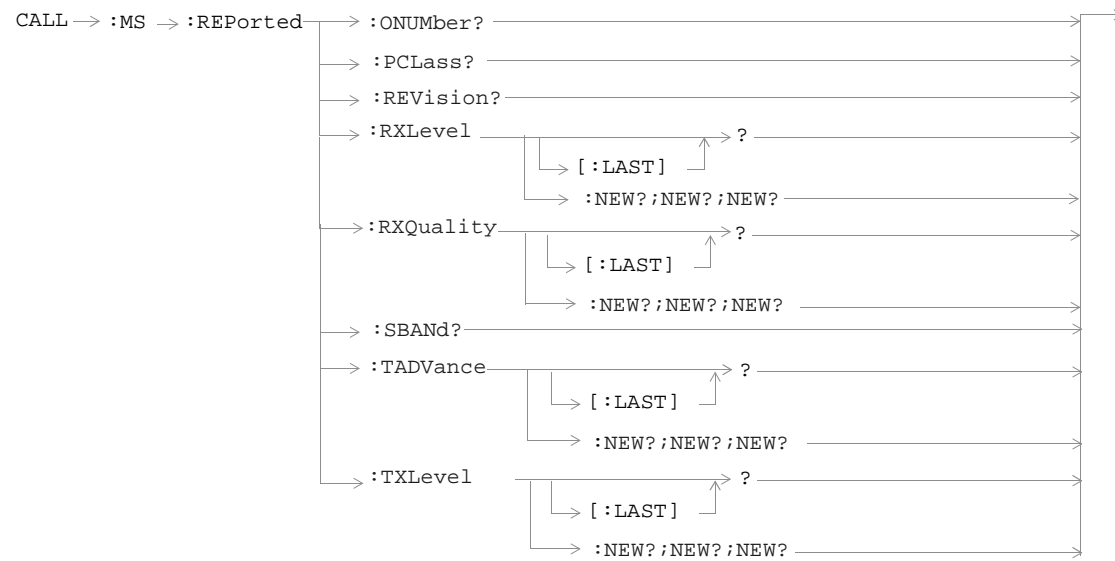


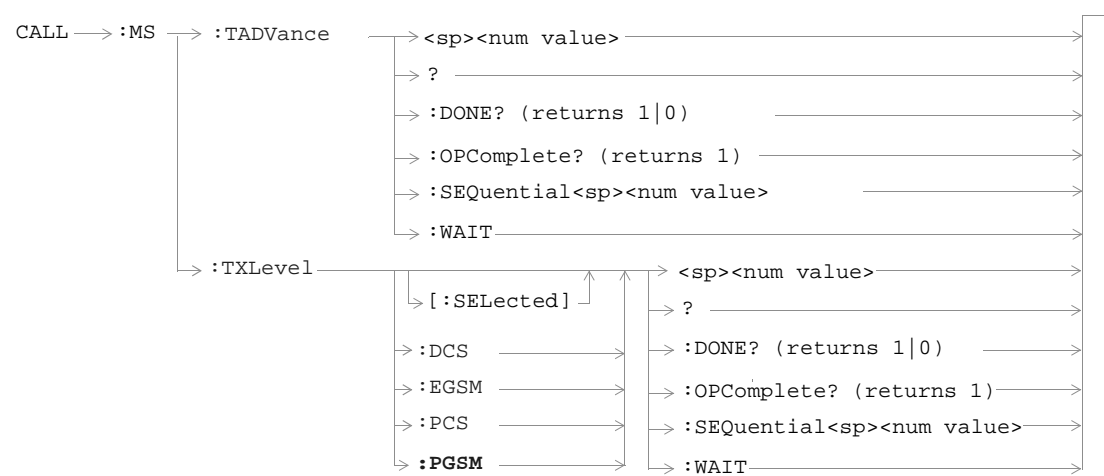

CALL:NCCode




CALL:OPERating




CALL:ORIGinate




CALL:PAGing

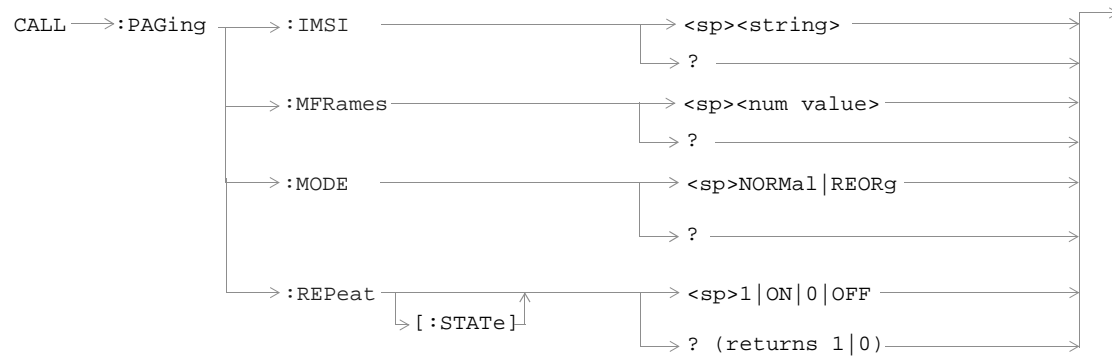


CALL:PMNCode

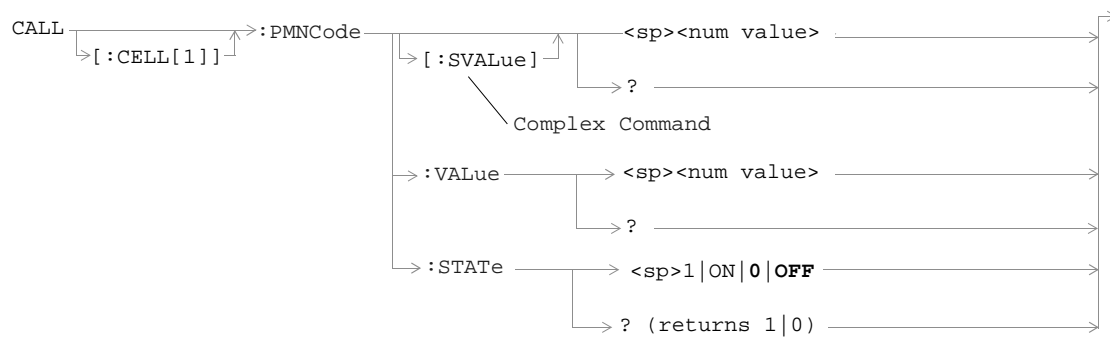



CALL:POWer

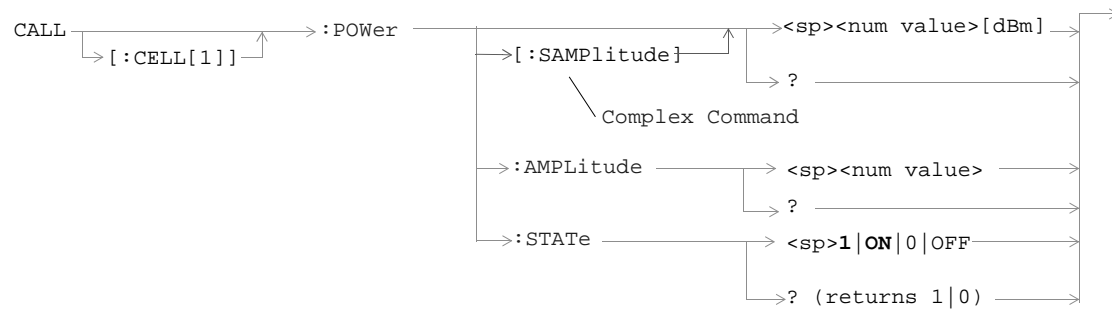


CALL:RFGenerator

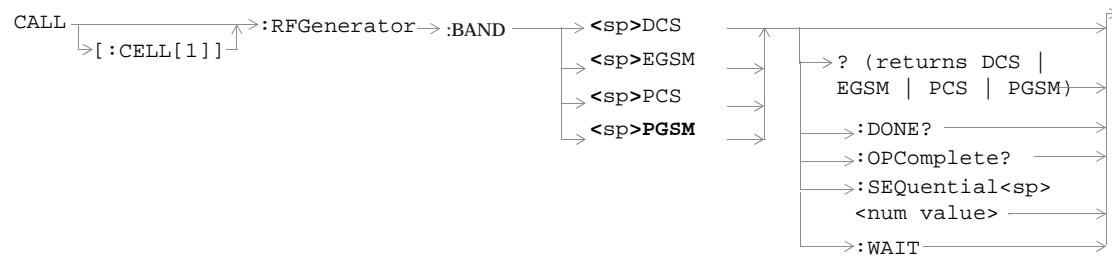

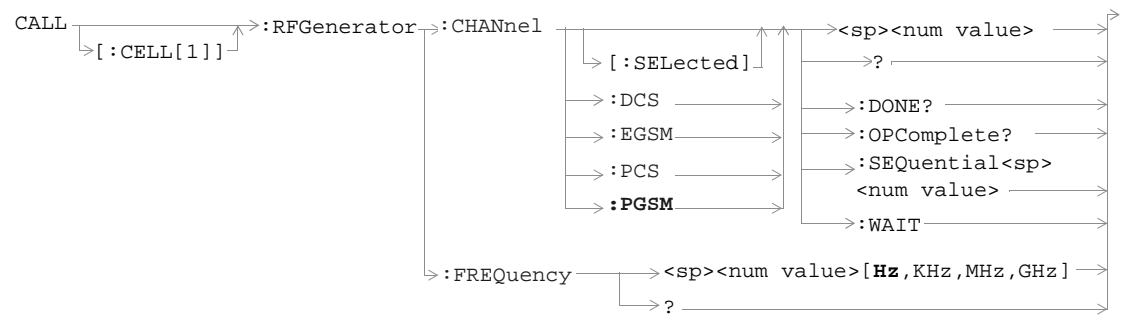


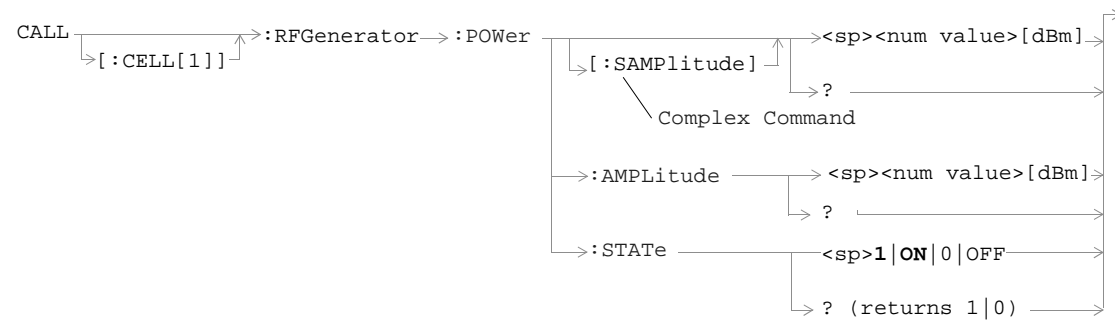


CALL:SIGNaling





CALL:STATus

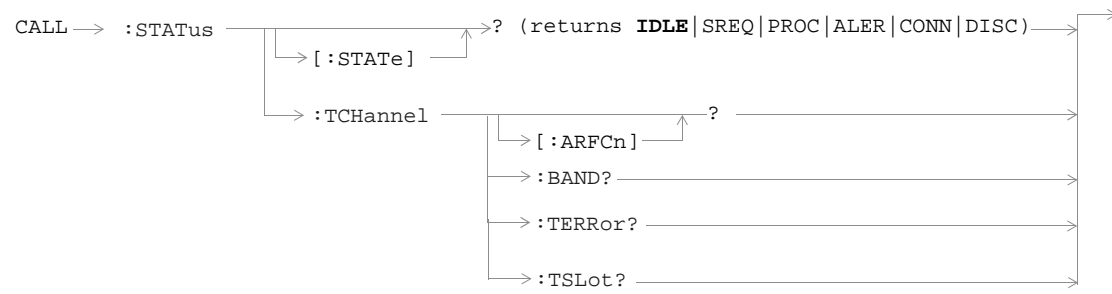


CALL:TCHannel

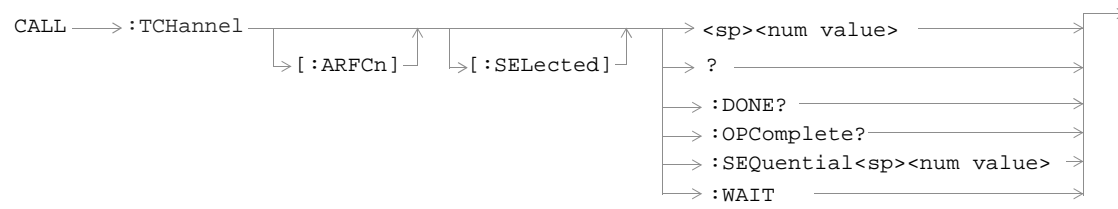


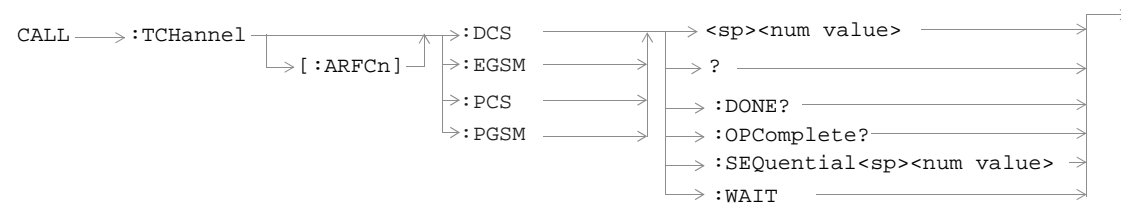

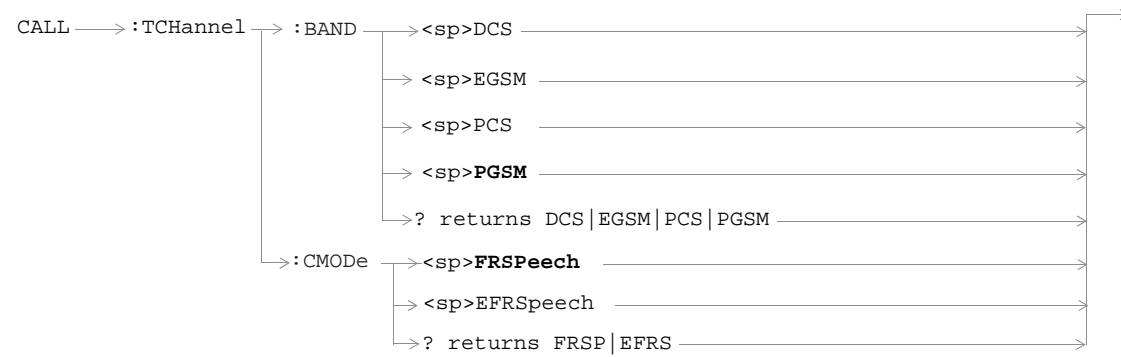


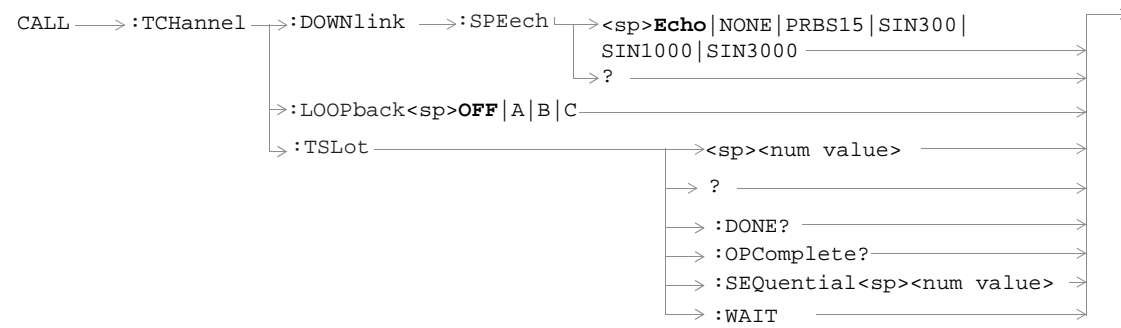


DISPlay

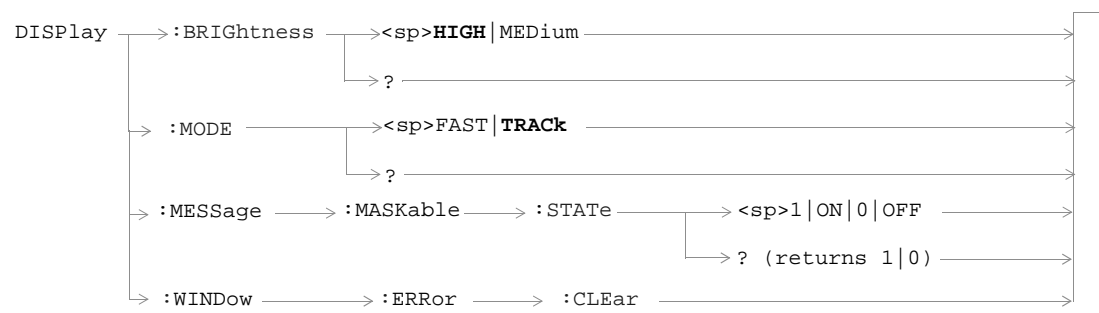



FETCh:AAudio

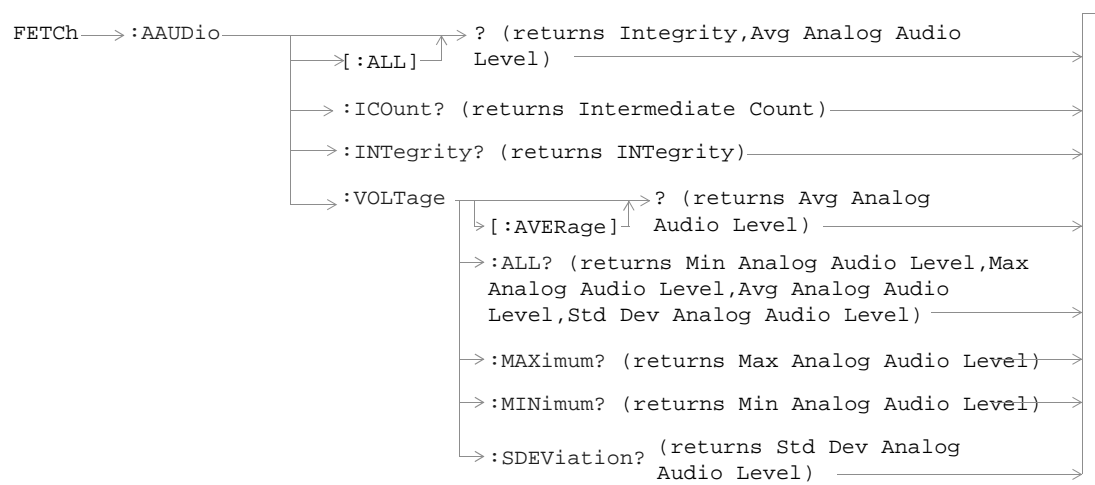


FETCH:BERRor

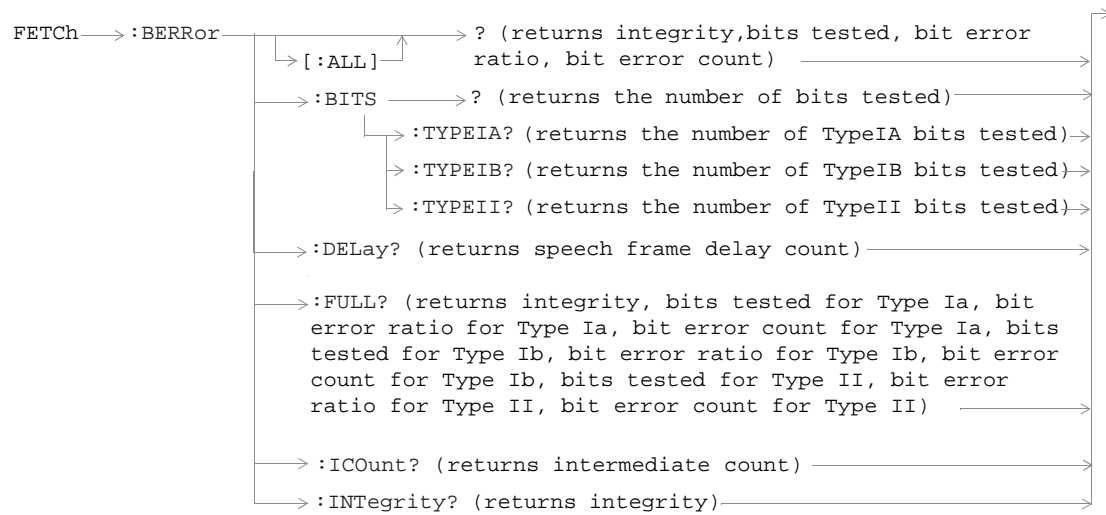

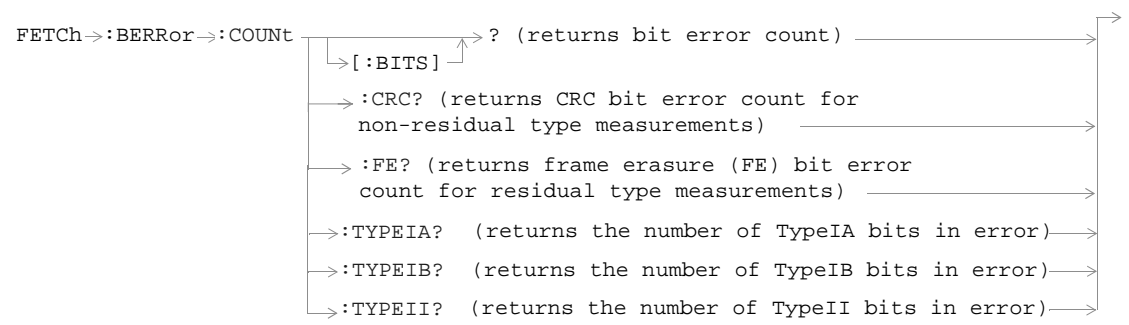


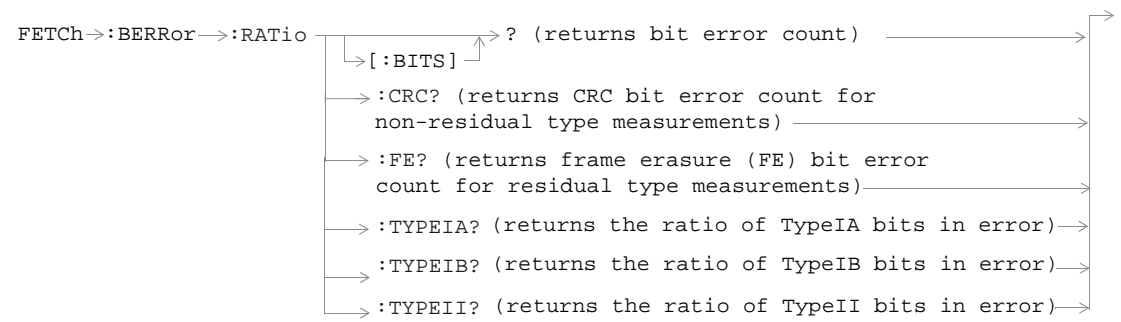


FETCh:DAUDio

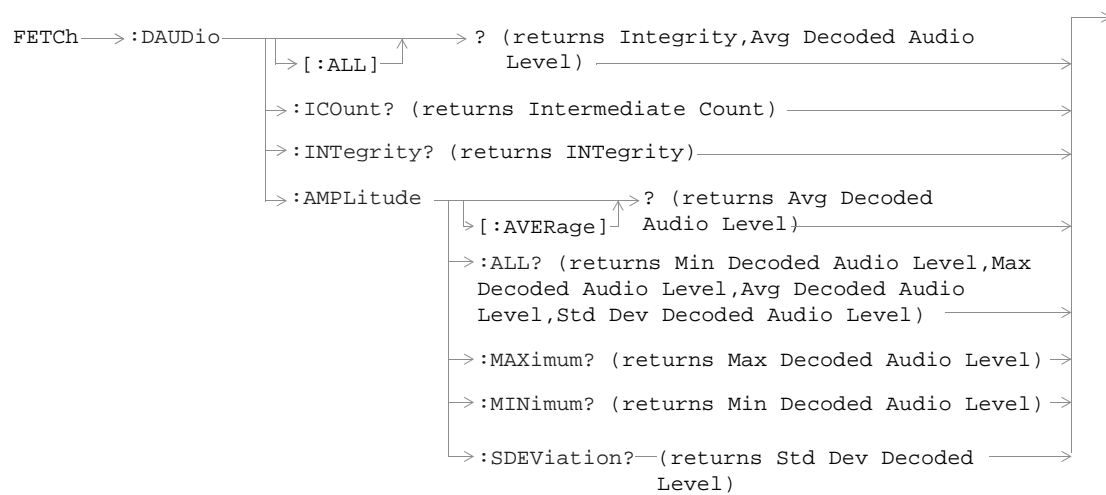


FETCH:DPOWER

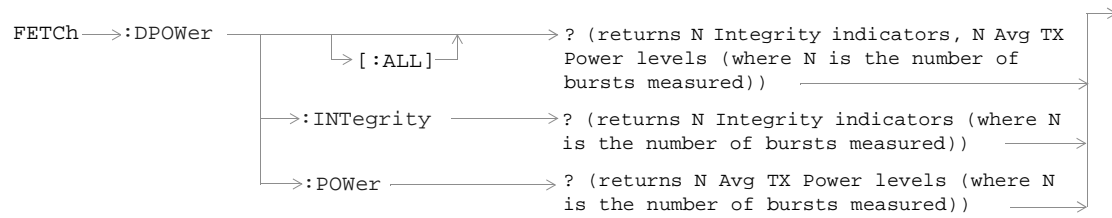


FETCH:FBERror

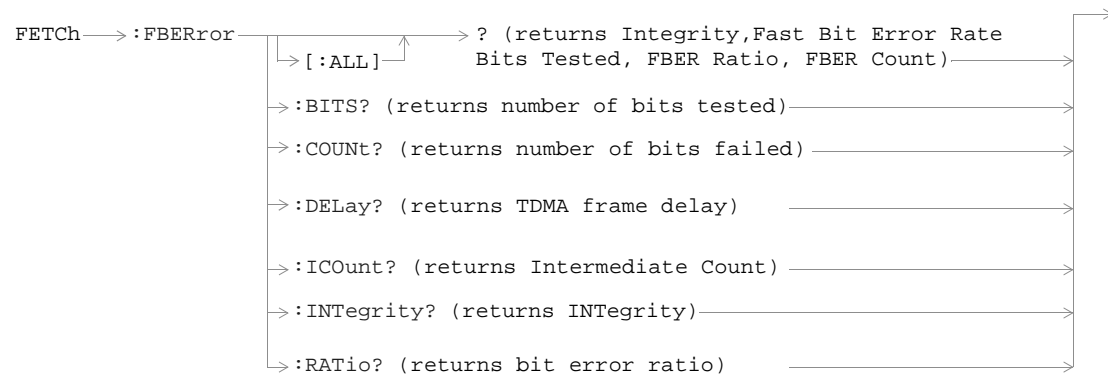


FETCH:IQTuning

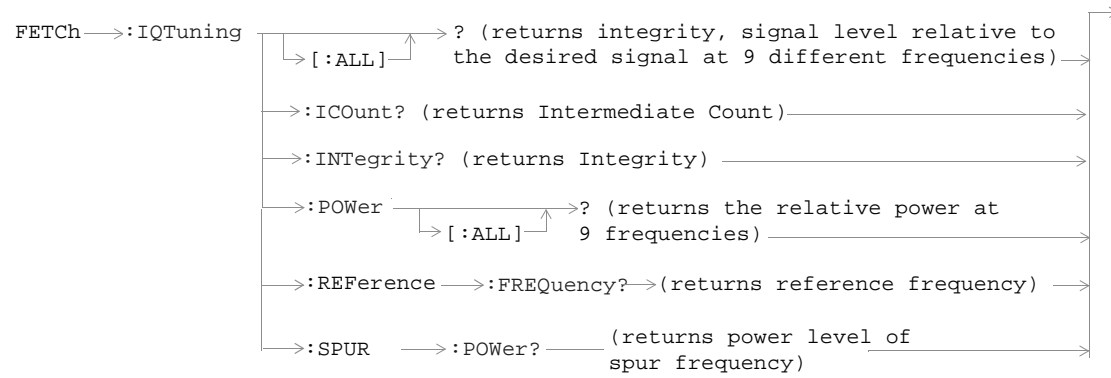



FETCH:ORFSpectrum

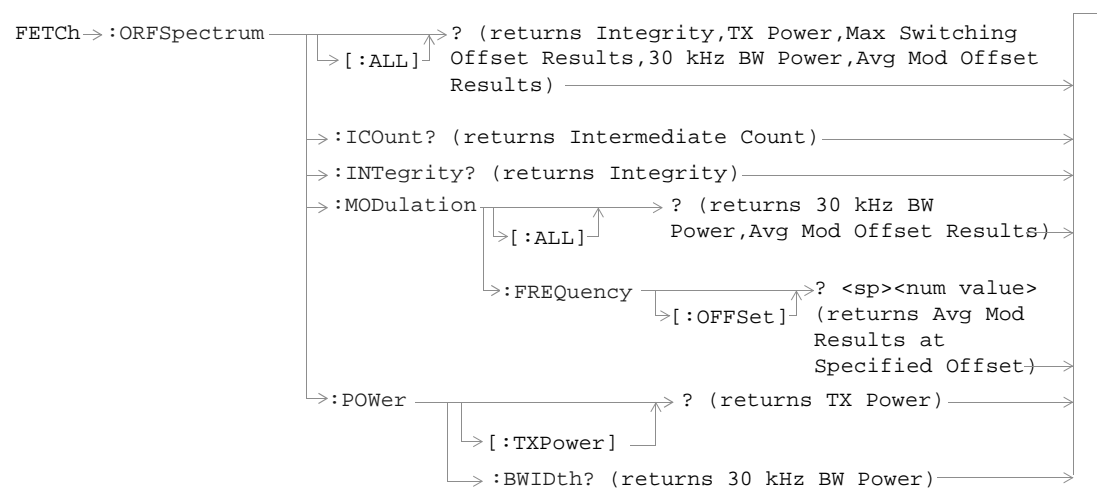

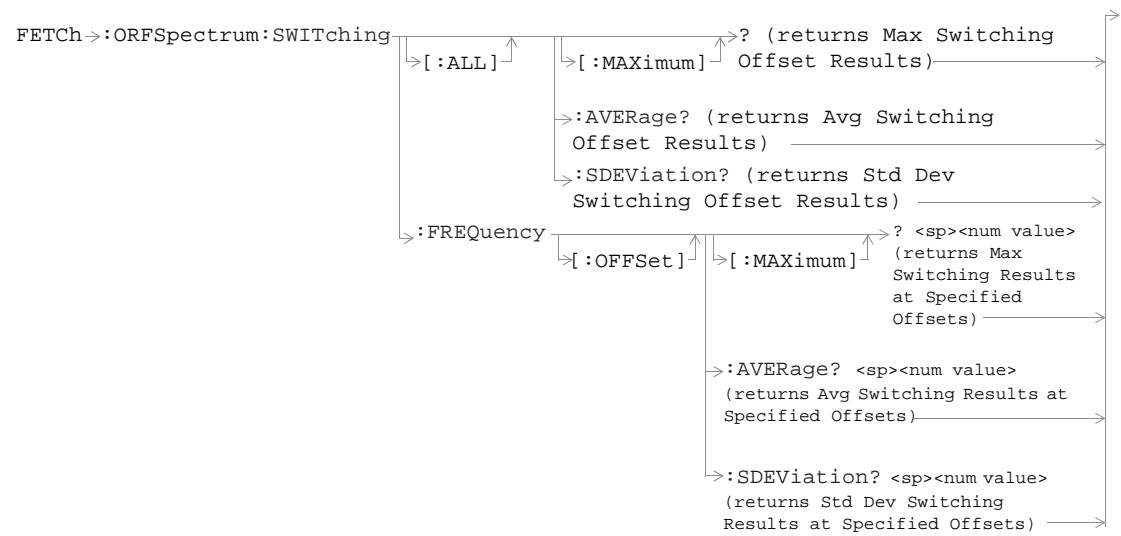



FETCH:PFERror

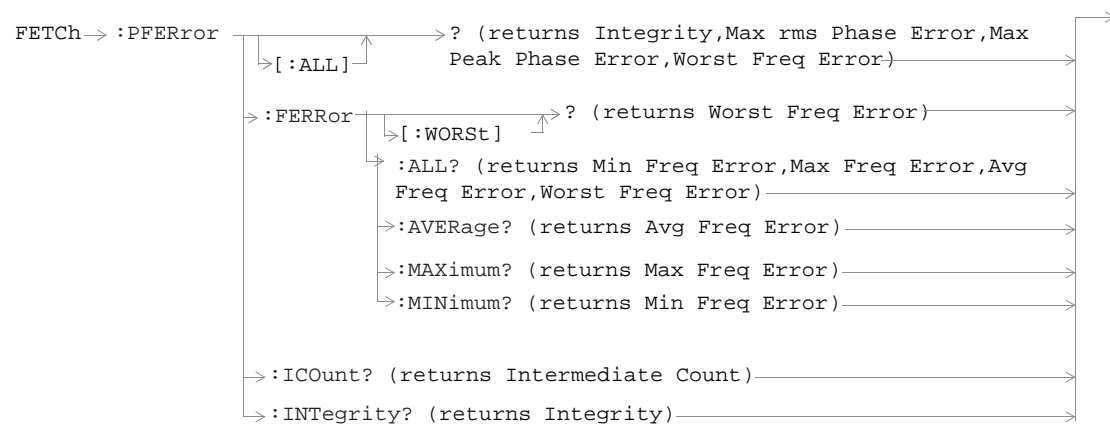


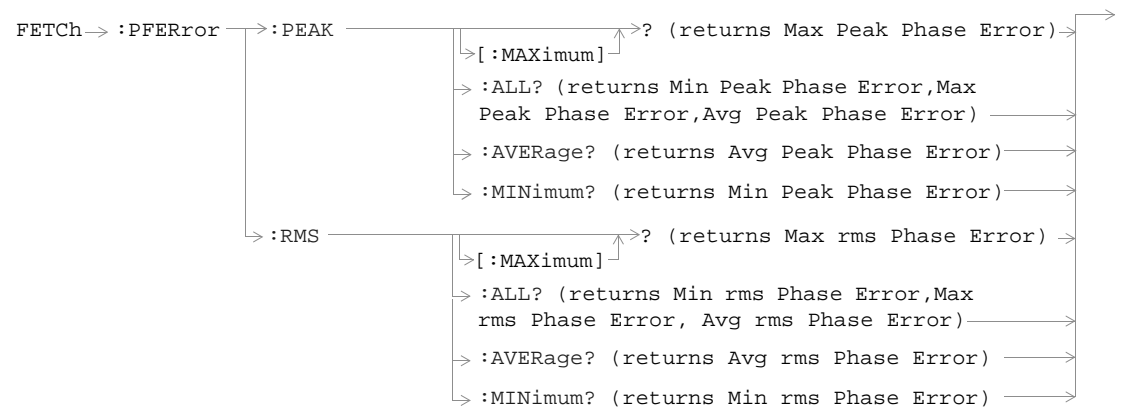


FETCh:PVTime

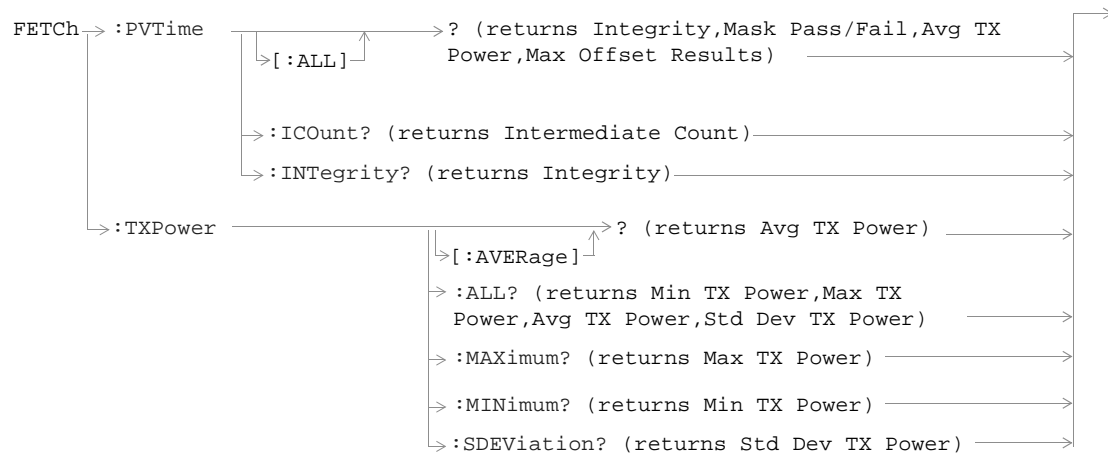

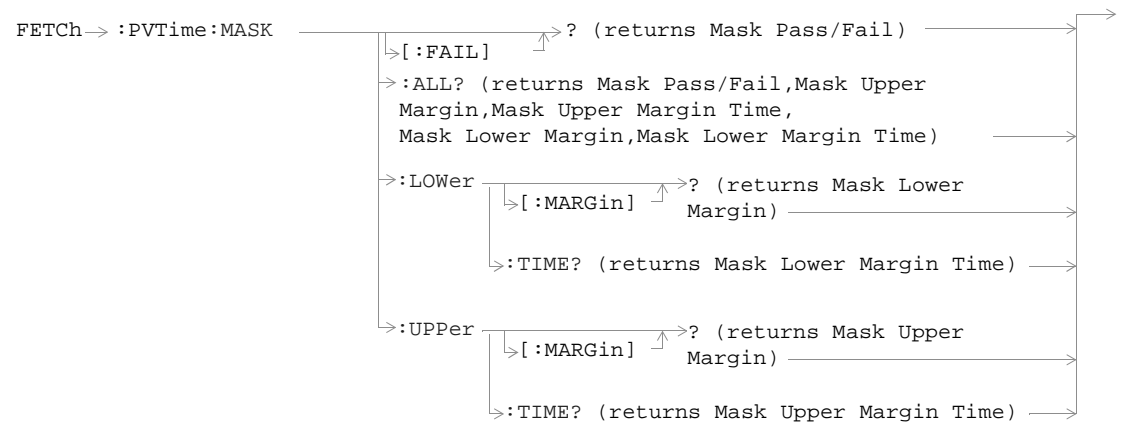


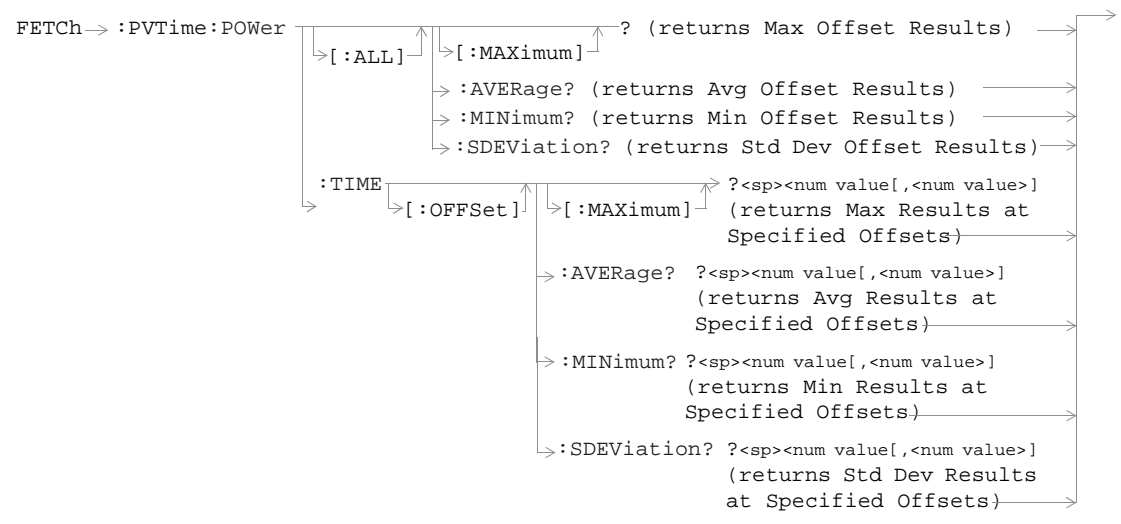


FETCH:TXPower

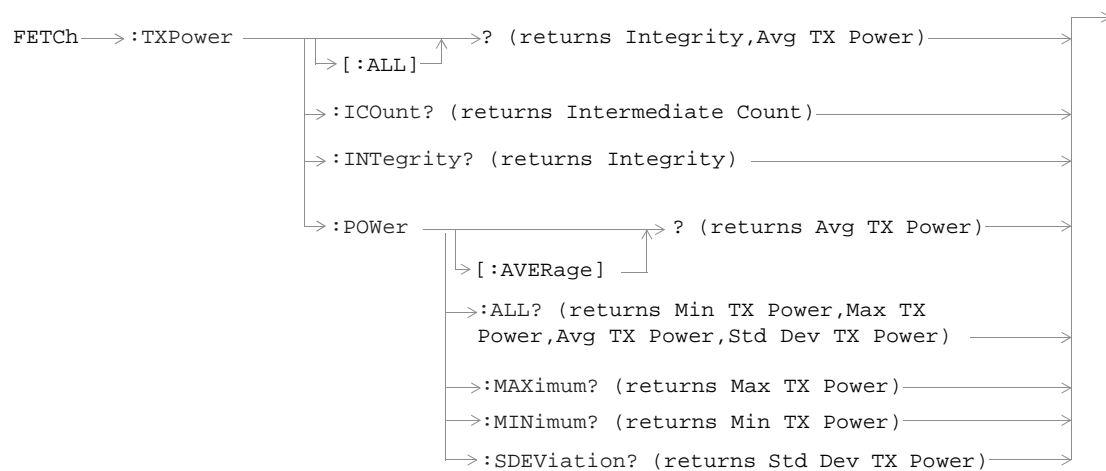



INITiate

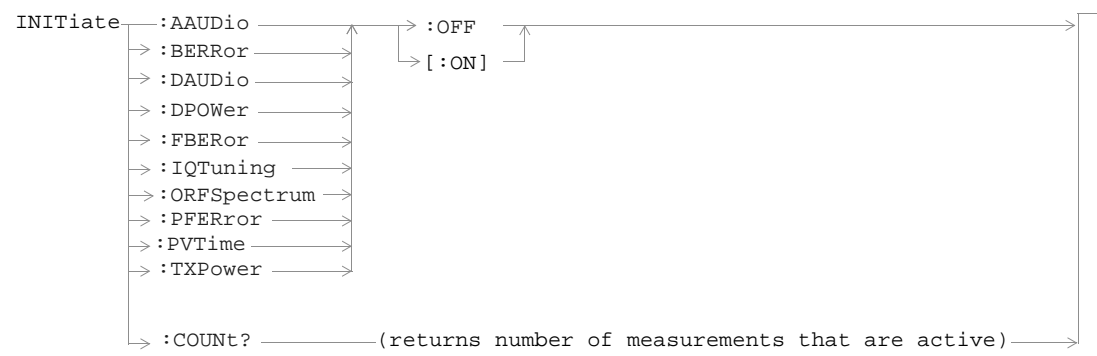

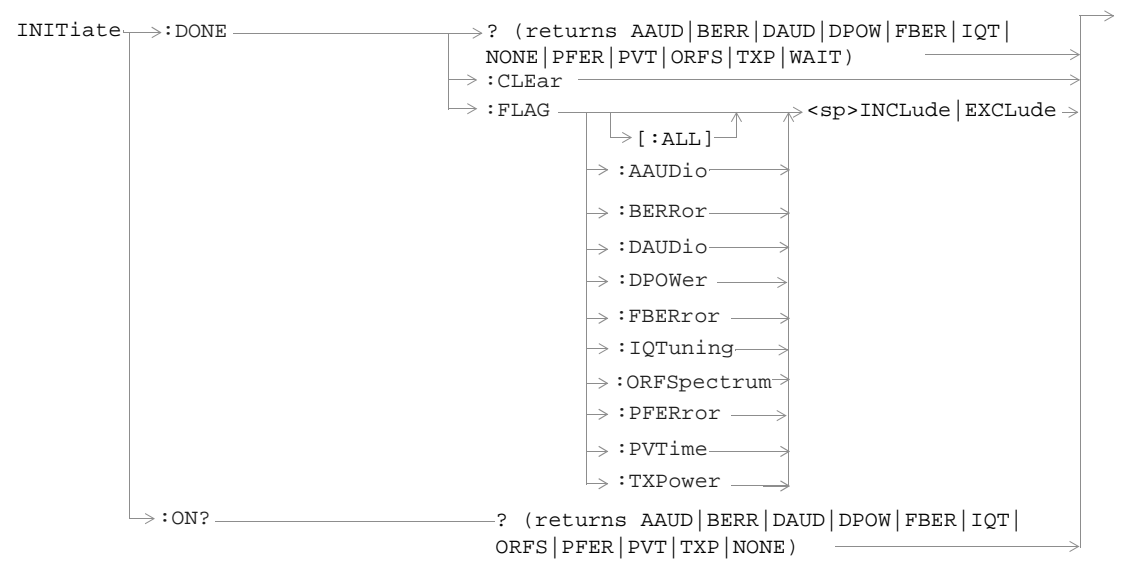



READ

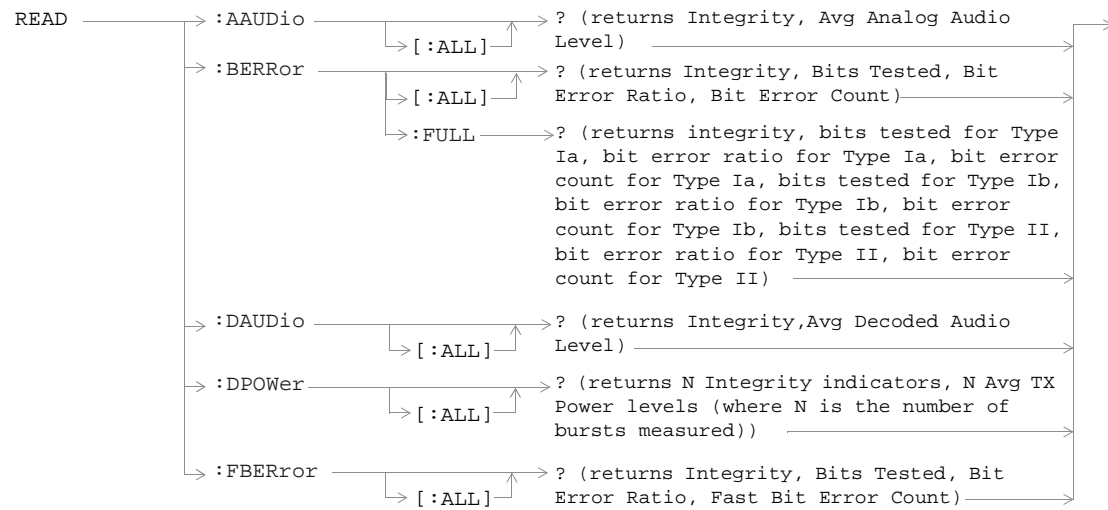

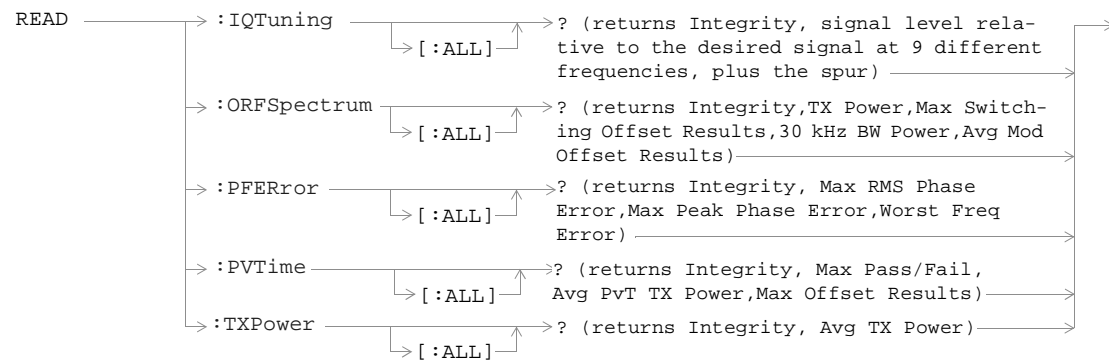



RFAnalyzer

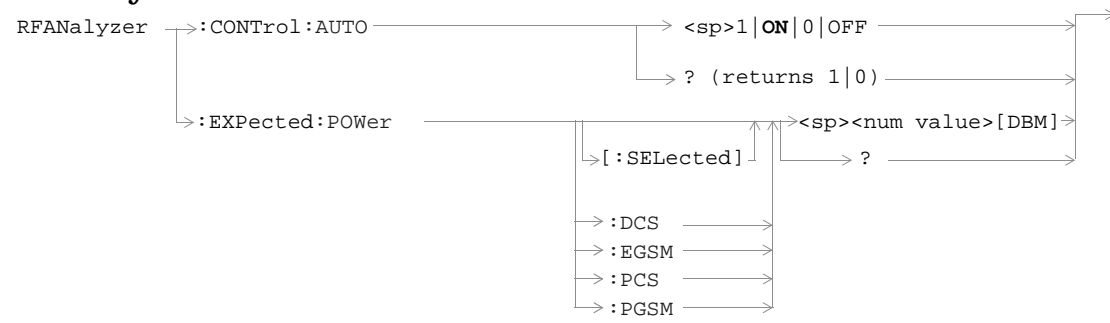

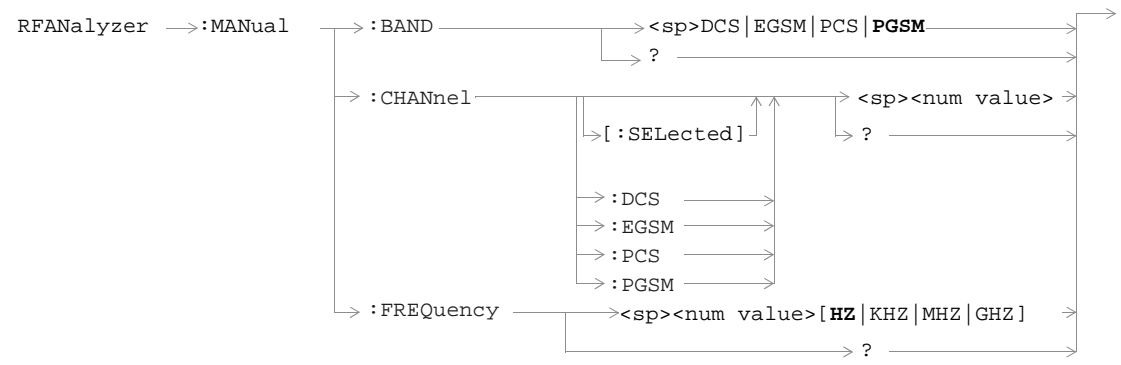



SETup:AAUDio

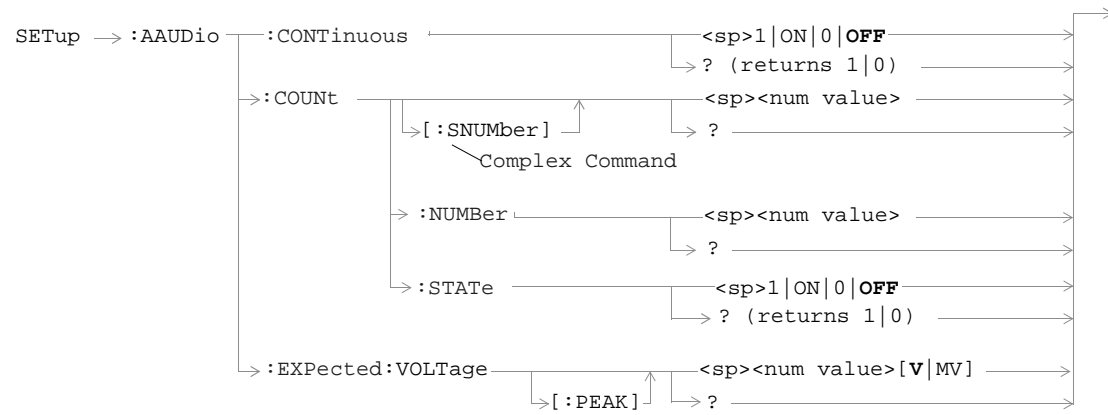

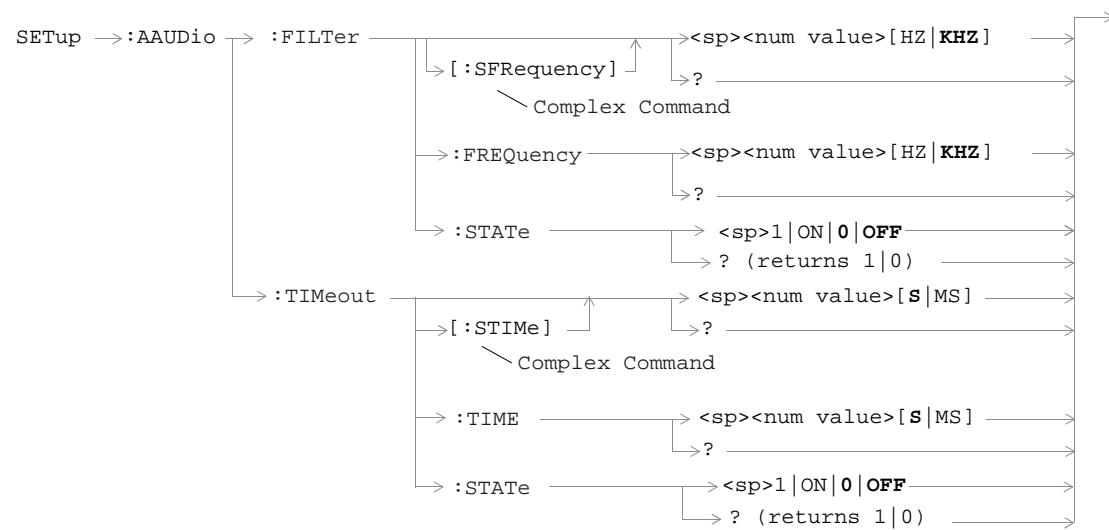



SETup:BERRor

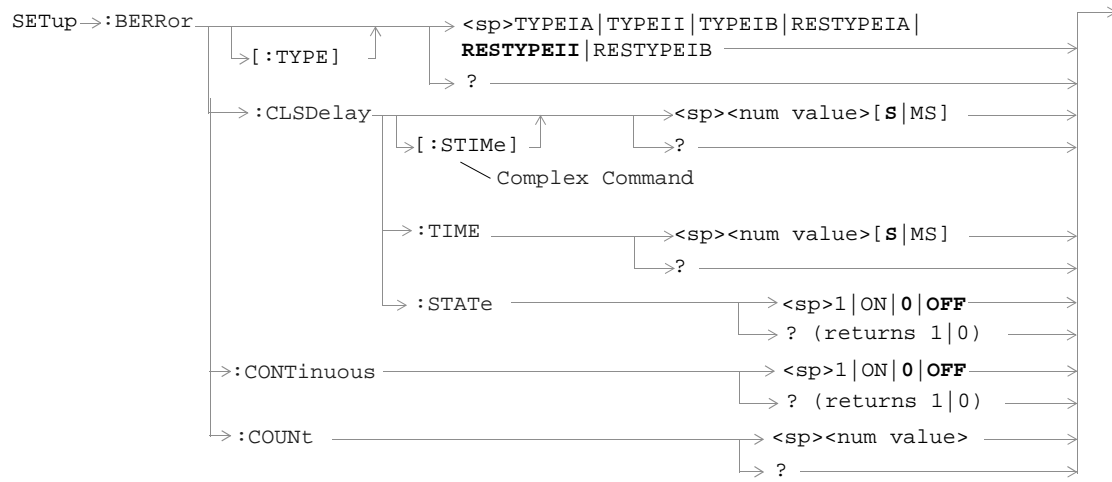

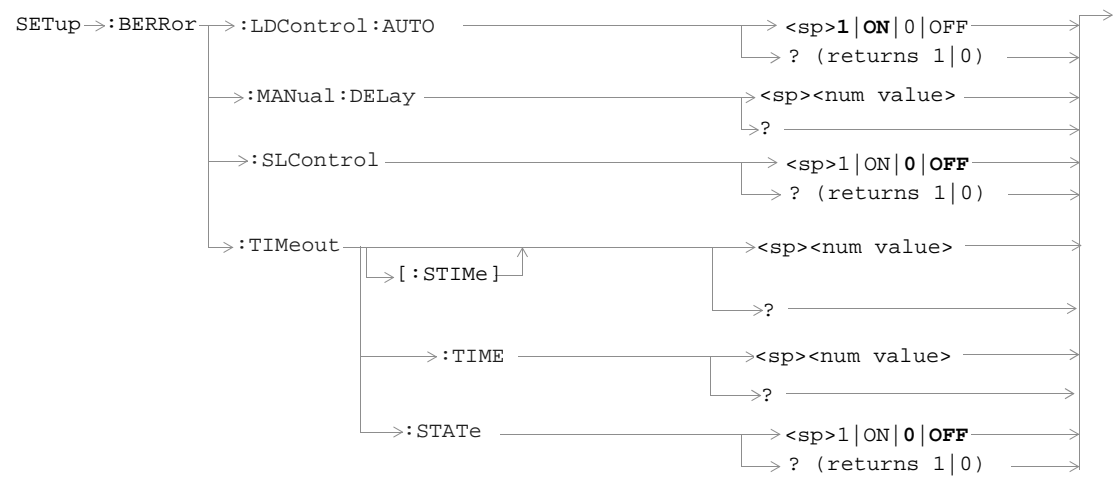


SETup:DAUDio

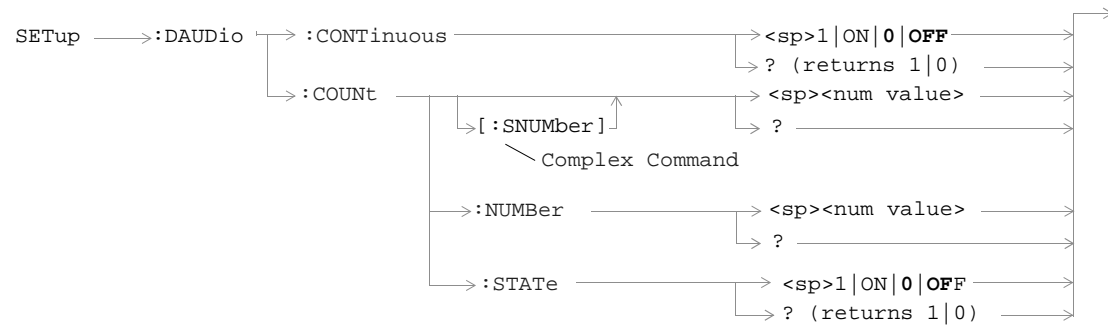


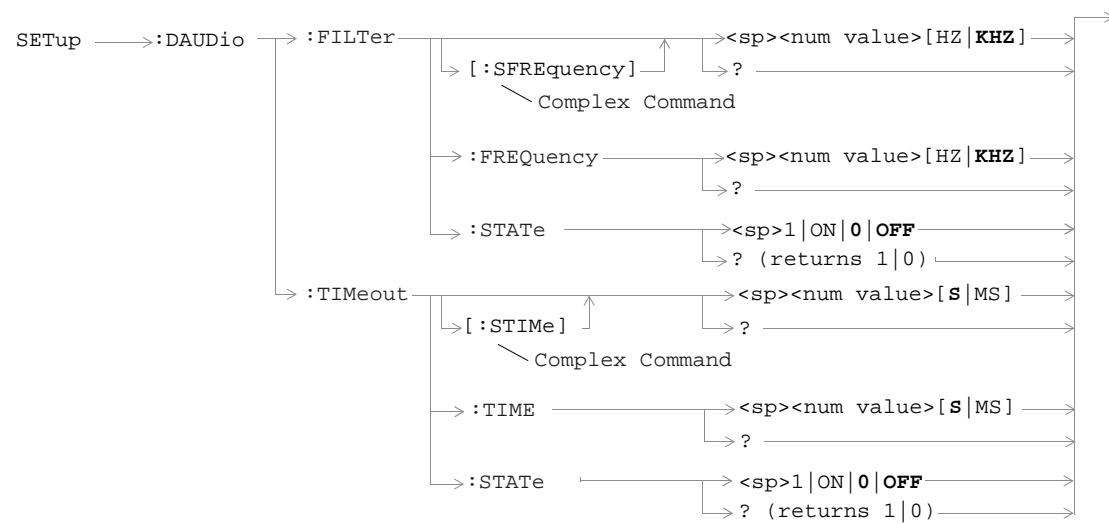


SETup:DPOWER

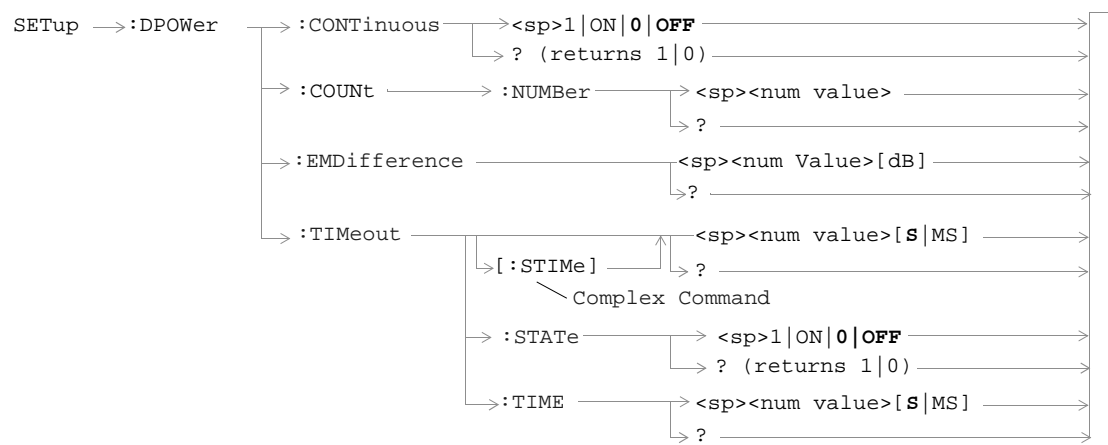



SETup:FBError

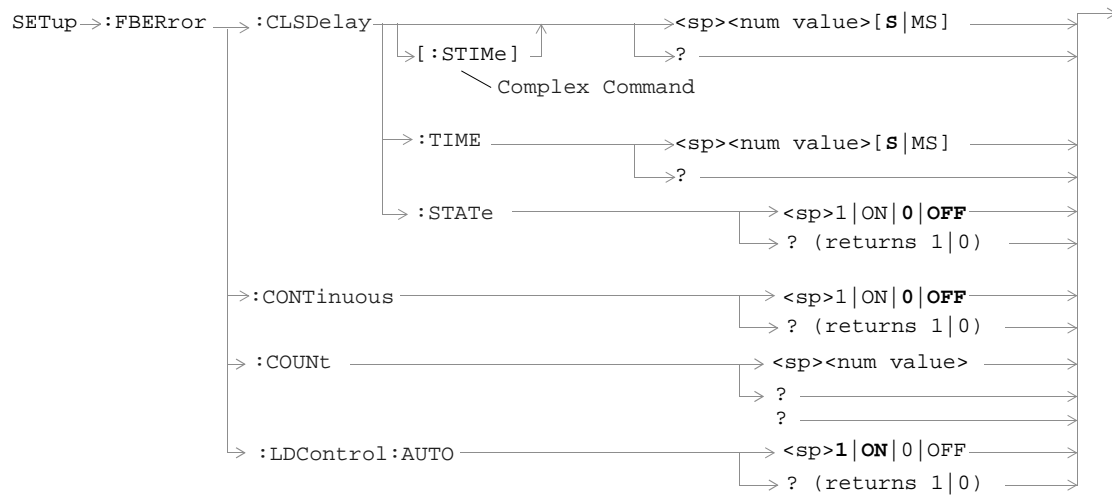

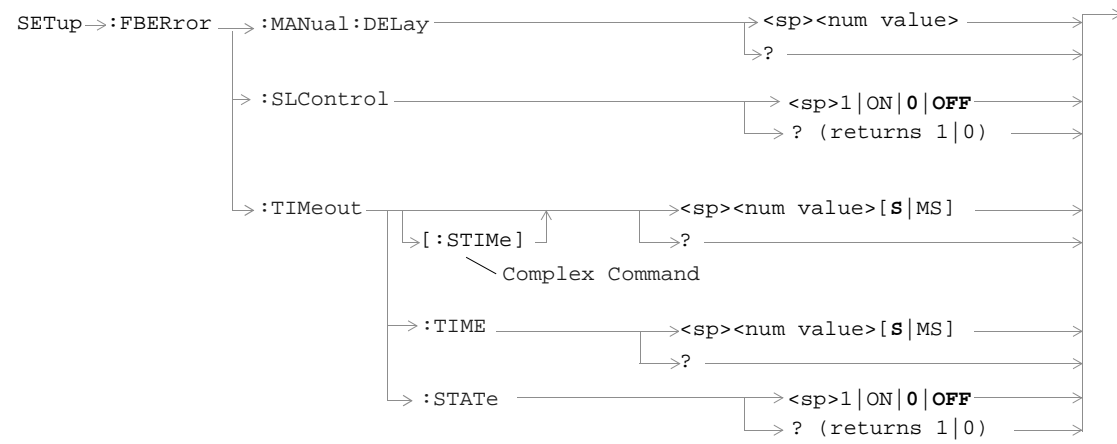



SETup:IQTuning

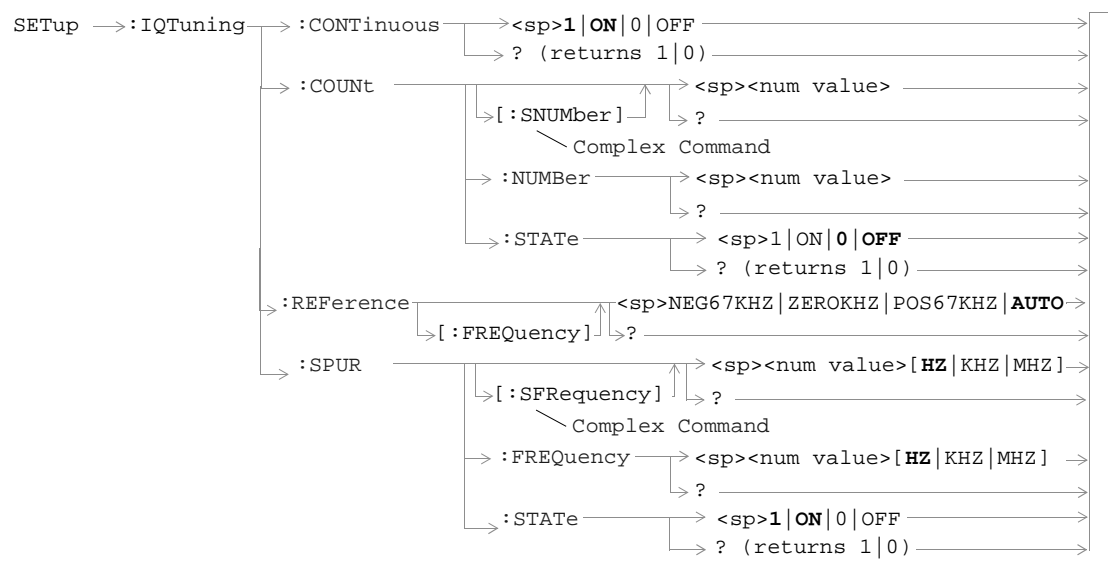


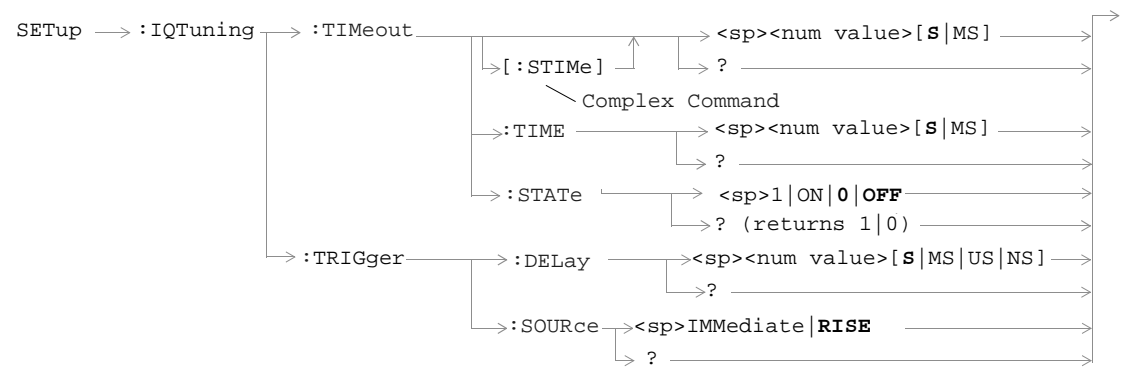


SETup:ORFSpectrum

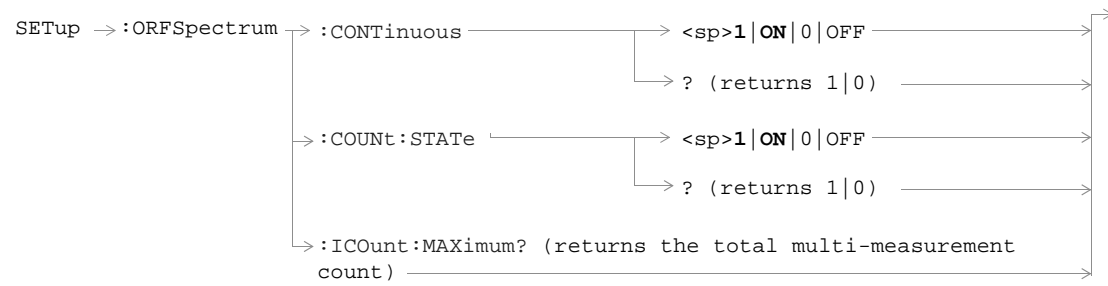


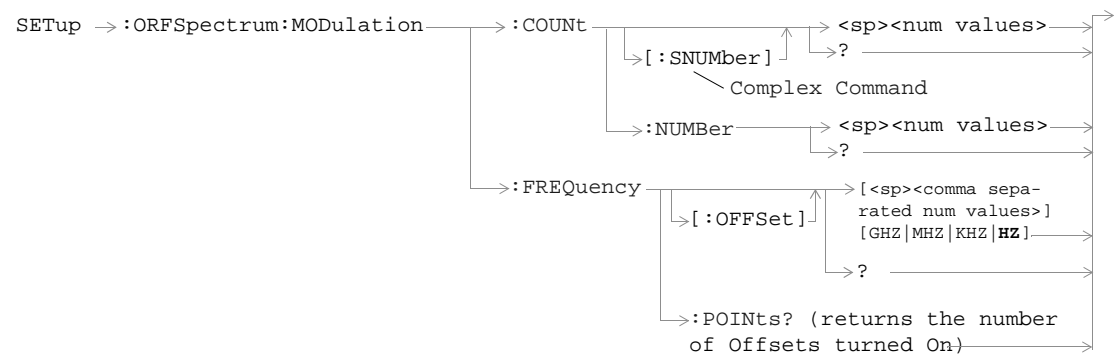


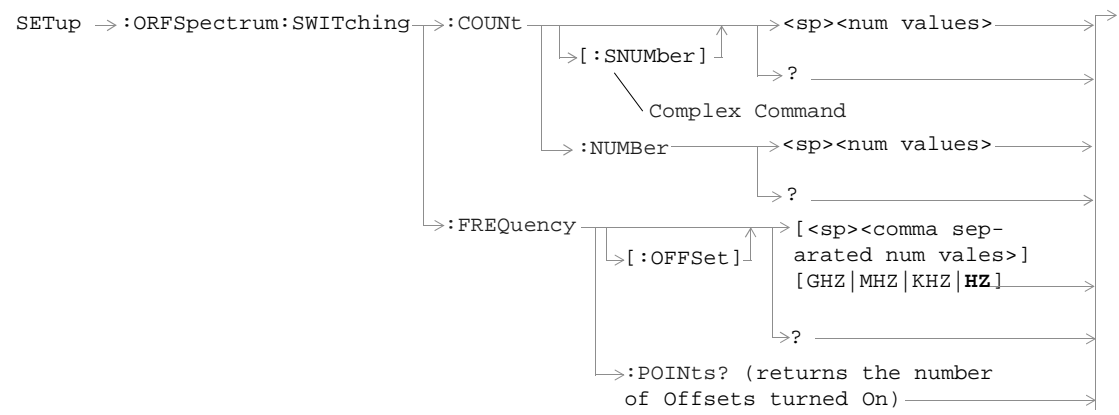

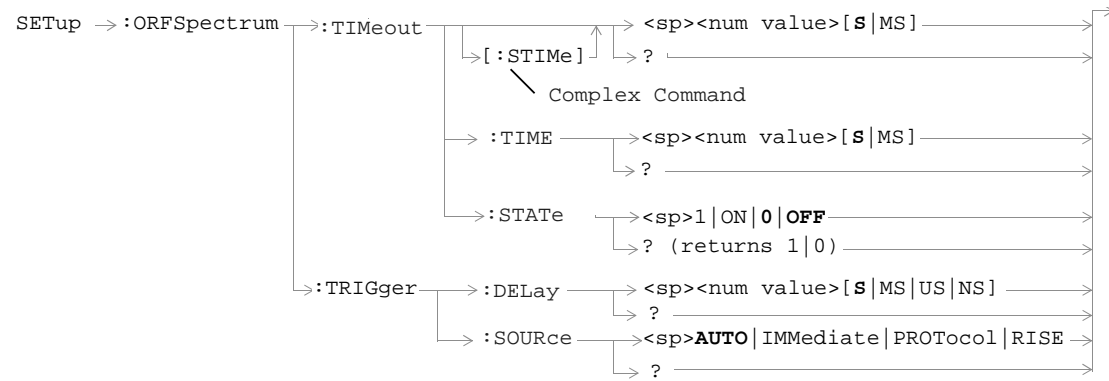



SETup:PFError

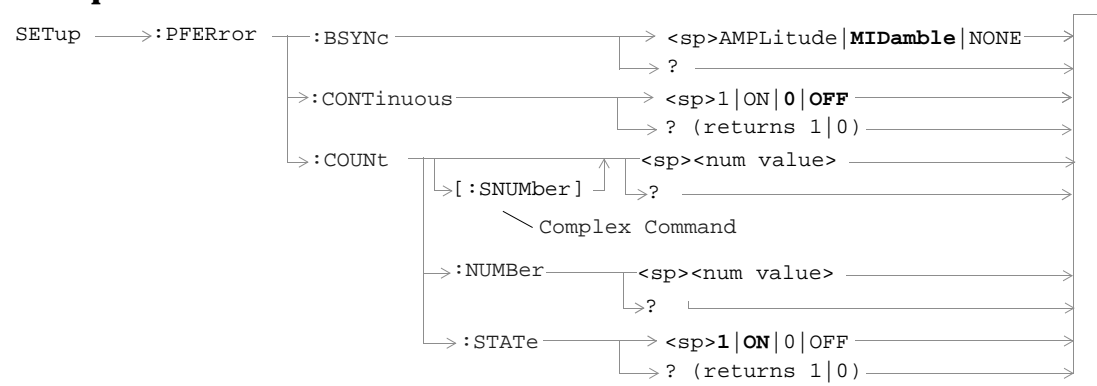

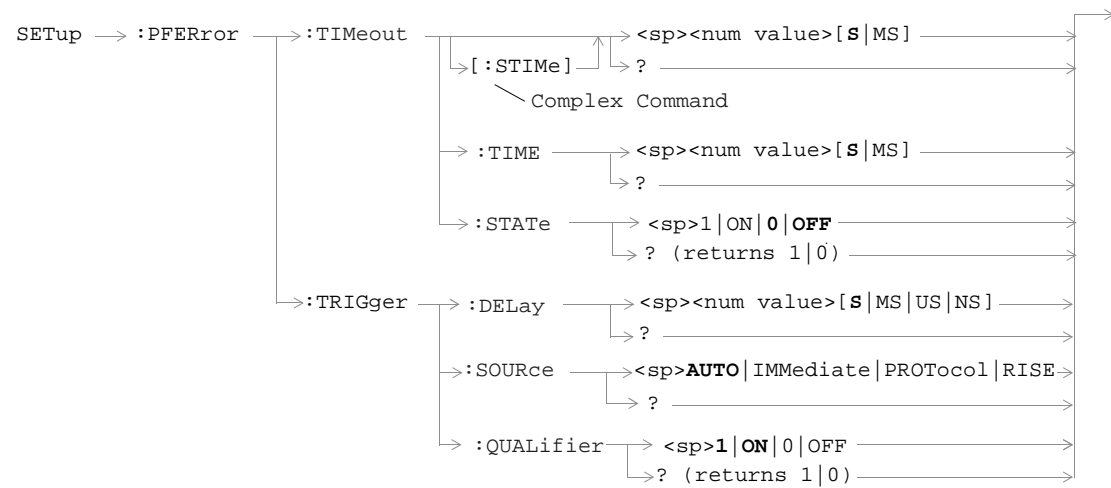



SETup:PVTime

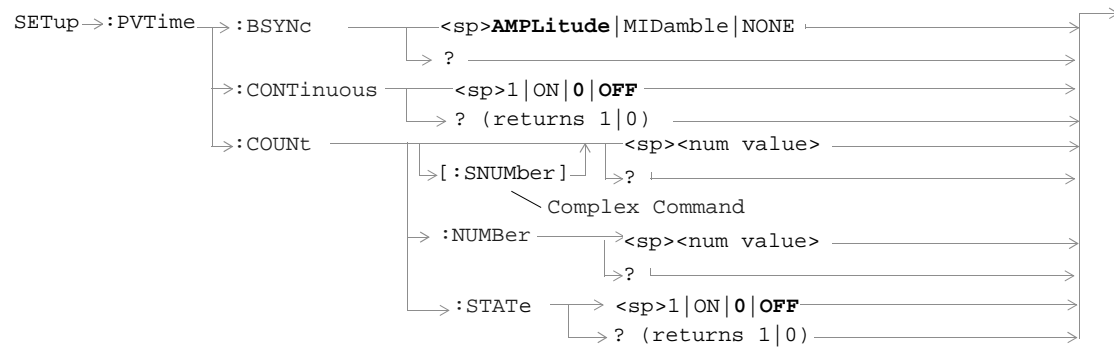

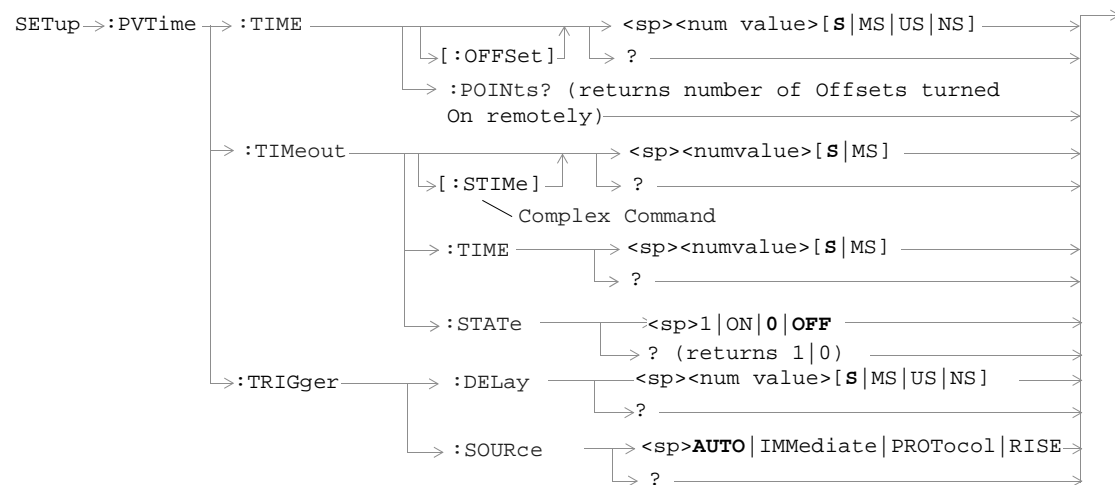



SETup:TXPower

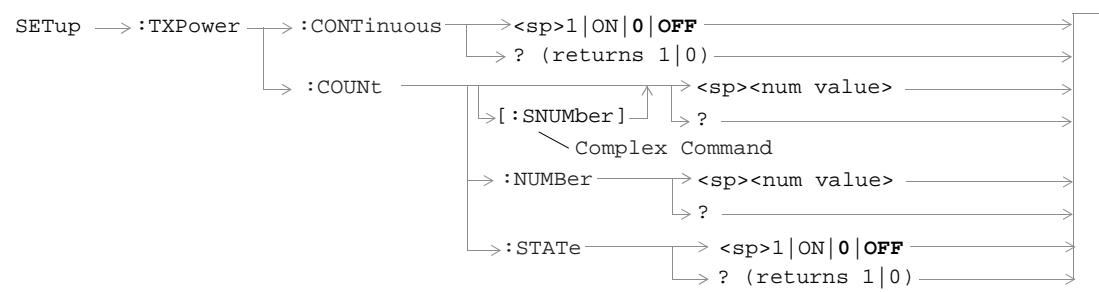


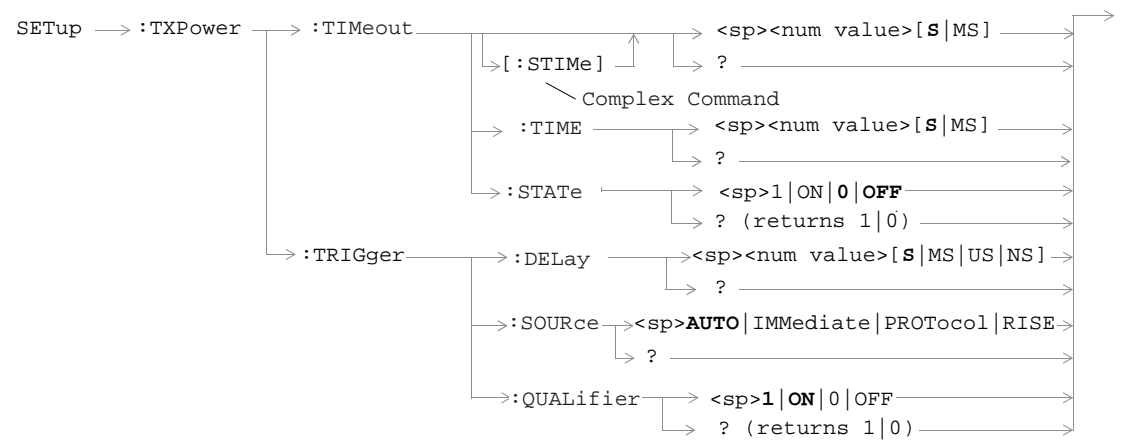



STATUS:OPERation

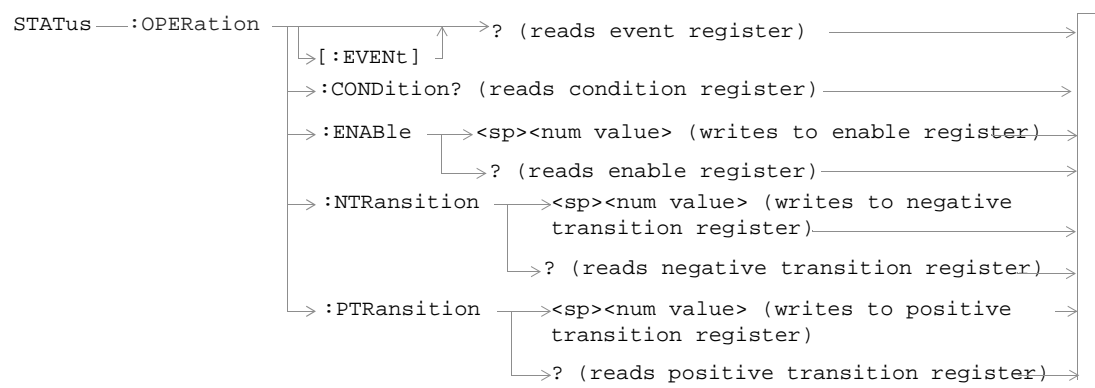


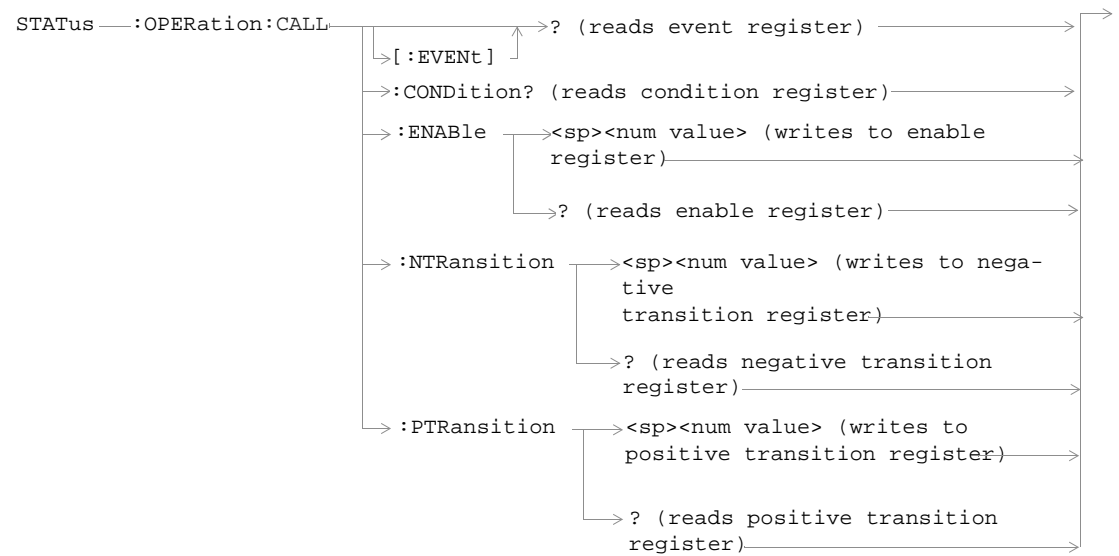

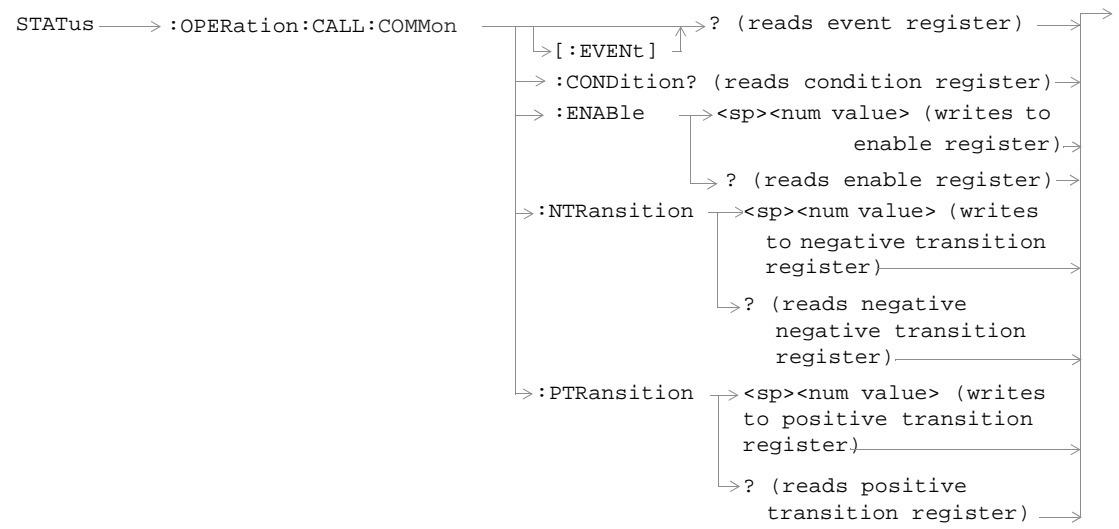

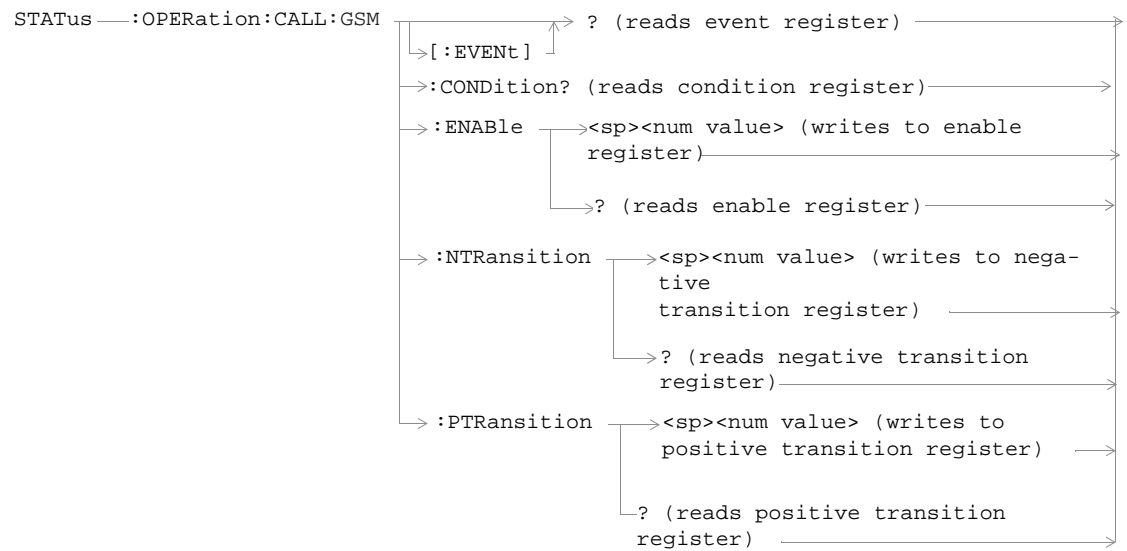

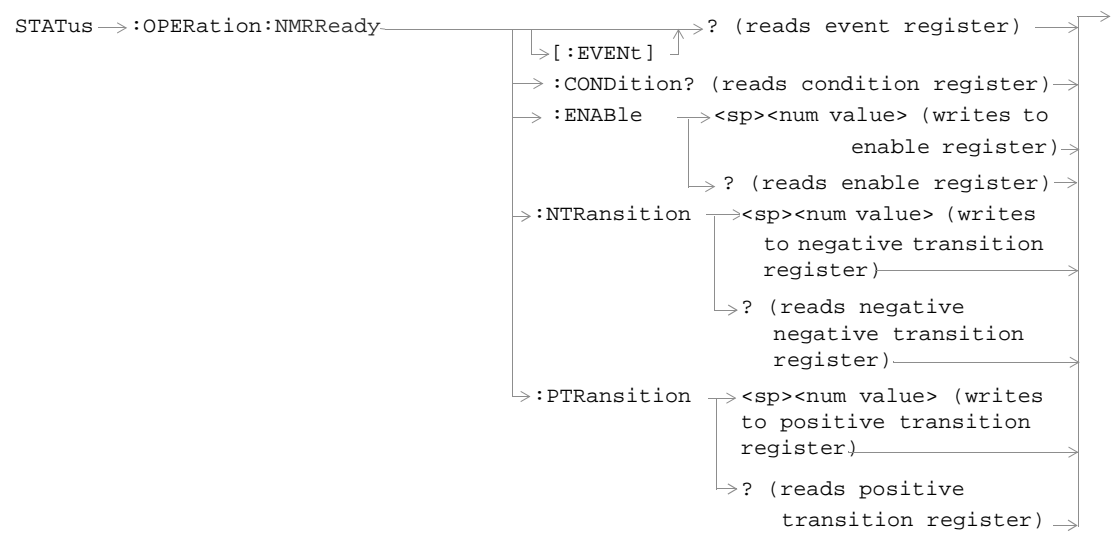


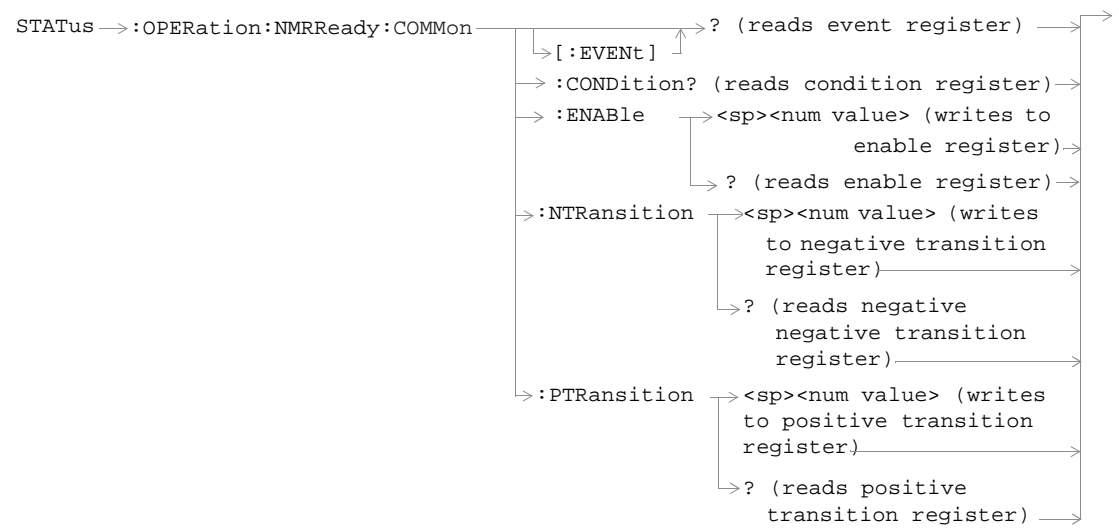



STATus:PRESet


STATus → :PRESet →


STATUS:QUESTIONable

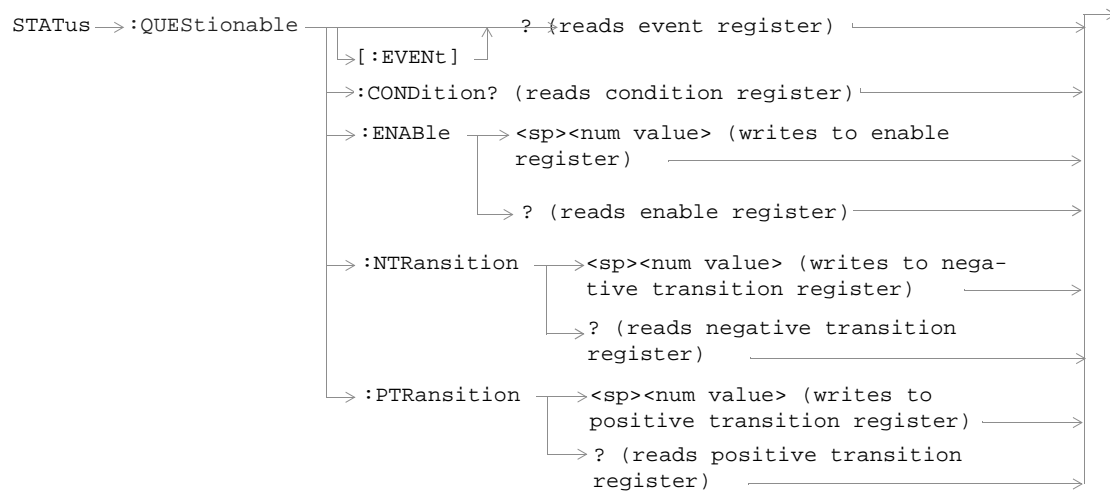


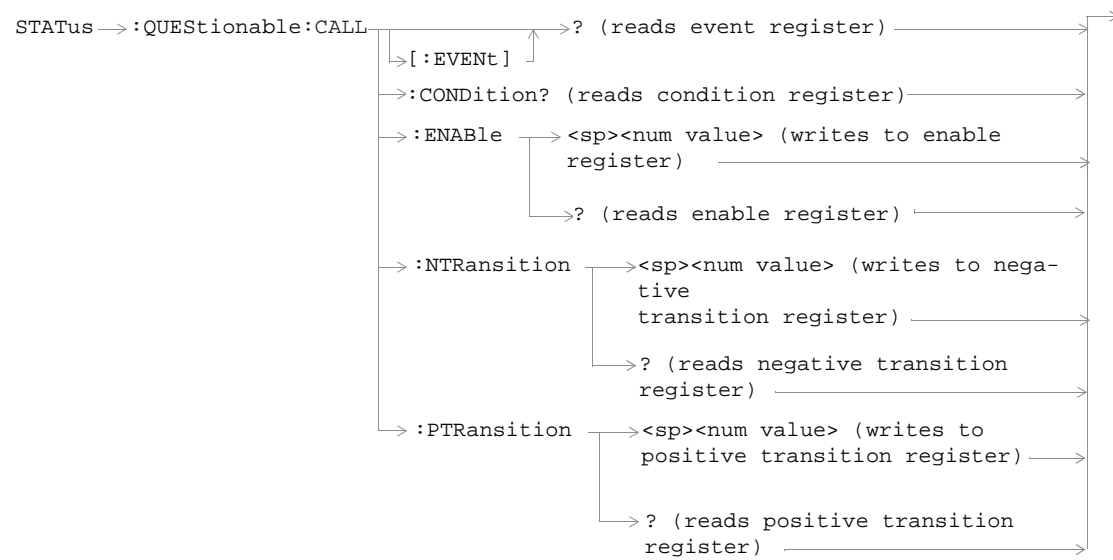


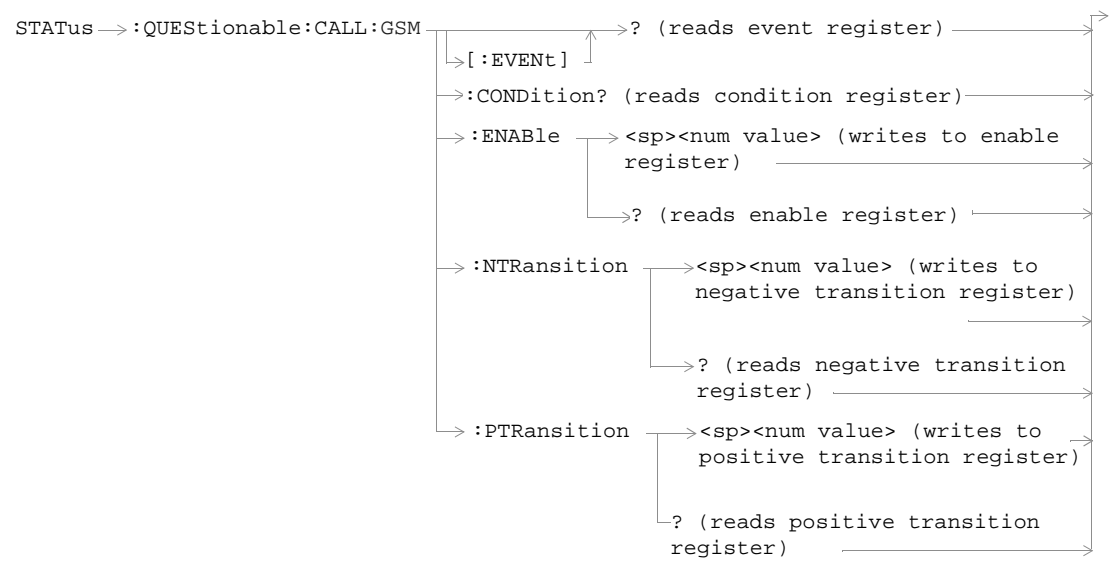

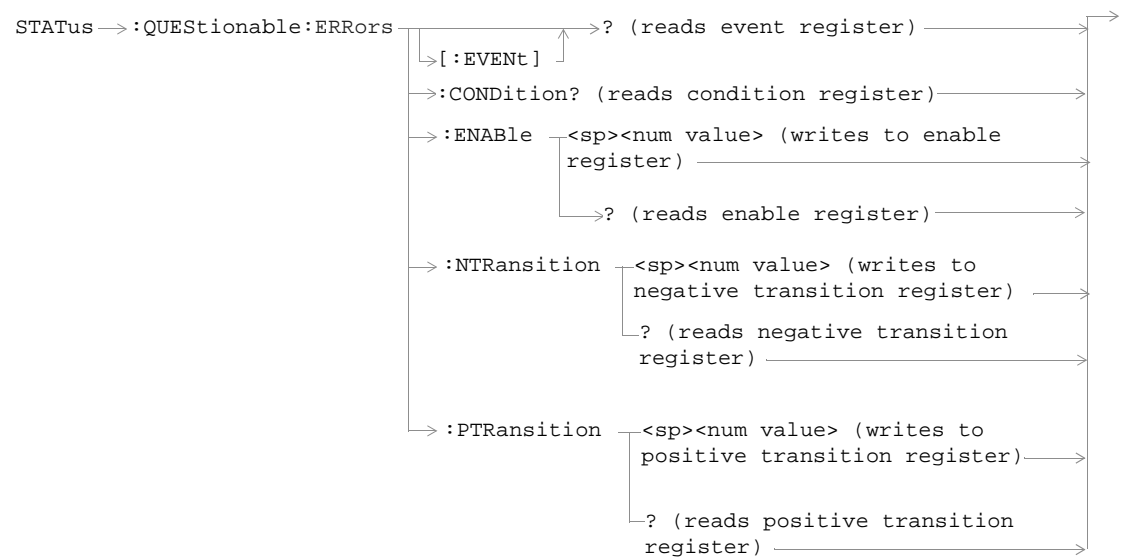

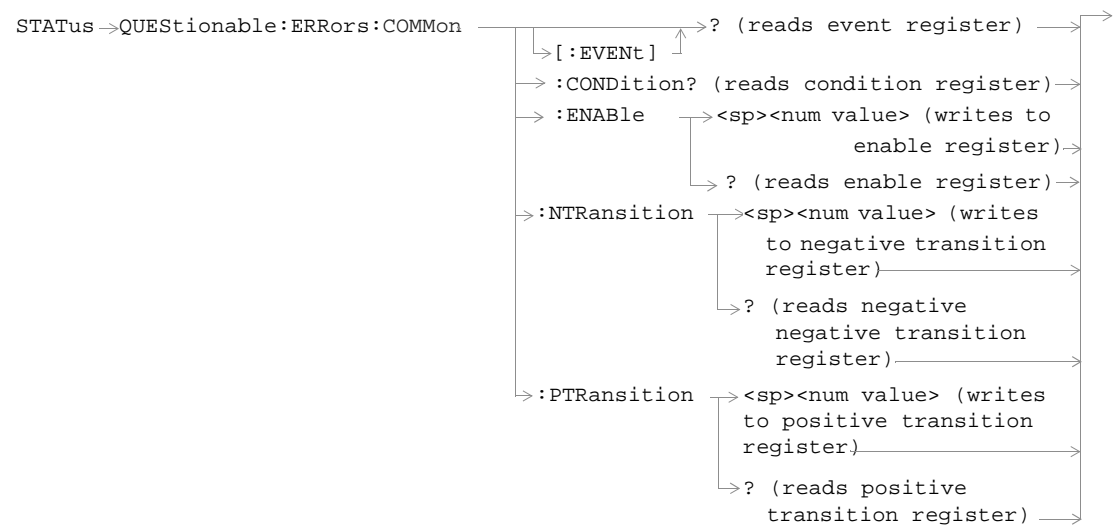

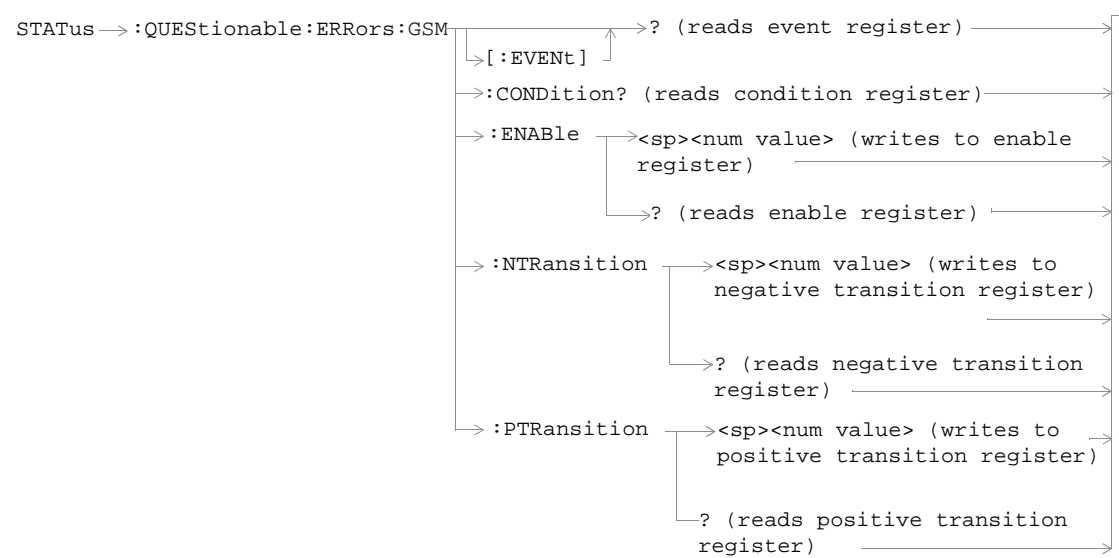

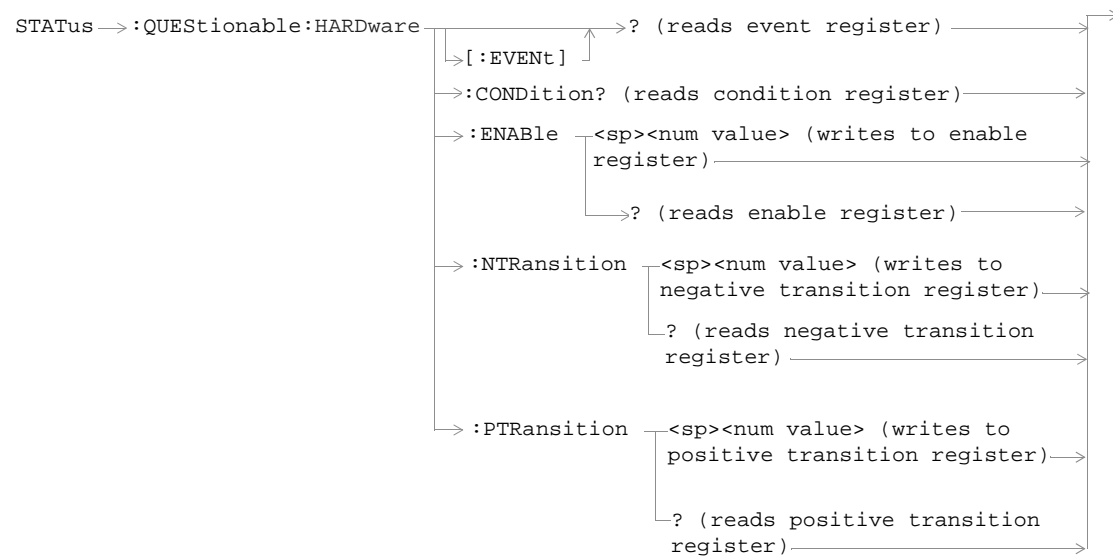

Status Byte Register

*STB?

*STB? 

Standard Event Status Register

*ESR?

*ESR? —————> Reads and clears the Std Event Status Register. ↗


*ESE?

*ESE? —————> Reads the Std Event Status Register Enable Register ↗

*ESE

*ESE —————> Writes to the Std Event Status Register Enable Register ↗


SYSTEM:APPLICATION

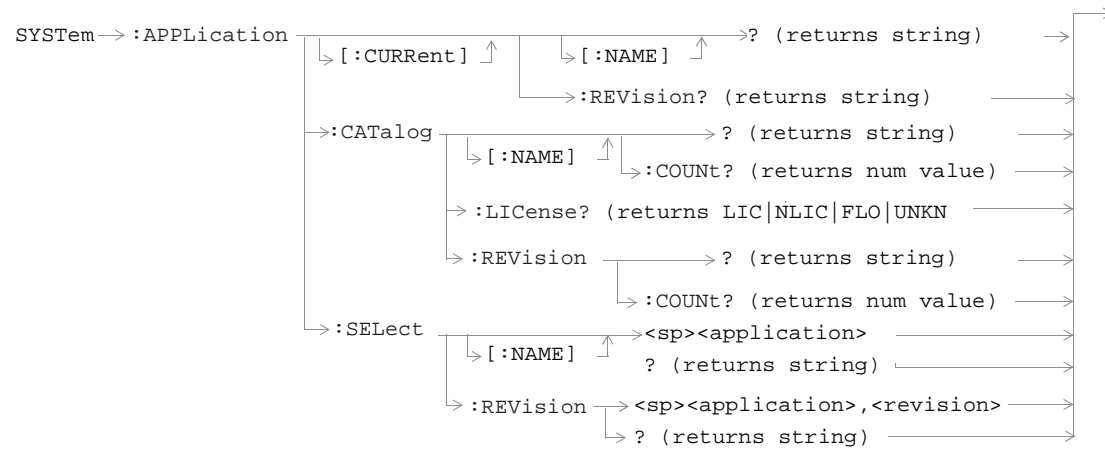

SYSTem:BEEPer




SYSTem:COMMunicate

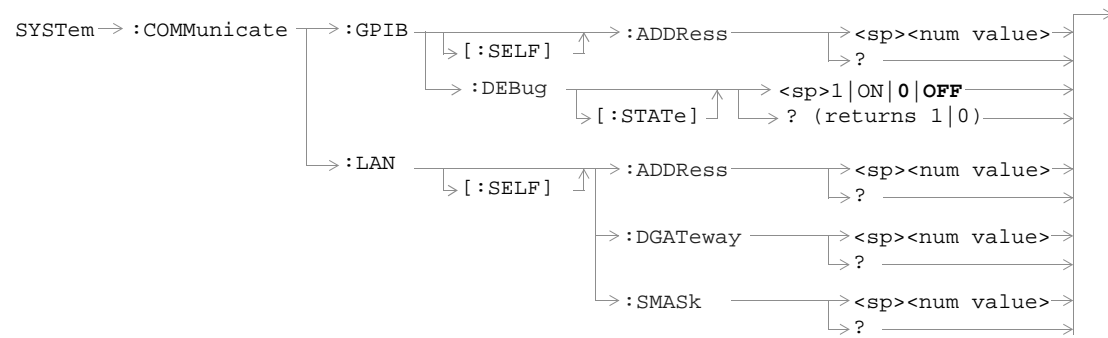


SYSTem:CONFigure

SYSTem → :CONFigure → :INFormation → :HARDware → :VERBoSe? → (returns model number,
serial number, revision
number, board ID and
Cal file information) →

SYSTem:CORRection

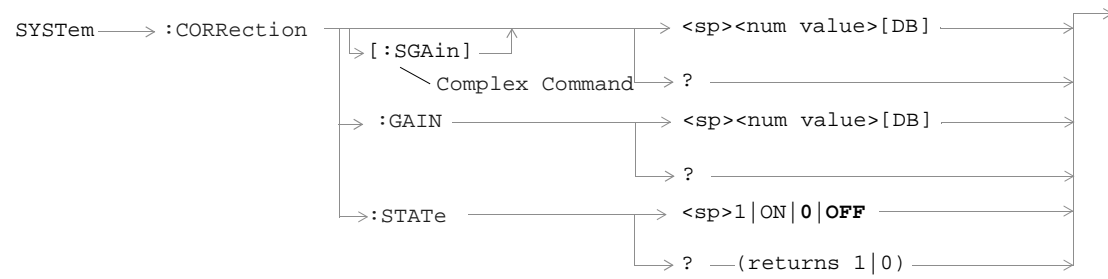


SYSTem:CURRent:TA

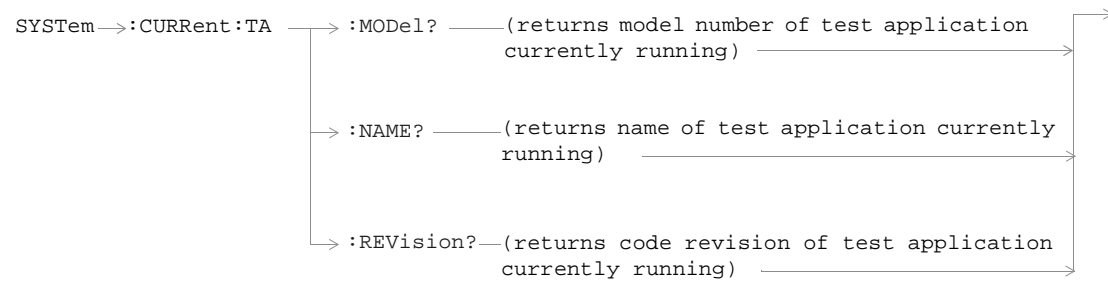

SYSTem:ERRor?

SYSTem → :ERRor? — (returns contents of error/event queue) →

SYSTEM:FTRigger

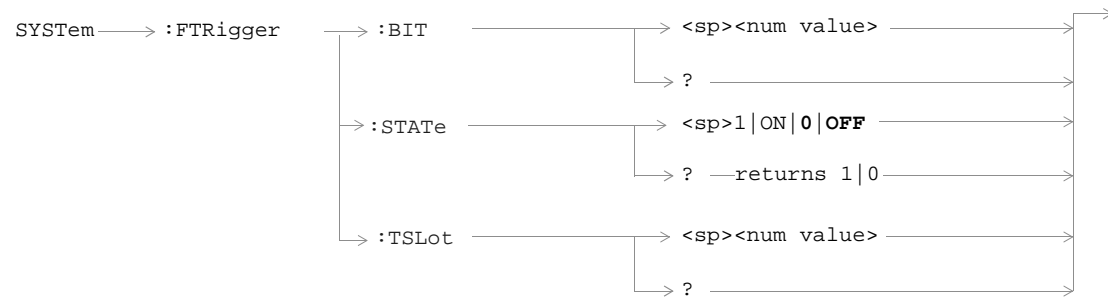


SYSTem:MEASurement


SYSTem → :MEASurement → :RESet →




SYSTem:PRESet

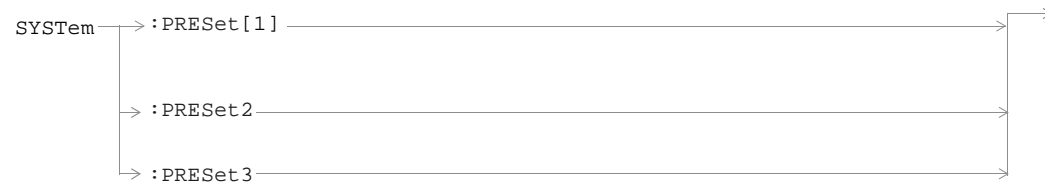

SYSTem:ROSCillator

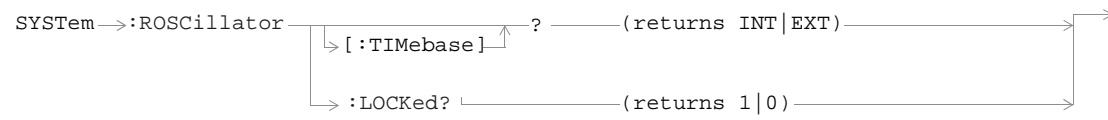

SYSTem:SYNChronized



IEEE 488.2 Common Commands

Description

***CLS**

The *CLS, clear status command, is defined in "IEEE Std 488.2-1992", 10.3. This command will also clear and close the error message screen on the test set's display.

***ESE**

The *ESE, standard event status enable command, is defined in "IEEE Std 488.2-1992", 10.10.

***ESE?**

The *ESE?, standard event status enable query, is defined in "IEEE Std 488.2-1992", 10.11.

***ESR?**

The *ESR?, standard event status register query, is defined in "IEEE Std 488.2-1992", 10.12.

***IDN?**

The *IDN?, identification query is defined in "IEEE Std 488.2-1992", 10.14. *IDN? is used to retrieve information about the test set in ASCII format.

*IDN?, returns ASCII codes 32 through 126 excluding comma and semicolon in four comma separated fields. Field

1 returns the manufacturer, field 2 returns the instrument model number, field 3 returns the serial number, field 4 returns 0.

***OPC**

The *OPC, operation complete command, is defined in “IEEE 488.2-1992”, 10.18. *OPC causes the test set to continuously sense the No Operation Pending flag. When the No Operation Pending flag becomes TRUE, the OPC event bit in the standard event status register (ESR) is set to indicate that the state of all pending operations is completed. The *OPC common command is not recommended for use as an overlapped command.

***OPC?**

The *OPC?, operation complete query, is defined in “IEEE Std 488.2-1992”, 10.19. The *OPC? query allows synchronization between the controller and the test set using either the message available (MAV) bit in the status byte, or a read of the output OPC?. The *OPC? query does not effect the OPC event bit in the Standard Event Status Register (ESR). The *OPC? common command is not recommended for use as an overlapped command.

***OPT?**

The *OPT?, option identification query, is defined in “IEEE Std 488.2-1992”, 10.20. Each option will have a unique name, that name will be returned with the query.

***RST**

The *RST command is defined in “IEEE Std 488.2-1992”, 10.32. The *RST command is a full preset, which restores a majority of settings to their default values.

***SRE**

The *SRE, service request enable command, is defined in “IEEE Std 488.2-1992”, 10.34. The parameter range for this command is 0 through 255.

***SRE?**

The *SRE?, service request enable query, is defined in “IEEE Std 488.2-1992”, 10.35. Values returned by this query range from 0 through 255.

***STB?**

The *STB?, read status byte query, is defined in “IEEE Std 488.2-1992”, 10.36. Values returned by this query range from 0 through 255.

***WAI**

The *WAI, wait-to-continue command, is defined in “IEEE Std 488.2-1992”, 10.39. The *WAI command prevents the test set from executing any further commands or queries until all pending operation flags are false. The *WAI command is not recommended for use as an overlapped command.

Syntax Equivalents

To find a syntax equivalent for a field on the Test Set's display.

1. Find the field name on the Test Set's display.

2. Look up the name in the alphabetical listing.

3. Turn to the page indicated.

Numerics

3 Digit MNC for PCS 1900, 35

A

Active Cell Status, 41
Amplitude, 11
Amplitude Offset, 111
Analog Audio Setup, 69

B

BA Table, 14
Band Pass Filter Frequency
 AAUD, 69
 DAUD, 74
BCC (Base Station Colour Code), 17
Beeper State, 108
Bit Error Setup, 71

Broadcast Chan, 18
Burst Synchronization
 PFER, 85
Burst Synchronization
 PVT, 87
Burst Timing Error, 41

C

Cal. first IQ mod, 12
Cal. second IQ mod, 12
Cell Activated State, 13
Cell Band, 16
Cell Power, 36
Cell Power State, 36
Corrupted Bursts, 21

D

Decode Errors, 21
Decoded Audio Setup, 74
Display mode, 46

E

End Call, 22
Expected Audio Amplitude, 69
Expected Burst, 19
Expected Peak Audio Amplitude, 69
Expected Power, 67
External trigger Bit Position, 114
External trigger state, 114

External trigger Timeslot, 114

F

FBER Setup, 77
Frequency, 11

G

Get IMEI at Call Setup, 24

H

HP-IB Address, 109

I

I/Q Tuning Setup, 79

L

LAC (Location Area Code), 25
LAN IP Address, 109

M

Manual Band, 67
Manual Channel, 67
Manual Frequency, 67
Max Frames Allowed for Assignment, 21
MCC (Mobile Country Code), 26
Measurement Log, 113
Measurement Offsets
 PVT, 87

Syntax Equivalents

Measurement Timeout

AAUD, 69
BERR, 71
DAUD, 74
FBER, 77
I/Q Tuning, 79
ORFS, 84
PFER, 85
PVT, 88
TXP, 89

Measurement Type, 71

Measurement Unit, 51, 53

Missing Bursts, 21

MNC (Mobile Network Code), 27

Mobile Loopback, 44

Modulation Offset

ORFS, 81

Modulation Offset

ORFS, 79, 81

Multi-Measurement Count

I/Q Tuning, 79

ORFS, 81

PFER, 85

PVT, 87

TXP, 89

Multi-Measurement Count (Modulation)

ORFS, 81

Multi-Measurement Count (Switching)

ORFS, 82

Multi-measurement Count Decoded Audio, 74

N

NCC (Network Colour Code), 31

Number of bits to test

BERR, 71

FBER, 77

O

Operating Mode, 32

ORFS Setup, 81

Originate Call, 33

P

Pages, 21

Paging IMSI, 34

Phase & Freq Setup, 85

Power vs Time Measurement Setup, 87

Pulse, 11

R

RACHs, 21

Receiver Control, 67

Reference Offset Frequency

I/Q Tuning, 79

Repeat Paging, 34

S

Speech, 44

Speech Frames Delay, 71

Switching Offset

ORFS, 82

T

TDMA Frames Delay, 77

Test Function, 23

Time Offset

PVT, 87

Timeslot, 44

Traffic Band, 43

Traffic Channel, 42

Trigger Arm

AAUD, 69

BERR, 71

DAUD, 74

FBER, 77

I/Q Tuning, 79

ORFS, 81

PFER, 85

PVT, 87

TXP, 89

Trigger Delay

I/Q Tuning, 79

ORFS, 84

TXP, 90

Trigger Qualifier

PFER, 86

Syntax Equivalents

TXP, 90
Trigger Source
I/Q Tuning, 79
ORFS, 84
PFER, 86
PVT, 88
TXP, 90
TX Power Setup, 89

U

Use 3 Digit MNC for PCS 1900, 35