
System Information Guide

**Agilent Technologies E7477A cdma2000
Wireless Solutions**

**Manual part number
E7477-90004**

Edition/Print Date

All Editions and Updates of this manual and their creation dates are listed below.

First Edition ... March 2001

Notices

Copyright © Agilent Technologies, Inc 1997, 1998, 1999, 2000, 2001 All Rights Reserved.

No part of this manual may be reproduced in any form or by any means (including electronic storage and retrieval or translation into a foreign language) without prior agreement and written consent from Agilent Technologies, Inc. as governed by United States and international copyright laws.

Trademarks

ArcView ® is a registered trademark of Environmental Systems Research Institute, Inc.

MapInfo ® is a registered trademark of MapInfo Corporation.

Pentium ® is a registered trademark of Intel Corporation.

PlaNET ® is a registered trademark of Mobile Systems International.

Adobe ® is a trademark of Adobe Systems Incorporated.

Windows NT ® and Windows 95 ® and Windows 98 ® are U.S. registered trademarks of Microsoft Corporation.

Hewlett-Packard ® is a registered trademark of Hewlett-Packard Limited.

Warranty

This Agilent Technologies, Inc. instrument product is warranted against defects in material and workmanship for a period of one year from date of shipment. During the warranty period, Agilent Technologies, Inc. Company will, at its option, either repair or replace products which prove to be defective. For warranty service or repair, this product must be returned to a service facility designated by Agilent Technologies, Inc.. Buyer shall prepay shipping charges to Agilent Technologies, Inc. and Agilent Technologies, Inc. shall pay shipping charges to return the product to Buyer. However, Buyer shall pay all shipping charges, duties, and taxes for products returned to Agilent Technologies, Inc. from another country.

Agilent Technologies, Inc. warrants that its software and firmware designated by Agilent Technologies, Inc. for use with an instrument will execute its programming instructions when properly installed on that instrument. Agilent Technologies, Inc. does not warrant that the operation of the instrument, or software, or firmware will be uninterrupted or error-free.

Limitation of Warranty

The foregoing warranty shall not apply to defects resulting from improper or inadequate maintenance by Buyer, Buyer-supplied software or interfacing, unauthorized modification or misuse, operation outside of the environmental specifications for the product, or improper site preparation or maintenance.

No other warranty is expressed or implied.

Agilent Technologies, Inc. specifically disclaims the implied warranties of merchantability and fitness for a particular purpose.

Exclusive Remedies

The remedies provided herein are Buyer's sole and exclusive remedies. Agilent Technologies, Inc. shall not be liable for any direct, indirect, special, incidental, or consequential damages, whether based on contract, tort, or any other legal theory.

Technology Licenses Notice

The Hardware and/or Software described in this document are furnished under a license and may be used or copied only in accordance with the terms of such license.

Restricted Rights Legend

If Software is for use in the performance of a U.S. Government prime contract or subcontract, Software is delivered and licensed as "Commercial computer software" as defined in DFAR 252.227-7014 (June 1995), or as a "commercial item" as defined in FAR 2.101(a) or as "Restricted computer software" as defined in FAR 52.227-19 (June 1987) or any equivalent agency regulation or contract clause. Use, duplication or disclosure of Software is subject to Agilent Technologies' standard commercial license terms, and non-DOD Departments and Agencies of the U.S. Government will receive no greater than Restricted Rights as defined in FAR 52.227-19(c)(1-2) (June 1987). U.S. Government users will receive no greater than Limited Rights as defined in FAR 52.227-14 (June 1987) or

DFAR 252.227-7015 (b)(2) (November 1995), as applicable in any technical data.

Agilent Technologies
1400 Fountaingrove Parkway
Santa Rosa, CA 95403-1799

Contents

Welcome to Your System Information Guide	5
Introduction	7
Specifications and Hardware Information	11
Calibration Cycle	11
General System Software Functionality	12
Data Export	12
Alarms and Alerts	16
Link Editor	19
Real-time Mapping (Option 160)	19
Report Generation	20
Virtual Front Panel Printing	21
Indoor Measurements (Option 180)	21
Agilent E7477A Software Specifications	23
Software Measurement Specifications	23
cdma2000 Pilot Channel Analysis	23
CW Power Measurements	26
Channel Power Measurements	28
Spectrum Measurements	29
cdma2000 Phone functionality	31
cdma2000 Phone Call Control	32
cdma2000 Phone Measurement Data	33
cdma2000 Phone Messaging	34
cdma2000 Mobile Debug Messaging	35
cdma2000 Post-Processing Software (Agilent OPAS32)	36
General Hardware Specifications	37
Personal Computer Recommendations, Minimum	37
External GPS Receiver Requirements	38
GPS and Vehicle Fitted Navigation Systems Supported	38
Differential GPS Receiver Supported	38
Antennas	39

Agilent E7477A Hardware Specifications	41
Supported Phones	49
Agilent E7477A System Options	51
Software License Options	52
Receiver Options	53
Agilent 86154A General System Accessories	59
General System Accessories	59
Agilent 86154A Option 540 Vehicle Based Drive Test Display System	65
Power Localization Options	67
Agilent 86154A, E7477A System Accesories	69
Part Number Summary	71
RF Connectors and Antennas	75

Welcome to Your System Information Guide

Thank you for choosing Agilent Technologies. In this Guide, you'll find the necessary information needed to support your drive test system.

For Information on...	See This
Overview of the Agilent Wireless Solutions System	"Introduction" on page 7
General Software Specifications	"General System Software Functionality" on page 12
E7477A Software Specifications	"Agilent E7477A Software Specifications" on page 23
General Hardware Specifications	"General Hardware Specifications" on page 37
E7477A Hardware Specifications	"Agilent E7477A Hardware Specifications" on page 41
E7477A System Options	"Agilent E7477A System Options" on page 51
General System Accessories	"Agilent 86154A General System Accessories" on page 59
E7477A System Accessories	"Agilent 86154A, E7477A System Accessories" on page 69
System Part Number Summary	"Part Number Summary" on page 71

If You Need Help...

To Do This...	See This
View and Print this Guide	Additional Documentation, Chapter 3, <i>Getting Started Guide</i>
Contact Agilent Technologies and the Product Web site	http://www.agilent.com/find/networks

Welcome to Your System Information Guide

Introduction

The E74xx drive test system is a scalable integrated air interface measurement system, used to obtain comprehensive RF measurement and call performance data versus location. Depending on the hardware options you have purchased, you will be able to make measurements on the following technology types:

- CDMA Cellular and PCS band
- TDMA Cellular and PCS band
- GSM900, DCS1800, GSM1900, or GSM900/DCS1800 Dual-band
- W-CDMA (UMTS) (currently not supporting phone measurements), or cdma2000
- GPRS (GSM) and Data (GSM)

Receiver-based, phone-based, or combined measurement capabilities are selected via stackable software licenses that reside on a supplied software protection key. Measurement receivers, which can be supplied with or without an internal GPS receiver, are supplied with magnetic mounting antennas, car mounting brackets, and RS-232 connection cables to link to a laptop PC (available as an accessory). Phone software licenses are supplied with dual-port ruggedized PCMCIA serial I/O cards.

The E74xx drive test system is a scalable measurement system for wireless optimization. It has four basic configurations:

- Phone-based measurement system using a single or multiple test mobile phones
- Receiver-based measurement system using a single or multiple digital measurement receivers
- Combined phone and receiver measurement system using a single or multiple receivers and phones
- Basestation Over Air Testing (Model E7490A, CDMA only)

Introduction


All of the above configurations can be used for indoor measurement. Measurements are matched to an imported floor plan or map in the absence of GPS.

The system requires a PC with Windows 95/98 or NT 4.0 (or later) running the receiver and/or phone-based measurement software. A navigation system, such as a GPS receiver and GPS antenna, is required to obtain longitude and latitude information for logging the position at which the measurements are taken by the receiver or the phone. This type of measurement can also be accomplished by use of the indoor option in lieu of the GPS option. The GPS receiver may be integrated into the digital receiver or it may be an external device. A suitable laptop PC and external GPS receiver can be supplied as drive test accessory products. The complete system is transportable in a lightweight briefcase that can be supplied as an accessory product.

[Figure 1 on page 9](#) illustrates a four phone and four receiver system.

Introduction

Figure 1 Four phone and four receiver system

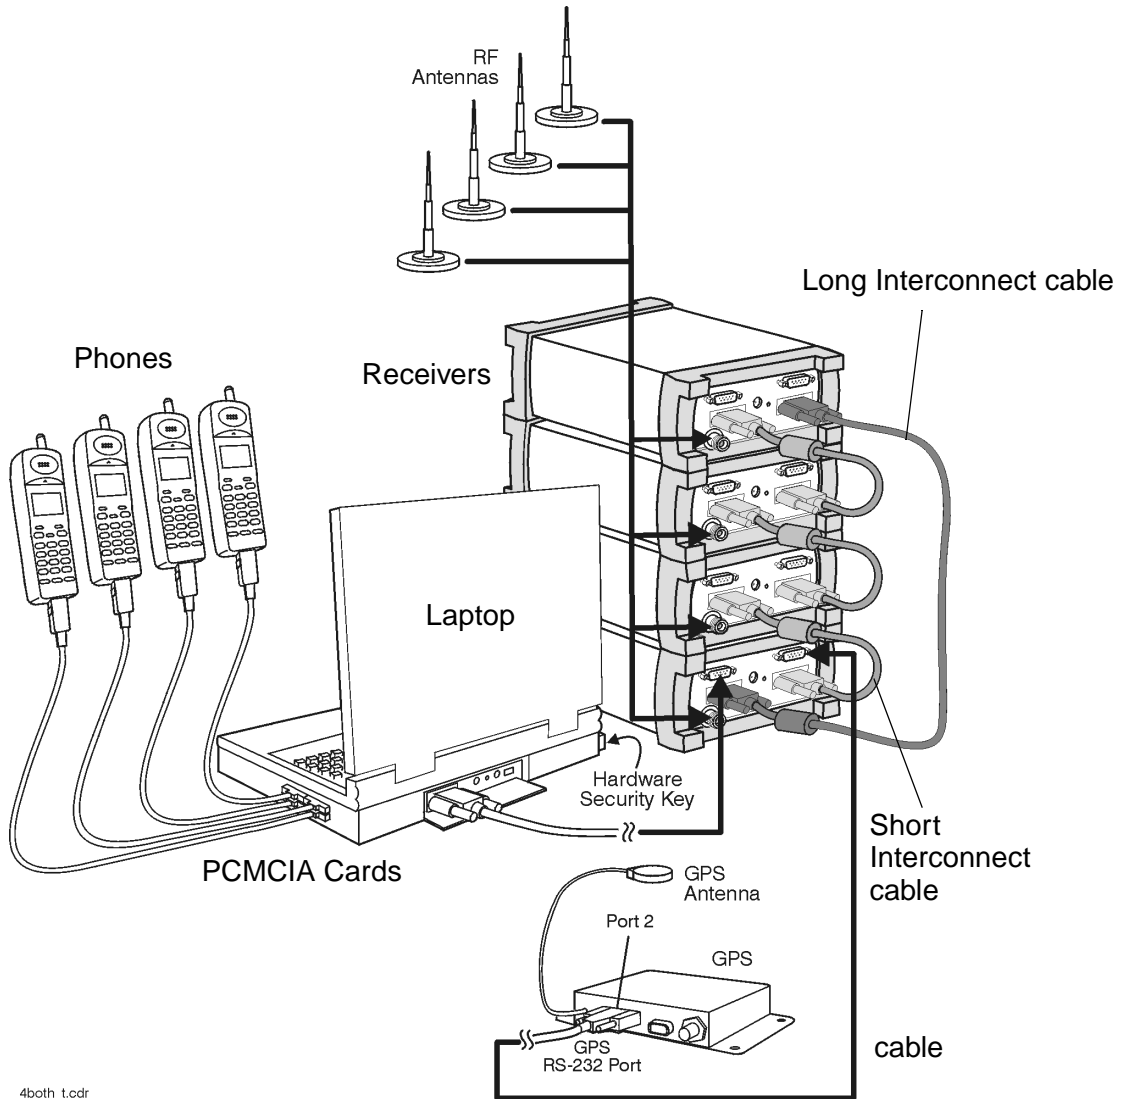

4both_t.cdr

Introduction

Specifications and Hardware Information

This section lists specifications and characteristics of the systems.

Specifications	Describes warranted performance over the temperature range 0°C to +55°C (unless otherwise noted) after the temperature of the Receiver has been stabilized by 30 minutes of continuous operation.
Typical	Provides useful information by giving non-warranted performance parameters. Typical refers to test data at the fiftieth percentile for a 25°C room temperature.
Characteristics	Provides useful information by giving non-warranted performance parameters. Characteristics describe product information for parameters that are either not subject to variation, non-measurable, verifiable through functional pass/fail tests, or as a matter of routine, not measured. <i>Characteristics are printed in italics.</i>

Calibration Cycle

Agilent Technologies warrants instrument specifications over the recommended calibration interval. To maintain specifications, periodic recalibrations are necessary. We recommend that the Receiver be calibrated at an Agilent Technologies service facility every 12 months.

General System Software Functionality

Some of the functionality of the system is common across all wireless solutions. The following sections describe these cross-solution features.

- [“Data Export” on page 12](#)
- [“Alarms and Alerts” on page 16](#)
- [“Link Editor” on page 19](#)
- [“Real-time Mapping \(Option 160\)” on page 19](#)
- [“Report Generation” on page 20](#)
- [“Virtual Front Panel Printing” on page 21](#)
- [“Indoor Measurements \(Option 180\)” on page 21](#)

Data Export

All measurement data can be exported from the Agilent Wireless Solutions database for display and post-processing. Any measurement data can be exported. The export function provides flexible filtering capability enabling you to define the specific data to be exported. Multiple data types can be exported to a single output file.

You can save export plans, and once saved, those plans can be quickly accessed for easy data export. An export plan is made up of:

Export Plan Element	Description
Data type	Defines which data will be exported. Column order is user-definable.
Alarm	Defines which alarms will be exported.
Note	Exports any user note or auto-note entered while recording data

General System Software Functionality

Export Plan Element	Description
Processing functions	Defines the functions that will be applied to the data during export.
Exclusion rules	Defines a set of conditions that, if true, the associated data will be excluded from the export.
Geographic binning	Defines data-reduction process in which the data is averaged based on geographic area or distance

Several different operations can be executed in order to extract the desired data in the desired format.

Processing functions

- None
- Choose
- Count - counts number of values above or below a specified threshold
- Field
- Match
- Maximum
- Minimum
- Sort - ascend or descend
- Value(x)

Conditionals

- Greater than (>) a threshold
- Less than (<) a threshold
- All values

Geographic binning methods

- **Bin size**
User defines the size in meters of bin to be used.
- **Percentage of low and high values to discard**
User defines the percentage of values to ignore from new raw data before calculating the bin.

General System Software Functionality

- **Bin by location (grid binning)**
 - Define the reference bin and point of bin to be used, choices are:
 - Center of bin
 - Corner of bin
 - Each bin then has the following secondary choices:
 - Southwest extent of drive data
 - ▲ Southeast extent of drive data
 - ▲ Northwest extent of drive data
 - ▲ Northeast extent of drive data
 - ▲ User-defined reference coordinates
- **Bin by distance travelled (linear binning)**
 - Data is averaged based on the distance traveled.

Data Output Formats

The output formats supported by the Agilent Wireless Solutions are listed below. The system is designed to work with MapInfo®¹ in an integrated manner via an OLE (object link embedded) link to the MapInfo application (MapInfo via COM). With “Run MapBasic” checked, this exports the data, launches MapInfo, creates the necessary MapInfo table, and creates a thematic map display in MapInfo. This functionality requires MapInfo be present.

- Arcview®² compatible file
- MapInfo via COM (optional - run MapBasic program after export)
- MapInfo compatible file
- Planet ®³ compatible file
- Text file

1. MapInfo® is a registered trademark of MapInfo Corp.
2. ArcView ® is a registered trademark of Environmental Systems Research Institute, Inc.
3. Planet ® is a registered trademark of Metapath.

General System Software Functionality

Export Column Data Delimiters

- Tab
- Comma
- Space

Optional Data Parameters

- Position
- Altitude
- Time
- Date

Optional Settings

- Fill column data
- Column headings
- Sequence Number

Position Formats

- Decimal degrees with direction
- Deg: Min: Sec with direction
- Signed decimal degrees
- Signed Deg: Min: Sec
- UTM (Universal Transverse Mercator)

Coordinate Datums

It is possible to change the coordinate datum being applied by the application. It can be changed during the plan configuration.

The following datums are available:

- AGD66
- AGD84
- European
- Hu-Tzu-Shan
- NAD27 (default) (North American)

General System Software Functionality

- NAD83 (North American)
- OS36 (GB)
- SAD56 (North Chile)
- SAD56 (South Chile)
- SAD69 (Brazil)
- SAD69 (Mean)
- Tokyo (J6)
- Tokyo-Korea
- WGS72 (World Geodetic System)
- WGS84 (World Geodetic System)

Alarms and Alerts

The Wireless Solutions Software has sophisticated alarm and alert capabilities. An alarm is a boolean expression made up of one or more conditions on single or multiple measurements, including comparisons of measurement results. An alert is a simplified alarm, defined as a single condition on a single measurement. An action, or actions, can be executed when an alarm or alert occurs. The re-trigger feature re-executes an alarm's actions if all the conditions have continuously been satisfied for a specified amount of time (alarm actions are normally executed only when the conditions transition from unsatisfied to satisfied). If an alert or alarm condition occurs, while data is being logged, each data record includes the alert/alarm information.

Alarm Wizard

The alarm wizard can be used to simplify setting up some of the more common alarms.

Features of the Alarm Wizard Set up

- Specify type of alarm required
- Receive notification of new or changed measurements
- Receive notification of resources required
- Customize settings, actions and other user-definable aspects

General System Software Functionality

- Set default Male and Female voice alarm messages

Actions (Alarms and Alerts)

- Play a .WAV audio file
- Display a text message
- Pause recording, Continue (resume) recording, or Stop recording measurements

Alert Conditions

- Greater than ($>$)
- Greater than or equal to (\geq)
- Less than ($<$)
- Less than or equal to (\leq)
- Equal to ($=$)
- Not equal to (\neq)

Alert Operators

- Value
- Delta
- Maximum
- Minimum

Alarm Conditions

- Greater than ($>$)
- Greater than or equal to (\geq)
- Less than ($<$)
- Less than or equal to (\leq)
- Equal to ($=$)
- Not equal to (\neq)
- Is a subset
- Is not a subset
- Sets intersect
- Sets do not intersect

General System Software Functionality

- Range (inclusive)
- Range (exclusive)

Alarm Preprocess Operators

- Value
- Maximum
- Minimum
- Subset
- Average
- Count
- Delta
- dField (a change in field value)
- Field
- MaxField
- MinField
- Median

Alarm Condition Operators

- OR
- AND
- XOR (exclusive OR)

Any measurement can be an operand in an alert or alarm. Below are some examples of alerts and alarms.

- **Alerts**
 1. Minimum (CW Power Trace) > -90 dBm
 2. Maximum(Spectrum) < -100 dBm
- **Alarms**
 3. (Heading < 300) and (GPS FIX Type = GPS 3D)
 4. Subset (CW Power Trace) NOT Subset (value Channel Power List)

General System Software Functionality

System status parameters can also be used as operands in alerts and alarms. For example, an alert can be set to trigger when the available disk space on the PC drops below 10 MB or when the GPS position fix is lost.

Link Editor

The Link Editor is available from the Tools menu and enables you to link controls in one virtual front panel (the source) with parameters in another virtual front panel (the destination). Links can be configured from either Configuration mode or Collection mode. You can:

- Link simple measurement results to parameters for other measurements.
- Link measurement parameters to parameters for other measurements.
- Invoke an action (such as a button click) on all virtual front panels of the same type.
- Invoke an action (such as a button click) on a select set of virtual front panels of the same type.

Real-time Mapping (Option 160)

Using the Positioning virtual front panel, you can display vector and raster-based maps against a real-time, plotted measurement result. The following features are available:

- Load and control map layers (TAB format).
- Add raster maps (GIF, TIF, and PNG format).
- Zoom in and Zoom out of map detail.
- Pan automatically and manually.
- Scale automatically and manually.
- Add labels and identify points.

General System Software Functionality

- Display alarms or notes on map. Click on alarm or note symbol to display the message associated with the alarm or note.
- Link a measurement result, via the link editor for display on the map as a thematic value.
- Map result values, in color, via the legend button. Pre-defined legends exist for most common measurement results.
- Specify base stations in StationInfo.txt to have them display on the map.
- Link the active server for a phone to the map and the program will draw a vector line from the current position to the appropriate base station.

Report Generation

The report generator is accessed using the **Tools > New Report (Ctrl+R)** menu option, or by clicking the report generator button in Collection mode. The reports generated are in HTML format with referenced images, which are captured in PNG format. The reports and images are stored in the report folder (if default installation was used:

C:\Program Files\Agilent Technologies\E74xx\Reports\reportname\). The following details can be entered by the user:

- Title (also used for the report folder name)
- User name
- Company name
- Time report generated. By default, this is the PC system time.
- Date. By default, this is the PC system date.
- Location. By default, these are the GPS coordinates identified at the time the report was generated.
- Comments. This is optional text, entered by the user.

General System Software Functionality

- A report can include all opened Virtual Front Panels, or just those minimized.
- A report may also contain textual and/or table information for specific measurements.

Once the report has been generated, it is displayed on the screen, using your default browser. Reports can be viewed by selecting the Reports tab while in Configuration mode. Reports can be imported and exported.

Virtual Front Panel Printing

It is possible to print virtual front panels. This feature is accessed from the File menu. There are two print commands:

- Print (Ctrl+P) prints the application main window and all other virtual front panels.
- Print VFP prints just the active virtual front panel.

The active virtual front panel is the window with the blue title bar (if default windows colors are used).

Indoor Measurements (Option 180)

The Agilent Wireless Solutions Software can be used for testing and measuring indoor coverage areas. These measurements are taken without reference to GPS or dead-reckoning position information.

An indoor system supports the following hardware:

- Phones
- Receivers (no PN correlation for CDMA)
- Pen tablet computer
- Computer pen input devices

General System Software Functionality

- Full set of backpack accessories
- Portable power supply for computer and receiver

The measurement control virtual front panel has the following features

- Selection of data points, such as user features like CW sources
- Waypoint information to specify distribution of data between two waypoints.
- Automatic interpolation of data between waypoints, during recording
- Imported maps converted to layer map files. Supports GIF, TIF, and PNG formats
- Zoom in and zoom out of map area.
- Automatic and manual pan.
- Automatic and manual scaling.
- Display alarms and notes on map. Click on alarm or note symbol to display the message associated with the alarm or note.
- Link measurements to display thematic values.
- Map result values in color via the legend button. Pre-defined legends exist for most common measurement results.

Agilent E7477A Software Specifications

Software Measurement Specifications

Agilent E7477A measurement software adds cdma2000 functionality to existing IS-95 driven features. Agilent E7477A measurement software includes the following measurement capabilities and functionality:

- [“cdma2000 Pilot Channel Analysis” on page 23](#)
- [“CW Power Measurements” on page 26](#)
- [“Channel Power Measurements” on page 28](#)
- [“Spectrum Measurements” on page 29](#)
- [“cdma2000 Phone Call Control” on page 32](#)
- [“cdma2000 Phone Measurement Data” on page 33](#)
- [“cdma2000 Phone Messaging” on page 34](#)
- [“cdma2000 Mobile Debug Messaging” on page 35](#)
- [“cdma2000 Post-Processing Software \(Agilent OPAS32\)” on page 36](#)

cdma2000 Pilot Channel Analysis

CDMA pilot channel analysis may be carried out using the Pilot virtual front panel. These measurements are part of Agilent E7477A Options 110 and 125.

The Agilent E7477A system is capable of measuring IS-95, cdma2000, and J-STD-008 CDMA pilot channels using the Agilent digital receiver. These measurements are independent of network parameter settings. The system executes four different types of CDMA pilot channel measurements (listed below). Any or all of them can be executed simultaneously.

Measurement Types

- **All pilots**

The System measures the power, both E_c and E_c/I_o for all 512 pilot channels. The results are displayed as a trace with one point for each of the 512 PN offsets.
- **Top N**

The system measures all of the pilots in the network and returns the 'N' Strongest pilot channels received, where 'N' is a user definable integer from 1 to 20. The results are displayed in bar graph format.
- **Zoomed pilots**

The user sets the center and span in terms of chips (or PN offsets). The results are displayed as a trace.
- **User list**

The user manually inputs a list of up to 20 PN offsets to be measured. The measurements are displayed in a bar graph format. The user list frequencies can be imported from a text file. This allows regularly used sets of frequencies or channels to be stored for quick loading into the application.

Measurement Controls

- Averaging
- Carrier frequency
 - Frequency
 - Channel
- Measurement types
 - All pilots
 - TopN pilots
 - Zoomed pilots
 - User list of pilots

Agilent E7477A Software Specifications

- Band
 - Uplink
 - Downlink
- PN increment

Markers (Trace Displays only)

- Multiple markers
- Delta markers
- To Max function
- Point and click
- Marker to center
- Auto Peak

Display Controls

- Power display (Y-axis parameter)
 - Ec/Io
 - Ec
- Show value (bar graphs only)
 - Peak Ec/Io
 - Peak Ec
 - Aggregate Ec/Io
 - Aggregate Ec
 - Aggregate - Peak
 - Delay Spread (Chips)
 - Pilot delay (Chips)

Measurement Results

- Peak Ec/Io
- Peak Ec
- Io
- Aggregate Ec/Io
- Aggregate Ec
- Aggregate - Peak
- Delay spread

Agilent E7477A Software Specifications

- Pilot delay
- Carrier frequency error

Peak pilot power (both E_c and E_c/I_o) are computed by selecting the strongest peak of the correlation for each pilot. **I_o** is the total received power integrated across the entire 1.2288 MHz signal bandwidth.

Aggregate pilot power (both E_c and E_c/I_o) is computed for a given pilot by integrating the power received over the time dispersion of that pilot. **Delay spread** is the duration of time over which this power is dispersed. Both aggregate pilot power and delay spread are determined with respect to an E_c/I_o threshold of -17 dB. The system also reports the difference between the aggregate and peak pilot power (**Aggregate-Peak**). This difference along with the delay spread provides a characterization of the multipath effect on that pilot.

Pilot delay is defined as the difference in time between when a pilot signal is received and when it should have been transmitted, as defined by GPS timing. For example, a base station transmitting PN offset 0 is expected to start a new short-code pattern synchronous with the GPS even second clock. If the signal is received 3 chips after the GPS even second clock, then the pilot delay is said to be 3 chips (1 chip = 0.8 microseconds). Timing offsets can be due to both propagation delay and base station timing problems.

Carrier Frequency Error is defined as the difference between the measured carrier frequency and the user specified carrier frequency. The measured carrier frequency is of the dominant pilot signal. Carrier frequency error can be due to both base station carrier error and doppler shift (if moving).

CW Power Measurements

CW power measurements can be carried out using the Power virtual front panel. These measurements are part of Agilent E7477A Options 110 and 120.

The Agilent E7477A can measure the peak power (CW Power) at user-defined frequencies within a user-defined resolution bandwidth. The user can define the frequencies to be measured in two different ways.

Frequency Entry Methods

- **List:** Enter a list of up to 20 frequencies. The user list frequencies can be imported from a text file. This allows regularly used sets of frequencies or channels to be stored for quick loading into the application.
- **Trace:** Enter a start frequency, step size, and count. The system measures at the start frequency, at the (start + step) frequency, (start + (count - 1)*step) frequency. For example, if the start frequency is set to 1900 MHz, the step size is set to 1 MHz, and the count is set to 4; then measurements are made at 1900 MHz, 1901 MHz, 1902 MHz, and 1903 MHz. Frequencies can be specified in terms of frequency units or channel number.

Measurement Controls

- Band
 - Uplink
 - Downlink
- Averaging
- Frequency
 - Arbitrary list (list)
 - Start/step/count (trace)
- IF Bandwidth
 - 1.25 MHz in wideband mode
 - In narrowband mode, 30 kHz, or with options 390 and 391 only, 200 kHz
- Resolution Bandwidth (CW power)
 - 8.36 kHz to 1 MHz in wideband mode
 - 246 Hz to 28 kHz in narrowband mode
- Resolution bandwidth (CW power, Option 390 and 391 only)
 - 8.36 kHz to 950 kHz in wideband mode
 - 1.68 kHz to 190 kHz in narrowband mode

Channel Power Measurements

Channel power measurements can be carried out using the Power virtual front panel. These measurements are part of Agilent E7477A Option 110.

The Agilent E7477A system can measure the total power (Channel Power) within a user-defined bandwidth at a user-defined set of frequencies. This differs from the CW power measurement in that the total power is integrated across the specified channel width. The user can define frequencies to be measured in two different ways.

Frequency Entry Methods

- **List:** Enter an arbitrary list of frequencies. The user list frequencies can be imported from a text file. This allows regularly used sets of frequencies or channels to be stored for quick loading into the application.
- **Trace:** Enter a start frequency, step size, and count. The system measures at the start frequency, at the (start + step) frequency,..., (start + (count - 1)*step) frequency. For example, if the start frequency is set to 1900 MHz, the step size is set to 1 MHz, and the count is set to 4; the measurements are made at 1900 MHz, 1901 MHz, 1902 MHz and 1903 MHz.

Frequencies can be specified in terms of frequency units or channel number.

Measurement Controls

- Averaging
- Band
 - Uplink
 - Downlink
- Frequency
 - Arbitrary list (list)
 - Start/step/count (trace)

Agilent E7477A Software Specifications

- IF Bandwidth
 - 1.25 MHz in wideband mode
 - In narrowband mode, 30 kHz or, with options 390 and 391, 200 kHz
- Resolution bandwidth (CW power only)
 - 8.36 kHz to 1 MHz in wideband mode
 - 246 Hz to 28 kHz in narrowband mode
 - 8.36 kHz to 1 MHz (with 1.25 MHz IF bandwidth)
 - 1.68 kHz to 190 kHz (with 200 kHz IF bandwidth, options 390, 391 only)
 - 25.08 kHz to 2.85 MHz (with 5 MHz IF bandwidth E6455C)
- Channel width (channel power only)
 - Agilent E7477A Option 320/330
 - ▲ 8.36 kHz to 60 MHz (with 1.25 MHz IF bandwidth)
 - ▲ 246 Hz to 60 MHz (with 30 kHz IF bandwidth)
 - Agilent E7477A Option 300/310
 - ▲ 8.36 kHz to 25 MHz (with 1.25 MHz IF bandwidth)
 - ▲ 246 Hz to 25 MHz (with 30 kHz IF bandwidth)
 - Agilent E7477A (E6455C Receiver)
 - ▲ 100 kHz to 10 MHz (with 5 MHz IF bandwidth)
 - ▲ 30 kHz to 10 MHz (with 1.25 MHz IF bandwidth)
 - Agilent E7477A Option 380/381
 - ▲ 8.36 kHz to 38 MHz (with 1.25 MHz IF bandwidth)
 - ▲ 246 Hz to 38 MHz (with 30 kHz IF bandwidth)
 - Agilent E7477A Option 390/391
 - ▲ 8.36 kHz to 75 MHz (with 1.25 MHz IF bandwidth)
 - ▲ 1.68 kHz to 75 MHz (with 30 kHz IF bandwidth)

Spectrum Measurements

These measurements are part of Agilent E7477A Options 110 and 120.

The Spectrum virtual front panel can be used to quickly diagnose RF problems. The system operates in both the downlink and uplink bands. The

Agilent E7477A Software Specifications

spectrum display provides the controls listed below. Frequencies can be specified in terms of frequency units or channel number.

Measurement Controls

- Frequency, tunable range¹
 - Agilent E7477A Option 320/330
 - ▲ 1850 - 1910 MHz [1845 - 1915 MHz]
 - ▲ 1930 - 1990 MHz [1925 - 1995 MHz]
 - Agilent E7477A Option 300/310
 - ▲ 824 - 849 MHz [819 - 854 MHz]
 - ▲ 869 - 894 MHz [864 - 899 MHz]
 - Agilent E7477A with E6455C receiver
 - ▲ 1920 - 1980 MHz [1895 - 1990 MHz]
 - ▲ 2110 - 2170 MHz [2100 - 2180 MHz]
 - Agilent E7477A Option 380/381
 - ▲ 832 - 870 MHz [827 - 875 MHz]
 - ▲ 887 - 925 MHz [882 - 930 MHz]
 - Agilent E7477A Option 390/391
 - ▲ 1710 - 1785 MHz [1705 - 1790 MHz]
 - ▲ 1805 - 1880 MHz [1800 - 1885 MHz]
 - Frequency, maximum span
 - Agilent E7477A Option 320/330
 - ▲ 70 MHz
 - Agilent E7477A Option 300/310
 - ▲ 35 MHz
 - Agilent E7477A with E6455C receiver
 - ▲ 80 MHz
 - Agilent E7477A Option 380/381
1. Spectrum measurement allows some out of band tuning above and below specified frequency ranges. These extended ranges are shown in brackets - []. The performance is not specified in these ranges. Characteristic noise floor increase is 2 dB with respect to specified range. Characteristic amplitude accuracy is unchanged with respect to specified range.

Agilent E7477A Software Specifications

- ▲ 48 MHz
- Agilent E7477A Option 390/391
- ▲ 85 MHz
- IF Bandwidth
 - 1.25 MHz in wideband mode
 - In narrowband mode, 30 kHz, or with options 390 and 391 only, 200 kHz
- Resolution bandwidth
 - 8.36 kHz to 1 MHz in wideband mode
 - 246 Hz to 28 kHz in narrowband mode
- Resolution bandwidth (Options 390/391 only)
 - 8.36 kHz to 950 kHz in wideband mode (with 1.25 MHz IF bandwidth)
 - 1.68 kHz to 190 kHz in narrowband mode (with 200 kHz IF bandwidth)

Markers

- Multiple markers
- Delta markers
- To Max function
- Point and click
- Marker to center
- Auto Peak

cdma2000 Phone functionality

These measurements are part of Agilent E7477A Option 105, 125, and 150.

The phone component of the Agilent E7477A system includes four main functions. Each one is associated with a control/display window called a virtual front panel.

- cdma2000 Phone Call Control (see [page 32](#))
- cdma2000 Phone Measurement Data (see [page 33](#))
- cdma2000 Phone Messaging (see [page 34](#))

Agilent E7477A Software Specifications

- cdma2000 Mobile Debug Messaging (see [page 35](#))

cdma2000 Phone Call Control

This functionality provides automated control of the handset from the PC. The Phone Call Control virtual front panel provides the control functions listed below.

Call controls

- Call Initiation mode
 - Sequence
 - Single (long) call
 - Termination
- Call Initiation control
 - Start/continue
 - Pause
 - Stop
- Automatic Call Sequencing
 - Access time (duration of call)
 - Redial wait (duration between calls)
 - Total calls (number of calls to be executed)
- Automatic Redial
 - On a dropped call
 - On a blocked call (failed origination)
 - Redial interval (wait duration after drop or block)
 - Maximum redial attempts
- Phone number entry
- Call Option list
 - EVRC (Enhanced Variable Rate Codec)
 - Markov (set 1 or set 2)
 - TSDO (Test Data Service Option)
 - Loopback (8 or 13 kbps)
 - Voice (8 or 13 kbps)

State Controls

- No analog (forces dual mode phone to stay in digital mode)
- Log to file (creates binary file)

Statistics logging controls

- Attempted calls
- Dropped calls
- Blocked calls (failed originations)
- Markov data

In addition to control functionality, the Phone Call Control virtual front panel displays the information listed below.

Display fields (text)

- Channel
- Call information
 - Access time counter
 - Redial time counter
 - Calls remaining
- Statistics
 - Dropped call rate
 - Blocked call rate
 - Total attempts
 - Total drops
 - Total blocks

cdma2000 Phone Measurement Data

The Agilent E7477A system extracts various measurement data from the mobile handset. You control extraction of the specific measurement types with a set of check boxes. The Phone virtual front panel provides the data types listed below.

Agilent E7477A Software Specifications

Display fields (text)

- State (conversation and call type)
- Status (mode)
- SAT
- PN increment
- RSSI (mobile received power)
- Tx Power (mobile transmit power)
- FER (frame erasure rate)
- Ec/Io
 - Aggregate
 - Dominant
- Tx Adj
- P Rev (protocol revision)

Tabular displays

- PN list

Bar graph displays

- Finger data (TA fingers)
- Pilot data
 - Active
 - Candidate
 - Neighbor

Line graph displays

- Rx / Tx level
- Temporal analyzer (TA searcher) IS-95 only

cdma2000 Phone Messaging

CDMA phone messaging display is carried out using the Phone Messaging virtual front panel. The Agilent E7477A system extracts and decodes the

layer 3 over-the-air messaging from the handset. The user can select any or all of the channel types listed below from which to extract and decode messaging.

Message logging controls

- Log to display
- Snapshot

Message type selection controls

- Access
- Paging
- Sync
- Forward traffic
- Reverse traffic

In the messaging display, the user can double-click on any message to expand it to the next level of detail. A snapshot function captures the last 50 messages to a separate display while the main display continues to update.

cdma2000 Mobile Debug Messaging

The Mobile Debug Messages virtual front panel displays debug messages from the handset. The user can filter out messages of lesser severity using the Minimum Severity Level option.

Message logging controls

- Snapshot

Measurement type

- Mobile Messages
- Minimum Severity Level
 - 0 (All Messages)
 - 1 (Medium and Above)

Agilent E7477A Software Specifications

- 2 (High and Above)
- 3 (Error and Above)
- 4 (Fatal Error Only)

Message severity is indicated by color. The colors are defined in the legend below the message display.

A snapshot function captures the last 50 messages to a separate display while the main display continues to update.

cdma2000 Post-Processing Software (Agilent OPAS32)

You can import E7477A data directly from many post-processing software products, including Agilent OPAS32 post-processing software. The Agilent OPAS32 is an optimization and performance-monitoring tool designed to process large amounts of collected data to simplify the task of optimization. The Agilent OPAS32 software provides the ability to analyze one or multiple drives at a time through either separate maps, or together in a merged format.

General Hardware Specifications

Personal Computer Recommendations, Minimum

The PC requirements differ depending on the operating system, and on whether you wish to collect data from a single phone or multiple phones.

Single phone

- Windows 95/98
 - Minimum: 266 MHz Pentium II or III, 64 Mbytes RAM
 - Recommended: 500 MHz Pentium III, 128 Mbytes RAM
- Windows NT 4.0 +service pack 6 or later / Windows 2000
 - Minimum: 266 MHz Pentium II or III, 64 Mbytes RAM
 - Recommended: 500 MHz Pentium III, 128 Mbytes RAM

Multiple phone

- Windows 95/98
 - Minimum: 333 MHz Pentium II or III, 64 Mbytes RAM
 - Recommended: 500 MHz Pentium III, 128 Mbytes RAM
- Windows NT 4.0 +service pack 6 or later / Windows 2000
 - Minimum: 333 MHz Pentium II or III, 64 Mbytes RAM
 - Recommended: 500 MHz Pentium III, 128 Mbytes RAM

NOTE

Windows 95 can not be used for Data and GPRS measurement systems. Also, Dial Up Networking needs to be installed on Windows 98 and Windows NT 4.0 for Data and GPRS measurement systems.

General Hardware Specifications

Common Requirements

- RS-232 DB9 Serial Port
- Parallel port: 25-pin bidirectional
- 110 Mbytes disk space for software installation
- 200 Mbytes disk space for data (recommended)
- CD-ROM drive recommended
- 800 x 600 display resolution minimum
- For multiple phone capability
 - Two PCMCIA slots
 - USB port with USB/serial hub (recommended)

External GPS Receiver Requirements¹

- TSIP, TAIP, or NMEA communication protocol
- RS-232 (DB9) interface

GPS and Vehicle Fitted Navigation Systems Supported

- Bosch Travel Pilot RGS08 Professional
- Magneti Marelli RP Nav200
- GARMIN GPSII/III/IIIplus
- Trimble DR
- Trimble 455/DR and 450
- Trimble SVeeSix
- Trimble 400

Differential GPS Receiver Supported

- DCI RDS-3000

1. For Agilent E7473A CDMA options 110, 111, or 120 and Agilent E7490A option 111, any external GPS will have to output a GPS 1 pulse/second signal for improved frequency accuracy.

General Hardware Specifications

Antennas

- Receiver RF input specifications:
 - Input impedance: 50Ω
 - Connector type: Type-N

General Hardware Specifications

Agilent E7477A Hardware Specifications

For full details on receiver types and options, refer to the appropriate system options section in this guide.

Agilent E7477A and Options 300/310 and 380/381 Cellular Receiver Specifications

		Options 300, 310	Options 380, 381
Model		E6452A Receiver	E6452A-H02
Frequency	Frequency range	824 to 849 MHz 869 to 894 MHz	832 to 870 MHz 887 to 925 MHz
	Frequency accuracy <i>With GPS time synchronization</i>	±1 ppm <i>±0.05 ppm, characteristic</i>	
	IF bandwidth	1.25 MHz, characteristic 30 kHz, characteristic	1.25 MHz, characteristic 30 kHz, characteristic
	Aging of TCXO	±1 ppm/year	
Amplitude	Accuracy, 1.25 MHz IF	±1 dB from -40 dBm to -100 dBm (20° to 30°C) typical	±1 dB from -40 dBm to -100 dBm (20° to 30°C) typical
		±2 dB from -40 dBm to -100 dBm (0° to 55°C)	±2 dB from -50 dBm to -100 dBm (0° to 55°C)
	Accuracy, 30 kHz IF	±1.5 dB from -40 dBm to -100 dBm (20° to 30°C) ±2.5 dB from -40 dBm to -100 dBm (0° to 55°C)	±3 dB from -40 dBm to -50 dBm (0° to 55°C)

Agilent E7477A Hardware Specifications

		Options 300, 310	Options 380, 381
Model		E6452A Receiver	E6452A-H02
	Noise figure	8.0 dB typical	
	Maximum safe input level	+10 dBm, 20V DC, characteristic	
	1 dB compression point ^a	-15 dBm, characteristic	
	Adjacent channel desensitization ^b	-25 dBm typical	
	Adjacent channel rejection ^c	45 dB typical	
	Internally generated spurious, input referred	-120 dBm	
Input/Output	RF input	50Ω Type-N	
Connectors	Computer	RS-232 (DB9) Male	
	GPS	RS-232 (DB9) Male	
	Power	DC power jack 100 mils, positive center	
Miscellaneous	Operating temperature range	0°C to 55°C	
	Maximum relative humidity	80% for temperatures up to 31°C, decreasing linearly to 50% relative humidity at 40°C	
	Storage temperature range	-40°C to +70°C	
	Dimensions	6 in x 3-5/8 in x 8 in 15.24 cm x 9.21 cm x 20.32 cm	
	Weight	4.6 lbs (2.1 kg)	
	Power (option 300, 380)	9 to 34 V DC, 9W	
	Power (internal GPS, option 310, 381)	9 to 34 V DC, 10W	
	Transformer AC Power (supplied with receiver)	100 - 240 Volts AC 50 - 60 Hz	

Agilent E7477A Hardware Specifications

		Options 300, 310	Options 380, 381
Model		E6452A Receiver	E6452A-H02
Internal GPS ^d (Option 310 & 381)	GPS Receiver	8 Channel internal GPS receiver	
	Connector type	SMA	
Differential compatible without dead reckoning			

- a. It is recommended the input signal level not exceed -40 dBm.
- b. Adjacent channel desensitization: 1 dB compression of tuned signal with interfering signal 1.25 MHz from tuned signal.
- c. Adjacent channel rejection applies to the narrowband mode (30 kHz IF filter) and is defined as: Suppression of interfering signal ± 30 kHz from tuned signal for 30 kHz.
- d. Systems fitted with an internal GPS do not support connection to external GPS receivers.

Agilent E7477A Hardware Specifications

Agilent E7477A - E6455C Receiver

Model	E6455C Receiver	
Frequency	Frequency range	1920 to 1980 MHz [1895-1990] 2110 to 2170 MHz [2100-2180]
	Frequency accuracy	±1 ppm
	<i>With GPS time synchronization</i>	<i>±0.05 ppm, characteristic</i>
	IF bandwidth	1.25 MHz, characteristic 5 MHz, characteristic
	Aging of TCXO	±1 ppm/year
Amplitude	Accuracy 1.25 MHz IF	± 0.5 dB from –25 dBm to –110 dBm (20° to 30°C) typical
	Accuracy, 5 MHz IF	±0.5 dB from –25 dBm to –100 dBm (20° to 30°C) typical
	Noise figure	8.0 dB typical
	Maximum safe input level	+10 dBm, 20V DC, characteristic
	1 dB compression point ^a	–15 dBm, characteristic
	Adjacent channel desensitization ^b	–20 dBm typical
	Adjacent channel rejection ^c	25 dB typical
	Internally generated spurious, input referred	–120 dBm for 1.25 MHz –115 dBm for 5 MHz
Input/Output	RF input	50Ω Type-N
Connectors	Computer	RS-232 (DB9) Male
	GPS	RS-232 (DB9) Male
	Power	DC power jack 100 mils, positive center
Miscellaneous	Operating temperature range	0°C to 55°C
	Maximum relative humidity	80% for temperatures up to 31°C, decreasing linearly to 50% relative humidity at 40°C
	Storage temperature range	–40°C to +70°C

Agilent E7477A Hardware Specifications

Model	E6455C Receiver	
	Dimensions	6 in x 3-5/8 in x 8 in 15.24 cm x 9.21 cm x 20.32 cm
	Weight	4.6 lbs (2.1 kg)
	Power	9 to 34 V DC, 10W
	Transformer AC Power (supplied with receiver)	100 - 240 Volts AC 50 - 60 Hz
	Support for Pulse triggering measurements (refer to the Getting Started Guide and online help for more information).	
Internal GPS	GPS Receiver	8 Channel internal GPS receiver
	Connector type	SMA
	Differential compatible without dead reckoning	
	Note: The internal GPS can be disabled if you wish to use an external GPS system.	

- a. It is recommended the input signal level not exceed -40 dBm.
- b. Adjacent channel desensitization applies to wideband mode (5 MHz IF filter) and is defined as: 1 dB compression of tuned signal with interfering signal 5 MHz from tuned signal.
- c. Adjacent channel rejection applies to the narrowband mode (1.25 MHz IF filter) and is defined as: Suppression of interfering signal ± 1.25 MHz from tuned signal.

Agilent E7477A Hardware Specifications

Agilent E7477A and Options 320/330, 390/391 PCS Receiver Specifications

		Options 320, 330	Options 390, 391
Model		E6450B Receiver	E6453A Receiver
Frequency	Frequency range	1850 to 1910 MHz	1710 to 1785 MHz
		1930 to 1990 MHz	1805 to 1880 MHz
	Frequency accuracy	±1 ppm	±1 ppm
	<i>With GPS time synchronization</i>	<i>±0.05 ppm, characteristic</i>	<i>±0.05 ppm, characteristic</i>
	IF bandwidth (wideband mode)	1.25 MHz, characteristic	1.25 MHz, characteristic
	IF bandwidth (narrowband mode)	30 kHz, characteristic	200 kHz, characteristic
	Aging of TCXO	±1 ppm/year	±1 ppm/year
Amplitude	Accuracy 1.25 MHz IF	±1 dB from -40 dBm to -100 dBm (20° to 30°C) typical	± 0.5 typical (-25 dBm to -100 dBm)
		±2 dB from -40 dBm to -100 dBm (0° to 55°C)	±2 dB from -40 dBm to -100 dBm (0° to 55°C)
	Accuracy, 30 kHz IF	±1.5 dB from -40 dBm to -100 dBm (20° to 30°C) typical	±1.5 dB from -40 dBm to -100 dBm (20° to 30°C) typical
		± 2.5 dB from -40 dBm to -100 dBm (0° to 55°C)	± 2.5 dB from -40 dBm to -100 dBm (0° to 55°C)
	Accuracy, 200 kHz IF		± 0.5 typical (-25 dBm to -100 dBm)
	Noise figure	8.0 dB typical	8.0 dB typical
	Maximum safe input level	+10 dBm, 20V DC, characteristic	+10 dBm, 20V DC, characteristic
1 dB compression point ^a	-15 dBm, characteristic	-15 dBm, characteristic	

Agilent E7477A Hardware Specifications

		Options 320, 330	Options 390, 391
Model		E6450B Receiver	E6453A Receiver
	Adjacent channel desensitization ^b	-25 dBm typical	-25 dBm typical
	Adjacent channel rejection ^c	45 dB typical	45 dB typical
	Internally generated spurious, input referred	-120 dBm	-120 dBm
Input/Output	RF input	50Ω Type-N	50Ω Type-N
Connectors	Computer	RS-232 (DB9) Male	RS-232 (DB9) Male
	GPS	RS-232 (DB9) Male	RS-232 (DB9) Male
	Power	DC power jack 100 mils, positive center	DC power jack 100 mils, positive center
Miscellaneous	Operating temperature range	0°C to 55°C	0°C to 55°C
	Maximum relative humidity	80% for temperatures up to 31°C, decreasing linearly to 50% relative humidity at 40°C	
	Storage temperature range	-40°C to +70°C	-40°C to +70°C
	Dimensions	6 in x 3-5/8 in x 8 in 15.24 cm x 9.21 cm x 20.32 cm	
	Weight	4.6 lbs (2.1 kg)	4.6 lbs (2.1 kg)
	Power (option 320, 390)	9 to 34 V DC, 9W	9 to 34 V DC, 9W
	Power (internal GPS option 330, 391)	9 to 34 V DC, 10W	9 to 34 V DC, 10W
	AC Power	100 - 240 Volts AC 50 - 60 Hz	100 - 240 Volts AC 50 - 60 Hz
Internal GPS ^d (Options 330, 391)	GPS Receiver	8 Channel internal GPS receiver	8 Channel internal GPS receiver
	Connector type	SMA	SMA
Differential compatible without dead reckoning			

a. It is recommended the input signal level not exceed -40 dBm.

Agilent E7477A Hardware Specifications

- b. For all options, adjacent channel desensitization applies to wideband mode (1.25 MHz IF filter) and is defined as: 1 dB compression of tuned signal with interfering signal 1.25 MHz from tuned signal.
- c. For all options, adjacent channel rejection applies to the narrowband mode (30 kHz and 200 kHz IF filter) and is defined as: Suppression of interfering signal ± 30 kHz from tuned signal and ± 200 kHz from tuned signal for 200 kHz.
- d. Systems fitted with an internal GPS do not support connection to external GPS receivers.

Supported Phones

cdma2000

- Qualcomm SURF5000-800
- Samsung SCH-X100

CDMA

- Qualcomm QCP-800, QCP-820, QCP-860, QCP-1900, QCP-1920, QCP-1960, QCP-2700, QCP-2760
- Sony CM-D500, CM-D600, CM-M1300, CM-B1201SPR, CM-S1101SPR
- Samsung SCH-1000
- Lucky Goldstar LG1300 Korean PCS
- Toshiba CM10 for Cellular J-CDMA

Agilent E7477A Hardware Specifications

Agilent E7477A System Options

For details on the measurement capabilities and setting up your system, refer to the *Getting Started Guide* shipped with your system. Contact your local Agilent sales and service office for information about ordering these options.

Option	Description	More Details On Page
105	cdma2000 Phone software license	page 52
110	cdma2000 Receiver software license	page 52
125	cdma2000 Receiver and Phone software license	page 52
150	cdma2000 Multiple Phone software license	page 53
160	Real-Time Mapping software	page 53
180	Indoor Measurement software	page 53
300	cdma2000 Cellular Band Receiver (1920-1980 MHz and 2110-2170 MHz)	page 53
310	cdma2000 Cellular Band Receiver (1920-1980 MHz and 2110-2170 MHz) with internal GPS	page 54
320	cdma2000 PCS Band Receiver (1850-1910 MHz and 1930-1990 MHz)	page 54
330	cdma2000 PCS Band Receiver (1850-1910 MHz and 1930-1990 MHz) with internal GPS	page 55
361	cdma2000 Cellular Band Receiver (1920 to 1980 MHz and 2110 to 2170 MHz) with switchable internal/external GPS	page 55
380	Japan cdma2000 Cellular Band Receiver (1920-1980 MHz and 2110-2170 MHz)	page 56

Agilent E7477A System Options

Option	Description	More Details On Page
381	Japan cdma2000 Cellular Band Receiver (1920-1980 MHz and 2110-2170 MHz) with internal GPS	page 56
390	Korea cdma2000 PCS Band Receiver (1850-1910 MHz and 1930-1990 MHz)	page 57
391	Korea cdma2000 PCS Band Receiver (1850-1910 MHz and 1930-1990 MHz) with internal GPS	page 57

Software License Options

Option	Part Number	Description
105		<ul style="list-style-type: none">• cdma2000 Phone software license• Software CD• Software License security key• Dual port PCMCIA serial I/O card
	E7474-90009	<ul style="list-style-type: none">• Getting Started Guide
	E7477-90004	<ul style="list-style-type: none">• System Information Guide
110		<ul style="list-style-type: none">• cdma2000 Receiver software license• Software CD• Software License security key
	E7474-90009	<ul style="list-style-type: none">• Getting Started Guide
	E7477-90004	<ul style="list-style-type: none">• System Information Guide
125		<ul style="list-style-type: none">• cdma2000 Receiver and Phone software license• Software CD• Software License security key• Dual port PCMCIA serial I/O card
	E7474-90009	<ul style="list-style-type: none">• Getting Started Guide
	E7477-90004	<ul style="list-style-type: none">• System Information Guide

Agilent E7477A System Options

Option	Part Number	Description
150 ^a		<ul style="list-style-type: none"> cdma2000 Multiple Phone software license Software License security key Dual port PCMCIA serial I/O card
160		<ul style="list-style-type: none"> Real-Time Mapping software license Software CD Software License Security Key
180 ^b		<ul style="list-style-type: none"> Indoor Measurement software license Software CD Software License security key
	E7474-90010	<ul style="list-style-type: none"> Indoor Getting Started Guide
	E7473-90019	<ul style="list-style-type: none"> System Information Guide

- a. Option 150 may be purchased as an upgrade software license with options 105 or 125, or it may be purchased separately. For more information on transferring licenses between security keys, refer to the License Manager online help.
- b. Enables indoor measurement correlation to an imported floor plan/map in the absence of GPS. Indoor option must operate with other, 100-series, measurement software options in order to collect and record measurement data. Supports *.tab, *.gif, *.tif formats for floor plan import.

Receiver Options

Option	Part Number	Description
300		cdma2000 Cellular Band Receiver (824-894 MHz) with:
	0950-2679	AC/DC Power Supply for Receiver
	1150-2061	Magnetic Mount Cellular Band Antenna (824-894 MHz)
	1200-1897	Antenna Adapter Connector (N Type to TNC)
	5182-4794	Receiver RS-232 9-pin to 9-pin Cable
	E6450-60007	Firmware Write Enable Key
	E6450-60010	Cigarette Lighter Power Adapter
	E7450-60001	15-pin Interconnection Cable 380mm (15in) (short)
	86154-60033	Vehicle Mounting Kit

Agilent E7477A System Options

Option	Part Number	Description
310		cdma2000 Cellular Band Receiver (824-894 MHz) with internal GPS and:
	0950-2679	AC/DC Power Supply for Receiver
	1150-2061	Magnetic Mount Cellular Band Antenna (824-894 MHz)
	1150-2085	Magnetic Mount GPS Antenna for internal GPS
	1200-1897	Antenna Adapter Connector (N Type to TNC)
	5182-4794	Receiver RS-232 9-pin to 9-pin Cable
	E6450-60007	Firmware Write Enable Key
	E6450-60010	Cigarette Lighter Power Adapter
	E7450-60001	15-pin Interconnection Cable 380mm (15in) (short)
	86154-60033	Vehicle Mounting Kit
320		cdma2000 PCS Band receiver (1850-1910 MHz and 1930-1990 MHz) with:
	0950-2679	AC/DC Power Supply for Receiver
	1150-5059	Magnetic Mount PCS Band Antenna (1850-1990 MHz)
	1200-1897	Antenna Adapter Connector (N Type to TNC)
	5182-4794	Receiver RS-232 9-pin to 9-pin Cable
	E6450-60007	Firmware Write Enable Key
	E6450-60010	Cigarette Lighter Power Adapter
	E7450-60001	15-pin Interconnection Cable 380mm (15in) (short)
	86154-60033	Vehicle Mounting Kit

Agilent E7477A System Options

Option	Part Number	Description
330		cdma2000 PCS Band receiver (1850-1910 MHz and 1930-1990 MHz) with internal GPS and:
	0950-2679	AC/DC Power Supply for Receiver
	1150-5059	Magnetic Mount PCS Band Antenna (1850-1990 MHz)
	1150-2085	Magnetic Mount GPS Antenna for internal GPS (1575 MHz, SMA)
	1200-1897	Antenna Adapter Connector (N Type to TNC)
	5182-4794	Receiver RS-232 9-pin to 9-pin Cable
	E6450-60007	Firmware Write Enable Key
	E6450-60010	Cigarette Lighter Power Adapter
	E7450-60001	15-pin Interconnection Cable 380mm (15in) (short)
86154-60033	Vehicle Mounting Kit	
361		cdma2000 Cellular Band Receiver with switchable internal/external GPS
	0950-2679	AC/DC Power Supply for Receiver
	1150-2061	Magnetic Mount Cellular Band Antenna (824-894 MHz)
	1150-2085	Magnetic Mount GPS Antenna for internal GPS
	1200-1897	Antenna Adapter Connector (N Type to TNC)
	5182-4794	Receiver RS-232 9-pin to 9-pin Cable
	E6450-60007	Firmware Write Enable Key
	E6450-60010	Cigarette Lighter Power Adapter
	E7450-60001	15-pin Interconnection Cable 380mm (15in) (short)
86154-60033	Vehicle Mounting Kit	

Agilent E7477A System Options

Option	Part Number	Description
380		Japan cdma2000 Cellular Band Receiver (825-960 MHz) with:
	0950-2679	AC/DC Power Supply for Receiver
	E6455-80005	Cellular Band Antenna (825-960 MHz)
	1200-1897	Antenna Adapter Connector (N Type to TNC)
	5182-4794	Receiver RS-232 9-pin to 9-pin Cable
	E6450-60007	Firmware Write Enable Key
	E6450-60010	Cigarette Lighter Power Adapter
	E7450-60001	15-pin Interconnection Cable 380mm (15in) (short)
86154-60033	Vehicle Mounting Kit	
381		Japan cdma2000 Cellular Band Receiver (825-960 MHz) with GPS and:
	0950-2679	AC/DC Power Supply for Receiver
	E6455-80005	Cellular Band Antenna (825-960 MHz)
	1150-2085	Magnetic Mount GPS Antenna for internal GPS (1575 MHz)
	1200-1897	Antenna Adapter Connector (N Type to TNC)
	5182-4794	Receiver RS-232 9-pin to 9-pin Cable
	E6450-60007	Firmware Write Enable Key
	E6450-60010	Cigarette Lighter Power Adapter
E7450-60001	15-pin Interconnection Cable 380mm (15in) (short)	
86154-60033	Vehicle Mounting Kit	

Agilent E7477A System Options

Option	Part Number	Description
390		Korea cdma2000 PCS Band Receiver (1710-1880 MHz) with:
	0950-2679	AC/DC Power Supply for Receiver
	E6455-80004	PCS Band Antenna (1710-1880 MHz)
	1200-1897	Antenna Adapter Connector (N Type to TNC)
	5182-4794	Receiver RS-232 9-pin to 9-pin Cable
	E6450-60007	Firmware Write Enable Key
	E6450-60010	Cigarette Lighter Power Adapter
	E7450-60001	15-pin Interconnection Cable 380mm (15in) (short)
86154-60033	Vehicle Mounting Kit	
391		Korea cdma2000 PCS Band Receiver (1710-1880 MHz) with GPS and:
	0950-2679	AC/DC Power Supply for Receiver
	E6455-80004	PCS Band Antenna (1710-1880 MHz)
	1150-2085	Magnetic Mount GPS Antenna for internal GPS (1575 MHz)
	1200-1897	Antenna Adapter Connector (N Type to TNC)
	5182-4794	Receiver RS-232 9-pin to 9-pin Cable
	E6450-60007	Firmware Write Enable Key
	E6450-60010	Cigarette Lighter Power Adapter
	E7450-60001	15-pin Interconnection Cable 380mm (15in) (short)
86154-60033	Vehicle Mounting Kit	

Agilent E7477A System Options

Agilent 86154A General System Accessories

The following options are offered by Agilent Technologies. By following the general setup and specifications, you can build your own system according to your needs, based on the standard system. The system can be integrated with a GPS receiver and mapping software. The digital receiver is not intended for stand-alone usage and does not function unless properly connected to one of the Agilent Wireless Solutions Systems.

These accessory options can ordered for any technology.

NOTE

To order any of the following options and accessories, specify model number 86154A and the option number, unless otherwise stated. For some accessories, such as Options 010, 030, 034, it is also necessary to indicate the Power Localization Options as shown on Page 48.

General System Accessories

Agilent Order Number	Option	Description	More Details On Page
86154A	010	Laptop PC Omnibook 6000 series model	page 62
86154A	020	Extra dual port ruggedized PCMCIA serial I/O card	page 62
86154A	030	Fujitsu Pen Tablet PC	page 63
86154A	032	Fujitsu Pen Tablet PC Accessories	page 63
86154A	034	Fujitsu Pen Tablet PC Battery Kit	page 63
86154A	036	Universal Serial Bus (USB) 4 port adapter	page 64

Agilent 86154A General System Accessories

Agilent Order Number	Option	Description	More Details On Page
86154A	099	Multi-Receiver Connection Kit	page 62
86154A	210	Trimble Placer 455-DR GPS Receiver	page 61
86154A	211	Adapter Cable for use with a Trimble Placer GPS/DR Receiver	page 61
86154A	212	Adapter Box for use with Trimble Placer GPS 455 Receiver	page 61
86154A	230	Differential GPS Receiver Kit ^a	page 61
86154A	410	Magnetic Mount PCS Band Antenna	page 64
86154A	425	Multiband Antenna	page 64
86154A	430	Magnetic Mount Cellular Band Antenna	page 64
86154A	500	Receiver Power Kit	page 65
86154A	507	Indoor Backpack	page 65
86154A	510	Vehicle Mounting Kit	page 65
86154A	531	Briefcase Carrier	page 60
86154A	540	Vehicle Based Drive Test Display System	page 65
86154A	ABA to ARS	Country specific power localization	page 67

a. Not available for the E7476A, which uses a receiver that only ships with internal GPS.

Agilent 86154A General System Accessories

External GPS Receiver Options

Option	Part Number	Description
210		Trimble Placer 455-DR GPS Receiver ^a with:
	E6450-80002	Magnetic Mount GPS Antenna for Trimble Placer
	8120-8650	Interconnect Cable (3) RS-232 DB9-M to DB9-F
	5182-1290	GPS Cigarette Lighter Power Adapter
	E7450-60005	Adapter Box Trimble Placer Receiver Documentation and software to calibrate the gyroscope and odometer is available on the Web at http://www.trimble.com
211		GPS/DR Receiver Adapter Cable
	E7450-60003	Adapter Cable
212	E7471-60007	Adapter Box for GPS/DR 455 Receiver with:
	E7450-60005	Adapter Box
	8120-8650	Interconnect Cables (3) RS-232 DB9-M to DB9-F
230	1150-5057	Differential GPS Receiver, RDS 3000 manufactured by DCI (Differential Corrections, Inc.). Includes utilities disk and Installation and Operator's Manual and:
	0960-0979	FM Antenna
	8120-8650	Serial Cable DB9-M to DB9-F
	5182-4794	Interconnect Cable RS-232 DB9-F to DB9-F

- a. The Trimble Placer GPS 455 provides Dead Reckoning for use when the GPS signal cannot be received.

Agilent 86154A General System Accessories

Laptop PC Option

Option	Part Number	Description
010	E7450-60014	Laptop PC with a minimum specification of: Pentium II Processor Windows 95/98 (loaded) 64 Mbytes RAM 6 Gbytes Hard Disc 24 x CD-ROM Enhanced lithium ion battery pack
	F1455A	Auto power adapter 14.1 inch XGA TFT display

Miscellaneous Accessories

Option	Part Number	Description
020		Dual Port Ruggedized PCMCIA Serial I/O Card
	E7471-80004	Socket dual port ruggedized serial I/O card connects to two phones to the computer through the PCMCIA slot. Connecting four phones requires two PCMCIA slots on the computer and two dual port ruggedized serial I/O cards.
099		Receiver Interconnect Cable Kit
	E7450-60001	15-pin Interconnection Cable 380mm (15in) (short)
	E7450-60002	15-pin Interconnection Cable 635mm (24in) (long)

Agilent 86154A General System Accessories

Fujitsu Pen Tablet PC Options

Option	Part Number	Description
030	86154-60007	Pen Computer Kit including Pen Tablet PC Stylistic 2300 with a 1 year warranty and the following minimum specification and parts. Note: More information on the Stylistic 2300 pen computer can be found on the Fujitsu web site, http://www.fpsi.fujitsu.com/product/st2300.htm Pentium II Processor 4 Gbytes Hard Drive 64 Mbytes RAM Windows 98 (loaded)
	86154-60012	External 3.5" Floppy Disc Drive
	86154-90009	Pen Tablet Stylus
	86154-60008	AC Adapter
	E7474-90010	Pen Tablet Getting Started Guide
	86154-60055	Travel Case
	86154-60009	In Service Case
	86154-60056	Harness for Service Case
	86154-60054	Hands Free Platform
	86154-60015	PCMCIA LAN Card
032	86154-60016	Car Auto Power System (12-24 VDC input)
034		Pen Tablet PC Battery Kit, consisting of:
	86154-60010	Lithium Ion Battery Pack (spare)
	86154-60011	External Battery Charger
	86154-60008	AC Adapter

Agilent 86154A General System Accessories

Option	Part Number	Description
036	86154-60004	Universal Serial Bus (USB) 4 Port Adapter kit
	86154-60021	4 Port USB Hub
	8121-0136	Extension Cable

Antenna Options

Option	Part Number	Description
410	1150-5059	Magnetic Mount PCS Band Antenna
430	1150-2061	Magnetic Mount Cellular Band Antenna

Indoor Antenna Options

Option	Part Number	Description
425	86154-60047	Multiband Antenna Kit
	86154-60059	PCS/Cellular/JCDMA Antenna (green)
	86154-60058	GSM/DCS/Korean CDMA Antenna (orange)
	86154-60061	3GPP Antenna (yellow)
	E6450-00013	Ground Plane
	E6450-60057	Cable: Antenna to Receiver
	1250-1753	F SMA Connector

Agilent 86154A General System Accessories

Portable Accessory Options

Option	Part Number	Description
500	86154-60005	Receiver Power Kit
	E6450-60051	Receiver Battery and Cable
	86154-60019	Receiver Battery Charger
507	86154-60006	Indoor Backpack and Accessories
	86154-60020	Indoor System Backpack
	86154-60057	Phone Pouch
	E7474-90010	Pen Computer Getting Started Guide
	E7474-90024	Back Pack Packing Information Sheet
510	86154-60033	Vehicle Mounting Kit
		Mounting Screws

Agilent 86154A Option 540 Vehicle Based Drive Test Display System

The 86154A Option 540 is only available for order in the USA and Latin America.

All 86154A Option 540 vehicle-mounted display system components are independent of wireless access technology. They work with any Agilent wireless solutions.

Display

- 12.1-inch diagonal, flat-panel color LCD display with 800 x 600 resolution
- View multiple virtual front panels (VFPs) at the same time
- Power cords included for use with both 120 V ac from a power inverter, or 12 V dc from a vehicle

Agilent 86154A General System Accessories

- Laptop connections - RS232
- Large, bright display for use in direct sunlight, with adjustable brightness for nighttime viewing
- Pedestal mounted
- Application-specific keypad
- Transmission hump mounting (typical in sport utility vehicles)
- Flat floor mounting (typical in minivans)

Functions during the drive including:

- "Freeze" and re-start measurements
- Start and stop recording
- Maximize, normalize and minimize measurement (VFPs)
- Navigate between VFPs
- Start and stop calls
- Show or hide measurement and display controls
- Show or hide toolbars
- Add an auto-numbered note to the measurement data
- Open and navigate the window menu in the drive-test software
- Create a report
- Perform a tools re-configure
- Clear alarms and other dialog boxes
- Move between open windows applications
- Turn alarms on and off
- Enable/disable links

Power Localization Options

In order that the correct power supplies and mains cables are supplied with your system, it is necessary to have the correct power localization. The localization options listed below only change the power cord and charger types supplied. They do not affect the software or manual language, which is U.S. English.

Option	Description	
ARM	Argentina - English	
ARS	Asia Pacific (UK Cord) / English	
ABG	Australia - English	
AKM	China - English	
ACE	Denmark - English	
ABB	Europe - English	
AKJ	Israel - English	
ACD	Switzerland - English	
AKL	Thailand	
ABA	U.S. - English	
ABU	United Kingdom - English	

Agilent 86154A General System Accessories

Agilent 86154A, E7477A System Accessories

These accessory options can be ordered for the E7477A system.

NOTE

To order any of the following options and accessories, specify model number 86154A and the option number, unless otherwise stated.

Agilent Order Number	Option	Part Number	Description
86154A	710	E6450-60029	Interconnect cable for QCP-800, QCP-1900, Sony CM-D500, Sony CM-D600 phones
86154A	711	E6450-60030	Interconnect cable for QCP-820, QCP-1920, QCP-2700, Sony CM-M1300, Sony CM-B1201SPR, and Sony CM-S1101STR phones
86154A	712	8120-8754	Interconnect cable for the Samsung SCH-1000 phone
86154A	713	E6450-60034	Powered interface cable for QCP-800, QCP-1900, Sony CM-D500, Sony CM-D600 phones
86154A	714	E6450-60033	Powered interface cable for QCP 820, QCP-1920, QCP-2700, Sony CM-M1300, Sony CM-B1201SPR, and Sony CM-S1101STR phones
86154A	715	E7452-60003	Interface cable for Toshiba CD-10T Japan CDMA phone
86154A	716	E7474-60008	Powered interface cable for Toshiba CD-10T Japan CDMA phone
86154A	717	E7474-60023	Interconnect cable for QCP-860, QCP-1960, and QCP-2760 phones
86154A	718	E7474-60031	Powered interface cable for QCP-860, QCP-1960, and QCP-2760 phones
86154A	719		Powered interface cable for Kyocera QCP-2035 and QCP-3035
86154A	720		Interconnect cable for Samsung SCH-X100

Agilent 86154A, E7477A System Accesories

Part Number Summary

The following list summarizes the part numbers that can be ordered from Agilent Technologies.

NOTE

When ordering parts from Agilent Technologies, it is recommended that you **order using the system option numbers**

CDMA Systems - Agilent E7473A

TDMA Systems - Agilent E7474A

GSM Systems - Agilent E7475A

W-CDMA Systems - Agilent E7476A

cdma2000 Systems - Agilent E7477A

Over Air Systems - Agilent E7490A

Accessories - see Agilent 86154A options.

However, if you have a need for a specific part, the following numbers can be used.

For more information on ordering parts or options, contact your local Agilent Technologies sales and service office.

Description	Part Number
Receiver	
AC/DC Power Supply for receiver	0950-2679
Magnetic Mount Cellular Band Antenna	1150-2061
Magnetic Mount Mini GPS Antenna for internal GPS – SMA	1150-2085
Magnetic Mount Mini GPS Antenna for internal GPS (Obsolete) – SMB	E6450-80002
Magnetic Mount PCS Band Antenna	1150-5059

Part Number Summary

Description	Part Number	
Receiver (continued)	Antenna Adapter Connector (N Type to TNC)	1200-1897
	Firmware Write Enable Key	E6450-60007
	Cigarette Lighter Power Adapter	E6450-60010
	2 AMP, 32 V, FB fuse for Cigarette Power Adapter	2110-0002
	15-pin Interconnection Cable 380mm (15in) (short)	5182-4794
	15-pin Interconnection Cable 635mm (24in) (long)	E7450-60002
	Pulse trigger interface cable	E7450-60015
	Magnetic Mount 1.7-1.9 GHz Band Antenna	E7450-80004
	Magnetic Mount 1.9 - 2.1 GHz Band Antenna	E6455-80003
	Magnetic Mount 900 MHz Band Antenna	E7450-80005
	Magnetic Mount GSM 900 RF Antenna	E7471-60009
	Vehicle Mounting Kit	86154-60033
	Universal Adapter (TNC) for RF Antenna	1200-1897
	Magnetic Mount DCS 1800 RF Antenna	E7475-60006
	Magnetic Mount GSM/PCS 1900 RF Antenna	E7475-60007
	Universal Adapter for RF Antenna	E7475-80005
External GPS	Bulkhead Mount GPS antenna for Trimble Placer (Obsolete)	1150-5061
	Trimble Placer 455 GPS Receiver	1150-5058
	GPS Cigarette Lighter Power Adapter	5182-1290
	Interconnect Cable RS-232 DB9-M to DB9-F	8120-8650
	Magnetic Mount Mini GPS Antenna for internal GPS	E6450-80002
	Adapter Cable for use with a Trimble Placer GPS/DR Receiver	E7450-60003
	Adapter Box for use with Trimble Placer GPS 455 Receiver	E7450-60005

Part Number Summary

Description	Part Number
Adapter Box and RS-232 Interconnect Cables (quantity 3)	E7471-60007
Differential GPS	FM Antenna 0960-0979
	Differential GPS Receiver, RDS 3000 manufactured by DCI (Differential Corrections, Inc.). Includes utilities disk and Installation and Operator's Manual. 1150-5057
	Interconnect Cable RS-232 DB9-F to DB9-F 5182-4794
Phone Parts	Kyocera QCP-2035.3035 Phone Data Cable 5060-8785
	Kyocera QCP 3035 Power Charger Adapter 5060-8786
	Interconnect Cable for QCP 2700, QCP 820, QCP-1920, Sony CM-M1300, Sony CM-B1201SPR, and Sony CM-S1101STR phones E6450-60030
	Interconnect Cable for QCP-800, QCP-1900, Sony CM-D500, Sony CM-D600 phones E6450-60029
	Interconnect Cable for the Samsung SCH-1000 phone 8120-8754
	Powered Interface Cable for QCP-800, QCP-1900, Sony CM-D500, Sony CM-D600 phones E6450-60034
	Powered Interface Cable for QCP 2700, QCP 820, QCP-1920, Sony CM-M1300, Sony CM-B1201SPR, and Sony CM-S1101STR phones E6450-60033
	Interface Cable for Toshiba CD-10T J-CDMA Phone E7452-60003
	Powered Interface Cable for Toshiba CD-10T J-CDMA Phone E7474-60008
	GSM Phone Data Cable E7471-62005
	GSM Car phone and data kit E7475-60028
	Interface Cable for Motorola StarTAC TDMA Phone E7474-60004
	Powered Interface Cable for Motorola StarTAC TDMA Phone E7474-60006
	Power Interface Cable for Sagem Test Mobile E7475-62010
	Interface Cable for QCP-860, 1960, 2760 Phones E7474-60023

Part Number Summary

Description		Part Number
	Powered Interface Cable for QCP-860, 1960, 2760 Phones	E7474-60031
	Samsung SCH-X100 Phone Data Cable	86154-60050
	Samsung SCH-X100 Battery Charger Adapter	86154-80005
Accessories	Extra Dual Port Ruggedized PCMCIA Serial I/O Card	1150-2067
	Dual Port PCMCIA Serial I/O Card	E7471-80004
	Single Port PCMCIA Serial I/O Card	0960-0992
	Auto Power Adapter	86154-85001
	Blank Software License Security Key	E7474-10007
Documentation	Getting Started Guide	E7474-90035
	Indoor Getting Started Guide	E7474-90038
	E7473A CDMA System Information Guide	E7473-90019
	E7474A TDMA System Information Guide	E7474-90034
	E7475A GSM System Information Guide	E7475-90011
	E7476A W-CDMA (UMTS) System Information Guide	E7476-90004
	E7477A cdma2000 System Information Guide	E7477-90004
	E7478A GPRS and Data System Information Guide	E7478-90006
	E7490A Over Air Test System Information Guide	E7490-90003

RF Connectors and Antennas

Options	Receiver Type	RF Connector Adapter	RF Antenna Part Number
300, 310	Cellular Band	1200-1897	1150-2061
320, 330	PCS Band GPS	1200-1897	E7475-60007
380, 381	J-CDMA Band	NA	E7450-80005
390, 391	Korean Band	NA	E7450-80004

