
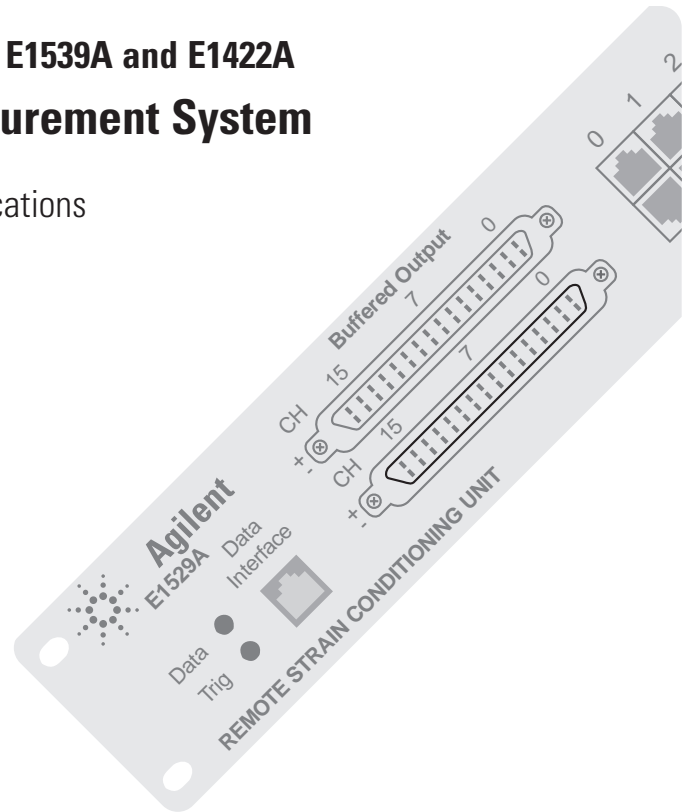


Agilent E1529A, E1539A and E1422A Strain Measurement System


Technical Specifications

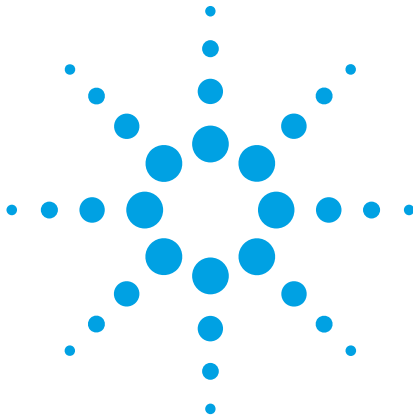

- Airframe structural and fatigue test
- Rocket and satellite structural test
- Wind tunnel flight load test

Remote Strain Conditioning Unit for Stress and Fatigue Testing

The Agilent E1529A Remote Strain Conditioning Unit simplifies stress and fatigue testing of large mechanical structures such as airframes and launch vehicles. The strain conditioning unit along with remotely-located data acquisition system provide high-quality static or dynamic strain measurements.

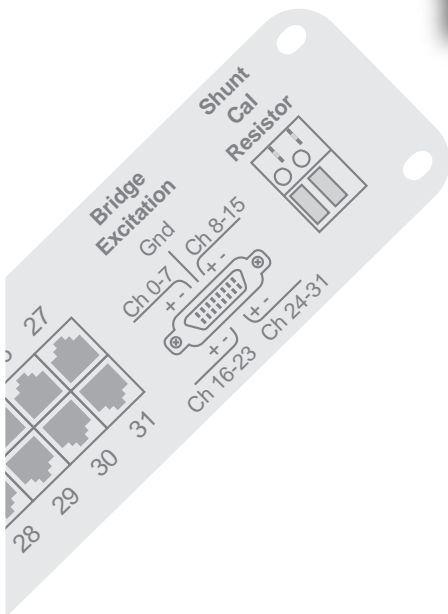

Agilent Technologies

Innovating the HP Way

General

Agilent E1529A outputs:	Single static output from 32:1 multiplexer 32 individually buffered dynamic outputs
Bridge completion:	120 Ω , 350 Ω and user installed, program selectable
Bridge configurations:	Full, half, and quarter
Remote operation:	330m (1000 ft) from multiplexed output 100m (300 ft) from buffered outputs
Bridge excitation:	User-supplied excitation in 8-channel banks
Linearization:	Mx+b on all channels
Calibration:	Internal self-calibration source 50 k Ω and user-installed shunt calibration resistor, program selectable
Measurement rate:	25 kSa/s via multiplexed output, up to 196 kSa/s dynamic
Static (multiplexed) outputs:	Gain (E1529A only) 32V per V Gain (E1529A + E1422A) 5000V per V
Resolution (1 LSB of E1422A)	0.06 μ V (subject to RMS noise limits)
Recommended measurement products:	Note: Companion products listed below are VXI-based. Twelve measurement module slots are typically available in systems using any one of Agilent's available 13-slot VXI mainframes.
Static strain measurements	E1422A Remote Channel DAC Module plus up to eight E1529A SCP
Dynamic strain measurements	E1432A 16-Channel 51.2 kSa/s Digitizer E1433A 8-Channel 196 kSa/s Digitizer

Bridge Specifications

Completion resistors:	
Values	120 Ω /350 Ω \pm 0.05%, \pm 5 ppm/ $^{\circ}$ C TC
Power	0.125W up to 125 $^{\circ}$ C
Shunt cal resistor:	50 k Ω \pm 0.1%, \pm 25 ppm/ $^{\circ}$ C TC
Quarter bridge offset:	3 μ strain (\pm 2 μ V), \pm 4 $^{\circ}$ C of tare cal
Excitation sense:	
Gain accuracy	\pm 0.01% of reading
Offset	<1 mV

Strain Measurement

Measurement range ($\mu\epsilon$) (Quarter bridge, \pm 5V excitation)	Resolution ($\mu\epsilon$)	RMS noise ($\mu\epsilon$)
\pm 200,000	6.1	0.4
\pm 50,000	1.5	0.4
\pm 12,500	0.4	0.4
\pm 3,125	0.1	0.4 (noise can be reduced by averaging)
System accuracy:	Note: After CAL routine, 1 hour warm-up, \pm 1 $^{\circ}$ C	
Voltage offset:	<2 μ V	
Gain error:	<0.015% of reading	
RMS Noise:	<1 μ V rms	
CMRR:	>100 dB, DC-10 MHz (common mode range \pm 10V)	
Drift: Note: drift errors can be removed by running CAL routine	Offset drift:	<1 μ V/ $^{\circ}$ C <1 μ V/month
	Gain drift:	<30 ppm/ $^{\circ}$ C

Dynamic outputs:

Gain:	32V per V \pm 0.1% of reading
Offset:	<250 μ V
Bandwidth:	>100 kHz
Equivalent input noise (E.I.N.):	<20 nV/ $\sqrt{\text{Hz}}$

Quarter Bridge Bending Errors:		(5 V Excitation, GF=2)
$\mu\epsilon$	Error ($\mu\epsilon$)	
-50,000	160	
-40,000	90	
-30,000	45	
-20,000	20	
-10,000	8	
0	1	
10,000	8	
20,000	20	
30,000	45	
40,000	90	
50,000	160	

Half Bridge Bending Errors:		(5 V Excitation, GF=2)
$\mu\epsilon$	Error ($\mu\epsilon$)	
-50,000	28	
-40,000	23	
-30,000	17	
-20,000	12	
-10,000	6	
0	0.5	
10,000	6	
20,000	12	
30,000	17	
40,000	23	
50,000	28	

Full Bridge Bending Errors :		(5 V Excitation, GF=2)
$\mu\epsilon$	Error ($\mu\epsilon$)	
-50,000	28	
-40,000	22	
-30,000	17	
-20,000	11	
-10,000	6	
0	0.3	
10,000	6	
20,000	11	
30,000	17	
40,000	22	
50,000	28	

Mechanical

Height:	4.45 cm (1.75 in)
Width:	49.53 cm (19.5 in)
Weight:	1.8 Kg (4 lbs)

Power Requirements

Line voltage:	90-264 Vac
Line frequency:	47-440 Hz
Input power:	8W

Environmental

Temperature:	-5 °C to +55 °C
Humidity:	5 to 85% R.H.
Altitude:	10,000 ft operating 30,000 ft non-operating

Warranty

E1529A:	1 year return to Agilent
----------------	--------------------------

Related Agilent Literature

E1529A Overview,
Pub. No. 5968-0432E

E1432A Technical Specifications,
Pub. No. 5965-7193E

E1432A/33A/34A Product Overview,
Pub. No. 5966-3062E

Test System and VXI Products
Data Book, Pub. No. 5966-2812E

On the Web, please go to
www.agilent.com/find/data_acq
for more information about Agilent
Technologies data acquisition
products.

Agilent Technologies' Test and Measurement Support, Services, and Assistance

Agilent Technologies aims to maximize the value you receive, while minimizing your risk and problems. We strive to ensure that you get the test and measurement capabilities you paid for and obtain the support you need. Our extensive support resources and services can help you choose the right Agilent products for your applications and apply them successfully. Every instrument and system we sell has a global warranty. Support is available for at least five years beyond the production life of the product. Two concepts underlie Agilent's overall support policy: "Our Promise" and "Your Advantage."

Our Promise

Our Promise means your Agilent test and measurement equipment will meet its advertised performance and functionality. When you are choosing new equipment, we will help you with product information, including realistic performance specifications and practical recommendations from experienced test engineers. When you use Agilent equipment, we can verify that it works properly, help with product operation, and provide basic measurement assistance for the use of specified capabilities, at no extra cost upon request. Many self-help tools are available.

Your Advantage

Your Advantage means that Agilent offers a wide range of additional expert test and measurement services, which you can purchase according to your unique technical and business needs. Solve problems efficiently and gain a competitive edge by contracting with us for calibration, extra-cost upgrades, out-of-warranty repairs, and on-site education and training, as well as design, system integration, project management, and other professional engineering services. Experienced Agilent engineers and technicians worldwide can help you maximize your productivity, optimize the return on investment of your Agilent instruments and systems, and obtain dependable measurement accuracy for the life of those products.

For More Assistance with Your Test & Measurement Needs go to

www.agilent.com/find/assist

Or contact the test and measurement experts at Agilent Technologies
(During normal business hours)

United States:
(tel) 1 800 452 4844

Latin America:
(tel) (305) 267 4245
(fax) (305) 267 4286

Canada:
(tel) 1 877 894 4414
(fax) (905) 206 4120

Australia:
(tel) 1 800 629 485
(fax) (61 3) 9272 0749

Europe:
(tel) (31 20) 547 2323
(fax) (31 20) 547 2390

New Zealand:
(tel) 0 800 738 378
(fax) 64 4 495 8950

Japan:
(tel) (81) 426 56 7832
(fax) (81) 426 56 7840

Asia Pacific:
(tel) (852) 3197 7777
(fax) (852) 2506 9284

Product specifications and descriptions in this document subject to change without notice.
Copyright © 1999, 2000 Agilent Technologies
Printed in U.S.A. 5/00
5963-9650E



Agilent Technologies

Innovating the HP Way