


***RF-5055PS***  
***AC/DC POWER***  
***SUPPLY***



The RF-5055PS AC/DC power supply provides a regulated 26.4 volts DC at 18 amps in a low-profile package for use with the RF-5833H-PA 150-watt power amplifier in tactical installations with duty cycles up to 20%.

When used with the RF-5056PS DC/DC converter, the RF-5055PS is designed to supply power to the auxiliary input of the RF-5056PS to conserve vehicular battery life when AC power is available. A 9-foot AC power cable is included.

The RF-5055PS may be mounted on the RF-5071VSM-03 shock mount for use in the most severe environments. The unit price includes a 9-foot (2.7 m) AC power cable.

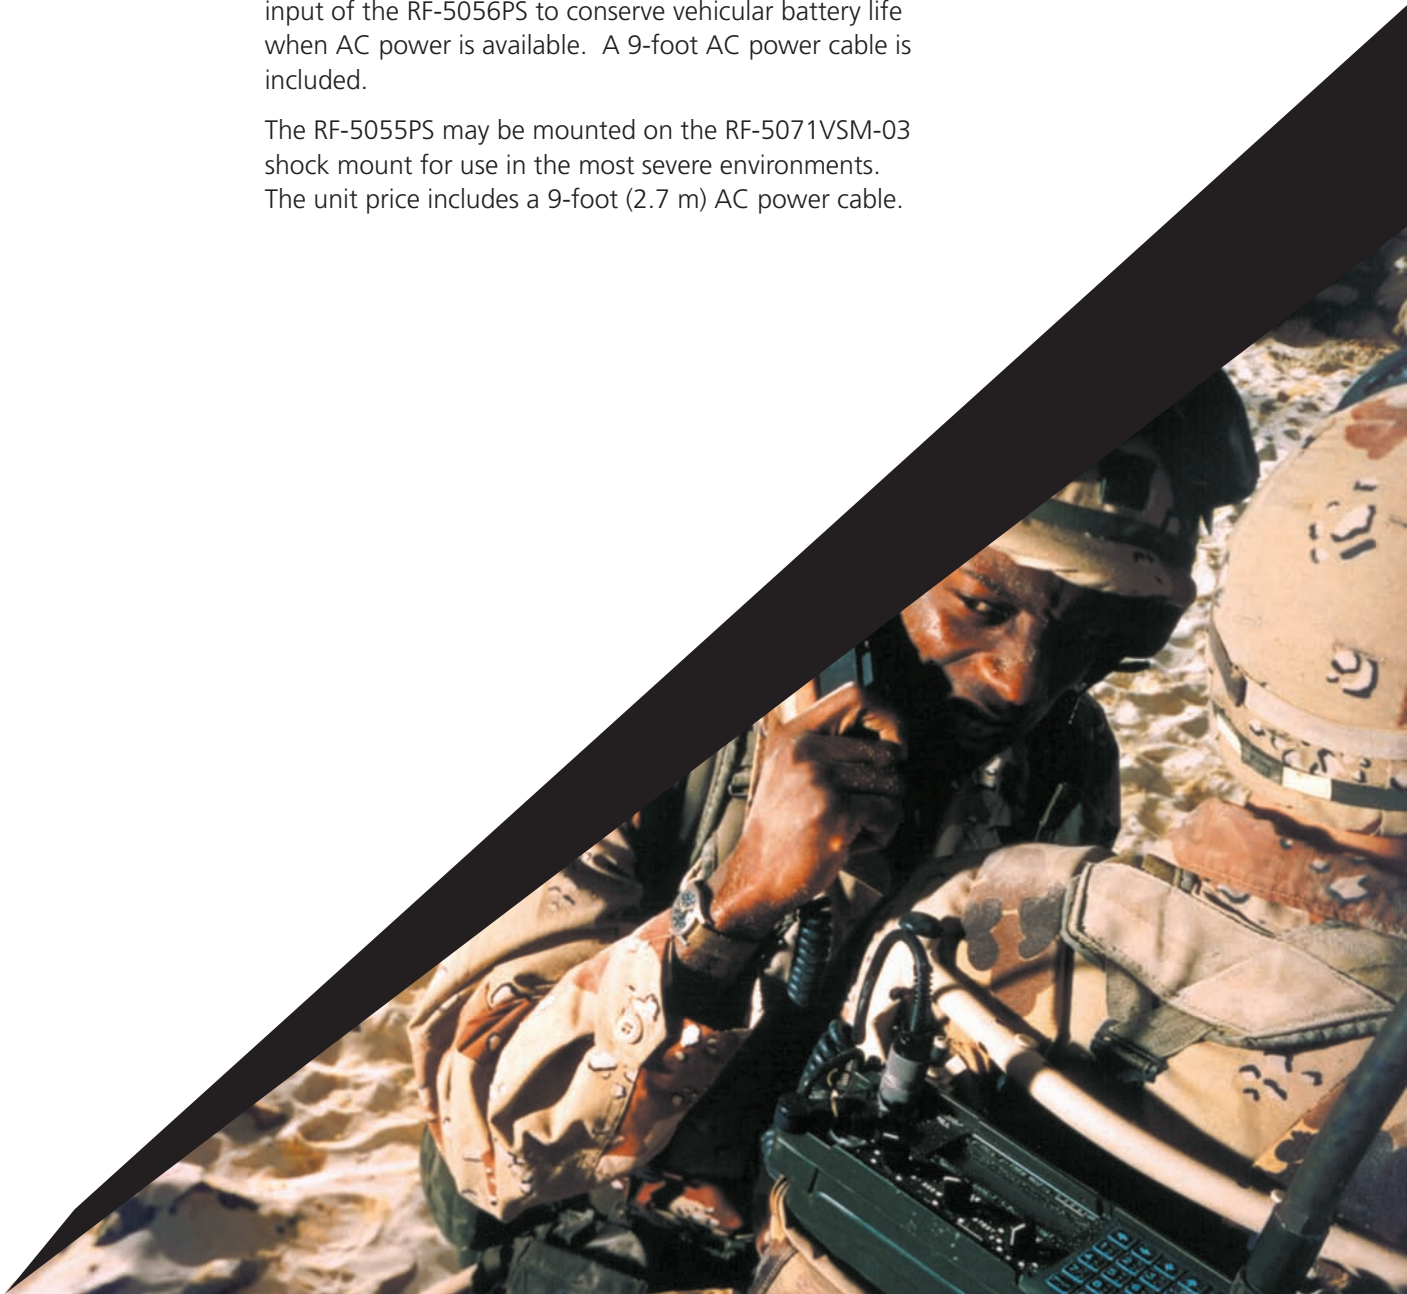

**General / Electrical**

- **Input Voltage**  
115/230 VAC 47-63 Hz
- **Power Factor (typical)**  
70% lagging
- **Output Voltage**  
+26.4 VDC
- **Output Current**  
16 Amps continuous at 25°C  
12 Amps continuous at 70°C  
22 Amps max
- **Regulation, Line Load**  
50 mV; 300 mV
- **Efficiency**  
85% at 18 Amp load
- **Thermal Protection**  
Heatsink exceeds 100°C

**Mechanical / Environmental**

- **Size**  
7.5 in W x 11.5 in D x 2.25 in H  
(19.1 cm W x 29.2 cm D x 34.5 cm H)
- **Weight**  
8 lbs (3.6 kg)
- **Finish**  
Color Green: 383  
Finish: CARC
- **Cooling**  
Conduction to outside heatsink
- **Temperature**  
Operating -65°F to +160°F (-54°C to +71°C)
- **Altitude**  
15,000 feet operating  
15,000 feet non-operating
- **Humidity**  
MIL-STD-810E Method 507.3, Procedure I, Natural, Constant High Humidity.  
(NEED NUMBER)
- **Shock/Vibration**  
MIL-STD-810E Ground Mobile
- **AC Power Cables**  
\*10181-9831-009 US (NEMA 5-15P)  
10181-9809-009 UK/Ireland (BS 1363)  
10181-9814-009 EU (CEE 7)
- **Additional Cables**  
10181-9833-010 Connects RF-5800H Series PA to supply  
  
10570-0716-A006 Connects RF-5800V-V and RF-5800M-V vehicular adapter kits and AN/VRC-103 to Supply

\*Included

FALCON is a registered trademark of Harris Corporation.  
Specifications are subject to change without notice.