

Systems Reference Library

Basic 4K Report Program Generator Specifications IBM 1401 IBM 1460

The IBM 1401 and 1460 Basic 4K Report Program Generator, with *load-and-go* capability, produces programs that write reports of variable format. This publication explains the writing of report specifications and the preparation of source decks, to produce object programs.

The language used for the report specifications is problem-oriented rather than machine-oriented. Therefore, little knowledge of machine-language coding is required.

Preface

Speed in preparing reports is achieved not only by rapid processing of *input data* but also by rapid preparation of *programs* to produce reports. Easier and faster preparation of report programs is the purpose of the IBM 1401 and 1460 Basic 4K Report Program Generator.

The Basic Report Program Generator (BRPG) produces report programs with a minimum of time and effort. Instead of writing a specific program for a report, the user states his problem and solution (the report specifications) in the BRPG language. BRPG processes the specifications, generating a program to write the reports. By relieving the user of the machine coding and most of the program testing, BRPG permits him to concentrate his efforts on the best solution to his problem. Thus, the Basic Report Program Generator is essentially *problem-oriented* rather than *machine-oriented*.

The programs produced by BRPG write reports in varying formats, using source data contained in card files. Output from programs produced by BRPG is prepared in any of these forms:

- Printed report
- Punched cards
- Printed report and punched cards

The reports produced by programs generated by BRPG range from a simple listing of items from the input file to complex reports that incorporate editing and calculations upon the input data. Included are such functions as printing various kinds of lines (heading lines, detail lines, total lines controlled by control-field changes, and offset total lines), crossfooting, and summary punching. Along with the report, exception records can be produced.

Machine Requirements

Object programs can be produced and executed on an IBM 1401 system equipped with a minimum of:

- 4,000 positions of core storage
- One IBM 1402 Card Read-Punch
- One IBM 1403 Printer.

Although the High-Low-Equal Compare special feature is not required, BRPG can use it to advantage if it is installed on the 1401 system.

Object programs can be produced and executed on an IBM 1460 system equipped with a minimum of:

- 8,000 positions of core storage
- One IBM 1402 Card Read-Punch
- One IBM 1403 Printer.

This is a reprint of an earlier edition and incorporates the following Technical Newsletters:

<u>Form No.</u>	<u>Pages</u>	<u>Dated</u>
N24-0277	23	10/29/64
N21-0029	29	2/15/65

Copies of this and other IBM publications can be obtained through IBM Branch Offices. A form is included at the back of this manual for readers' comments. If this form has been removed, address comments to: IBM Corporation, Product Publications, Dept. 245, Rochester, Minn. 55901.

Contents

Introduction	5
Input File	5
Control Card	6
Writing Report Specifications	6
General Description	6
Correlating the Report Specifications	7
IBM 403 Printer Spacing Chart	7
Classification of Lines	9
Input Specifications	9
Data Specifications	13
Calculation Specifications	16
Format Specifications	21
Numeric-Level Classification	25
Numeric-Level Format Specifications	28
Performance Data	29
Sample Report Documentation	29
Index	36

Basic 4K Report Program Generator Specifications

IBM 1401

IBM 1460

The IBM 1401 and 1460 Basic 4K Report Program Generator (BRPG) produces programs that write reports of variable format from card input files. Instead of writing a specific program for each report, the user writes a set of specifications (Figure 1). He punches these into cards and prepares the necessary control card. All of these cards make up the source deck for BRPG. The user then places the source deck and the BRPG processor deck in the card reader of the IBM 1401 or 1460.

The next step is determined by the user's choice of one of two options. The two options are:

1. Load-and-go.
2. Load-and-go, with the machine-language program deck punched out for future use.


If the user is prepared to run the report program but does not want to keep the program for future reports, he chooses the first option. He places his card input file in the card reader and starts operating the IBM 1401 or 1460 system. BRPG prints an *edit listing* and generates the report program. The edit listing is a printed record of the source deck. Certain kinds of errors (for example, unacceptable entries in the report specifications) will produce error messages.

The report program is a machine-language program, located in core storage. The program is ready to be run, using the card input-data file supplied. The output that the program produces is in printed form, punched-card form, or both.

If the user chooses to generate a report program to produce a report *now* and to retain the program for *future* reports, he selects the second option. He places a deck of blank cards in the punch feed and his card input file in the card reader and starts the IBM 1401 or 1460. BRPG prints the edit listing, generates the report program, and punches that program into cards. The program, which remains in core storage after the punch-out operation, is ready to be run, using the card input file supplied. The output, as in the other option, can be in printed form, in punched-card form, or in both forms.

Input File

The file that a program generated by BRPG can process must be contained in cards. A card file consists of all the cards in the deck. The order in which records are processed is determined by the card order. Processing the last card indicates the end of the file.

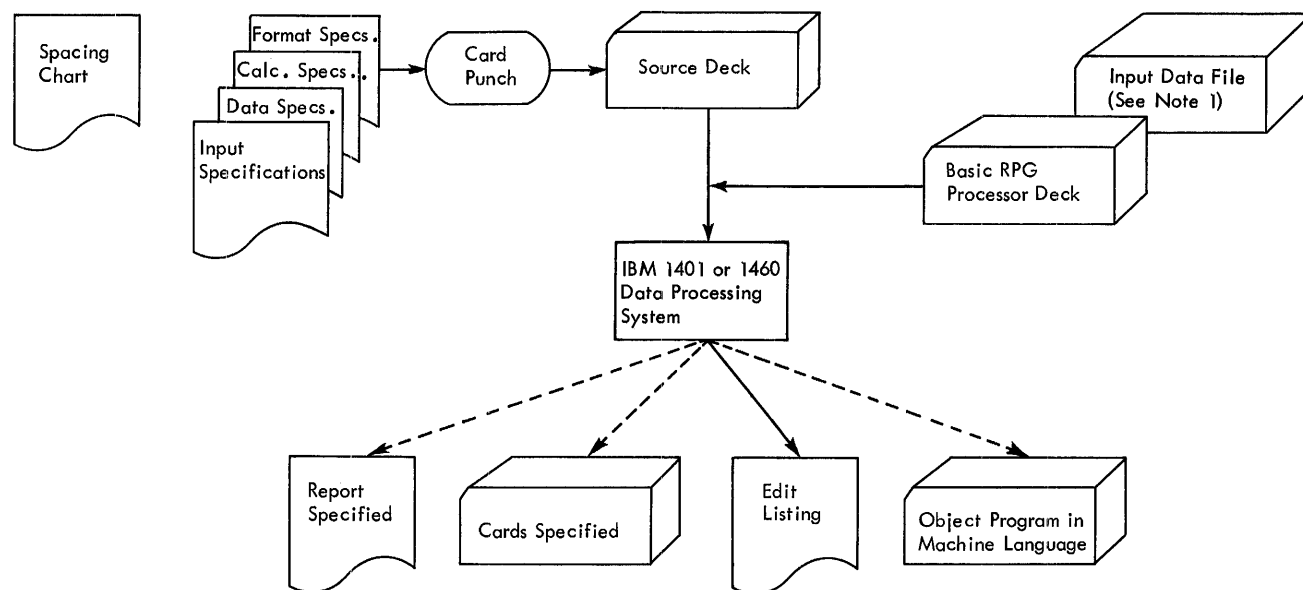

Note 1: When a punched object-program deck is specified (to be used to produce this report in future), place blank cards in punch feed.

Figure 1. Producing a Report Using the Basic Report Program Generator

Control Card

The Basic 4K Report Program Generator; IBM 1401 and 1460 requires one control card from which it extracts certain information. In it, the user punches information that identifies the control card, the core capacity of the system, and the number of print positions on the IBM 1403 Printer. The format and contents of the control card are:

Columns	Contents	Explanation
1-3	CTL	Identifies the control card
4-5	04	Always 04, because neither the BRPG processor nor a generated object program will use more than 4,000 positions of core storage.
6-8	100 or 132	Specifies the number of print positions of the IBM 1403 Printer attached to the IBM 1401 or 1460.
9-12	1401 or 1460	Specifies the system to be used to generate and execute the object program.

Writing Report Specifications

General Description

To generate an object program, the IBM 1401 and 1460 Basic Report Program Generator requires certain information. The information answers these questions:

1. What are the characteristics of the file from which the report data is obtained?
2. What type of information is to be extracted from the input file? From which records can these source fields be obtained?
3. What types of calculations are to be performed during the execution of the object program? How are the results of these calculations to be manipulated?
4. What is the format of the report? What headings and constants must it contain? How should the data composing the report be edited?

As shown in Figure 1, four forms are required for writing the report specifications. The forms contain answers to the preceding questions. The information is punched into cards with one card punched for each line. These cards comprise the specifications source deck for the BRPG program.

Before the actual report specifications can be written, the user must have a clear image of what he wants as the final product. That is, he must know the contents of each line of the report, the spacing between lines, and the positioning of the information within each line of the report. He uses the IBM 1403 Printer Spacing Chart, Form X24-6436, before writing specifications. Preparing this chart consists of laying out the complete format of the report to obtain a pictorial representation of the final product. Although no cards for the source deck are punched directly from the entries on this chart, the pictorial representation serves

as a guide to completing the four specifications sheets. It thus plays an important role in writing report specifications.

The spacing chart and the four forms required are listed here in the order in which they are used. A brief description of the functions of each form is also given. Later sections will explain their use in more detail.

1. IBM 1403 Printer Spacing Chart, Form X24-6436

This chart was described earlier as the form on which the user's image of the report is projected. Define the position of each field on each line of the report and include constant information, headings, and editing symbols, where applicable.

2. Input Specifications, Form X24-6590

A description of the data file, from which the information required for the report will be extracted, must be specified on this form. Describe each type of record in the data file, with its distinguishing record codes and control fields.

3. Data Specifications, Form X24-6591

On this form the user lists the data fields necessary for processing the report. These data fields may be output fields or factors in calculations. Each field described is associated with the input record or records that contribute to it. It is also associated with any conditions that govern the processing of those input records. Any number of fields from one or more input records can be listed as the sources of a data field. The input sources can be added and subtracted as well as moved to the data field. Furthermore, the user can state that the status (positive, negative, zero, or blank) of a data field will be needed to govern subsequent processing. For example, a line can be conditioned to print only if a particular data field is positive.

4. Calculation Specifications, Form X24-6592

Although a limited amount of calculation is available through entries on the *data specifications* sheet, the *calculation specifications* sheet must be used for more extensive calculations including multiplication, division, and comparing. This form accommodates calculations on data fields described on the *data specifications* sheet, as well as constants and the results of previous calculations. Half-adjusting and the conditions governing the performance of a calculation can all be shown on this sheet. Furthermore, the user can define status conditions based upon the sign of the calculated result or the comparison of two fields.

5. Format Specifications, Form X24-6593

The final step in writing report specifications is describing the format of output lines. Name each line by its

type and relation to other lines. Specify the medium of output (printing, punching) as well as the conditions for output. Stacker selection of punched output or forms control of printed output can be specified. Having named a line, list all the constants, data fields, and edit control-words that compose the line. (Control words specify where commas, decimals, and conditional credit—CR or minus symbols—are to print and where zero suppression is to stop.) Provision is made for description of conditions, if any, governing the inclusion of a field within a line.

Correlating the Report Specifications

When completed, the five forms are an interrelated statement of the problem being specified as shown in Figure 2. The spacing chart represents the output lines described in the format specifications sheet. The same line names are used on both forms.

The names given to various input records on the input specifications sheet are the same names used as *field sources* on the data specifications sheet to indicate the record from which a data field is taken during report writing. Each input record is assigned a unique two-digit number called a *resulting condition* number. During report processing, this condition is fulfilled whenever a record with the *record codes* specified for that resulting condition is present in the input area. The fulfillment of such a condition can govern the processing of a source field in the data specifications, the performance of a calculation specification, the placement of a field within a line or the output of that line as stated in the format specifications. The fulfillment of a resulting condition can be compared to the transferring of a selector on an accounting machine during the presence of a particular card. It can also be compared to the setting of a programming switch on a stored-program machine to indicate the presence of a particular record type. The change of a *control field* specified for input records can also govern the processing of source fields (for example, to provide group indication), the performance of a calculation, the printing of lines, and the punching of cards.

Thus, the input specifications describe the kinds of records in the input data file according to the coding and control fields that are significant in these records. These specifications determine many conditions for processing the data to be extracted from the input file.

The fields named on the data specification sheet can be used as factors in calculations or as fields in lines. The fields named on the calculation specifications sheet can also be placed in lines on the format specifications sheet. Sometimes the status of a field (positive, negative, zero, or blank) is important in the processing of

that or other fields. It may be that calculations should not be performed on zero or blank fields or it may be that a field should be printed in different positions depending upon whether it is positive or negative. Perhaps a line should be printed only when a certain field is not blank. Whenever the status of a field is important to processing, that status can be specified on the data sheet or calculation sheet beside the field name. Then, the status is assigned a unique two-digit resulting-condition number to represent it. Fulfillment of that condition during processing can govern further processing, as just indicated.

Thus, fields from the data and calculation sheets contribute to the lines on the format sheet. Conditions representing the presence of a record in the input area, the change in control between that record and the previous record, or the status of certain fields that have been processed can govern the presence and placement of fields within a line or the printing or punching of that line. Furthermore, a line can be included in the output because the output conditions were met for a previous line. This relationship is described by a *next line* specification on the format sheet.

Considered together, the five forms represent the input file, the significant data fields within that file, the manipulations necessary to obtain the required output fields, and the line formats in which the fields are to appear.

This summarizes briefly the elements that enter into report specifications. In the sections that follow, each of the forms will be examined in greater detail. The rules and conventions governing report specifications are presented.

IBM 1403 Printer Spacing Chart

The purposes of laying out the report on the spacing chart are:

1. to establish the positions at which the various data will be printed or punched, as well as to indicate the spacing between printed lines, and
2. to assign each line a unique identification code representing
 - a. the type of line,
 - b. the level of the line, and
 - c. the number of the line within its level.

Layout of Lines and Fields

The numbers across the top and bottom of the spacing chart represent the IBM 1403 print positions. The numbers down the left side are line numbers. The user selects the line number and print positions for a par-

Figure 2. Specifications Correlation Chart

IBM

LINE DESCRIPTION

FIELD HEADINGS/WORD MARKS

INTERNATIONAL BUSINESS MACHINES CORPORATION
IBM 407, 408, 409, 1403 AND 1404 PRINTER SPACING CHART
6 Lines Per Inch

Form X24-6436
Printed in U.S.A.

LINE DESCRIPTION		FIELD HEADINGS/WORD MARKS																																									
		0			1			2			3			4			5			6			7			8			9			10			11			12			13		
1	GLUE	<div style="display: flex; justify-content: space-between;"> ← IBM 1403, Model 1 ← IBM 407, 408, 409 ← IBM 1403 & 1404, Model 2 </div>																																									
2	AAA	DEPT. XXXXX																																									
3	AAA	XX-XX-XX																																									
4	AAA	XXXXX,XXX,XX- \$XXX,XXX,XX- \$XXX,XXX,XX- \$XXX,XXX,XX- \$XX,XXX,XXX,XX-																																									
5	AAA	\$XXXX,XXX,XX- \$XXXX,XXX,XX- \$XXXX,XXX,XX- \$XX,XXX,XXX,XX-																																									

IBM

INTERNATIONAL BUSINESS MACHINES CORPORATION
REPORT PROGRAM GENERATOR INPUT SPECIFICATIONS
IBM 1401 - 1440 - 1460

Form X24-6590
Printed in U.S.A.

Report _____ Page 16 77 of _____
Programmed by _____ Date _____

RECORD SEQUENCE		RECORD CODES												CONTROL FIELDS												CARD NUMBER																																																						
SEQ	NO	POSITION	MS	PS	NS	CODE	POSITION	MS	PS	NS	CODE	POSITION	MS	PS	NS	CODE	POSITION	MS	PS	NS	CODE	POSITION	MS	PS	NS	CODE	POSITION	MS	PS	NS	CODE	POSITION	MS	PS	NS	CODE	POSITION	MS	PS	NS	CODE																																							
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	0,1,0

DATA SPECIFICATIONS

FIELD NAME		FIELD LENGTH		FIELD STATUS		FIELD SOURCE		FIELD OPERATION		FIELD COND		FIELD SOURCE		FIELD OPERATION		FIELD COND		FIELD SOURCE		FIELD OPERATION		FIELD COND		FIELD SOURCE		FIELD OPERATION		FIELD COND		FIELD SOURCE		FIELD OPERATION		FIELD COND		CARD NUMBER																																												
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	0,1,0

CALCULATION SPECIFICATIONS

FIELD NAME		FIELD LENGTH		FIELD STATUS		FACTOR 1		FACTOR 2		FIELD NAME OF REMAINDER		FIELD NAME OF REMAINDER		CARD NUMBER																																																																		
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	0,1,0

FORMAT SPECIFICATIONS

LINE OUTPUT CONDITIONS		FIELD OUTPUT CONDITIONS		CONSTANT OR EDIT CONTROL WORD		CARD NUMBER																																																																										
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	0,1,0

ticular field and makes his notation in the selected positions. In the sample layout (Figure 3) note that headings and other constant information are spelled out completely in the print positions assigned to them. Variable information is represented by X's and includes, where applicable, credit symbols, punctuation, etc. The position in an amount field where zero suppression ends is indicated by a zero rather than an X.

Line-Identification Code

The column at the left on the spacing chart is used to assign each line a three-character identification code. This code identifies the line later on the format sheet where each line is described according to type and content.

The first character of the identification code is H for a heading line, D for a detail line, or T for a total line. All lines must be identified as belonging to one of these categories.

Classification of Lines

Two methods of classifying lines may be used. Because it does not require a consideration of established order or rank, *alphabetic-level* classification is a quick and efficient method of assigning an identification code to each line. See *Numeric-Level Classification* for a detailed explanation of the hierarchical relationship between line-levels. However, all examples in *Format Specifications* will be given as alphabetic classification.

Alphabetic-Level Classification

Assign letters to heading lines, detail lines, and total lines as shown in Figure 3. The first heading line in Figure 3 is assigned HAA. The second heading line is assigned HBB; the third, HCC, etc. The first detail line is assigned DAA. The first total line is assigned TAA. The second total line is assigned TBB; the third, TCC, etc.

For convenience, these lines are assigned pairs of letters, but if printing occurs on a large number of lines, the lines may be classified as HAA, HAB, HAC, etc.

Input Specifications

This form (Figure 4) specifies the input file from which the report is to be prepared. The user describes each type of input record in the file. He specifies the record codes (that is, the characters used to uniquely identify the records) and the control-data fields significant in that record type. Records that must be processed in sequence within a control group can be given numbers representing their place in the sequence. The following paragraphs describe the information entered on the form.

Record Sequence

Column 1 must contain a C for every line-entry that specifies a record type. See *Sequence Control* under *Input Specifications* for a discussion of the SCFx entry.

Columns 2-3 specify two numeric or two alphabetic *sequence characters*. If, to ensure proper processing, certain types of input data records must be in an established sequence within a control group, columns 2-3 of the input specifications sheet can contain numeric sequence entries in ascending order.

If input data records do not have an established sequence within a control group, or if it is not desirable to halt processing when the records are out of sequence, alphabetic sequence designations should be used. Some applications contain both sequential and non-sequential records.

For sequential records *column 4* indicates the number (either a 1 or N) of that type of record in a control group in the input data file. If there is only one record of a type per group, enter a 1 in column 4. If there is more than one record of a type, enter an N in column 4.

Column 4 can be left blank for non-sequential records.

Column 5 must contain the letter X if the presence of a sequential record in the input data file is optional. If a record type is *required* for proper processing, leave *column 5* blank.

Record Codes

An input record can be identified by any number of record codes. All record codes specified for a single record type are considered in an *and* relation. That is, all the codes must be present in the record. Columns 6-41 of the input specifications sheet provide space on one line-entry to specify as many as six record codes per type of input record. It is possible, however, to specify more than six record codes per type by using more than one line-entry:

- The first line has no resulting-condition number in columns 42-43.
- Succeeding lines have a C in column 1 and the additional record codes.
- Only the last line-entry for a single record type has a resulting-condition number in columns 42-43.

Columns 6-8 state the position number (input card column) that contains the record-code character.

Column 9 must contain an N if a negation condition is intended; otherwise it is left blank. A negation means that the code described is not present in the record specified.

Column 10 must have a Z, D, or C, depending upon whether the record-code comparison to be made is that of the zone portion only, the digit portion only, or the full character.

Figure 3. Spacing Chart for Monthly Expense Distribution Report



INTERNATIONAL BUSINESS MACHINES CORPORATION
IBM 407, 408, 409, 1403 AND 1404 PRINTER SPACING CHART

Form X24-6436
Printed in U. S. A.

LINE DESCRIPTION FIELD HEADINGS/WORD MARKS 6 Lines Per Inch Printing span:

← IBM 1403, Model 1
← IBM 407, 408, 409
← IBM 1403 & 1404, Model 2

GLUE	407, 408, 409 Form Alignment 1403, 1404	0	1	2	3	4	5	6	7	8	9	10	11	12	13
1		1	2	3	4	5	6	7	8	9	10	11	12	13	
2															
3	HAA														
4															
5															
6	HAB 1"														
7															
8															
9															
10															
11	HAC														
12	HAD 2"														
13	HAE														
14	HAF	*** DEPT. NO. XXX													
15															
16	HBA	** GEN. LEDGER NO. XXX													
17															
18	HCA 3"	* SUB. LEDGER NO. XXX													
19															
20															
21	DAA				XXXX		XX XX		XX,XXX.XX						
22															
23	TBB								XXX,XXX.XX *	X,XXX,XXX.XX	XX,XXX,XXX.XX				
24															
25															
26															
27															
28	TAA														
29															
30															
31															
32															
33															
34															
35															
36															
37															
38															
39															
40															
41															
42															
43															
44															
45															
46															
47															
48															
49															
50															
51															

MONTHLY EXPENSE DISTRIBUTION REPORT

REPORT DATE XX-XX-XX

OUR INVOICE DATE AMOUNT AMOUNT AMOUNT
NUMBER MO DAY BY ACCOUNT BY DEPT

*** DEPT. NO. XXX

** GEN. LEDGER NO. XXX

* SUB. LEDGER NO. XXX

XXXX XX XX XX,XXX.XX

XXX,XXX.XX * X,XXX,XXX.XX XX,XXX,XXX.XX

FINAL AMOUNT XXX,XXX,XXX.XX

DUAL-SPEED CARRIAGE (IBM 1403, 1404)
Punch only one channel per line. Holes in the same channel should be punched at least 8 lines apart.

MEASUREMENTS Horizontal spacing 1/10" Vertical spacing 1/6"	FORM WIDTHS Min. 3 1/2" Max. 18 3/4"	COMMONLY USED FORM DEPTHS 3 1/2", 3 1/2", 3 5/8", 5 1/2", 6" 7", 7 1/2", 8 1/2", 11"
---	--	--

NOTE: This chart is subject to inaccuracies from variations in humidity. Dimensions of form should be calculated from measurements shown and not scaled from this chart.

620513MSP

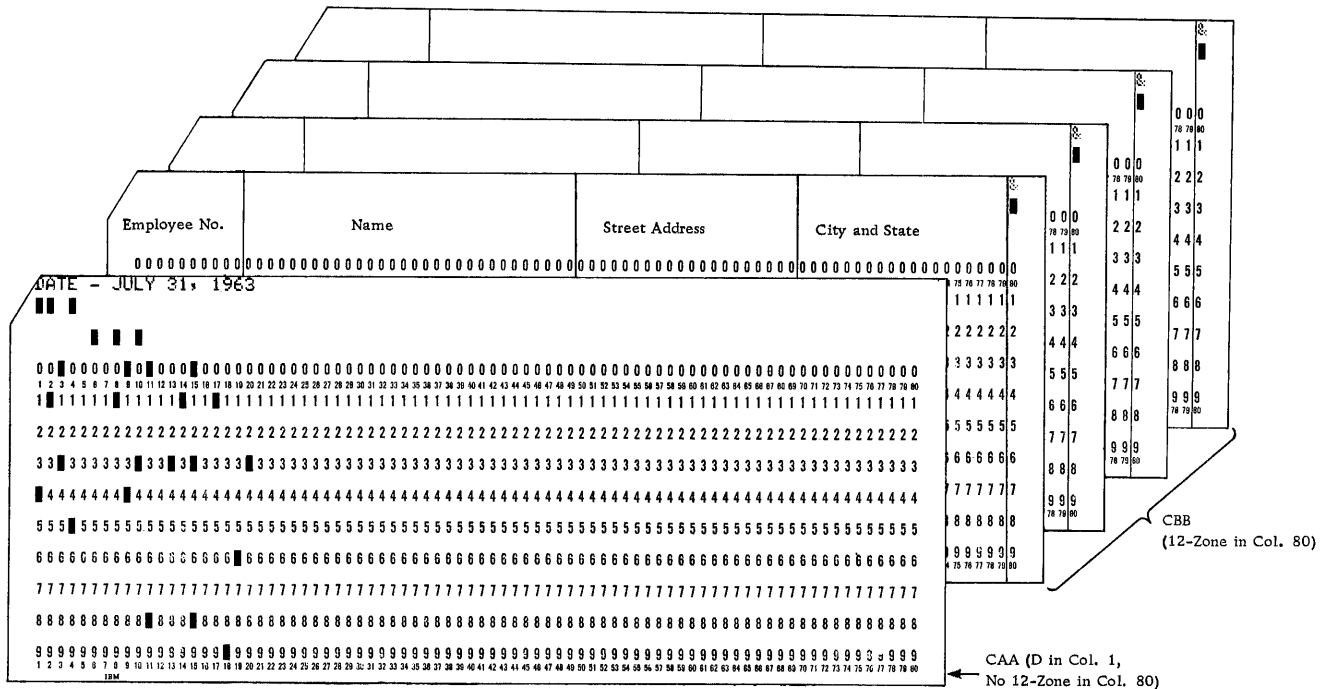


Figure 5. Sample Name and Address File

Control Fields

Control fields identify the classifications to which the record belongs. Columns 44-73 of the input specifications sheet list the control fields present in each type of input data record. Each field is described by its rightmost position in the input record and its length. The fields are specified in ascending sequence of control levels beginning with the entries for the most minor level in Field 1 (columns 44-48) and continuing to the right as far as necessary. Six is the maximum number of control fields that can be specified.

It is not necessary that a control field be in the same position in different record-types. It is important, however, that a field be entered under the proper control level on the input specifications sheet.

If there are more than six record codes in a record type, the control-field entries are made only on the last line-entry for that record type.

Sequence Control

A special entry applies when the records of an input file are required to be in a fixed sequence in a control

RECORD SEQUENCE	RECORD CODES																												FIELD 1		
	SEC. NUMBER	POSITION	MOT.	D/V/N	CODE	POSITION	MOT.	D/V/N	CODE	POSITION	MOT.	D/V/N	CODE	POSITION	MOT.	D/V/N	CODE	POSITION	MOT.	D/V/N	CODE	POSITION	MOT.	D/V/N	CODE	POSITION	MOT.	D/V/N		CODE	
CAA	0,0,1	C,D	0,8,0	N,Z	C																										0,1
CBB	0,8,0	Z,C																													0,2

Figure 6. Input Specifications for Name and Address File

group. This is the SCFx entry in columns 1-4, which is used for numerically-designated types of records. The x is the number of the control field governing the sequence of numerically designated types of records.

For example, in a payroll application, suppose that one of each of these records is required for each employee: Name and Address card (defined as C01) and an Hours Worked (C02) card. The sequence of these two kinds of cards is fixed: The C01 card must precede the C02 card for every employee. Employee Number is defined as control field 1. Then, the last entry on the input specifications sheet is SCF1 in columns 1-4. BRPG thus provides for checking the sequence of these two cards for every employee's cards in the file. (See Figure 7.) Every application that has sequential-record specifications must have an SCFx entry at the end of the input specifications.

RECORD SEQUENCE	RECORD CODES																												FIELD 1				
	SEC. NUMBER	POSITION	MOT.	D/V/N	CODE	POSITION	MOT.	D/V/N	CODE	POSITION	MOT.	D/V/N	CODE	POSITION	MOT.	D/V/N	CODE	POSITION	MOT.	D/V/N	CODE	POSITION	MOT.	D/V/N	CODE	POSITION	MOT.	D/V/N		CODE	END	LENGTH	
C0,5	N,N	0,8,0			C,1																										0,6	1,1,1	
C0,5	N,N	0,8,0			C,2																											0,7	1,1,1
C0,5	N,N	0,8,0			C,3																											0,8	1,1,1
C0,1	N	0,8,0			N,C																											0,0,6	0,5
C0,2	N	0,8,0			C																											0,0,6	0,5
SCF1																																	

Figure 7. Three Kinds of Input Defined as One Record-Sequence Type, and Fixed-Sequence Input Records

A		FIELD NAME		FIELD LENGTH UNEDITED		DECIMAL LENGTH		HALF ADJUST		FIELD STATUS				FACTOR 1		O P		FACTOR 2		A S		COND		COND		COND		COND		FIELD NAME OF REMAINDER		FIELD LENGTH OF REMAINDER		CARD NUMBER				
1	2	7	8	10	11	12	13	14	15	16	17	18	19	20	21	22	23	28	29	30	35	36	37	38	40	42	43	45	46	47	52	53	54	55	75	76	80	
																																						0,1,0
																																						0,2,0
																																						0,3,0
																																						0,4,0
																																						0,5,0
																																						0,6,0
																																						0,7,0
																																						0,8,0
																																						0,9,0
																																						1,0,0
																																						1,1,0
																																						1,2,0
																																						1,3,0
																																						1,4,0
																																						1,5,0
																																						1,6,0
																																						1,7,0
																																						1,8,0
																																						1,9,0
																																						2,0,0

Figure 13. Calculation Specifications Sheet

numeric field that contains no decimals, enter 00. For alphabetic or alphanumeric fields that contain no decimals, leave these columns blank.

Half Adjust

When the user wants to half-adjust (or round) the result of a calculation, he should enter an alphabetic X in column 13. Half-adjusting the result is accomplished automatically by adding 5 to the number in the highest-order position to be *dropped*. Half-adjusting is done just prior to placing the result of a calculation in the Field Name specified. See *Decimal Alignment* under *Calculation Specifications* for an example that illustrates half-adjusting. When no half-adjusting is wanted, leave column 13 blank.

Field Status

As in the case of data specifications, the user may want to govern later processing (as defined by format specifications and subsequent calculation specifications)

according to the status of a particular field. Columns 14-22 of the calculation specifications sheet can be used for this purpose. The allowable entries in columns 14, 17, and 20 are those given for the field status of the data specifications sheet (B, Z, N, and P), as well as the following entries that are related to the comparison of two fields:

- E — Factor 2 is equal to factor 1.
- U — Factor 2 is unequal to factor 1.
- H — Factor 2 is higher in sequence than factor 1.
- L — Factor 2 is lower in sequence than factor 1.

As mentioned under *Field Status* for the data specifications sheet, each status entry (columns 14, 17, and 20) should be defined by a corresponding unique resulting-condition number (columns 15-16, 18-19, and 21-22). These resulting-condition numbers can be used to govern other operations.

Note: The H, L, and E entries are valid only if the IBM 1401 Data Processing System used to execute the object program is equipped with the high-low-equal compare special feature.

Factor 1

Columns 23-28 are used to state the field name or the *literal constant* that is the multiplicand, dividend, augend, minuend, or the field with which another field is compared. A field name thus entered must have been specified by an appropriate entry in columns 2-7 of the data specifications sheet, by a previous line-entry on the calculation specifications sheet, or by a W-entry on a format specifications sheet (see *Format Specifications*). The alphabetic name of factor 1 is left-justified when it is less than six letters long, the first letter being entered in column 23.

Literal constants can be used as factor 1 (see *Constants* under *Calculation Specifications*). When factor 1 is a numeric literal less than seven characters long, or an alphameric literal less than five characters long, enter the literal constant as factor 1. If the literal requires less than six columns, right-justify it (enter the units position in column 28), but do not use leading zeros.

A constant that is too long to be written on the calculation sheet as factor 1 can be used indirectly as factor 1. Such a constant then becomes a *named constant*, because the entry in factor 1 columns (23-28) must be WORDxx.

Op (Operation) + - × / C

Column 29 can be used to identify the operation to be performed using the two factors. The entries and the operations they represent are:

Operation	Entry on Specifications Sheet in Column 29	Punch in Card Column 29
Plus	+	12-zone
Minus	-	11-zone
Multiplied by	×	0 and 7
Divided by	/	0 and 1
Compare factor 2 with factor 1	C	12-zone and 3

Plus and minus specifications on this sheet provide for addition and subtraction operations upon data developed by the data specifications sheet or prior entries on the calculation specifications sheet. Factor 1 and Factor 2 of a multiplication or division operation must not contain blanks.

A	FIELD NAME	FIELD LENGTH UNEDITED	FIELD LENGTH EDITED	FIELD STATUS								FACTOR 1	OP	FACTOR 2				FIELD NAME OF REMAINDER		
				STATUS	RESULTING CONDITION	RESULTING STATUS	RESULTING CONDITION	MULTIPLICAND DIVIDEND AUGEND, OR MINUEND	+ - ×/ C	COND	N			COND	N	COND	N			
	FLDA	0,0,6	0,0									FLDB	X	FLDC	A					
	FLDD	0,0,6	0,0									FLDB	X	FLDC	S					
	FLDE	0,0,6	0,0									FLDB	X	FLDC	I					
	FLDF	0,0,6	0,0									FLDB	X	FLDC	O					
	FLDG	0,1,3	0,0									FLDB	X	WORD03	S					

Figure 14. Multiplication Specifications

A	FIELD NAME	FIELD LENGTH UNEDITED	FIELD LENGTH EDITED	FIELD STATUS								FACTOR 1	OP	FACTOR 2				FIELD NAME OF REMAINDER	
				STATUS	RESULTING CONDITION	RESULTING STATUS	RESULTING CONDITION	MULTIPLICAND DIVIDEND AUGEND, OR MINUEND	+ - ×/ C	COND	N			COND	N	COND	N		
	TOTAMT	0,0,6	0,0									AMOUNT	A	FL					
	TOTAL	0,0,6	0,0									AMOUNT	S	FL					

Figure 15. Progressive-Total Specifications

Factor 2

Columns 30-35 are used for the name of the field (or the value of the constant) that is being specified as one of the following: multiplier, divisor, addend, subtrahend, or the field compared with factor 1. The explanation given for factor 1 applies to factor 2.

AS00 (Add, Subtract, Reset Add, Reset Subtract)

Column 36 must contain an A, an S, 0 (12, 0), or 0 (11, 0), depending upon whether the result of the calculation being specified by this line-entry is to be added to, subtracted from, or substituted for the previous contents of the field named in columns 2-7 of this line-entry. Figure 14 illustrates various multiplication operations. Assume that FLDB and FLDC are specified on the data sheet, having field lengths of 004 and 002, respectively, and no decimals. Plus, minus, and divide operations can be similarly specified. An explanation of the entries in Figure 14 follows:

1. The first line-entry specifies that the product of FLDB × FLDC be added to the contents of FLDA and that the sum be placed at FLDA.
2. The second line specifies that the product of FLDB × FLDC be subtracted from the contents of FLDD and that the difference be placed at FLDD.
3. The third line-entry specifies that the product of FLDB × FLDC be reset-added into FLDE.
4. The fourth line specifies that the product of FLDB × FLDC be reset-subtracted into FLDF.
5. The fifth line specifies that the product of FLDB × WORD03 be subtracted from the contents of FLDG and that the difference be placed at FLDG. WORD03 is the field name of a 9-position constant that must be defined on the format specifications sheet by a W-entry.

Figure 15 illustrates a means of obtaining progressive totals. Note the absence of an entry in the factor 1 field and in the OP field (column 29). This is the explanation of the entries in Figure 15:

1. The first line specifies that the field AMOUNT be added to the contents of TOTAMT and that the sum be placed at TOTAMT on a change in control field 1.

Line

Columns 2-4 identify the line being specified. Entries for these columns are taken from the spacing-chart entries that define the line by *type*, *level*, and *number*.

If a line is identified as HAA, write an H in column 2, an A in column 3, and an A in column 4. If a line is identified as TAB, write a T in column 2, an A in column 3, and a B in column 4.

The entry in column 2 specifies the *type* of the line. It must be H for a heading line, D for a detail line, or T for a total line. An important consideration in assigning *type* to a line is the difference between a total line and a heading or detail line with regard to the record in the input area when the line is formed. The test for control-field changes, the performance of total-time calculations, and the formation of total lines precede the function of removing fields from the input record. Thus, an input record that causes a control change *cannot* contribute data to total lines that result from that control change.

Detail calculations, heading lines, and detail lines follow the removal of fields from the record in the input area. Thus that record can contribute to these calculations and lines. Therefore, naming a line according to type is not arbitrary, particularly with regard to total and detail lines.

Output

Column 5 must contain an alphabetic X if the line is to be printed; otherwise it is left blank.

Column 6 must contain an alphabetic X if the line is to be punched into an output card; otherwise it is left blank.

If both printing and punching are being specified for the line, an X must be entered in both columns 5 and 6.

Column 7 must not be used for BRPG.

Next Line

Columns 8-10 define the next line to be printed and/or punched. This field is primarily for use with hierarchically related lines and should be left blank when using alphabetic-level classification of lines.

Space

In columns 11-12 center the number of line spaces to be taken *before* printing the line. The 01, 02, or 03 specifies single, double, or triple line-spacing before the printing of the line being specified.

In columns 13-14 the 01, 02, or 03 calls for single, double, or triple line-spacing *after* the printing of the line being specified.

Skip

In columns 15-16 the entries 01-12 designate skipping to carriage tape channels 1-12, respectively, *before* printing the line being specified.

In columns 17-18 entries 01-12 cause skipping to carriage tape channels 1-12, respectively, *after* printing the line being specified.

In preparing reports that require headings at the top of a page, format specifications usually control form-skipping upon overflow. For a simple report, however, no specifications are necessary to cause the forms to be advanced from the last printed line on a page to the first print line of the next page. Thus, if report specifications provide no forms control for overflow, whenever the object program senses a punch in carriage tape-channel 12 while printing, it automatically causes skipping to channel 1. When the 12-punch in the carriage tape is sensed while printing a total line, all total lines whose output conditions are met print before overflow-skipping occurs.

Stacker

In column 19 the entry of a 4 or 8 causes the card containing this line to be selected into the corresponding 1402 punch stacker. When no selection is desired, column 19 must be left blank.

Line-Output Conditions

A line will appear in the output only if line-output conditions for the given line are specified and fulfilled. Columns 20-28 can be used to specify a maximum of three conditions under which the line being specified is to become output. If two or three conditions are entered on one line-entry, they are considered in an *and* relation. The entries in these columns can be any of the resulting conditions defined on the other specifications sheets, as well as OF (overflow), LC (last card), 1P (first page), F1-F6 (a change in control fields 1 through 6), and negations of any of these.

Figure 19 shows that lines HAA and HBB are to be printed when condition 04 is met. If condition 04 is defined on the input-specifications sheet to be the

LINE	OUT-PUT	NEXT LINE	SPACE	SKIP	LINE OUTPUT CONDITIONS				FIELD NAME	FIELD END	FIELD OUTPUT CONDITIONS			FIELD SUPPRESSED
					COND 1	COND 2	COND 3	COND 4			COND 1	COND 2	COND 3	
HAA	X				01	01		04						
HBB	X				01			04						

Figure 19. Conditioning Lines to Be Used as Output

presence in the input area of a record containing an L in column 80, the heading lines HAA and HBB will print.

All lines that are to be printed when condition 04 is met will be printed in the order in which they appear on the format-specifications sheet.

Condition 1P (First Page)

1P is a condition unique to the format specifications. It is fulfilled at the beginning of processing before any input records have been read. The purpose of this condition is to cause the printing of a cover sheet or page heading lines on the first sheet.

Thus, lines that contain *only constant information* and that appear in the output before any input records are processed can be printed or punched as a result of condition 1P. Because this condition precedes any input record, no information from the input file can appear in a line conditioned by 1P. Thus, a page heading line that contains a date from the first record in a file will not contain that date on the first sheet if the line is conditioned by 1P. The line should be conditioned by the resulting-condition number that represents the date header record.

Variable Line-Output Conditions

Some applications require that varying conditions govern the appearance of a line in the output. A line that is governed by *or* conditions must be specified with a separate line-entry for each *or* condition. The first line-entry made in the normal manner will specify the first *or* condition. Each succeeding line-entry consists of an L in column 1 and the *or* condition in columns 20-28 as required. Overflow, when it is used as one of two or more *or* conditions, must be written as the last of the *or* conditions. A next-line entry cannot be made for a line that has both an overflow (OF) condition and an *or* relationship with some other line-output condition.

If a detail line called DAA is to be punched when any one of these three conditions is met: (1) condition 02 and not condition 05; (2) condition 06, or (3) condition 09; the proper entries on the format specifications sheet are as shown in Figure 20.

Note: Columns 29-75 are left blank for line specifications (L in column 1). As explained later, columns 76-80 pertain to both line and field specifications.

FORMAT	LINE TYPE	LINE NUMBER	OUT-PUT	NEXT LINE	SPACE	SKIP	LINE OUTPUT CONDITIONS			FIELD NAME	FIELD END	FIELD OUTPUT CONDITIONS			ZERO SUPPRESS
							COND. N	COND. D	COND. A			COND. N	COND. D	COND. A	
L	D	A	A	X				0	2	N	0	5			
L											0	6			
L												0	9		

Figure 20. Or Line-Output Conditions

Format (For a Field)

In the description of a field within a line or the definition of a constant, *column 1* contains an F, B, K, or W.

The meaning of these entries is as follows:

- F — identifies the entry as a *field* specification for a data field or a WORDxx that *will not be blanked* after it is placed in an output line.
- B — identifies the entry as a *field* specification for a data field that *will be blanked* after it is placed in an output line. This entry causes processing similar to a read-out and reset total operation on an accounting machine.
- K — identifies the entry as a *field* specification that uses a literal constant.
- W — identifies the entry as a *field* specification that *defines* a constant or an edit control-word.

Note: Columns 2-28 are blank in a line-entry that specifies a field or a constant.

Field Name

State in *columns 29-34* the name of the field to be inserted in the line whose specification immediately precedes the field entry. An entry with a B in column 1 must contain a field name from columns 2-7 of the data or calculation specifications sheets. An F entry in column 1 can also contain a field named in the data or calculation specifications, or it can have a WORDxx defined by a W-entry elsewhere in the format specifications. Those field names that are less than six characters long must be left-justified. The entry of a K in column 1 requires a blank field name. (A *literal* is not named.) The entry of a W in that column must have a field name of the form WORDxx, where xx is a number in the range 00-99. W-entries are fully explained later in this section under *Constant or Edit Control Word*.

Field End

Place in *columns 35-37* the number of the rightmost position of the field in the output line as shown on the spacing chart. These columns are left blank for a W-entry.

Field Output Conditions

Columns 38-46 provide for a maximum of three conditions, considered in an *and* relation, under which the field being specified is to be placed in the output line.

The same conditions that can govern line output are acceptable in these columns. If several conditions in an *or* relation govern the output of the field, separate entries must be made, each giving all of the information required for the field as well as each *or* condition.

named (or *defined*) by a format specification. This specification must contain a *W* in column 1, *WORDxx* in columns 29-34, and the *constant* or the *edit control word* in columns 48-75. A constant defined as *WORDxx* that is to be used in computations must be written in the *form* of a numeric literal. For example, if *WORD04* were the constant 12345.67 to be used as factor 2 in a calculation specification (see Figure 17), the proper format specification would be as shown in Figure 22. Constants that are not to be used in computations, as well as all edit control words, must be written in the *form* of alphameric literals. In Figure 21, the edit control word \$bb,bb0.bb* (used twice by its name *WORD01*) is defined as *WORD01* on line 120. In all applications, *W*-entries (if used) must follow all other format specifications.

Page Number

Columns 76-77 are used for page numbering in both line and field specifications. The page-number entry is in the upper right-hand corner of the format sheet. The pages are numbered consecutively beginning with the spacing chart as page number 01.

Card Number

The first twenty lines of the sheet have preprinted card numbers in columns 78-80, as explained in this corresponding paragraph under *Input Specifications*.

Order of Format Specifications

The first entry on the format sheet must be a format specification for an output *line* (L in column 1).

Line Specifications (L in Column 1)

The required order of format specifications for *lines* is:

1. Alphabetic-level heading lines.
2. Numeric-level heading lines (if used — see *Numeric Level Classification*).
3. Detail lines
4. Numeric-level total lines (if used — see *Numeric Level Classification*)
5. Alphabetic-level total lines

Within each of these groups, lines must be specified in the same order desired in the output (printed or punched output).

Field Specifications (F, B, or K in Column 1)

All field specifications that have an F, B, or K in column 1 must follow the L-entry for the output line in which these fields will appear. These *field* entries can be in any order after the *line* specification.

W-Entries

All field specifications that *define constants or edit control words* (W in column 1) must be written *last* on the format sheet(s).

Numeric-Level Classification

The concept of line *level* is based upon the relationship of a line to other lines. Heading or total lines that are independent of each other should be given alphabetic-level designations. Heading or total lines that are related in a hierarchy can be given numeric-level designations corresponding to their positions in the hierarchy. A hierarchical relationship can be likened to total operation on an accounting machine; i.e., major lines force minor and intermediate lines. The principle underlying a hierarchical relationship is that lines of higher level govern lines of lower level.

Line-Level Relationships

Of the three types of report lines (H, D, and T), heading and total lines can be related in an established order or rank. Such lines, known as *hierarchical* lines, are assigned a *number* from 1 through 8 as the second character of the line identification code. This number represents the rank or *level* of a line in its relationship to other lines within the hierarchical structure. Heading and total lines in the lowest level must be assigned a *level number* of 1; the next higher level number assigned must be 2; then 3; and so on, through 8 for the highest level.

For both heading and total lines that are given numeric *level* designations (that is, hierarchical heading and total lines), there may be more than one print line that belongs to a given level. These lines should be numbered, beginning with the number 1 for the first line of that level. For example, suppose that a report requires three heading lines; two of these should print on an intermediate control-field change, and the remaining one should print on a minor control-field change. In this example, the three heading lines would be assigned these line-identification codes: H21 and H22 (the first and second heading lines of the intermediate level), and H11 (the first heading line of the minor level — there is only one minor heading line in this example).

Suppose that, in the foregoing example, there are five total lines that should print; two on a change in the intermediate control field and three on a change in the minor control field. These five total lines should be given these line-identification codes: T11, T12, and T13 (the first, second, and third total lines of the

minor level), and T21 and T22 (the first and second lines of the intermediate level).

Heading lines in a hierarchy (identified by such numeric *level* designations as H21, H22, and H11) are printed in this order:

1. All the heading lines in the highest level, in line-number order.
2. All the heading lines in the next lower level, in line-number order.
3. And so on. The heading lines of the lowest level are printed last, in line-number order.

In the previous example, the order of printing the heading lines (upon a change in the intermediate control field) is H21, H22, and H11.

Total lines in a hierarchy (identified by such numeric level designations as T11, T12, T13, T21, and T22) are printed in this order:

1. All the total lines in the lowest level, in line-number order.
2. All the total lines in the next higher level, in line-number order.
3. And so on. The total lines in the highest level are printed last, in line-number order.

In the previous example, the order of printing the total lines (upon a change in the intermediate control field) is T11, T12, T13, T21, and T22.

Line-output conditions should be assigned only to the *first* line of each level that should print. Succeeding lines of any *numbered* level will follow the first line of that level. For example, condition F1 should condition heading line H11 to print, but not H12. The reason is that when H11 is printed, H12 will automatically follow, because it is the second line of level *I*.

In accordance with the proper order of writing the format specifications (see *Order of Format Specifications*), programs generated by BRPG print report lines in this order:

1. Alphabetic Level Heading Lines
Printed in the order of entry on the format specifications sheet
2. Numeric Level Heading Lines
Printed in high-to-low-level order according to their places in the hierarchy
3. Detail Lines
Printed in the order of entry on the format specifications sheet

4. Numeric Level Total Lines

Printed in low-to-high-level order according to their places in the hierarchy

5. Alphabetic Level Total Lines

Printed in the order of entry on the format specifications sheet

Hierarchical treatment is given only to *numeric-level heading* and *total* lines.

When the object program is running, a total line with a numeric-level designation such as T3x will force T11 and its subsequent lines, and T21 and its subsequent lines, to come before it whenever the output conditions are fulfilled for T3x.

Figure 23 reveals a difference in the hierarchical relationships for total and heading lines. Total lines appear in *ascending* order by level; heading lines appear in *descending* order by level.

When there is a single detail-line format in a report, that line can be given an alphabetic-level designation to reflect its independent status. Such is the case in Figure 23 in which the detail line is named DAA. Other applications might have any number of detail-line formats which, when they do not relate to one another, are classified alphabetically by level.

Note that the *level* of a line is not necessarily equal to the *number of the control field* with which the line is associated. For instance, a total or heading line of level three may not relate to control field three in the input data file. It is possible that *level-one* heading lines might relate to a change in control-field *two*. In some applications, lines with alphabetic-level designations might relate to control fields. Thus, even though six is the maximum number of control fields that can be specified, there can be eight numeric levels for each type of line specified.

The *line number* permits scheduling lines within a level. In Figure 23 there are six heading lines in the highest level. That level is associated with department number. Whenever the department changes, the six heading lines composing level three print in the line-number sequence within that level; that is, H31, H32, H33, H34, H35, and H36. Even though there is only one line in each of the lower levels of heading line in that report (H21 and H11), the lines have numeric line-number designations because they are hierarchical. The same principle applies to the total lines, T11, T21, and T31, in the same report. Application of the line-number concept to hierarchical total lines corresponds to special programming on the IBM 407 Accounting Machine. For instance, four minor total lines could be named T11, T12, T13, and T14. When assigning line numbers, always start with the number 1.



LINE DESCRIPTION

FIELD HEADINGS/WORD MARKS

INTERNATIONAL BUSINESS MACHINES CORPORATION
IBM 407, 408, 409, 1403 AND 1404 PRINTER SPACING CHART
6 Lines Per Inch

Form X24-6436
Printed in U.S.A.

Printing space:

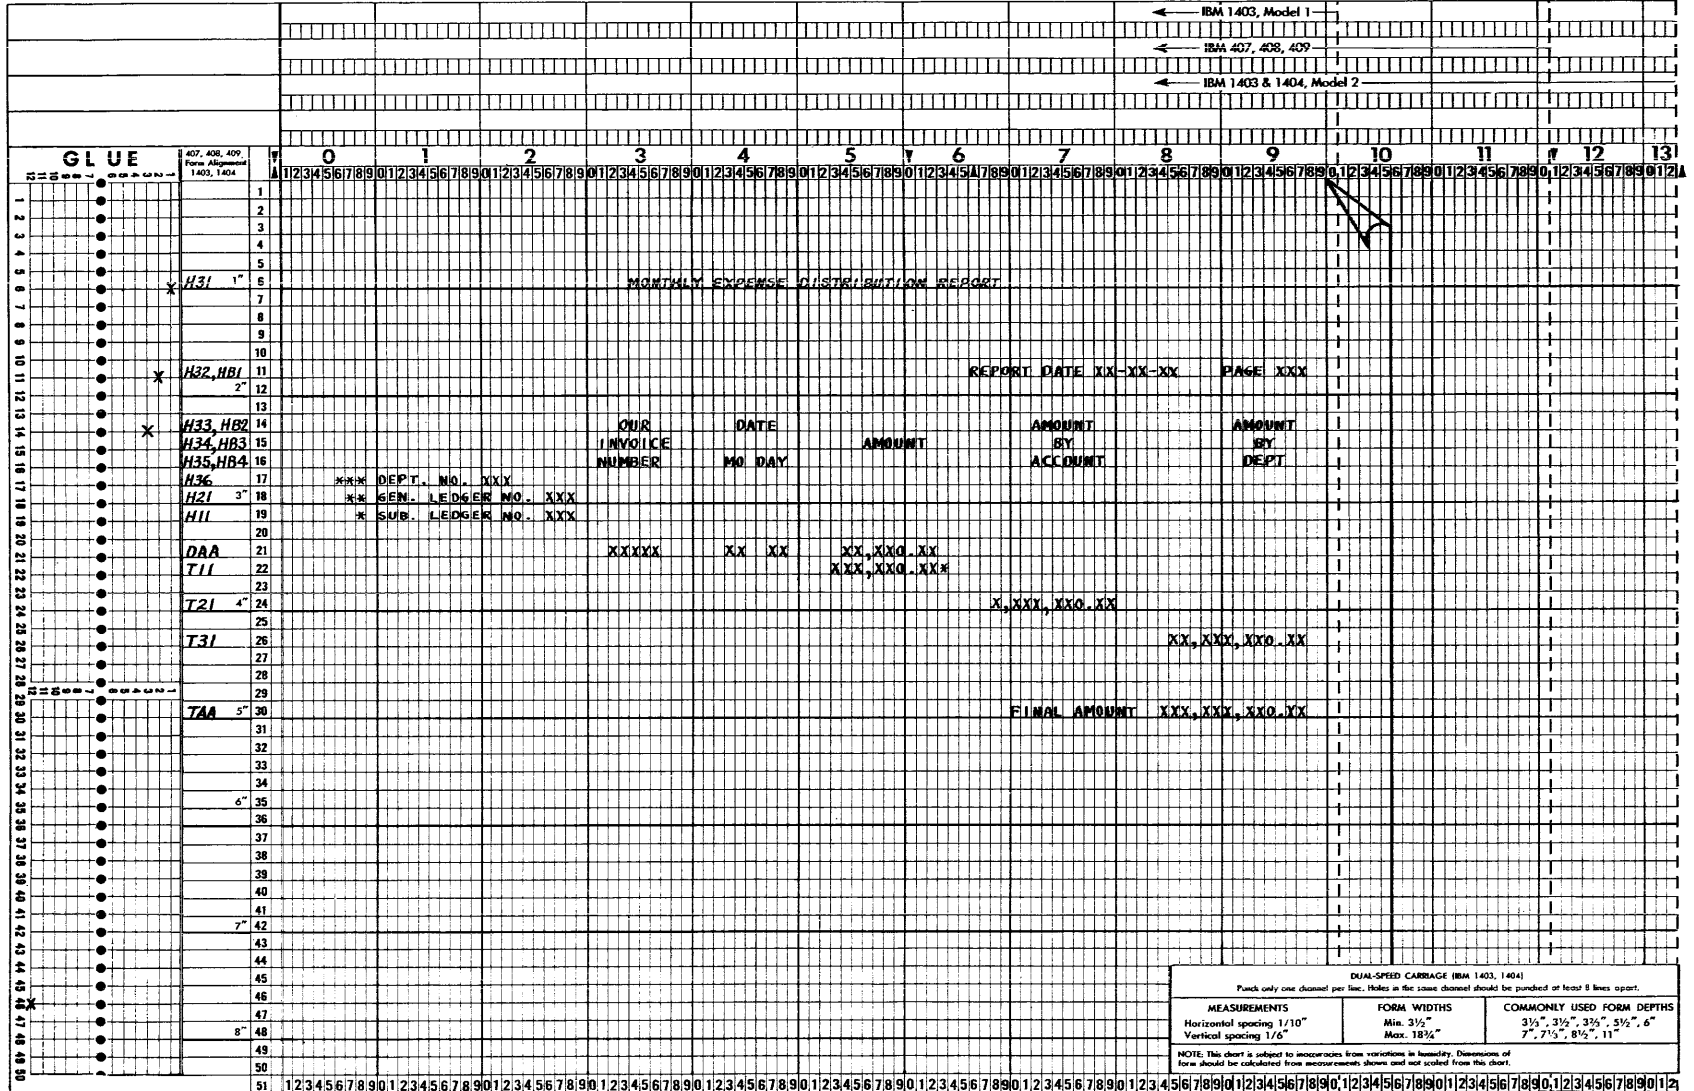


Figure 23. Spacing Chart for Monthly Expense Distribution Report, Numeric-Level Classification

FORMAT	LINE	TYPE	LEVEL	PRINT	NEXT LINE	SPACE		SKIP	STACKEE	LINE OUTPUT CONDITIONS			FIELD NAME	FIELD END	FIELD OUTPUT CONDITIONS			ZERO SUPPRESS																																									
						BEFORE	AFTER			COND 0	COND 1	COND 2			COND 0	COND 1	COND 2		COND 0	COND 1	COND 2																																						
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48												
	H	1	1	X																																																							
	H	1	2	X	H 12						0																																																
														S	Q	L	D	T	O																																								
														S	H	I	P	T	O																																								
														N	U	M	B	E	R																																								

Figure 24. Conditioning Lines to Be Used as Output

Numeric-Level Format Specifications

Format specifications for numeric-level classification closely follow those for alphabetic-level classification, and reference must be made to the previous section dealing with format specifications. However, three specifications are different:

Line

The entry in column 2 specifies the type of the line, as in alphabetic level classification.

Column 3 specifies the level of the line. Column 4 specifies the number of the line within a given level. When lines of a level are to be numbered, be sure to assign the number 1 to the first line.

The entries on the format specifications sheet pertaining to lines must be in *descending level-order for heading lines, and in ascending level-order for total lines*. This is the normal order of printing related report lines.

Next Line

Columns 8-10 define the next line to be printed and/or punched. This entry is made only if the *next line* specified in these columns should come unconditionally in the output after *this line* (the line being described in this entire line-entry). Otherwise columns 8-10 should be left blank. When a *next line* is specified in columns 8-10, that next line must be of the *same type and level* as the line being specified. That is, columns 8-9 must be the same as columns 2-3.

Line-Output Conditions

Columns 20-28 can be used to specify a maximum of three conditions under which the line being specified is to become output. If two or three conditions are entered on one line-entry, they are considered in an *and* relation. The entries in these columns can be any of the

resulting conditions defined on the other specifications sheets, as well as OF (overflow), LC (last card), 1P (first page), F1-F6 (a change in control fields 1 through 6), and negations of any of these. If a line is referenced by a previous entry as a *next line*, columns 20-28 are left blank. This is because its line-output conditions must be the same as those for the line that referenced it.

A line will appear in the output *only* if:

1. *Line-output conditions* for the given line are specified and fulfilled, or
2. The line was specified as the *next line* of another line for which the output conditions are fulfilled, or
3. The line is of lower level in a hierarchy than another line of the same type for which the output conditions are fulfilled.

To illustrate the first principle, see Figure 24. The line H11 is specified to be printed when condition 04 is met. If condition 04 is defined on the input specifications sheet to be the presence in the input area of a record containing an L in column 80, the first heading line will be printed when that record is present.

The second principle is also illustrated in Figure 24. Heading line H12 will print only after line H11 prints, because the format specification of H11 contains a *next line* entry of H12. Note that no output conditions are specified for H12.

The third principle with regard to line-output conditions relates to the specification of hierarchies of lines.

Lines related in a hierarchy must be of the *same type* and must have *numeric-level designations* that reflect their relative positions within the hierarchy. The processing principle underlying a hierarchical relationship is that lines of a higher level govern lines of lower level. For example, assume that a report has two major total lines (T31 and T32), two intermediate total lines (T21 and T22), and three minor total lines (T11, T12, and T13). Then, when the output conditions are fulfilled for the T31 line, the object program will force T11 and its next lines (T12 and T13), and T21 and its next line (T22), to come before the T31 and T32 lines in the output *without regard for the line-output conditions of the T1x and T2x lines*.

Furthermore, multiple lines within one level in a hierarchy must be referenced by *next line* designations rather than individual line-output conditions whenever there is a higher level of lines in the hierarchy. Thus, H21 must call for H22 as a next line and H22 must call for H23 as a next line to ensure that all three will be present in the output when H3x lines precede them.

In summary, the line output conditions are equally as important as the type and level distinctions in the relationship of lines to one another. Careful analysis should be made of these conditions when the lines are named.

Compressed Specifications

The BRPG program compresses each specifications entry into a string of characters that is used directly by the BRPG program in generating the desired report program. The total number of characters resulting from compressing the specifications entries must not exceed 1900. If the total does exceed 1900, the BRPG program will print the message PROG TOO BIG and halt.

The user can determine the number of characters into which each specifications entry will be compressed. Each type of entry compresses into a number of characters that can be calculated by a simple arithmetic formula. The formula to be used for each type of entry is shown below.

Entry Type	Formula
L entry	28
F entry	$17 + \text{Literal length} + (9 \times \text{No. of conditions})$
B entry	$20 + \text{Literal length} + (9 \times \text{No. of conditions})$
K entry	$10 + \text{Literal length} + (9 \times \text{No. of conditions})$
W entry	$10 + \text{Literal length}$
Data entry	$24 + (6 \times \text{No. of conditions}) + (9 \times \text{No. of field status tests})$
Calculations entry	57 for divide; otherwise 49
Input entry	$10 + (6 \times \text{No. of record codes}) + (5 \times \text{No. of control fields})$

Performance Data

The time required to generate a Basic 4K Report Program Generator program for an IBM 1401 or 1460 varies from 4.0 minutes to 4.9 minutes with 3.5 to 4.1 minutes for compile time and .5 to .8 minutes for punching the object deck.

The minimum number of statements in BRPG is four (one input, one data, and two format). The maximum number of statements allowed in BRPG depends upon the amount of core needed to compress the user's specifications. This compression area is increased beyond the normal requirements by the following factors.

Format Specifications

1. Literal length on B, F, K, and W entries
2. Field conditioning on B, F, and K entries.

Data Specifications

1. Field-status entries
2. Source-field conditioning.

Calculations Specifications

Use of divide operation.

Input Specifications

1. Control-field entries
2. Multiple-record code entries.

The following specifications were used to run a suggested maximum program of 70 statements.

Type	No.	Description
Input	5	One record code each; two control fields for each input card.
Data	30	Three with field status.
Calculations	9	Five multiplications and four divisions.
Format:		
Heading	4	Two K entries of 10 characters each and one F entry.
Detail	10	Four B and four F entries.
Total	12	Four B and five F entries with two edit words of eight characters each.

The case shown in Figures 25-33 was run on an IBM 1401 with an IBM 1402 Card Read-Punch, Model 1, and an IBM 1403 Printer, Model 2. It contains 65 statements and requires 4.5 minutes of machine time.

Sample Report Documentation

Documentation for one sample report is presented in this section. Figure 25 shows a portion of the card-input file for the Monthly Expense Distribution Report. Figure 26 is the printer spacing chart. Figures 27-32 are the specifications sheets and Figure 33 shows the printed report.

Control Card

Assuming that the user has an IBM 1401 system with an IBM 1403 Printer with 100 print positions, the control card will have the following format:

Columns	Contents	Explanation
1-3	CTL	Identifies the control card.
4-5	04	Neither the BRPG processor nor the generated object program will use more than 4,000 positions of core storage.
6-8	100	Specifies the size (number of print positions) of the printer.
9-12	1401	Specifies the system to be used to generate and execute the object program.

SDAY ENTRY DATE		DAY IN-VOICE DATE		VENDOR ABBREVIATION	VENDOR NUMBER	OUR INVOICE NUMBER	ENTRY	GEN. LEDG. ACCOUNT NUMBER	SUB. LEDG. ACCOUNT NUMBER	DEPT. CHARGED	MATERIAL OR PART NUMBER	ORDER NUMBER	DEPT. USING	SDAY DUE DATE	QUANTITY	UNIT	ITEM AMOUNT	CODE	
12086		915760041						K15		0211950								4	
12125		913700041						J23		0087595								4	
12084		913660041						214		0072192								4	
12042		913660041						407		0068750								4	
07-18-62																			
0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3
4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4
5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5
6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6
7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7
8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8
9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9
12	2	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21
22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61
62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	

Figure 25. Cards from Input File for Monthly Expense Distribution Report

INTERNATIONAL BUSINESS MACHINES CORPORATION
IBM 407, 408, 409, 1403 AND 1404 PRINTER SPACING CHART
6 Lines Per Inch



LINE DESCRIPTION FIELD HEADINGS/WORD MARKS

Printing span: ← IBM 1403, Model 1
← IBM 407, 408, 409
← IBM 1403 & 1404, Model 2

GLUE	407, 408, 409, Form Alignment 1403, 1404	0	1	2	3	4	5	6	7	8	9	10	11	12	13
1															
2															
3	HAA														
4															
5															
6	HAB														
7															
8															
9															
10															
11	HAC														
12	HAD														
13	HAE														
14		*** DEPT. NO. ***													
15															
16	HBA	*** GEN. LEDGER NO. ***													
17															
18	HCA	* SUB. LEDGER NO. ***													
19															
20															
21	DAA				XXXXX		XX XX		XX,XXX.XX						
22															
23	TBB								XXX,XXX.XX *	X,XXX,XXX.XX		XX,XXX,XXX.XX			
24															
25															
26															
27															
28	TAA														
29															
30															
31															
32															
33															
34															
35															
36															
37															
38															
39															
40															
41															
42															
43															
44															
45															
46															
47															
48															
49															
50															
51															

MONTHLY EXPENSE DISTRIBUTION REPORT

REPORT DATE XX-XX-XX

OUR INVOICE NUMBER DATE AMOUNT AMOUNT BY AMOUNT BY

NUMBER NO DAY ACCOUNT DEPT

*** DEPT. NO. ***

*** GEN. LEDGER NO. ***

* SUB. LEDGER NO. ***

XXXXX XX XX XX,XXX.XX

XXX,XXX.XX * X,XXX,XXX.XX XX,XXX,XXX.XX

FINAL AMOUNT XXX,XXX,XXX.XX

DUAL-SPEED CARriage (IBM 1403, 1404)
Punch only one document per line. Holes in the lower document should be punched at least 6 lines apart.

MEASUREMENTS	FORM WIDTHS	COMMONLY USED FORM DEPTHS
Horizontal spacing 1/10"	Min. 3 1/2"	3 1/2", 3 1/2", 3 3/4", 5 1/2", 6"
Vertical spacing 1/6"	Max. 18 3/4"	7", 7 1/2", 8 1/2", 11"

NOTE: This chart is subject to inaccuracies from variations in humidity. Dimensions of form should be calculated from measurements shown and not scaled from this chart.

430515MSP

Figure 26. Spacing Chart for Monthly Expense Distribution Report

RECORD SEQUENCE		RECORD CODES												CONTROL FIELDS												CARD NUMBER																	
1	2	POSITION	NOT	CODE	POSITION	NOT	CODE	POSITION	NOT	CODE	POSITION	NOT	CODE	POSITION	NOT	CODE	POSITION	NOT	CODE	POSITION	NOT	CODE	POSITION	NOT	CODE		POSITION	NOT	CODE	76	77	78	79	80									
C	B	0	8	D	4												0	1	0	3	5	0	3	0	3	2	0	3	0	3	8	0	3				0	1	0				
C	A	0	8	N	D	4											0	2																					0	2	0		
																																								0	3	0	
																																									0	4	0

Figure 27. Input Specifications for Monthly Expense Distribution Report

D	FIELD NAME	FIELD LENGTH UNEDITED	DECIMAL LENGTH	FIELD STATUS				SOURCES OF FIELD												CARD NUMBER																								
				STATUS	RESULTING CONDITION	STATUS	RESULTING CONDITION	FIELD SOURCE	NUMERIC	FIELD END	FIELD LENGTH	COND	A	COND	FIELD SOURCE	NUMERIC	FIELD END	FIELD LENGTH	COND		A	COND	FIELD SOURCE	NUMERIC	FIELD END	FIELD LENGTH	COND	A	COND	76	77	78	79	80										
	DATE	0	8					C	A	A	0	1	8																												0	1	0	
	INVNUM	0	5					C	B	B	0	2	7																												0	2	0	
	MONTH	0	2					C	B	B	M	0	5	3		J	K																								0	3	0	
	DAY	0	2					C	B	B		0	5	5																											0	4	0	
	AMOUNT	0	7	0	2			C	B	B		0	6	9																											0	5	0	
	TOTAMT	0	8	0	2			C	B	B		0	6	9	0	7	A																							0	6	0		
	DEPNUM	0	3		0	3		C	B	B		0	3	8																											0	7	0	
	GENNUM	0	3					C	B	B		0	3	2																											0	8	0	
	SUBNUM	0	3					C	B	B		0	3	5																											0	9	0	
																																									1	0	0	
																																										1	1	0
																																										1	2	0

Figure 28. Data Specifications for Monthly Expense Distribution Report

A	FIELD NAME	FIELD LENGTH UNEDITED	DECIMAL LENGTH	HALF ADJUST	FIELD STATUS				FACTOR 1	OP	FACTOR 2	AS				FIELD NAME OF REMAINDER	FIELD LENGTH OF REMAINDER	CARD NUMBER																									
					STATUS	RESULTING CONDITION	STATUS	RESULTING CONDITION				+	+	+	+				COND	A	COND	A	76	77	78	79	80																
	AMTACT	0	9	0	2					T	T	T	T	F1																										0	1	0	
	AMTDEP	0	1	0	2					T	T	T	T	F2																											0	2	0
	FLNAMT	0	1	1	0	2				T	T	T	T	F3																											0	3	0
																																									0	4	0
																																									0	5	0

Figure 29. Calculation Specifications for Monthly Expense Distribution Report

MONTHLY EXPENSE DISTRIBUTION REPORT					
					REPORT DATE 07-18-63
	OUR INVOICE NUMBER	DATE MO DAY	AMOUNT	AMOUNT BY ACCOUNT	AMOUNT BY DEPT
*** DEPT. NO. 041					
** GEN. LEDGER NO. 913					
* SUB. LEDGER NO. 660					
	12042	1 07	687.50		
	12084	2 14	721.92		
			1,409.42 *		
* SUB. LEDGER NO. 700					
	12125	11 23	675.95		
			675.95 *	2,085.37	2,085.37
				FINAL AMOUNT	2,085.37

Figure 33. Printed Report of Monthly Expense Distribution Report

Index

Alphabetic-Level Classification	9	Line-Identification Code	9
Alphameric Literals	20	Line-Level Relationships	25
A (Arithmetic)	16	Line-Output Conditions	22, 28
Calculation Specifications	6, 16	Literal Constants as Output Fields	24
Card Number	13, 15, 19	Load-and-Go	5
Classification of Lines	9	Machine Requirements	4
Conditions	19	Named Constants	20
Condition 1P (First Page)	23	Named Constants (WORDxx)	24
Constants	19	Naming a Constant	24
Constant or Edit Control Word	24	Next Line	22, 28
Control Card	6	Numeric-Level Classification	25
Control Fields	12	Numeric-Level Format Specifications	28
Conversion of Month Field	16	Numeric Literals	19
Data Specifications	6, 13	Op (Operation)	18
Decimal Alignment	20	Order of Calculation Specifications	21
Decimal Length	14, 16	Order of Data Specifications	16
D (Data)	14	Order of Input Specifications	13
Edit Control Word	24	Order of Format Specifications	25
Edit Listing	5	Output	22
Factor 1	18	Page Number	13, 15, 19
Factor 2	18	Performance Data	29
Field End	23	Printer Spacing Chart	6, 7
Field Length of Remainder	19	Record Codes	9
Field Length Unedited	14, 16	Record Sequence	9
Field Name	14, 16, 23	Report Specifications	6
Field Name of Remainder	19	Sample Report	29
Field Output Conditions	23	Sequence Control	12
Field Status	15, 16, 17	Skip	22
Format (For a Line)	21	Sources of Field	14
Format (For a Field)	23	Space	22
Format Specifications	6, 21	Stacker	22
Half Adjust	16, 17	Tot/Det	19
Input File	5	Variable Line-Output Conditions	23
Input Specifications	6, 9	Z (Zero Suppress)	24
Layout of Lines and Fields	8		
Line	22, 28		

International Business Machines Corporation

Data Processing Division

112 East Post Road, White Plains, N. Y. 10601