




## PORTABLE ENCLOSED MODELS

Portable, metered or unmetered cased units are available in many models for laboratory and test bench applications. Each unit consists of a variable autotransformer and an overload protector.

A voltmeter, ammeter and/or wattmeter is available on some models. The output circuit is protected by either a thermal overload protector, resettable from the front panel or by easily accessible and replaceable fuses.

Shielding is provided to reduce stray fields sufficiently to provide an overall accuracy of 3% of full scale.

A double pole on-off switch interrupts both sides of the AC line. Where dual range meters are used, make before break range switches permit switching under load. A convenient carrying handle is provided on all models.

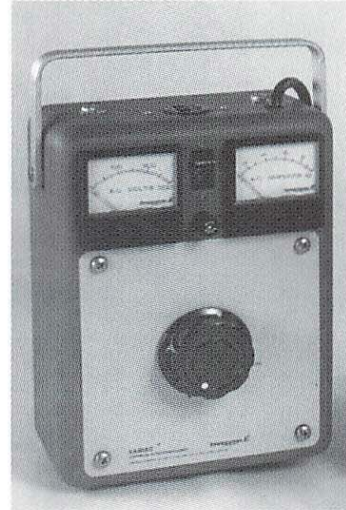

### SINGLE PHASE, 120V, 50-60Hz INPUT

RATED CURRENT AMPERES	MAX CURRENT AMPERES	KVA	OUTPUT VOLTAGE RANGE	TYPE NO.	METER RANGE AMPS	METER RANGE WATTS	METER RANGE VOLTS	2 OR 3 WIRE CORD AND RECEPTACLE	NET WEIGHT (lbs)	SHIP WEIGHT (lbs)	W	H	D
5.0	6.5	0.78	0-140	W5MT † *	-	-	-	3	8	15	4.875	6.562	4.375
5.0	6.5	0.78	0-140	W5MT3 † *	-	-	-	3	8	15	4.875	6.562	4.375
5.0	6.5	0.78	0-140	W5MT3VM	-	-	150	3	8	19	4.875	6.562	4.375
5.0	6.5	0.78	0-140	W5MT3A	1 / 5	-	150	3	11	19	6.750	9.50	5.250
5.0	6.5	0.78	0-140	W5MT3W	-	150/750	150	3	12	19	6.750	9.50	5.250
5.0	6.5	0.78	0-140	W5MT3AW	1 / 5	150/750	150	3	12	21	11.937	8.625	5.375
7.1	9.2	1.1	0-120	W5LMT3	-	-	-	3	8	18	4.875	6.562	4.375
10.0	11.0	1.32	0-140	W8MT3 ‡	-	-	-	3	10	16	5.375	7.0	6.125
10.0	11.0	1.32	0-140	W8MT3VM	-	-	150	2	10	16	5.375	7.0	6.125
10.0	13.0	1.56	0-140	W10MT †	-	-	-	3	16	24	6.750	9.5	5.250
10.0	13.0	1.56	0-140	W10MT3 †	-	-	-	3	16	24	6.750	9.5	5.250
10.0	13.0	1.56	0-140	W10MT3A	2 / 10	-	150	3	18	30	8.625	11.937	5.375
10.0	13.0	1.56	0-140	W10MT3W	-	300/1500	150	3	18	30	8.625	11.937	5.375
18.1	23.0	2.6	0-140	W20MT3A	20	-	150	3	27	34	8.625	11.937	5.375
18.1	23.0	2.6	0-140	W20MT3 †	-	-	-	3	20	23	8.625	11.937	5.375

### SINGLE PHASE, 240V, 50-60Hz INPUT

2.0	2.6	0.62	0-280	W5HMT †	-	-	-	2	8	8	4.875	6.562	4.375
4.0	5.2	1.25	0-280	W10HMT	-	-	-	2	15	15	6.750	9.50	5.250
4.0	5.2	1.25	0-280	W10HMT3	-	-	-	3	15	15	6.750	9.50	5.250
8.0	10.4	2.50	0-280	W20HMT3 †	-	-	-	3	27	27	8.625	11.937	5.375
8.0	10.4	2.50	0-280	W20HMT3A	10	-	300	3	25	25	8.625	11.937	5.375

† UL Listed \* CSA Approved ‡ 60Hz Only