



DBK65™

8-Channel Transducer Interface Module



Compatibility: ✓ WaveBook ✓ ZonicBook ✓ LogBook ✓ DaqBook ✓ DaqLab ✓ DaqScan ✓ DaqBoard/2000 Series

Features


- 8 channels of 2, 3, 4, or 6 wire transducer inputs
- Attaches to P1 connector, or directly to WaveBook voltage input channels (via optional cables)
- Provides excitation voltage of 5V, 10V, 15V, and 24V, jumper selectable per channel
- Custom excitation voltage of 5 to 20V with user-supplied resistor
- Accommodates internal current-shunt resistor, selectable per channel
- Convenient 6-terminal removable screw-terminal connectors
- 2-terminal switch-closure provided per channel for transducer calibration




The DBK65 supplies transducer power and easy connectivity to the acquisition system

The DBK65 provides 8 channels of transducer interface capability, making it easy to connect 2, 3, 4, and 6 wire transducers. Convenient removable screw-terminal connectors, one per channel, make attaching and removing transducers quick and easy.

Input Configurations for any Channel

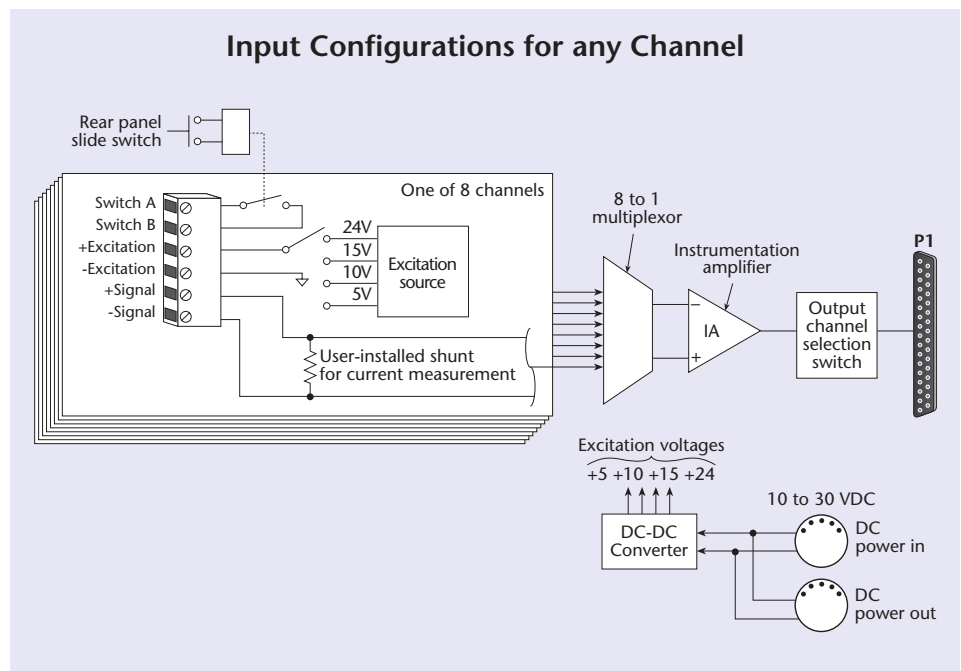

Usage Examples

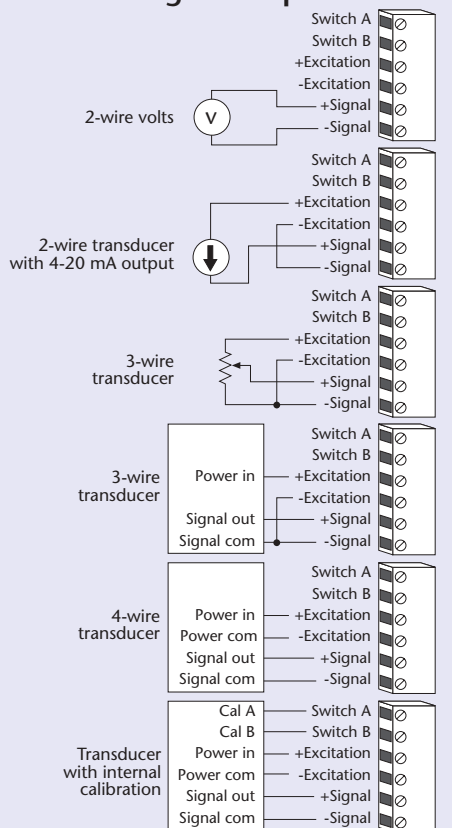

The DBK65 is ideally suited for 4 to 20 mA transducer outputs, 3-wire string pots, 4-wire bridge-based transducers, and 6-wire bridge-based transducers with internal shunt cal. Each channel can be set-up for a different excitation voltage, with 5, 10, 15, and 24V provided by the DBK65's internal power supply. A custom voltage source between 5 and 20V can be done with a user-supplied resistor.

Two terminals on each channel provide a relay closure that can be used to switch in an internal calibration resistor for 6-wire

transducers. The 8 relays can be enabled via a rear-panel switch which activates 8 internal relays. The relay closures on all 8 channels are enabled simultaneously.


When used with a Daq or LogBook system, a multiplexer in the DBK65 is controlled like any other expansion input channel via the P1 expansion port. When used with WaveBook systems, the user is required to wire the transducer signal to a BNC cable and attach to a WaveBook or WBK10A voltage input channel.



DBK65™

Specifications & Ordering Information


DaqBook and DBK65 System Example

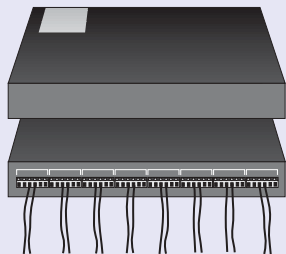

DaqBook/2001
16-bit, 200-kHz A/D converter

DBK65
8-channel transducer interface module


WaveBook and DBK65 System Example

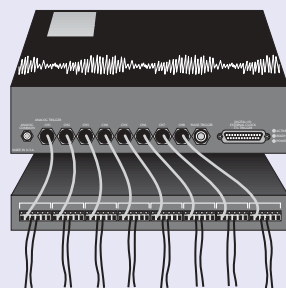

WaveBook/516E
Ethernet-based 16-bit, 1-MHz data acquisition system

DBK65
8-channel transducer interface module

LogBook and DBK65 System Example

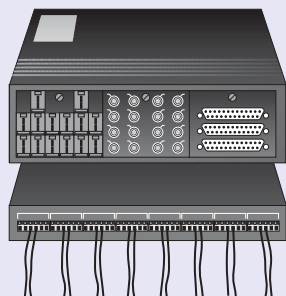

LogBook/360
16-bit, stand-alone data acquisition system with 3 internal expansion

DBK65
8-channel transducer interface module



Removable terminal blocks for each channel make wiring to your sensor easy

Specifications

Dimensions: 285 mm W x 220 mm D x 45 mm H (11" x 8.5" x 1.75")

Weight: 1.13 kg (2.5 lbs.)

Operating Temperature: -30°C to +70°C

System Connector: DB37 male, mates with P1*

Transducer Connector: 6-pin removable screw-terminal block

Power Connector: 5-pin DINs that allow daisy-chaining

DC Power Input: 10 to 30 VDC

DC Power Required: 15V @ 833 mA, 20V @ 625 mA, assuming max load, 755 mW required from P1 when used with a DaqBook

Gain Ranges: x1

Inputs: 8 differential voltage inputs

Maximum Input Voltage Range: ±10V

Input Impedance: 20M Ohm

Accuracy: ±[0.025% +150 µV] (typ); ±[0.1% +250 µV] (max)

Temperature Coefficient: 10 ppm for every degree outside the range of 0° to 50°C

Maximum Input Voltage (without damage): ±35V

3 dB Bandwidth: 2.6 MHz

CMRR: 80 dB typ

Output Voltage: Each channel, jumper-selectable to +5V, +10V, +15V, and +24V

Voltage Accuracy: ±2% typical

Current Limit: 100 mA per channel

Load Regulation: 5% typ

Total Output: 240 mA max for all 8 channels

Ordering Information

Description	Part No.
8-channel transducer interface module	DBK65

Accessories & Cables

Rack mount kit	RackDBK3
Shielded P1 T cable for use with DaqBook/2020, LogBook/360, and WBK40/41	CA-255-4T
Shielded P1 T cable for use with DaqBook/2001, DaqBook/2005, LogBook/300, DaqLab/2001, and DaqLab/2005	CA-255-2T
Ribbon cable for use with DaqScan	CA-37-x

Note: The CA-37-x ribbon cable can also be used in lieu of the CA-255-x molded T cables.

For complete information on accessories and cables, visit www.iotech.com/acc

Related Products

WaveBook	p. 17
ZonicBook	p. 59
LogBook	p. 75
DaqBook	p. 89
DaqLab	p. 103
DaqScan	p. 108
DaqBoard/2000 Series	p. 192

* Attachment to the DaqBoard/2000 requires a DBK200, DBK201, DBK202, or DBK203 adapter