



# Serial488/4™

## 4-Channel IEEE 488/Serial Converter



### Features

- Controls up to four RS-232 or RS-422 devices from one IEEE 488 controller
- Each serial port is individually programmable for baud rate, word length, etc.
- Built-in 64K data buffer dynamically allocates data storage
- XON/XOFF or CTS/RTS handshaking for each serial channel
- Rugged rack-mountable package with built-in power supply

Serial488/4™ is a four-channel IEEE 488 to serial converter that enables an IEEE 488 controller to command up to four bidirectional RS-232 or RS-422 devices.

The unit attaches to an IEEE 488 controller in the same manner as an IEEE instrument, and allows the IEEE 488 controller to communicate with serial printers, plotters, and instruments or with other computers. The unit allows the IEEE 488 controller to access each of the serial ports individually by using a secondary IEEE address for each channel, or by using dual-primary addressing.

Each of the serial ports is individually configurable for RS-232 or RS-422 operation. Serial port parameters such as baud rate, word length, stop bits, and parity are also individually programmable per channel.


All parameters are programmable from the IEEE controller and are stored in nonvolatile memory. The IEEE controller can read the status of each channel at any time and determine the number of characters received on the serial port, as well as the status of error conditions for that channel.

The Serial488/4 is a 64K RAM dynamically allocated for use as a data buffer for all the serial ports. Handshaking on the serial ports, either XON/XOFF or CTS/RTS, automatically inhibits serial devices from sending more characters when the data buffer is nearly full.

The Serial488/4 is packaged in a rugged rack mountable case with an internal power supply. Serial port connections are made via four 9-pin sub-D style connectors.



Computers with an IEEE interface can command up to four serial instruments and peripherals with one Serial488/4

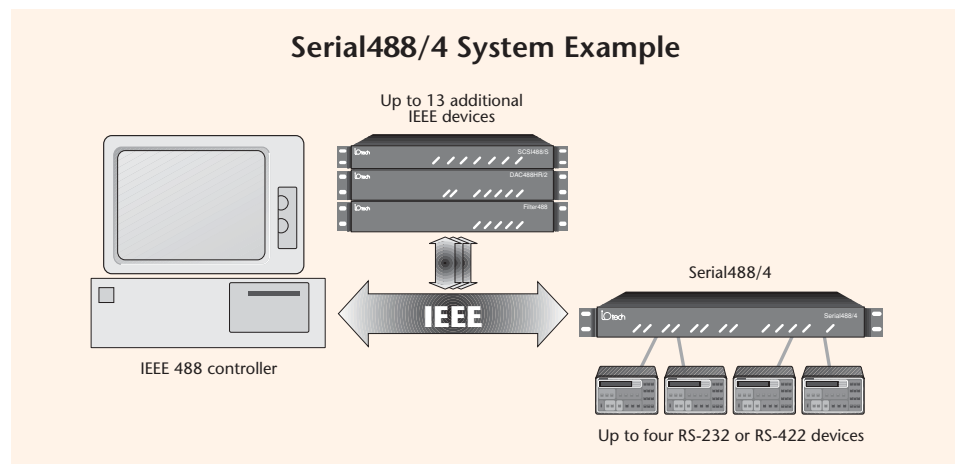

### Specifications

#### Serial Interface

EIA RS-232C: AB, BA, BB, CA, CB  
 EIA RS-422: Balanced voltage  
 Character Set: Asynchronous bit serial  
 Duplex: Full  
 Word Length: 7 or 8 data bits  
 Stop Bits: 1 or 2  
 Parity: Odd, even, mark, space or disabled  
 Baud Rates: 110, 300, 600, 1200, 1800, 2400, 3600, 4800, 7200, 9600, 19200, and 16 x external clock input  
 Terminator: CR, LF, CR-LF or LF-CR.  
 Control: Supports Clear To Send (CTS), Request To Send (RTS), or XON/XOFF  
 Serial I/O Buffers: 64,000 characters  
 Output Voltage: ±5V min (RS-232C) 5V typ (RS-422A)  
 Input Voltage: ±3.0V min; ±15V max  
 Connector: Four 9-Pin Sub-D male mating connectors supplied

#### IEEE 488 Interface

Implementation: SH1, AH1, T6, TE1, L4, LE1, SR1, PP0, RL0, DC1, C0, E1  
 Terminator: Software selectable CR, LF, CR-LF, LF-CR with EO1  
 Connector: Standard IEEE 488 connector; metric studs

**Programmable Parameters:** IEEE Terminators, Serial Terminators, EO1, SRQ Mask, Data Channel, Baud Rate, Word Length, Parity, Stop Bits, Serial Control

#### General

**Indicators:** LEDs for Talk, Listen, SRQ, Error, Power, and Send and Receive for each channel  
**Power:** 105 to 125 VAC, 60 Hz; or 210 to 250 VAC, 50 Hz; 15 VA max  
**Environment:** 0° to 35°C; 0 to 95% RH, non-condensing  
**Controls:** Power Switch (rear panel)  
 External DIP switches select Dual Primary or Secondary address mode and IEEE Address  
**Dimensions:** 425 mm W x 203 mm D x 45 mm H (16.75" x 8" x 1.75"); rack mount kit included  
**Weight:** 4.5 kg (10 lbs)

### Ordering Information

Description	Part No.
4-channel IEEE 488 to serial converter including rack-mount kit	Serial488/4
Shielded IEEE 488 cable, 6 ft.	CA-7-3

For complete information on accessories and cables, visit [www.iotech.com/acc](http://www.iotech.com/acc)