



UHF TRUNKED RADIOS

IC-F610

 (MT Version—Europe)

IC-F620

 (MT Version—U.S.A.)

MPT Trunking

**MPT1327/1343
MAP27**

Meets

MIL-STD 810



The above photo includes the optional DTMF MIC, HM-100TN.

- **Compatible with MPT 1327/1343 networks**

The IC-F610/F620 MT series meets your MPT 1327/1343 trunking system. Dispatcher, individual, group, emergency, priority and telephone (PSTN and PABX)* calls are available.

* Trunking network must be connected to PSTN/PABX.

- **Alphanumeric display and independent volume knob**

The wide, 10-digit alphanumeric display shows numerous status icons and call back memories for easy recognition. An independent volume knob offers instant volume control.

- **DTMF direct dialling and short data message**

With optional DTMF microphone HM-100TN, DTMF dialling allows you to make up a call from your palm. Short data message and 32 status call codes also can be sent directly.

- **Map27 data capability**

By connecting a PC or other terminal with optional OPC-822 (RS-232C) cable, MAP27 provides data communication easily.

- **Conventional operation with CTCSS**

Even in out of trunking service areas, 32 conventional channels with CTCSS signalling supports your communication. Wide/narrow channel spacing (25/12.5kHz) is selectable.


- **Invertible chassis from the front panel**



Icom Inc.

ADDITIONAL FEATURES

- 40 phone memory banks with alphanumeric names
- Optional voice scrambler, UT-109
- Built-in audio compander
- Own and 3rd party divert calls
- Flash ROM CPU for firmware upgrade capability
- MIL810 rugged construction
- Rewritable system messages
- Advanced PC programming capability
- 5-digit routing code for abbreviation dialling
- Complementary operation with IC-F40GT/GS MT series

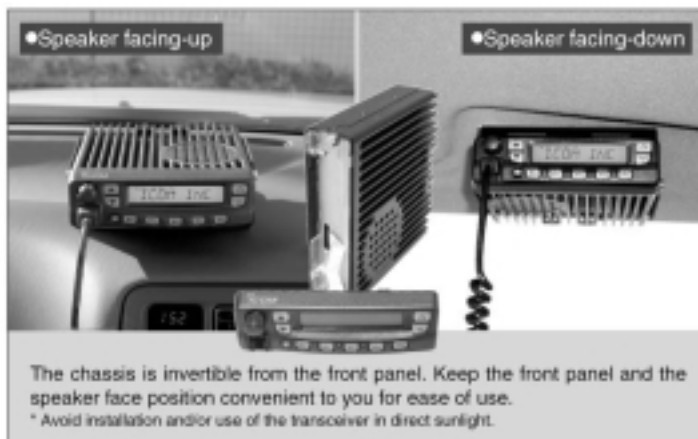

SPECIFICATIONS

- Frequency coverage : 400–430MHz
440–490MHz
- Number of channels : 32 channels (Conventional mode)
- Power supply voltage : 13.2V DC (ETS)
13.6V DC (EIA)
- Current drain (approx.) : Tx at 25W 7A
Rx max. audio 1.2A
standby 300mA
- Operating temperature range : –25°C to +55°C (ETS)
–22°F to +140°F (EIA)
- Antenna impedance : 50Ω (SO-239)
- Dimensions (W×H×D) : 140×40×170mm; 5½×19⅙×6⅛"
- Weight : 1.2kg; 2lb 10oz
- Rated output power : 25W
- Microphone impedance : 600Ω (8-pin modular)
- Audio output power : 4W typical at 10% distortion with a 4Ω load
- External speaker connector : 2-conductor 3.5 (d) mm (⅛")/4Ω

Measurements made in accordance with EIA-152C/204D, TIA-603 or ETS 300 086. All stated specifications are subject to change without notice or obligation.

Applicable U.S. Military Specifications

Icom makes rugged products that meet MIL-STD requirements and strict environmental standards as follows.


Standard	MIL 810C		MIL 810D		MIL 810E		MIL 810F	
	Method	Proc.	Method	Proc.	Method	Proc.	Method	Proc.
Low Pressure	500.1	I	500.2	I, II	500.3	I, II	500.4	I, II
High Temp.	501.1	I	501.2	I, II	501.3	I, II	501.4	I, II
Low Temp.	502.1	I	502.2	I, II	502.3	I, II	502.4-3	I, II
Temp. Shock	503.1	I	503.2	I	503.3	I	503.4	I
Solar Radiation	505.1	I	505.2	I	505.3	I	505.4	I
Rain	506.1	I, II	506.2	I, II	506.3	I, II	506.4	I, II
Humidity	507.1	I, II	507.2	II, III	507.3	II, III	507.4	–
Salt Fog	509.1	I	509.2	I	509.3	I	509.4	–
Dust	510.1	I	510.2	I	510.3	I	510.4	I
Vibration	514.2	VIII, X	514.3	I	514.4	I	514.5	I
Shock	516.2	I, II, V	516.3	I, IV	516.4	I, IV	516.5	I, IV

Supplied Accessories

- Hand mic. (HM-100N)
- DC power cable
- Mounting bracket kit
- Fuses
- Key assign stickers

OPTIONS

- **HM-100TN DTMF MICROPHONE**
For external terminal connection.
- **OPC-617 ACC CABLE**
For external terminal connection.
- **OPC-822 INTERFACE CABLE (For MAP27)**
Allows you to connect with a PC through RS-232C serial port for data communications.
- **SM-25 DESKTOP MICROPHONE**
Convenient for dispatching, equipped with monitor switch.
- **SP-5/SP-10/SP-22 EXTERNAL SPEAKERS**
Input impedance: 4Ω; Max. input power: 5W
- **UT-109 VOICE SCRAMBLER UNIT (Version 02)**
Provides operating security. Up to 32 scrambling codes are available. Ask your dealer for details.



Icom Inc.

1-1-32, Kamiminami, Hirano-ku, Osaka 547-0003, Japan Phone: 06 6793 5302 Fax: 06 6793 0013 URL: <http://www.icom.co.jp/world/index.html>

Count on us!

Icom America Inc.

<Corporate Headquarters>
2380 116th Avenue N.E., Bellevue, WA 98004, U.S.A.
Phone: (425) 454-8155 Fax: (425) 454-1509
URL : <http://www.icomamerica.com>
<Customer Service> Phone : (425) 454-7619

Icom Canada

Glenwood Centre #150-6165 Highway 17,
Delta, B.C., V4K 5B8, Canada
Phone: (604) 952-4266 Fax: (604) 952-0090
URL : <http://www.icomcanada.com>

Icom (Australia) Pty. Ltd.

A.B.N. 88 006 092 575
290-294 Albert Street, Brunswick, Victoria, 3056, Australia
Phone: 03 9387 0666 Fax: 03 9387 0022
URL : <http://www.icom.net.au>

Icom New Zealand

146A Harris Road, East Tamaki, Auckland, New Zealand
Phone: 09 274 4062 Fax: 09 274 4708
URL : <http://www.icom.co.nz>

Icom (Europe) GmbH

Communication Equipment
Himmelgeister Str. 100, D-40225 Düsseldorf, Germany
Phone: 0211 346047 Fax: 0211 333639
URL : <http://www.icomeurope.com>

Icom Spain S.L.

Ctra. de Gracia a Manresa Km. 14,750
08190 Sant Cugat del Valles Barcelona, SPAIN
Phone: (93) 590 26 70 Fax: (93) 589 04 46
URL : <http://www.icomspain.com>

Icom (UK) Ltd.

Unit 9, Sea St., Herne Bay, Kent, CT6 8LD, U.K.
Phone: 01227 741741 Fax: 01227 741742
URL : <http://www.icomuk.co.uk>

Icom France S.a

Zac de la Plaine, Rue Brindejonc des Moulinais
BP 5804, 31505 Toulouse Cedex, France
Phone: 561 36 03 03 Fax: 561 36 03 00
URL : <http://www.icom-france.com>

Asia Icom Inc.

6F No. 68, Sec. 1 Cheng-Teh Road,
Taipei, Taiwan, R.O.C.
Phone: (02) 2559 1899 Fax: (02) 2559 1874
URL : <http://www.asia-icom.com>

Beijing Icom Ltd.

1305, Wanshang Plaza, Shijingshan Road,
Beijing, China
Phone: (010) 6866 6337 Fax: (010) 6866 3553



Certificate Number Q14190

Icom Inc. (Japan), is an ISO9001 certification acquired company.

Your local distributor/dealer: