

JVC

SERVICE MANUAL

DYNAMIC MICROPHONE

MV-J1 (E),(K),(N)
MV-J3-BK (E),(K),(N)
MV-J3-GD (K),(N)

The "product Exchange System" is applicable to this product.
 For limited spare parts, refer to the parts list.




Specifications

	MV-J1	MV-J3-BK/GD
Type	Dynamic	Dynamic
Directivity	Uni-directional	Uni-directional
Sensitivity	- 56dB ± 3dB (0db1V/Pa, at 1kHz)	- 56dB ± 3dB (0db1V/Pa, at 1kHz)
Frequency response	100Hz-12,000Hz	100Hz-13,000Hz
Output impedance	600 ohms at 1kHz	600 ohms at 1kHz
ON/OFF switch	Provided	Provided
Cord length	3m (9.8ft), with 3.5mm dia. mini plug (Nickel Plated)	3m (9.8ft), with 3.5mm dia. mini plug (Gold Plated)
Dimensions	5.6cm (2-1/4") dia. × 18.9cm (7-1/2")	6.1cm (2-3/8") dia. × 18.9cm (7-1/2")
Mass	115g (4.1oz), without cord	250g (8.8oz), without cord
Accessories	Plug Adapter (Nickel Plated)	Plug Adapter (Gold Plated)

Design and specifications subject to change without notice.

MV-J1 (E),(K),(N)
 MV-J3-BK (E),(K),(N)
 MV-J3-GD (K),(N)

Packing Method

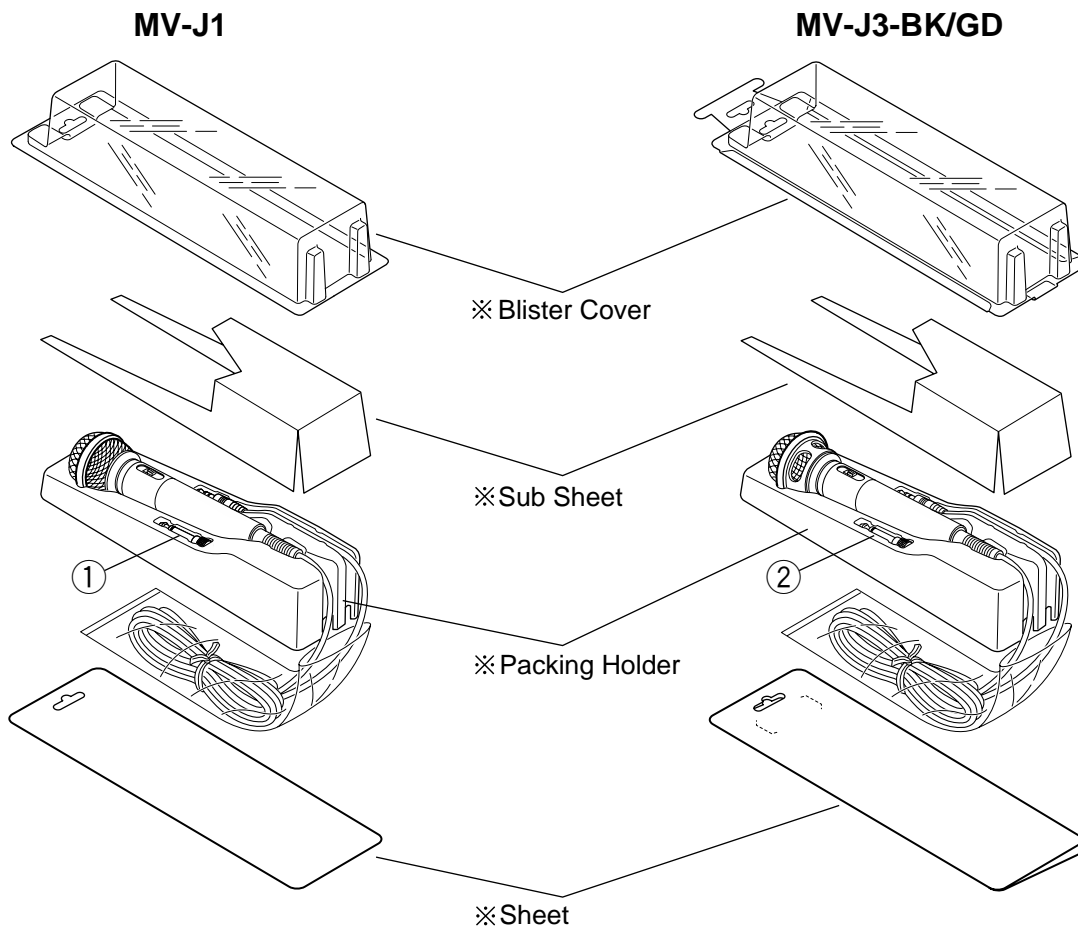


Note : These parts which was marked ※ (Blister cover/sub sheet/packing holder and sheet) will not be able to supply as our service parts

■ Packing Materials

△	Item No.	Parts No.	Parts Name	Q' ty	Description
	1	J46978-001	Plug Adapter	1	Nickel Plated. for MV-J1
	2	J46978-002	Plug Adapter	1	Gold Plated. for MV-J3

* Parts marked (△) are safety parts. When replacing, be sure to use the specified one.

Wiring Diagram

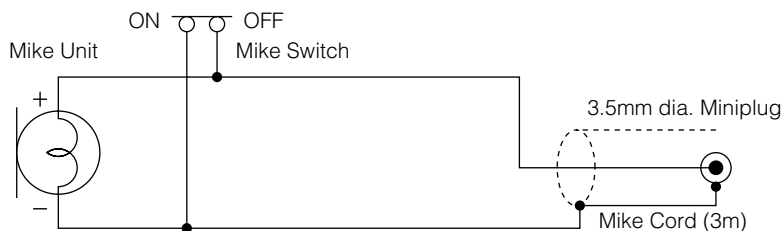

VICTOR COMPANY OF JAPAN, LIMITED

COMMUNICATION NETWORK BUSINESS UNIT, 1644, SHIMOTSURUMA, YAMATO-SHI KANAGAWA-KEN, 242-8514, JAPAN