JVC SERVICE MANUAL STEREO HEADPHONES

HA-D570D(E)

The "Product Exchange System" is applicable to this product. For limited spare parts, refer to the parts list.




Specifications

Туре	: Moving coil
Frequency response	: 16-22,000 Hz
Nominal impedance	: 32 ohms
Sensitivity	: 100dB/1 mW
Max.input capability	: 50 mW
Cord length	: 3.5 m (11.48 ft) with 3.5mm dia.stereo miniplug
Mass	: 200 g (7.05 oz) without cord
	250 g (8.81 oz) with cord
Accessory	: Plug adaptor (converts stereo miniplug to stereo
	phone plug)

Design and specifications subject to change without notice.

Packing Method

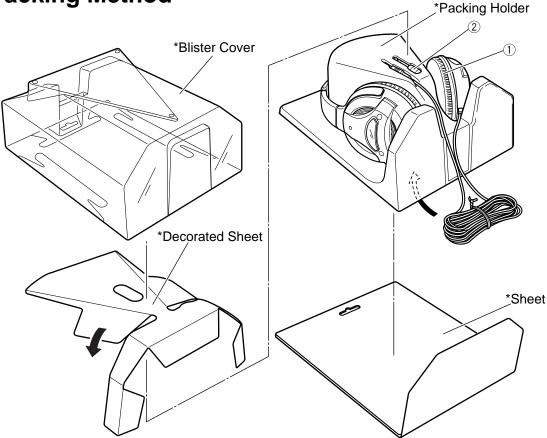


Note : These parts which was marked *(Blister cover/ Decorated sheet/packing holder and sheet) will not be able to sypply as our service parts.

Packing Materials

\triangle	Item No.	Parts No.	Parts Name	Q' ty	Description
	1	J46821-001	Ear Pad	2	
	2	J32687-002	Plug Adaptor	1	

*Parts marked (riangle) are safety parts. When replacing, be sure to use the specified one.

Wiring Diagram

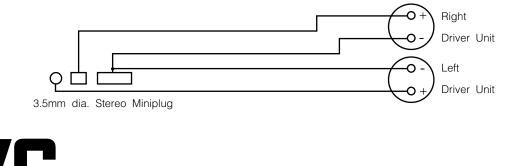

VICTOR COMPANY OF JAPAN, LIMITED

COMMUNICATION NETWORK BUSINESS UNIT, 1644, SHIMOTSURUMA, YAMATO-SHI KANAGAWA-KEN, 242-8514, JAPAN

