

# JVC

## SERVICE MANUAL

### COLOUR TELEVISION

BASIC CHASSIS

JK

## AV-25P8(PH)

This service manual mainly consists of the following items:

- The items which differ from those for the AV-25PX service manual.
- The initial value for each setting item.


For details other than those described in this manual, please refer to the following service manual.

Reference Service Manual: AV-25PX Service Manual (No. 51752, Aug. 2000)

**Note:** The page in parentheses shows the one for the AV-25PX service manual (No. 51752, Aug. 2000).



## HOW TO IDENTIFY MODEL

While referring to the illustration given below, identify model name on the rating label affixed to the rear cover.

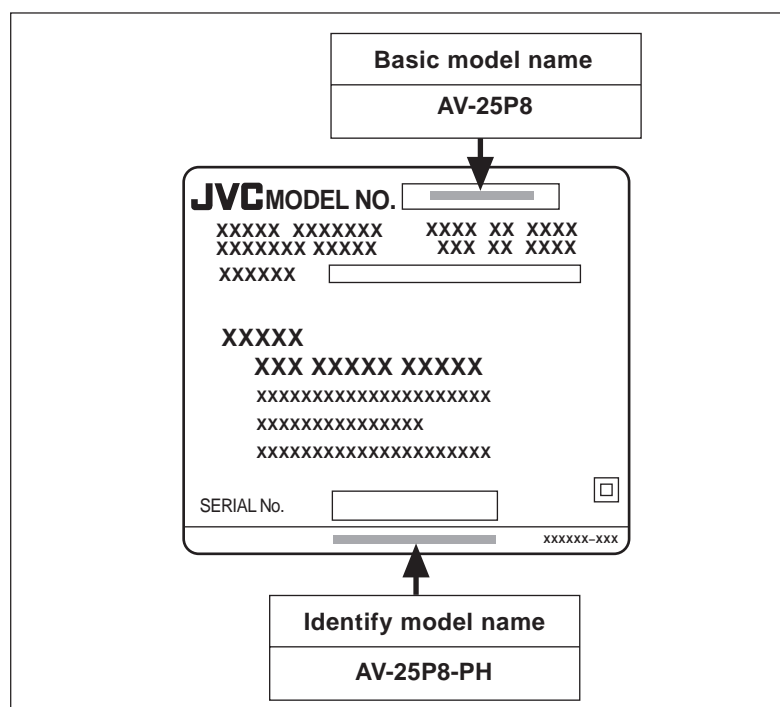

# PARTS DIFFERENCE TABLE

The different parts between AV-25PX and AV-25P8(PH) are described below:

△	REF. NO.	AV-25PX	AV-25P8(PH)	PART NAME	DESCRIPTION
		PART No.	PART No.		
<b>■ EXPLODED VIEW PARTS LIST (Pages 35 and 36)</b>					
△	10	QMP40D0-200J3 or QMP40D0-200J5 	QMPR010-200-E2 or QMPR010-200-K2 	POWER CORD	
△	12	LC10477-003A-H	LC10477-003A-HK	REAR COVER	
△	14	LC20377-010B-H	GG20003-008A-H	RATING LABEL	
	25	LC10475-013A-H	LC10475-013A-HK	FRONT CABI ASSY	
<b>■ PRINTED WIRING BOARD PARTS LIST [POWER &amp; DEF PWB ASSY] (Page 41-)</b>					
	—	SJK-2004A-H2	SJK-2013A-H2	POWER & DEF PWB ASSY	
<b>■ PACKING PARTS LIST (Page 47)</b>					
	1	LC10845-003A-H	GG10077-001A	PACKING CASE	
	2	LC10479-002D-H	LC10545-004B	CUSHION ASSY	8 pcs. in 1 set
△	6	LCT0864-001A-H	LCT0852-001A-H	INST BOOK	
	7	CM47385-00B-H	CP30902-050(R)	POS/SERIAL LABEL	
△	8	LCT0662-001A-H	————	DIGEST MANUAL	
△	9	LCT0661-001A-H	————	DIGEST MANUAL	

# SPECIFICATIONS (Page 2)

Item		CONTENTS
<b>Dimensions (W × H × D)</b>		655mm × 530.5mm × 465mm
<b>Mass</b>		36kg
<b>TV RF System</b>		B, G, I, D, K, K1, M
<b>Colour System</b>		PAL, SECAM, NTSC3.58, NTSC4.43
<b>Receiving Frequency</b>	<b>VHF (L)</b>	46.25MHz ~ 168.25MHz
	<b>VHF (H)</b>	175.25MHz ~ 463.25MHz
	<b>UHF</b>	471.25MHz ~ 863.25MHz
	<b>CATV</b>	Mid (X-Z, S1-S10), Super (S11-S20), Hyper (S21-S41) bands receivable
<b>Intermediate Frequency</b>		
	<b>VIF Carrier</b>	38.0MHz
	<b>SIF Carrier</b>	33.5MHz(4.5MHz), 32.5MHz(5.5MHz), 32.0MHz(6.0MHz), 31.5MHz(6.5MHz)
<b>Colour Sub Carrier Frequency</b>		
	<b>PAL</b>	4.43MHz
	<b>SECAM</b>	4.40625MHz, 4.25MHz
	<b>NTSC</b>	3.58MHz / 4.43MHz
<b>Power Input</b>		Rating: AC110 ~ 240V, 50/60Hz Operating: AC90 ~ 260V, 50/60Hz
<b>Power Consumption</b>		119W
<b>Picture Tube</b>		Visible size : 60cm measured diagonally
<b>High Voltage</b>		31.0kV ±1.5kV (at zero beam current)
<b>Speaker &amp; Audio Output</b>		Open dome speaker 10W+10W, 10cm round x 2
<b>Video Audio Input terminals</b>		
<b>Video1</b>	<b>S-Video</b>	Y: 1Vp-p Positive (Negative sync provided, when terminated with 75Ω) C: 0.286Vp-p (Burst signal, when terminated with 75Ω)
	<b>Video</b>	1Vp-p 75Ω (RCA pin jack)
	<b>Audio (L/R)</b>	500mVrms (-4dBs), High impedance (RCA pin jack)
<b>Video2</b>	<b>Video</b>	1Vp-p 75Ω (RCA pin jack)
	<b>Audio (L/R)</b>	500mVrms (-4dBs), High impedance (RCA pin jack)
<b>Video3</b>	<b>Video/Y</b>	Composite video 1Vp-p 75Ω (RCA pin jack) Component video 1Vp-p 75Ω (RCA pin jack)
	<b>Cb</b>	Component video B-Y 0.7Vp-p 75Ω (RCA pin jack)
	<b>Cr</b>	Component video R-Y 0.7Vp-p 75Ω (RCA pin jack)
	<b>Audio (L/R)</b>	500mVrms (-4dBs), High impedance (RCA pin jack)
<b>Video4</b>	<b>Video</b>	1Vp-p 75Ω (RCA pin jack)
	<b>Audio (L/R)</b>	500mVrms (-4dBs), High impedance (RCA pin jack)
<b>Video Audio Output terminal</b>		
	<b>Video</b>	1Vp-p 75Ω (RCA pin jack)
	<b>Audio (L/R)</b>	500mVrms (-4dBs), High impedance (RCA pin jack)
<b>Aerial Input Terminal</b>		75Ω Unbalanced, Coaxial
<b>Headphone Jack</b>		Stereo mini jack (3.5ø)
<b>AV Compu Link terminal</b>		AV Compu Link II, mini jack (3.5ø)
<b>Remote Control Unit</b>		RM-C113 (AA/R06 / UM-3 dry battery × 2)

*Design & specifications are subject to change without notice.*

# SPECIFIC SERVICE INSTRUCTIONS

## SETTING OF SYSTEM CONSTANT SET (Page 9)

Table 1

CONTENTS	VARIABLE RANGE	INITIAL SETTING VALUE
COLOUR	<input type="checkbox"/> MULTI <input type="checkbox"/> TRIPLE <input type="checkbox"/> PAL <input type="checkbox"/>	MULTI
MSP	<input type="checkbox"/> YES <input type="checkbox"/> NO <input type="checkbox"/>	NO
SUPER BASS	<input type="checkbox"/> YES <input type="checkbox"/> NO <input type="checkbox"/>	NO
CENTER SPEAKER	<input type="checkbox"/> YES <input type="checkbox"/> NO <input type="checkbox"/>	NO
TEXT	<input type="checkbox"/> YES <input type="checkbox"/> NO <input type="checkbox"/>	NO
BLUE BACK MUTE	<input type="checkbox"/> YES <input type="checkbox"/> NO <input type="checkbox"/>	NO
VOLUME LIMIT	<input type="checkbox"/> YES <input type="checkbox"/> NO <input type="checkbox"/>	YES
COLOUR AUTO	<input type="checkbox"/> YES <input type="checkbox"/> NO <input type="checkbox"/>	NO
TILT	<input type="checkbox"/> YES <input type="checkbox"/> NO <input type="checkbox"/>	YES
C-TRAP	<input type="checkbox"/> 1 <input type="checkbox"/> 0 <input type="checkbox"/>	1
E.M.C.	<input type="checkbox"/> YES <input type="checkbox"/> NO <input type="checkbox"/>	NO
N/S WHITE BACK	<input type="checkbox"/> YES <input type="checkbox"/> NO <input type="checkbox"/>	NO
7 LED SPEED	<input type="checkbox"/> 00 <input type="checkbox"/> 10 <input type="checkbox"/> 20 <input type="checkbox"/> ... <input type="checkbox"/> 1250 <input type="checkbox"/> 1270 <input type="checkbox"/> 1260 <input type="checkbox"/>	00

## USER SETTING CONDITIONS (Page 9)

Table 2

PICTURE SETTING		FEATURES	
PICTURE MODE	BRIGHT	SLEEP TIMER	OFF
CONTRAST	CENTER	ON TIMER	PR1 0:00
BRIGHT	CENTER	BLUE BACK	ON
SHARP	CENTER	CHILD LOCK	OFF
COLOUR	CENTER	CHANNEL GUARD	--
TINT	CENTER	AUTO SHUT OFF	OFF
WHITE BALANCE	COOL	VIDEO-3 SETTING	COMPONENT
PICTURE FEATURES		INSTALL	
A.A.C	ON	LANGUAGE	ENGLISH
AUTO VNR	AUTO	AUTO PROGRAM	--
COLOUR SYSTEM	TV: According to preset CH VIDEO: AUTO PAL	EDIT / MANUAL	PRESET CH only Others: blank
ZOOM	REGULAR	DEMO	
ECO SENSOR	OFF	DEMO	OFF
PICTURE TILT	CENTER	OTHERS	
SOUND SETTING		VOLUME	Appropriate sound level
BASS	CENTER	CHANNEL PRESET	Refer to Operating Instructions.
TREBLE	CENTER	CHANNEL POSITION	1 POSITION
BALANCE	CENTER	SUB POWER	ON
AI VOLUME	ON	ON SCREEN DISPLAY	POSITION INDICATION
BBE	ON	TV/VIDEO	TV
SPATIALIZER	OFF	SOUND SYSTEM	B/G

# SERVICE ADJUSTMENTS

## ■ Initial Setting Value

### ■ SETTING OF VSM PRESET (Page 18)

[INITIAL SETTING VALUES OF VSM PRESET (SUB MENU 5. VSM PRESET)]

ITEM \ PICTURE MODE	BRIGHT	STANDARD	SOFT
1. BRIGHT	+0	+0	+0
2. CONT	+17	+0	-4
3. COLOR	+0	+0	-1
4. SHARP	+0	+0	-3
5. TINT	+0	+0	+0

: Do not adjust.

### ■ SETTING OF WHITE BALANCE PRESET (Page 19)


[SETTING OF WHITE BALANCE PRESET (SUB MENU 6. WB PRESET)]

ITEM \ WHITE BALANCE	COOL	MID	WARM
1. R DRIVE	0	-3	+26
2. B DRIVE	0	-23	-27

: Do not adjust.

## ■ VIDEO / CHROMA CIRCUIT ADJUSTMENT (Page 19)

CONTENTS		PAL	SECAM	NTSC 3.58	NTSC 4.43
1. CUTOFF	R	-60			
	G	-60			
	B	-60			
2. DRIVE	R	+0			
	B	+0			
3. BRIGHT	TV	0	0	0	—
	VIDEO	+1	-4	-2	—
	COMPONENT	-3			
4. CONT	TV	0	0	0	—
	VIDEO	+2	0	+2	—
	COMPONENT	+2			
5. COLOUR	TV / VIDEO	+10	+18	+0	-2
	COMPONENT	+8		+18	
6. TINT	TV	+6	+6	-1	0
	VIDEO	+6	+6	+6	0
	COMPONENT	+6		-3	
7. BLACK OFFSET	R-Y	—	0	—	—
	B-Y	—	0	—	—
8. SHARP	TV	-15	-17	-15	—
	VIDEO	-13	-11	-12	—
	COMPONENT	-15			

 : Do not adjust.

### Adjustment of SUB COLOUR-II (Page 22)

Adjustment part	Description
<b>5. COLOUR</b>	
PAL COLOUR	Value (A) in the figure: Set to <b>0V (W &amp; G)</b> .
SECAM COLOUR	Value (A) in the figure: Set to <b>-5V (W &amp; G)</b> .
NTSC 3.58 COLOUR	Value (A) in the figure: Set to <b>+6V (W &amp; G)</b> .

### Adjustment of SUB TINT-II (Page 23)

Adjustment part	Description
<b>6. TINT</b>	
NTSC 3.58 TINT	Value (B) in the figure: Set to <b>+6V (W &amp; Cy)</b> .

## ■ DEFLECTION CIRCUIT ADJUSTMENT (Page 25)

[DEFLECTION ADJUSTMENTS INITIAL SETTING VALUE (SUB MENU 4. DEF)]

Setting item	Adjustment name	Initial setting value					
		REGULAR		ZOOM		16:9	
		50Hz	60Hz	50Hz	60Hz	50Hz	60Hz
1. V-SHIFT	Vertical shift	-3	0	+1	0	-1	0
2. V-SIZE	Vertical size	+13	0	+36	+35	-37	-37
3. SUBTITLE	Subtitle	0	+1	0	+7	0	0
4. H-CENT	Horizontal center	-9	+5	-1	-1	0	0
5. H-SIZE	Horizontal size	+11	-1	-9	-7	-1	0
6. EW-PIN	Side pin correction	-1	-1	-4	-5	+2	+1
7. TRAPEZ	Trapezoidal distortion correction	+4	-1	0	0	-1	+1
8. EW.COR.L	Corner pin correction Low side	-2	0	0	0	+1	+1
9. EW.COR.H	Corner pin correction High side	-2	0	0	0	+1	+1
10. V.S-COR	Vertical size correction	+9	0	0	0	0	0
11. V-LIN	Vertical Linearity	0	0	+1	0	0	0
12. H-BLK-R	Horizontal Blanking Right	0	0	0	0	+29	0
13. H-BLK-L	Horizontal Blanking Left	0	0	0	0	0	0
14. V-EHT	V size correction level caused by EHT change	-4	0	0	0	0	0
15. H-EHT	H size correction level caused by EHT change	-4	0	0	0	0	0
16. EHT-GAIN	Size correction gain caused by EHT change	0	0	0	0	0	0

: Do not adjust.

## ■ AUDIO CIRCUIT ADJUSTMENT (Page 29)

[AUDIO ADJUSTMENTS INITIAL SETTING VALUE (SUB MENU 3. AUDIO)]

Setting item	Variable range	Fixed value
1. ERROR LIMIT	000H ~ FF0H	100H
2. A2 ID THR	00H ~ FFH	14H
3. BASS	-17 ~ +17	+0
4. TREBLE	-17 ~ +17	+0

: Do not adjust.



# JVC

VICTOR COMPANY OF JAPAN, LIMITED

TELEVISION RECEIVER DIVISION 1106 Heta, Iwai-city, Ibaraki-prefecture, 306-0698, Japan

---

AV25P8PH-SK #3



CTH 0009  
CRT