


# Block diagram

XM-PX50WT/XM-PX50BU

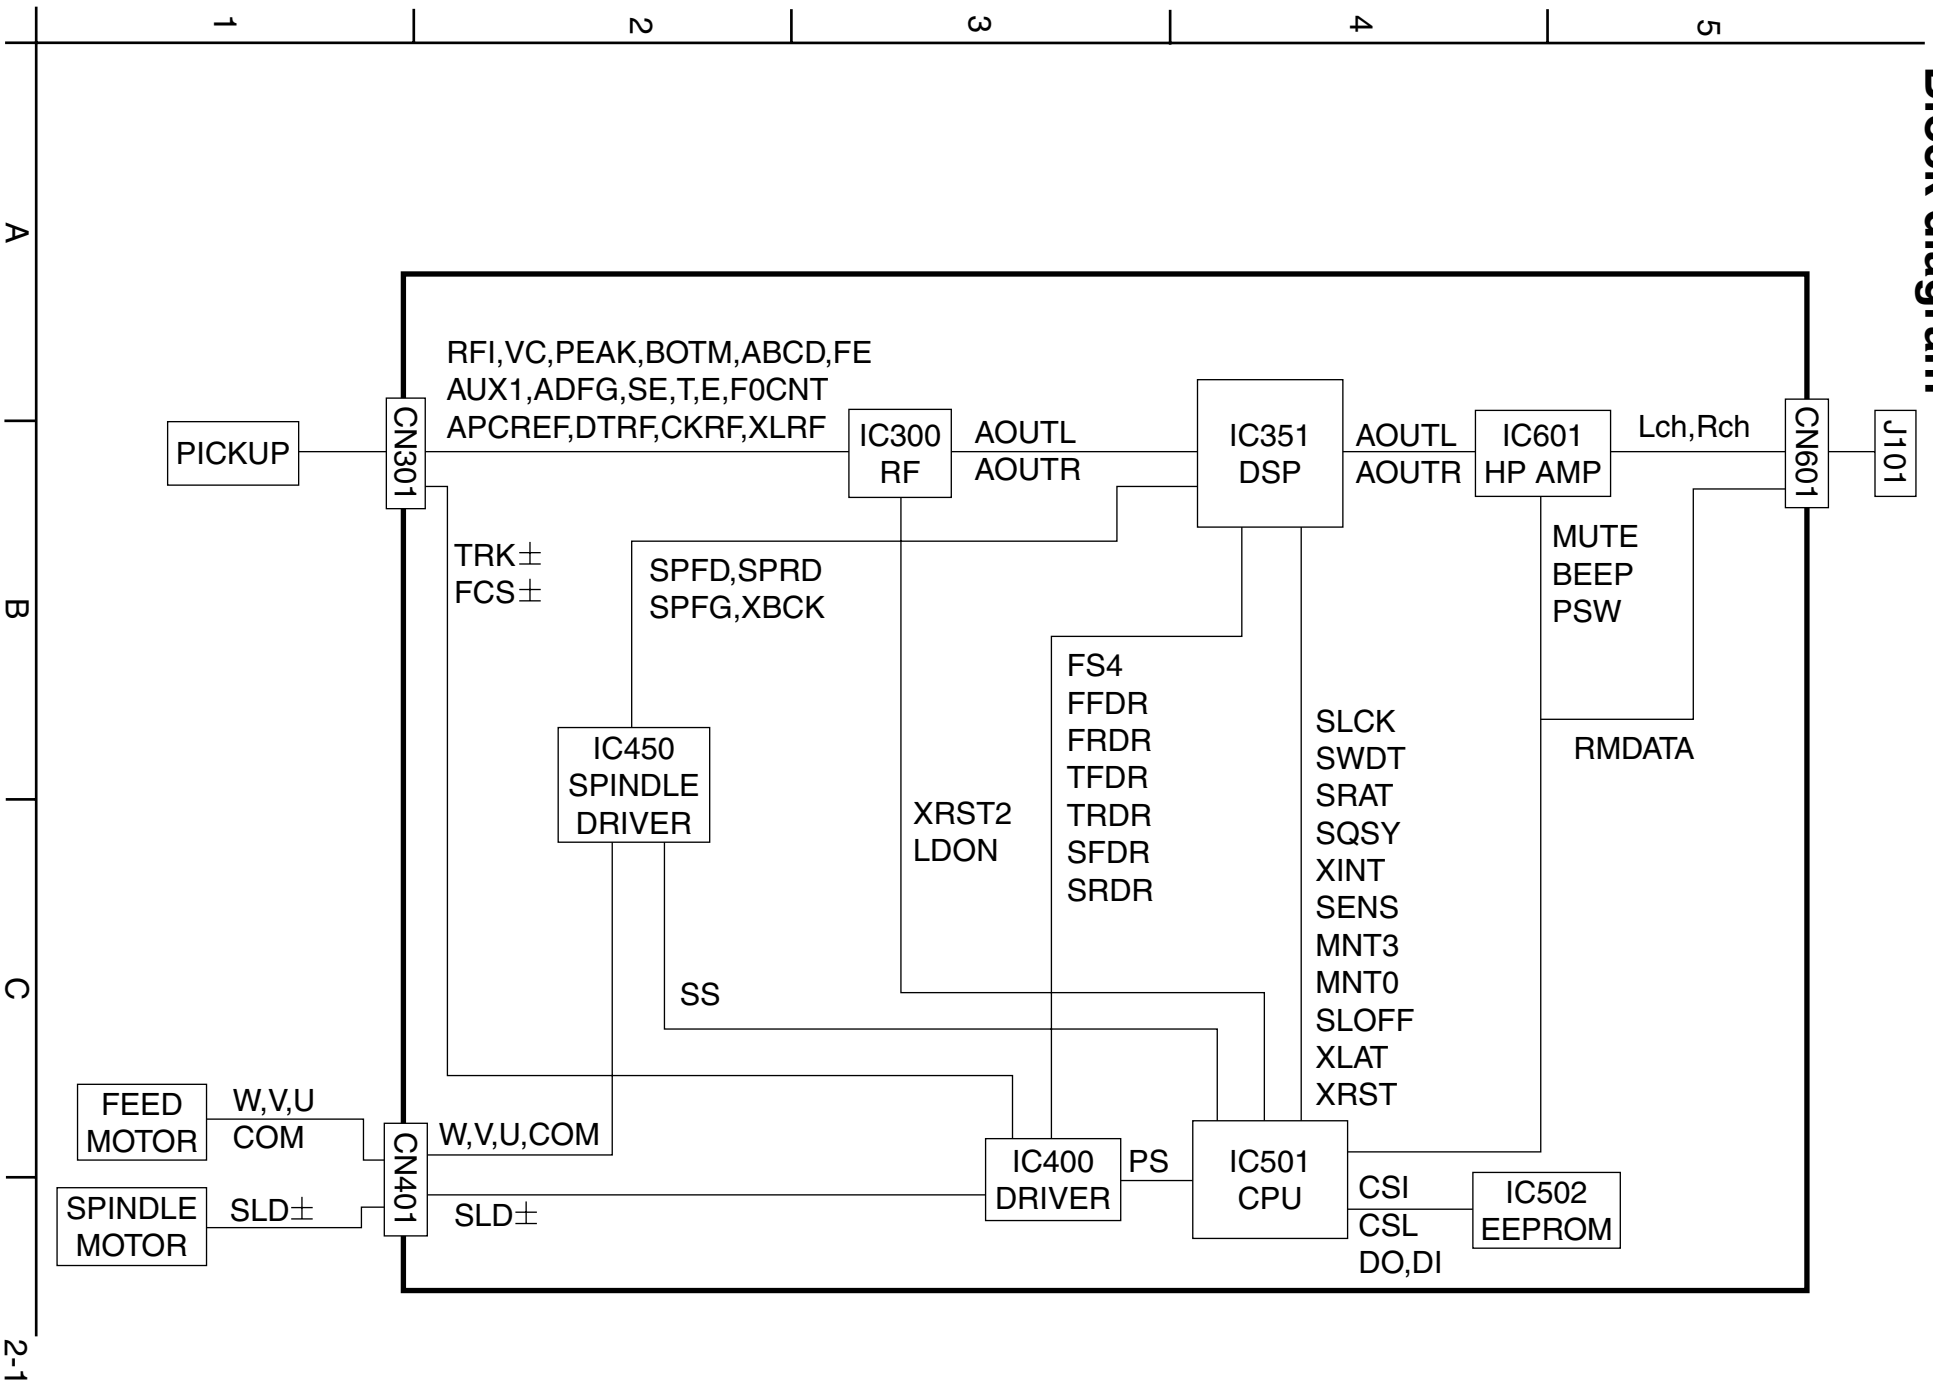

1

2

3

4

5

A

B


C

2-1


< M E M O >

# Standard schematic diagram

5  
4  
3  
2  
1

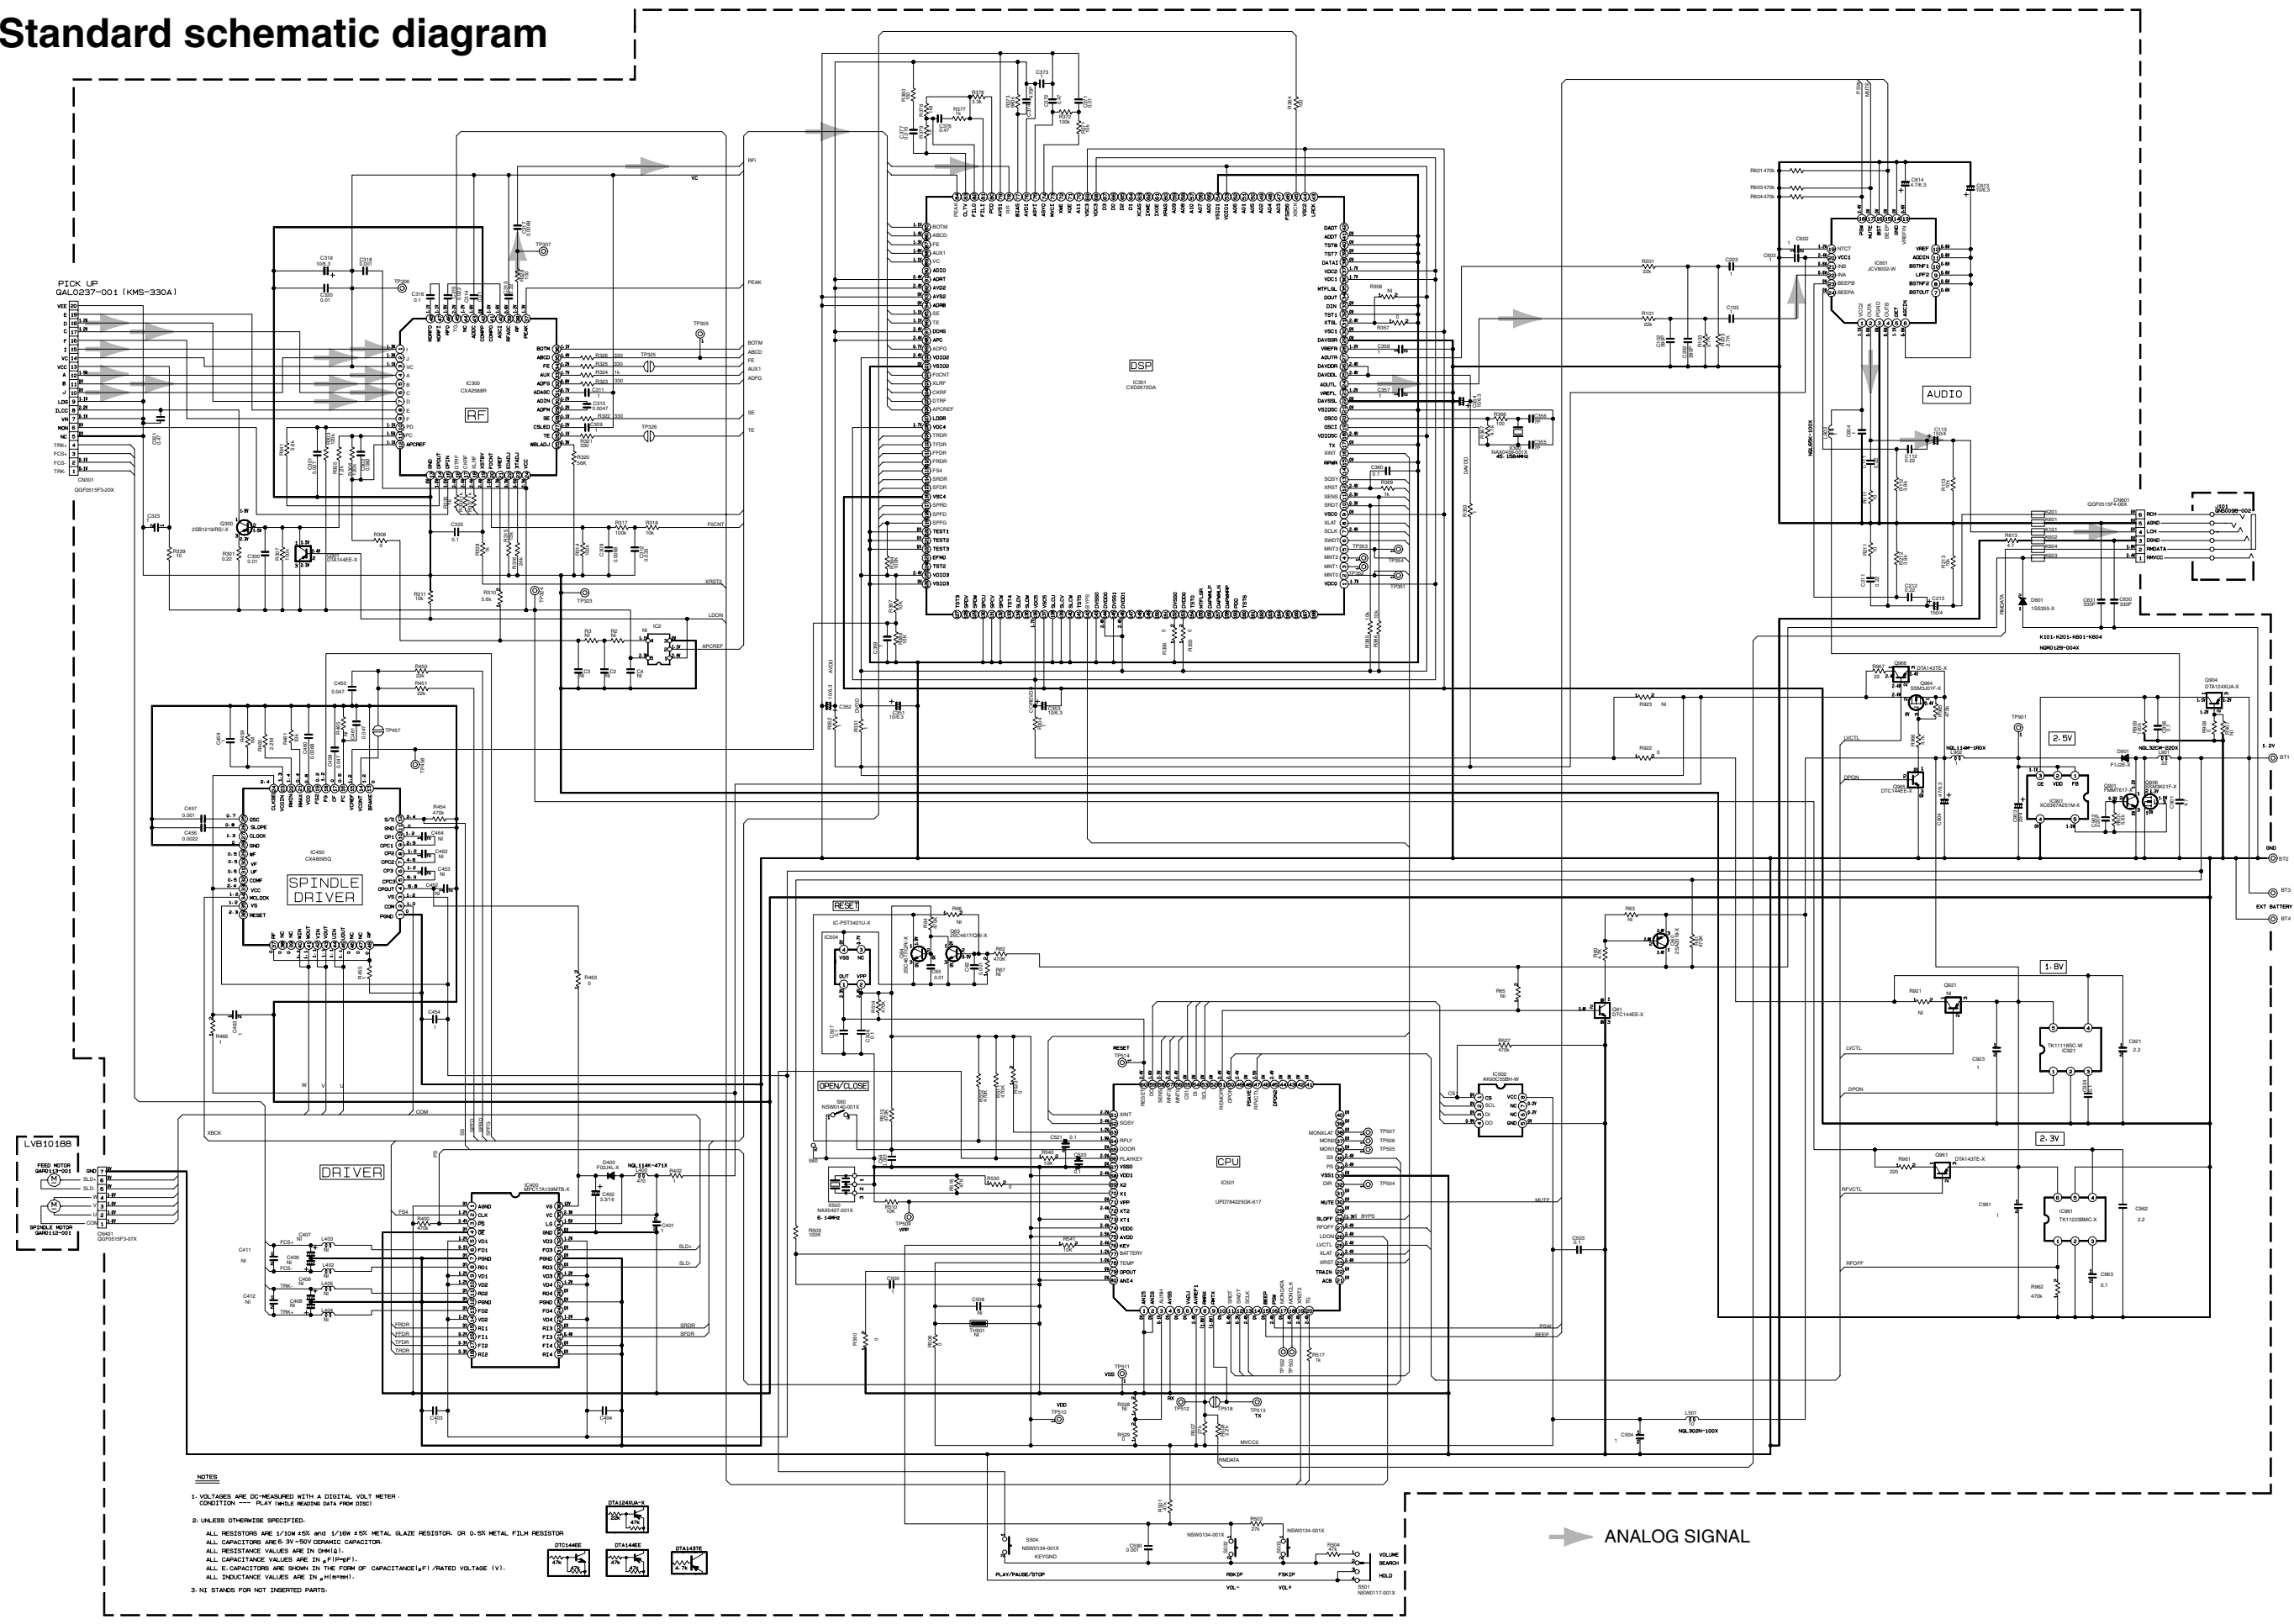

**NOTES**  
 1. VOLTAGES ARE DC-MEASURED WITH A DIGITAL VOLT METER - CONDITION: PLAY (WHEEL READING DATA FROM DISC)  
 2. UNLESS OTHERWISE SPECIFIED:  
 ALL RESISTORS ARE 1/16W ±5% 0805 1/16W ±5% METAL GLAZE RESISTOR, OR 0.5W METAL FILM RESISTOR  
 ALL CAPACITORS ARE 0.3V-50V CERAMIC CAPACITOR  
 ALL RESISTANCE VALUES ARE IN OHMS (Ω)  
 ALL CAPACITANCE VALUES ARE IN PICOFARADS (pF)  
 ALL INDUCTANCE VALUES ARE IN MICROHENRIES (μH)  
 ALL DIMENSIONS ARE IN MILLIMETERS (MM)  
 3. NC STANDS FOR NOT INSERTED PARTS.



➔ ANALOG SIGNAL

