

2015, 2015-P,  
2016, 2016-P

# 6½-Digit THD Multimeters 6½-Digit Audio Analyzing Multimeters



The Models 2015-P and 2016-P Audio Analyzing Digital Multimeters and the Models 2015 and 2016 Total Harmonic Distortion Multimeters combine audio band quality measurements and analysis with a full-function 6½-digit DMM. Test engineers can make a broad range of voltage, resistance, current, frequency, and distortion measurements, all with the same compact, half-rack measurement instrument. The Model 2016 and 2016-P have twice the sine wave generator output of the Model 2015 for applications that require test signals greater than 8Vrms. The Model 2015-P and 2016-P offer additional processing capacity for frequency spectrum analysis.

## Frequency Domain Distortion Analysis

For applications such as assessing non-linear distortion in components, devices, and systems, DSP-based processing allows the Models 2015-P, 2015, 2016, and 2016-P to provide frequency domain analysis in conventional time domain instruments.

They can measure Total Harmonic Distortion (THD) over the complete 20Hz to 20kHz audio band. They also measure over a wide input range (up to 750Vrms) and have low residual distortion (-87dB). The THD reading can be expressed either in decibels or as a percentage.

In addition to THD, the Models 2015, 2015-P, 2016, and 2016-P can compute THD+Noise and Signal-to-Noise plus Distortion (SINAD). For analyses in which the individual harmonics are the criteria of greatest interest, the instruments can report any of the (up to 64) harmonic magnitudes that can be included in the distortion measurements. The user can program the actual number of harmonics to be included in a computation, so accuracy, speed, and complexity can be optimized for a specific application.

## Optimized for Production Testing

The Models 2015, 2015-P, 2016, and 2016-P can perform fast frequency sweeps for characterizing audio-band circuitry in production test systems. For example, the instruments can execute a single sweep of 30 frequencies and transmit both rms voltage readings and THD readings to a computer in only 1.1 seconds. With that data, a complete frequency response analysis and a harmonic distortion vs. frequency analysis can be performed in a very short time. Thus high speed testing of the audio performance of a high volume device such as a cellular telephone can be performed without reducing the number of tests or reducing the measurements in each test. With these instruments, which are optimized for production testing, test engineers can lower test times, in comparison to test speeds achievable with general purpose audio analyzers, without sacrificing production test quality.

## Dual Output Source

The Models 2015, 2015-P, 2016, and 2016-P include an internal audio band sine wave source for generating stimulus signals. A second output, the inverse of the first output, is also available, simplifying the testing of differential input circuits for common mode or noise cancellation performance.

The Models 2015 and 2015-P have a 4Vrms single-ended output and 8Vrms differential source output. For tests that require a higher stimulus signal, the Model 2016 and 2016-P provide a 9.5Vrms single-ended output and a 19Vrms differential output.

## APPLICATIONS

- Wireless communication device audio quality testing
- Component linearity testing
- Lighting and ballast THD limit conformance testing
- Telephone and automotive speaker testing

1.888.KEITHLEY (U.S. only)

[www.keithley.com](http://www.keithley.com)

KEITHLEY

2015, 2015-P,  
2016, 2016-P

**Ordering Information**


- 2015 Total Harmonic Distortion 6½-Digit Multimeter
- 2015-P Audio Analyzing DMM
- 2016 Total Harmonic Distortion 6½-Digit DMM w/9V Source Output
- 2016-P Audio Analyzing DMM w/9V Source Output

These products are available with an Extended Warranty.

**Accessories Supplied**

Model 1751 Safety Test Leads, User Manual, Service Manual.

Figure 1. Total Harmonic Distortion Analysis and Frequency Response of a Portable Wireless Telecommunication Device

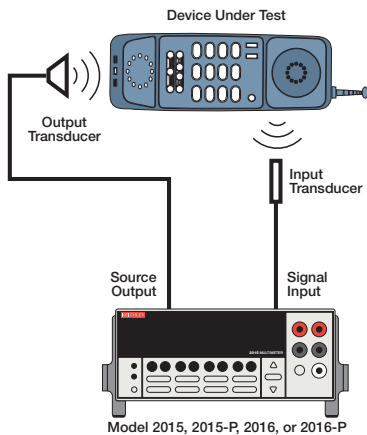

Figures 1, 2, and 3 demonstrate how the Model 2015, 2015-P, 2016, or 2016-P can provide both time domain and frequency domain measurements in a single test protocol. Figure 1 shows a sample test system schematic with a telecommunication device in a loop back mode test. The Audio Analyzing DMM's source provides a stimulus frequency sweep, and the Audio Analyzing DMM measures the response from the microphone circuit. Figure 2 shows the resulting frequency domain analysis of the THD and the first three harmonics as a function of frequency. Figure 3 shows the time domain analysis of microphone circuit output voltage as a function of frequency.

1.888.KEITHLEY (U.S. only)

www.keithley.com

# 6½-Digit THD Multimeters 6½-Digit Audio Analyzing Multimeters

**Wide Selection of Audio Filters**

Five industry-standard bandpass filters are provided for shaping the input signal for audio and telecommunication applications. Available filters include the CCITT weighting filter, CCIR filter, C-message filter, CCIR/ARM filter, and "A" weighting filter. The Models 2015, 2015-P, 2016, and 2016-P provide programmable, high cutoff (low pass) and low cutoff (high pass) filters. Furthermore, the two filters can be implemented together to form a bandpass filter. The programmable filters can be used to filter out noise generated by electromechanical machinery on the production floor or to simulate other types of system transmission characteristics.

**Broad Measurement Flexibility**

In addition to their THD, THD+Noise, SINAD, and individual harmonic measurement capabilities, the instruments provide a comprehensive set of DMM functions, including DCV, ACV, DCI, ACI, 2WΩ, 4WΩ, temperature, frequency, period, dB, dBm, and continuity measurements, as well as diode testing. This multi-functional design minimizes added equipment costs when configuring test setups.

Figure 2. THD and 2nd, 3rd, and 4th Harmonics as a Function of Frequency


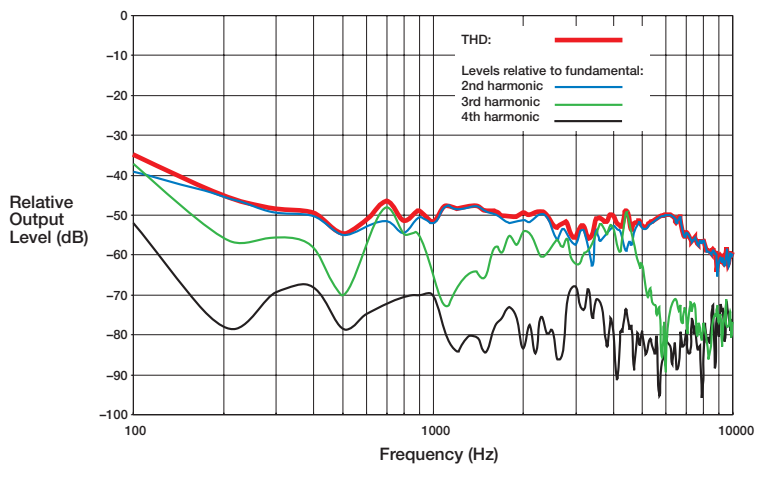


Figure 3. Frequency Response



Audio Analyzing and Total Harmonic Distortion DMMs

DMMS, DATA ACQUISITION/  
SWITCHING SYSTEMS

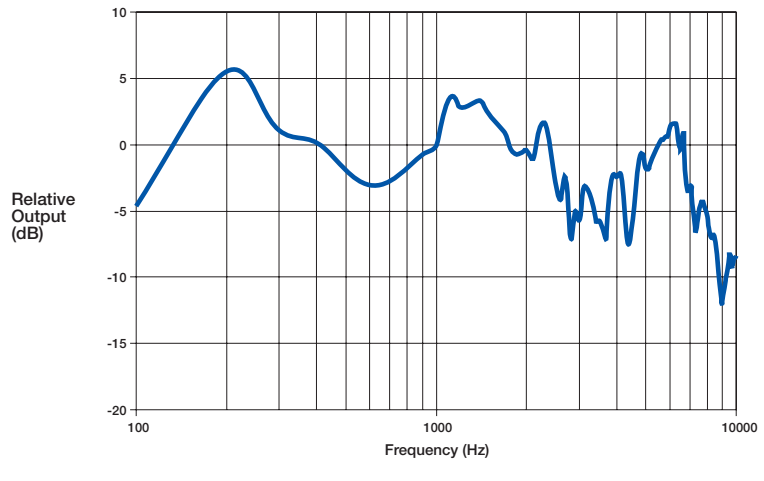

A GREATER MEASURE OF CONFIDENCE

# 2015, 2015-P, 2016, 2016-P

## Wide Band or Narrow Band Noise Measurements

The Models 2015, 2015-P, 2016, and 2016-P are capable of measuring both wide band noise and narrow band noise. Alternatively, these instruments' DSP (digital signal processing) capabilities allow users to make frequency domain measurements of RMS voltage noise over the 20Hz–20kHz frequency audio band or a narrow portion of the band. Furthermore, noise measurements can be extracted in the presence of a stimulus signal for fast signal-to-noise computations.

## Spectrum Analysis

The Model 2015-P and 2016-P have internal computational capabilities that allow them to characterize an acquired signal spectrum. These instruments can identify and report the frequency and amplitude of the highest value in a complete spectrum or within a specified frequency band. It can also identify additional peaks in descending order of magnitude. The Model 2015-P's and 2016-P's on-board capabilities make it simple to obtain a thorough analysis of a frequency spectrum more quickly and with little or no need for external analysis software.

# 6½-Digit THD Multimeters 6½-Digit Audio Analyzing Multimeters

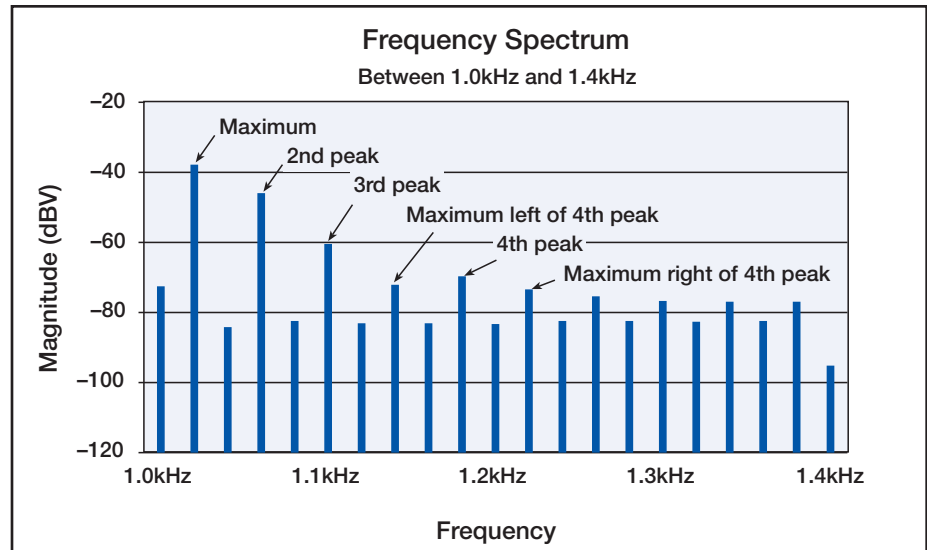


Figure 4. The Model 2015-P and 2016-P directly identify peak values of the frequency spectrum.

## ACCESSORIES AVAILABLE

### CABLES/ADAPTERS

7007-1	Shielded IEEE-488 Cable, 1m (3.3 ft)
7007-2	Shielded IEEE-488 Cable, 2m (6.6 ft)
8501-1, 8501-2	Trigger-Link Cables, 1m (3.3 ft), 2m (6.6 ft)
8502	Trigger Link Adapter Box
8503	Trigger Link Cable to 2 male BNCs, 1m (3.3 ft)
7009-5	RS-232 Cable


### RACK MOUNT KITS

4288-1	Single Fixed Rack Mount Kit
4288-2	Dual Fixed Rack Mount Kit

### OTHER

KPCI-488	IEEE-488 Interface/Controller for the PCI Bus
KPC-488.2AT	IEEE-488 Interface Card for IBM PC/AT (full slot)
KPC-TM	Trigger Master Interface
TestPoint	Test Development Software
1050	Padded Carrying Case
2015-EW	1 Year Warranty Extension
2015-P-EW	1 Year Warranty Extension
2016-EW	1 Year Warranty Extension
2016-P-EW	1 Year Warranty Extension

Rear panel of all models

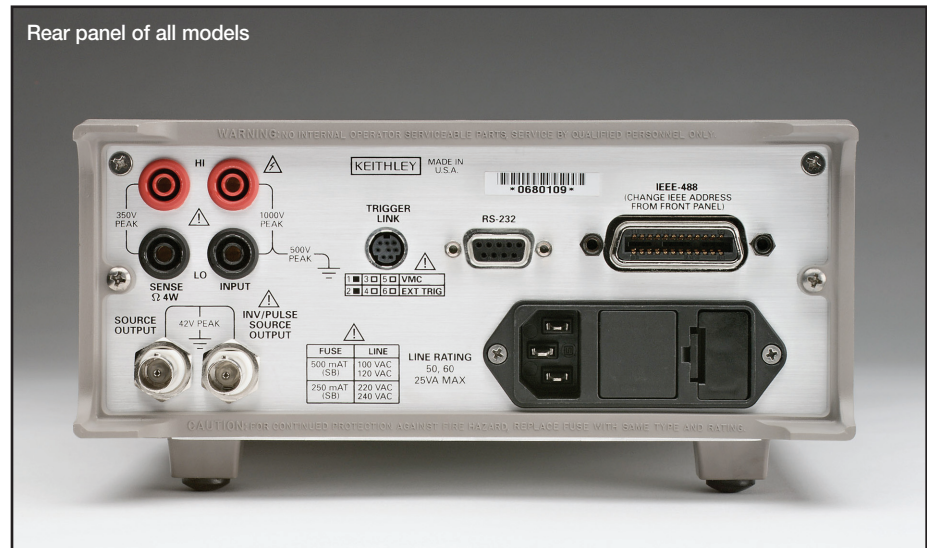

1.888.KEITHLEY (U.S. only)

[www.keithley.com](http://www.keithley.com)

**KEITHLEY**

A GREATER MEASURE OF CONFIDENCE

2015, 2015-P,  
2016, 2016-P

# 6½-Digit THD Multimeters 6½-Digit Audio Analyzing Multimeters

## DISTORTION CHARACTERISTICS

VOLTAGE RANGE: 100mV 1V 10V 100V 750V (user selectable).  
 INPUT IMPEDANCE: 1MΩ paralleled by <100pF.  
 DISPLAY RANGE: 0–100% or 0–100.00dB.  
 RESOLUTION: 0.0001% or 0.00001dB.  
 FUNDAMENTAL FREQUENCY RANGE: 20Hz–20kHz.  
 HARMONIC FREQUENCY RANGE: 40Hz–50kHz.  
 FREQUENCY RESOLUTION: 0.008Hz.  
 FREQUENCY ACCURACY: ±0.01% of reading.  
 FREQUENCY TEMPERATURE COEFFICIENT: ≤100ppm over operating temperature range.

MEASUREMENT MODE	ACCURACY (1 Year, 23°C ±5°C)	RESIDUAL DISTORTION <sup>1</sup>
THD and individual harmonic magnitudes	±0.8dB, 20Hz to 20kHz <sup>2</sup>	0.004% or –87dB 20Hz to 20kHz
THD + n	±1.5 dB, 100Hz to 20kHz <sup>2</sup>	0.056% or –65dB 20Hz to 20kHz
SINAD	±1.5dB 100Hz to 20kHz <sup>2</sup>	+65dB 20Hz to 20kHz
AC Level V rms	±(0.13% of reading + 0.009% of range) 20Hz to 20kHz	

## DISTORTION MEASUREMENT AUDIO FILTERS

None C-Message  
 CCITT Weighting CCIR/ARM  
 CCIR "A" Weighting

NUMBER OF HARMONICS INCLUDED IN THD CALCULATION: 2 to 64 (user selectable).  
 HI AND LO CUTOFF FILTERS (bus settable): 20Hz–50kHz. Can be combined to form brick-wall bandpass filter.

## DISTORTION MEASUREMENT READING RATE<sup>3</sup>

FUNDAMENTAL FREQUENCY ACQUISITION MODE	FUNDAMENTAL FREQUENCY RANGE	MINIMUM READINGS PER SECOND
Single acquisition or stored value	20 Hz to 100 Hz	14
	100 Hz to 1 kHz	24
	1 kHz to 20 kHz	28
Automatic	20 Hz to 30 Hz	5.5
	30 Hz to 400 Hz	6
	400 Hz to 20 kHz	6.6

## FREQUENCY SWEEP READING RATE

NUMBER OF FREQUENCIES	TIME (seconds) <sup>4</sup>
5	0.2
30	1.1
100	3.5
200	6.9

## NOTES

- Input signal at full scale.
- V<sub>N</sub> ≥20% of range and harmonics >–65dB.
- Speeds are for default operating conditions (\*RST), and display off, auto range off, binary data transfer, trig delay = 0.
- Typical times: frequencies in 400–4kHz range, binary data transfer, TRIG DELAY = 0, Display OFF, Auto Range OFF. Data returned is THD measurement plus AC voltage.

## GENERATOR CHARACTERISTICS

FREQUENCY RANGE: 10–20kHz.  
 FREQUENCY RESOLUTION: 0.007Hz.  
 FREQUENCY ACCURACY: ±(0.015% of reading + 0.007Hz)<sup>1</sup>.  
 FREQUENCY TEMPERATURE COEFFICIENT: <100ppm over operating temperature range.

## SOURCE OUTPUT:

WAVEFORM: Sinewave.  
 AMPLITUDE RANGE: 2015, 2015-P: 2V rms (50Ω and 600Ω) or 4V rms (HI Z).  
 2016, 2016-P: 4.75V rms (50Ω and 600Ω) or 9.5V rms (HI Z).  
 AMPLITUDE RESOLUTION: 2015, 2015-P: 0.5mV rms (50Ω and 600Ω) or 1mV rms (HI Z).  
 2016, 2016-P: 1.25mV rms (50Ω and 600Ω) or 2.5mV rms (HI Z).  
 AMPLITUDE ACCURACY: 2015, 2015-P: ±(0.3% of setting + 2mV)<sup>1,4</sup>.  
 2016, 2016-P: ±(0.3% of setting + 5mV)<sup>1,4</sup>.  
 AMPLITUDE TEMPERATURE COEFFICIENT: Typically 0.015%/°C.  
 AMPLITUDE FLATNESS: ±0.1dB<sup>1,4,5</sup>.  
 OUTPUT IMPEDANCE: 50Ω ± 1Ω or 600Ω ± 10Ω, user selectable.  
 THD: –64dB<sup>6</sup>.  
 NOISE: 2015, 2015-P: 100μV rms<sup>2</sup>.  
 2016, 2016-P: 250μV rms<sup>2</sup>.  
 DC OFFSET VOLTAGE: 2015, 2015-P: ±1.2mV<sup>1</sup>. 2016, 2016-P: ±3mV<sup>1</sup>.

## INV/PULSE OUTPUT (SINEWAVE MODE):

FREQUENCY: Same as source output.  
 AMPLITUDE RANGE: 2015, 2015-P: 2V rms (50Ω and 600Ω) or 4V rms (HI Z).  
 2016, 2016-P: 4.75V rms (50Ω and 600Ω) or 9.5V rms (HI Z).  
 AMPLITUDE RESOLUTION: 2015, 2015-P: 0.5mV rms (50Ω and 600Ω) or 1mV rms (HI Z).  
 2016, 2016-P: 1.25mV rms (50Ω and 600Ω) or 2.5mV rms (HI Z).  
 AMPLITUDE ACCURACY: 2015, 2015-P: ±(2.0% of setting + 2mV)<sup>1,4</sup>.  
 2016, 2016-P: ±(2.0% of setting + 5mV)<sup>1,4</sup>.  
 AMPLITUDE FLATNESS: ±0.1dB<sup>1,4,5</sup>.  
 OUTPUT IMPEDANCE: Same as Source Output setting.  
 THD: –64dB<sup>6</sup>.  
 NOISE: 2015, 2015-P: 100μV rms<sup>2</sup>.  
 2016, 2016-P: 250μV rms<sup>2</sup>.  
 DC OFFSET VOLTAGE: 2015, 2015-P: ±1.1mV typ., ±13mV max.<sup>1</sup>  
 2016, 2016-P: ±3mV typ., ±13mV max.<sup>1</sup>

## INV/PULSE OUTPUT (PULSE MODE):

FREQUENCY: Same as source output.  
 DUTY CYCLE: 45% ±3%.  
 OUTPUT IMPEDANCE: Same output impedance as the source output.  
 AMPLITUDE: 0.0V ±0.07V to 4.9V ±0.12V pulse open circuit<sup>1,3</sup>.  
 0.0V ±0.05V to 3.3V ±0.08V pulse 100Ω load<sup>1,3</sup>.  
 OVERSHOOT: 1.0V maximum pulse open circuit<sup>3</sup>.  
 0.2V maximum with 100Ω load pulse open circuit<sup>3</sup>.  
 UNDERSHOOT: 1.1V maximum pulse open circuit<sup>3</sup>.  
 0.45V maximum with 100Ω load pulse open circuit<sup>3</sup>.

## NOTES

- 1 year, 23°C ±5°C.
- Measured at V<sub>OUT</sub> = 0V with gain 100 amplifier and 2-pole 50kHz low pass filter, Inv/Pulse in sinewave mode, HI Z output impedance, and no load.
- With HI Z output impedance and 1m 50Ω coaxial cable.
- HI Z output impedance, no load.
- 4V output.
- THD measurement includes harmonics 2 through 5, 1V rms output, HI Z, no load.

Model 2015, 2015-P, 2016 Specifications

DMMS, DATA ACQUISITION/  
SWITCHING SYSTEMS

1.888.KEITHLEY (U.S. only)

www.keithley.com

KEITHLEY

A GREATER MEASURE OF CONFIDENCE

# 2015, 2015-P, 2016, 2016-P

# 6½-Digit THD Multimeters 6½-Digit Audio Analyzing Multimeters

Model 2015, 2015-P, 2016 Specifications

## DC VOLTAGE

RANGE	RESOLUTION	ACCURACY 23°C ± 5°C ±(ppm of rdg. + ppm of range)		INPUT RESISTANCE
		90 DAY	1 YEAR	
100.0000 mV	0.1 μV	40 + 35	50 + 35	> 10 GΩ
1.000000 V	1.0 μV	25 + 7	30 + 7	> 10 GΩ
10.00000 V	10 μV	20 + 5	30 + 5	> 10 GΩ
100.0000 V	100 μV	30 + 6	45 + 6	10 MΩ ± 1%
1000.000 V	1 mV	35 + 6	45 + 6	10 MΩ ± 1%

## RESISTANCE

RANGE	RESOLUTION	ACCURACY 23°C ± 5°C ±(ppm of rdg. + ppm of range)		TEST CURRENT
		90 DAY	1 YEAR	
100.0000 Ω	100 μΩ	80 + 40	100 + 40	1 mA
1.000000 kΩ	1 mΩ	80 + 10	100 + 10	1 mA
10.00000 kΩ	10 mΩ	80 + 10	100 + 10	100 μA
100.0000 kΩ	100 mΩ	80 + 10	100 + 10	10 μA
1.000000 MΩ	1 Ω	80 + 10	100 + 10	10 μA
10.00000 MΩ	10 Ω	200 + 10	400 + 10	700 nA
100.0000 MΩ	100 Ω	1500 + 30	1500 + 30	700 nA

## DC CURRENT

RANGE	RESOLUTION	ACCURACY 23°C ± 5°C ±(ppm of rdg. + ppm of range)		BURDEN VOLTAGE
		90 DAY	1 YEAR	
10.00000 mA	10 nA	300 + 80	500 + 80	< 0.15 V
100.0000 mA	100 nA	300 + 800	500 + 800	< 0.03 V
1.000000 A	1 μA	500 + 80	800 + 80	< 0.3 V
3.00000 A	10 μA	1200 + 40	1200 + 40	< 1 V

## CONTINUITY 2W

RANGE	RESOLUTION	ACCURACY 23°C ± 5°C ±(ppm of rdg. + ppm of range)		TEST CURRENT
		90 DAY	1 YEAR	
1 kΩ	100 mΩ	100 + 100	120 + 100	1 mA

## DIODE TEST

RANGE	RESOLUTION	ACCURACY 23°C ± 5°C ±(ppm of rdg. + ppm of range)		TEST CURRENT
		90 DAY	1 YEAR	
3.00000 V	10 μV	30 + 7	40 + 7	1 mA
10.00000 V	10 μV	30 + 7	40 + 7	100 μA
10.00000 V	10 μV	30 + 7	40 + 7	10 μA

## DC OPERATING CHARACTERISTICS

DIGITS	READINGS/s	PLCs	RMS NOISE 10V RANGE	NMRR	CMRR
6½	5	10	< 1.5 μV	60 dB	140 dB
6½	50	1	< 4 μV	60 dB	140 dB
5½	500	0.1	< 22 μV	—	80 dB
4½	2000	0.01	< 150 μV	—	80 dB

## DC SYSTEM SPEEDS 2, 6

RANGE CHANGE<sup>3</sup>: 50 / s.  
 FUNCTION CHANGE<sup>3</sup>: 45 / s.  
 AUTORANGE TIME<sup>3, 10</sup>: < 30 ms.  
 ASCII READINGS TO RS-232 (19.2K BAUD): 55 / s.  
 MAX. INTERNAL TRIGGER RATE: 2000 / s.  
 MAX. EXTERNAL TRIGGER RATE: 400 / s.

## TRUE RMS AC VOLTAGE AND CURRENT CHARACTERISTICS

RANGE	RESOLUTION	FREQUENCY RANGE	ACCURACY (1 Year), 23°C ± 5°C
			±(% of reading + % of range)
100 mV to 750 V	0.1 μV to 1 mV	3 Hz–10 Hz	0.35 + 0.03
		10 Hz–20 kHz	0.06 + 0.03
		20 kHz–50 kHz	0.12 + 0.05
		50 kHz–100 kHz	0.60 + 0.08
		100 kHz–300 kHz	4 + 0.5

## AC OPERATING CHARACTERISTICS

FUNCTION	DIGITS	READINGS/s	RATE	BANDWIDTH
ACV (all ranges), and	6½	2s/reading	SLOW	3 Hz–300 kHz
ACI (all ranges)	6½	1.4	MED	30 Hz–300 kHz
	6½	4.8	MED	30 Hz–300 kHz
	6½	2.2	FAST	300 Hz–300 kHz
	6½	35	FAST	300 Hz–300 kHz

## FREQUENCY AND PERIOD CHARACTERISTICS

ACV RANGE	FREQUENCY RANGE	PERIOD RANGE	GATE TIME	RESOLUTION ±(ppm of reading)	ACCURACY 90 DAY/1 YEAR ±(% of reading)
100 mV	3 Hz	333 ms	1 s (SLOW)	0.333	0.01
to	to	to	0.1 s (MED)	3.33	0.01
750 V	500 kHz	2 μs	10 ms (FAST)	33.3	0.01

## FREQUENCY NOTES

- Specifications are for squarewave inputs >10% of ACV range, except 100mV range. On 100mV range frequency must be >10Hz if voltage is <20mV
- 20% overrange on all ranges except 750V range.

## TEMPERATURE CHARACTERISTICS

THERMOCOUPLE TYPE	RANGE	RESOLUTION	90 DAY/1 YEAR (23°C ± 5°C) ACCURACY Relative to Reference Junction		USING 2001-TCSCAN <sup>5</sup>
			Reference Junction	Using	
J	–200 to + 760°C	0.001°C	±0.5°C	±0.65°C	±0.65°C
K	–200 to + 1372°C	0.001°C	±0.5°C	±0.70°C	±0.70°C
T	–200 to + 400°C	0.001°C	±0.5°C	±0.68°C	±0.68°C

## GENERAL SPECIFICATIONS

**POWER SUPPLY:** 100V / 120V / 220V / 240V ± 10%.  
**LINE FREQUENCY:** 45Hz to 66Hz, automatically sensed at power-up.  
**POWER CONSUMPTION:** 22VA.  
**OPERATING ENVIRONMENT:** Specified for 0°C to 50°C. Specified to 80% R.H. at 35°C.  
**STORAGE ENVIRONMENT:** –40°C to 70°C.  
**WARRANTY:** 3 years.  
**SAFETY:** Conforms with European Union Directive 73/23/EEC, EN 610110-1, UL 3111-1.  
**EMC:** Conforms with European Union Directive 89/336/EEC, EN 55011, EN 50082-1, EN 61000-3-2, EN 61000-3-3, FCC part 15 class B.  
**WARMUP:** 1 hour to rated accuracy.  
**DIMENSIONS:** Rack Mounting: 89mm high × 213mm wide × 370mm deep (3½ in × 8½ in × 14¾ in).  
**Bench Configuration (with handle and feet):** 104mm high × 238mm wide × 370mm deep (4¼ in × 9½ in × 14¾ in).  
**NET WEIGHT:** 2.9kg (6.3 lbs).  
**SHIPPING WEIGHT:** 5kg (11 lbs).  
**VOLT HERTZ PRODUCT:** ≤ 8 × 10<sup>7</sup> V·Hz.  
**ACCESSORIES SUPPLIED:** Model 1751 Safety Test Leads, User Manual.

1.888.KEITHLEY (U.S. only)

www.keithley.com

**KEITHLEY**

A GREATER MEASURE OF CONFIDENCE

DMMS, DATA ACQUISITION/  
SWITCHING SYSTEMS