


KENWOOD

SIRIUS 




Here<sub>2</sub>Anywhere™

**KPA-H2CFM**  
Car Docking Kit  
Installation Guide


## Box contents

Unpack your KPA-H2CFM kit carefully and make sure that everything listed here is present:


1 x Cradle & base

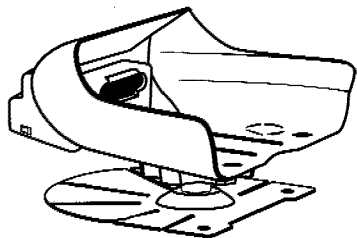


1 x Antenna



1 x Cigarette lighter power adapter



1 x Audio Cable



1 x Carry Bag



1 x Hardware bag



If anything is missing or damaged, notify your dealer immediately. If your KPA-H2CFM was shipped to you directly, notify your shipper immediately. Kenwood recommends that you retain the original carton and packing materials in case you need to ship your KPA-H2CFM in the future.

## Safety precautions

### Warning

Take the following precautions to prevent traffic accidents and avoid personal injury:

- Installation must be performed according to this installation manual. Kenwood is not responsible for issues arising from installations not performed according to the procedures in this manual.
- Do not install the unit where it may obstruct your view through the windshield or of your vehicle's indicator displays.
- Do not install the unit where it may hinder the function of safety devices such as an airbag. Doing so may prevent the airbag from functioning properly in the event of an accident.
- The installation and use suggestions contained in this manual are subject to any restrictions or limitations that may be imposed by applicable law—the purchaser should check applicable law for any restrictions or limitations before installing and/or operating this unit.
- Failure to follow these safety instructions and warnings may result in a serious accident.

### Caution

Take the following precautions to keep the unit in proper working order:

- Be sure the unit is connected to a 12V DC power supply with a negative ground connection.
- Do not install the unit where it will be exposed to high levels of humidity, moisture, or dust.
- When replacing a fuse, use only a new one with the proper rating. Using a fuse with the wrong rating may cause the unit to malfunction.
- To prevent a short circuit when replacing a fuse, first unplug the cigarette lighter adapter from the cigarette lighter.
- When drilling holes to mount the unit, make sure not to damage wiring or other systems on the other side.

### FCC Warning

This equipment may generate or use radio frequency energy. Changes or modifications to this equipment may cause harmful interference unless the modifications are expressly approved in the instruction manual. The user could lose the authorization to operate this equipment if an unauthorized change or modification is made.


## Installation in a vehicle

Note: Do not put Here<sub>2</sub>Anywhere in the cradle until you have completed the installation.

### 1. Determine where you want to mount Here<sub>2</sub>Anywhere.

- Do not install Here<sub>2</sub>Anywhere where it may obstruct your view through the windshield or your view of your vehicle's indicator displays.
- Do not install Here<sub>2</sub>Anywhere where it will hinder your access to the vehicle's controls.
- Do not install Here<sub>2</sub>Anywhere where it may hinder the function of safety devices such as an airbag. Doing so may prevent the air-bag from functioning properly in the event of an accident.
- Find a location that provides good visibility of and access to Here<sub>2</sub>Anywhere's front panel.
- Kenwood strongly recommends that you mount Here<sub>2</sub>Anywhere in a location where the base can be attached with the provided screws.


### 2. The leaves on the base can be bent to conform to curved mounting surfaces.

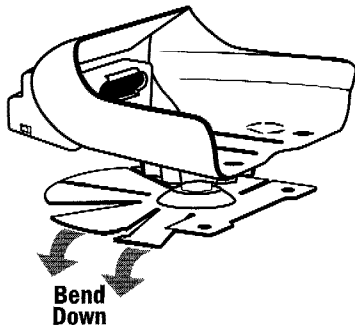

### 3. Peel the covering away from the adhesive on the bottom of the base and adhere it to the mounting surface. Use the provided screws to securely attach the base to the surface.

- If using screws, be sure that you do not damage wiring or other systems on the other side of the mounting surface..

### 3A. Set the FM Transmit switch on the side of the cradle to ON (right).




Note: To avoid possible interference with FM radio reception, set the FM Transmit switch to OFF when you're not using Here<sub>2</sub>Anywhere.

### 3B. Set the FM frequency switch on the back of the cradle to a frequency that's not being used by an FM station in your area (below). When you want to listen to Here<sub>2</sub>Anywhere, tune your car stereo's FM radio to this frequency.




## Installation in a vehicle (continued):

3C. If your car stereo has an aux input, you can connect Here<sub>2</sub>Anywhere directly to it instead of using the FM transmitter. Plug the supplied audio cable into the back of the cradle, as shown; plug the red and white connectors into your car stereo.

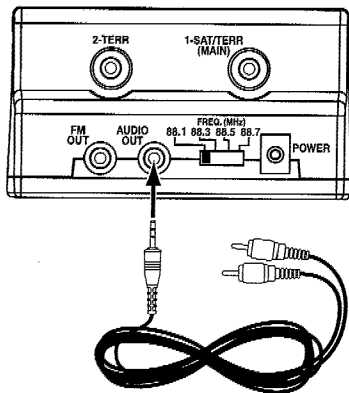


4. Plug the cigarette lighter adapter into the back of the cradle, as shown. Don't plug the adapter into the cigarette lighter until the installation is completed.

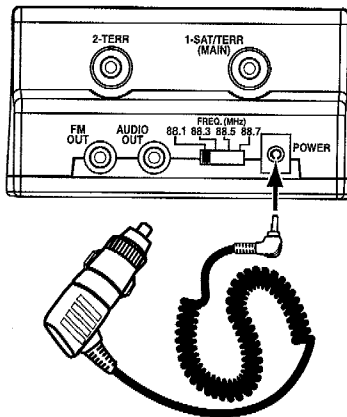

## Mounting the included antenna:


1. Temporarily plug the antenna into the "1-Sat/Terr (Main) connector on the back of the cradle until it is firmly seated, as shown.

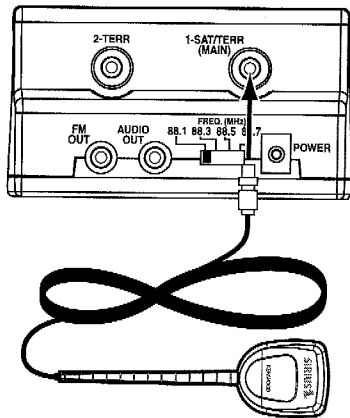

## Mounting the antenna (continued):

Note: If you're using the Kenwood CX-SR10 SIRIUS antenna, you'll need to remove the plastic housings from the antenna connectors before connecting it to the cradle. Once you've removed the housings, connect the wire that had the yellow connector to the connector on the cradle labeled "1-Sat/Terr (Main)", and connect the other one to the connector labeled "2-Terr".


2. Find an antenna location on a metal surface at least 12" x 12". The antenna should be mounted exactly 5.5" (the length of the antenna's tail) away from the vehicle's rear window, so that only the portion of the cable protected by the

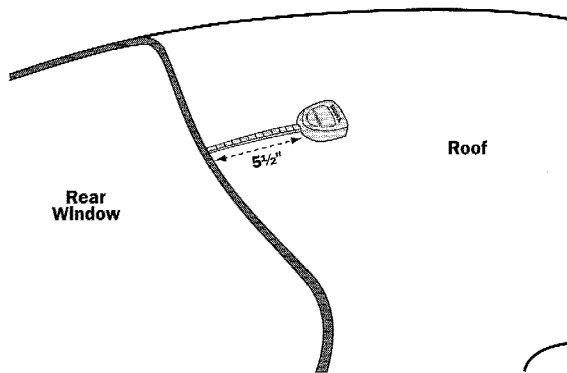

tail is exposed, as shown below and to the left. The antenna's 3 powerful magnets will secure it to the metal surface.

- Do not shorten the antenna's tail. Doing so could damage the cable, since its insulation is integrated with the tail.
  - Best reception is achieved with the antenna mounted on the roof; mounting on the trunk lid will work for convertibles.
  - If the vehicle has a roof rack or skid ribs, it may be necessary to mount the antenna off-center.
2. Before permanently mounting the antenna and routing the cable, confirm that the antenna is mounted in a good location:
    - a. Temporarily plug the cigarette lighter adapter into the cigarette lighter.
    - b. Slide Here<sub>2</sub>Anywhere all the way into the cradle so that the connector at the rear of the unit makes proper contact in the cradle. Press the POWER button to turn Here<sub>2</sub>Anywhere on.
    - c. If your Here<sub>2</sub>Anywhere has been properly connected and the antenna is receiving the SIRIUS signal (preview stream #184) you will hear audio. If you do not hear audio, the display will read "Acquiring Signal". Re-orient the antenna until you hear audio.
      - Make sure the vehicle is not in garage, or somewhere the satellite signal could be blocked
  3. Turn Here<sub>2</sub>Anywhere's power off and remove it from the cradle; unplug the cigarette lighter adapter from the cigarette lighter; unplug the antenna from the cradle.

4. Remove the yellow protective backing from the adhesive strip and firmly adhere it to the underside of the antenna tail. (Do not remove the red protective backing at this time.)
5. Once the strip is adhered to the tail, remove the red protective backing from the adhesive and firmly adhere the tail to the vehicle.
  - At room temperature, maximum adhesion usually occurs within 72 hours. During this period, car washes and other contact with the antenna and tail should be avoided.

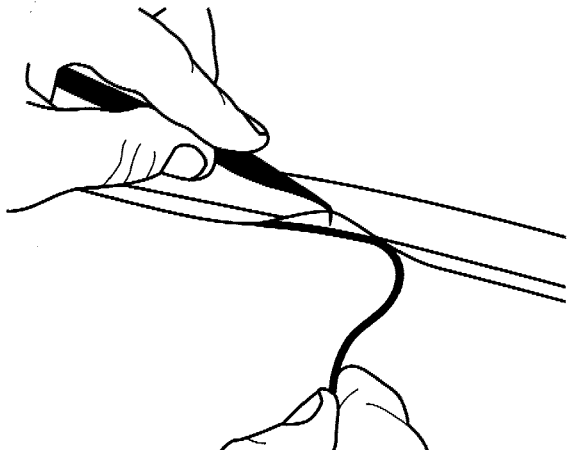

6. Route the exposed portion of the antenna cable from the end of the tail to the vehicle's interior by tucking it underneath the rubber molding around the vehicle's rear window, as shown below and to the left.
7. Route the cable from the lowest point of the rear window into the trunk. Take advantage of any existing cable channels or wiring conduits.
  - For SUVs, minivans & 5-door vehicles, bring the cable into the vehicle under the rubber molding for the tailgate, and continue under the interior trim.
8. From the trunk, route the cable around the passenger compartment and to the back of the cradle.
  - Do not pull the cable across sharp edges that could damage it.
  - Keep the cable away from areas where it could become tangled in driver's and passenger's feet.
9. Plug the antenna into the back of the cradle (see pg. 5, Step 1).
10. Plug the cigarette lighter adapter into the cigarette lighter.
  - **KENWOOD RECOMMENDS UNPLUGGING THE CIGARETTE LIGHTER ADAPTER AFTER YOU TURN THE VEHICLE'S IGNITION OFF.** (In some vehicles, the cigarette lighter remains active after the ignition has been turned off, and leaving Here<sub>2</sub>Anywhere's cigarette lighter adapter plugged-into the cigarette lighter could drain the vehicle's battery.)

You're now ready to use Here<sub>2</sub>Anywhere.

# KENWOOD

[www.kenwoodusa.com](http://www.kenwoodusa.com)

[www.kenwoodusa.com/Inquiry](http://www.kenwoodusa.com/Inquiry)

**1-800-KENWOOD**

**Main Office**

P.O. Box 22745

Long Beach, CA 90801-5745

©2003 Kenwood USA Corporation.  
All Rights Reserved.

0021-0403-H2CFM INST