

After installing all components, connect the wiring according to Fig. 3.

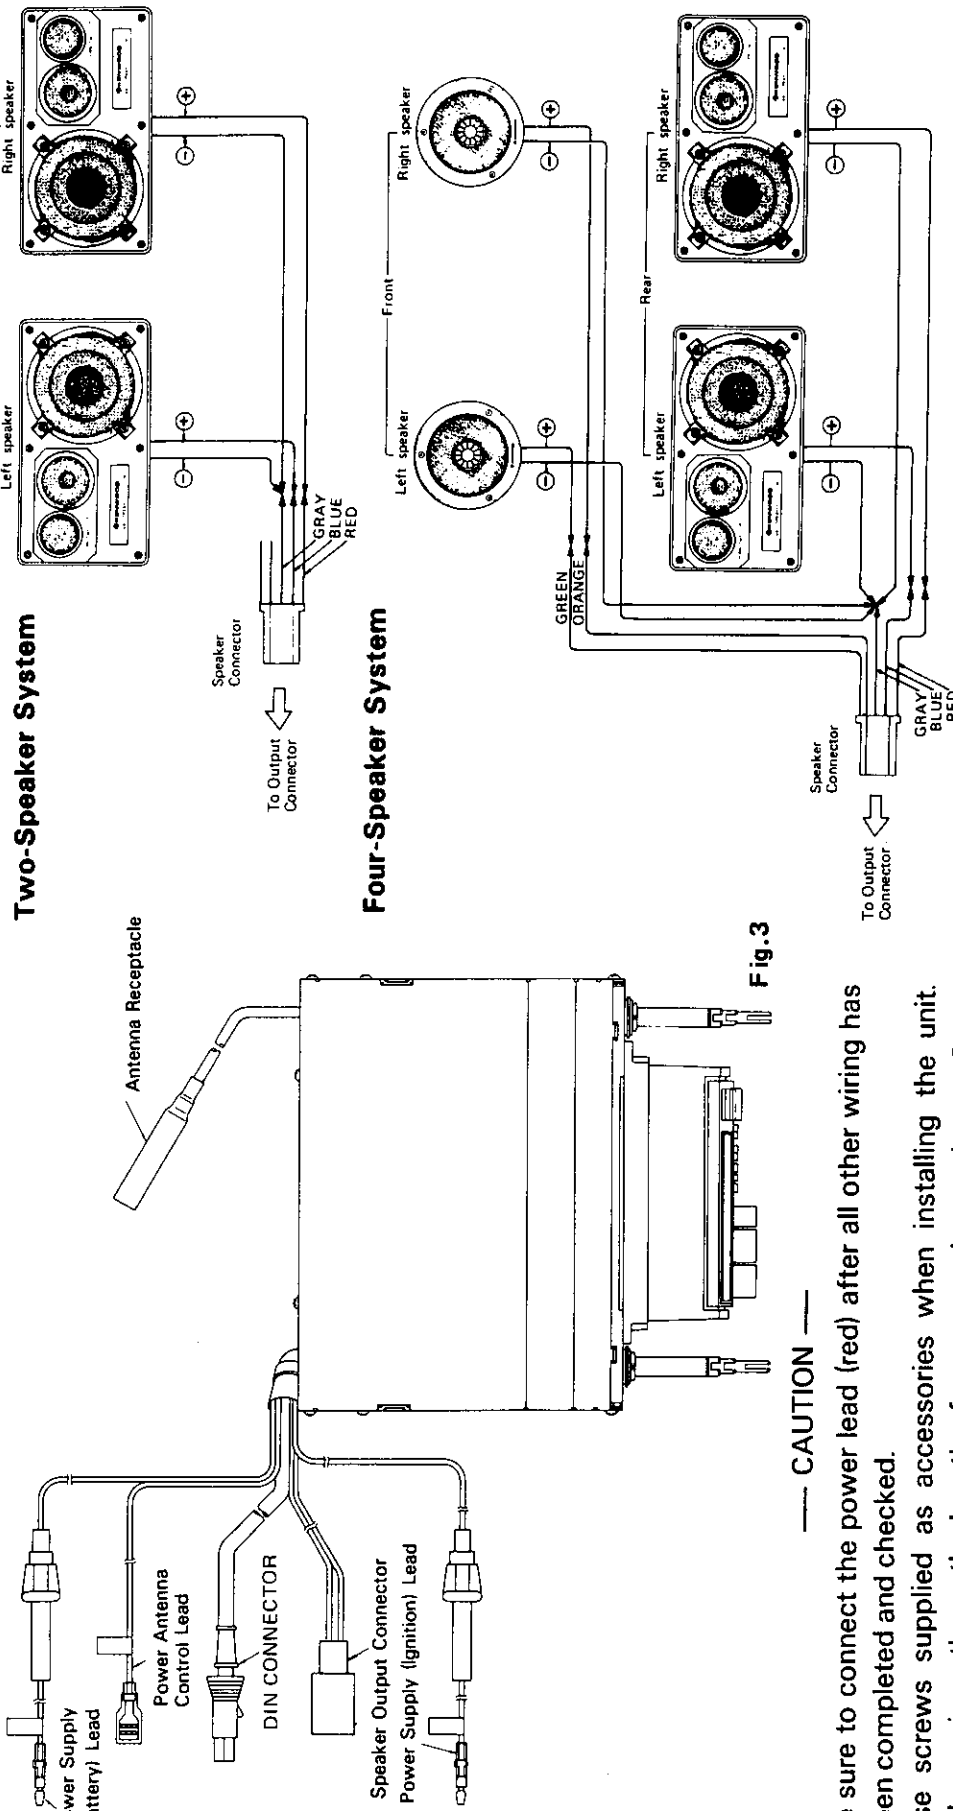


Fig. 3

CAUTION

Be sure to connect the power lead (red) after all other wiring has been completed and checked. Use screws supplied as accessories when installing the unit. When using others, the length of screw can be used up to 6 mm (M5) for side or/and rear panel.

NOTE: When using two-speaker systems, be sure to cover the two other unused lead wires at the speaker connector with tape or use wire nuts to insulate them.

NOTE: Be sure to connect the speaker cable to the speaker connector cable either with a wire nut or solder, and then cover with tape.