


SPECIFICATIONS

Transmit frequency range: 144 to 146 MHz
 Mode: F3
 RF output power: 10W (at DC13.8V and 50 Ω antenna impedance)
 Drive input: 0.8W to 1.5W
 Input impedance: 50 Ω
 Antenna impedance: 50 Ω
 Spurious radiation: Less than -60dB (with TR-2300)
 DC current: Less than 2.7A (with TR-2300)
 (13.8V, HIGH position)
 Power supply: 11.5 to 16V DC (standard: 13.8V)
 Grounding: Negative grounding
 Dimensions: 64 (66)W x 51 (54)H x 170 (194) D (mm)
 (Figures in () include projections)
 Weight: Approx. 680 gr.



SCHEMATHEEK
 Beh. T. Hultermans
 Postbus 4228
 5604 EE Eindhoven

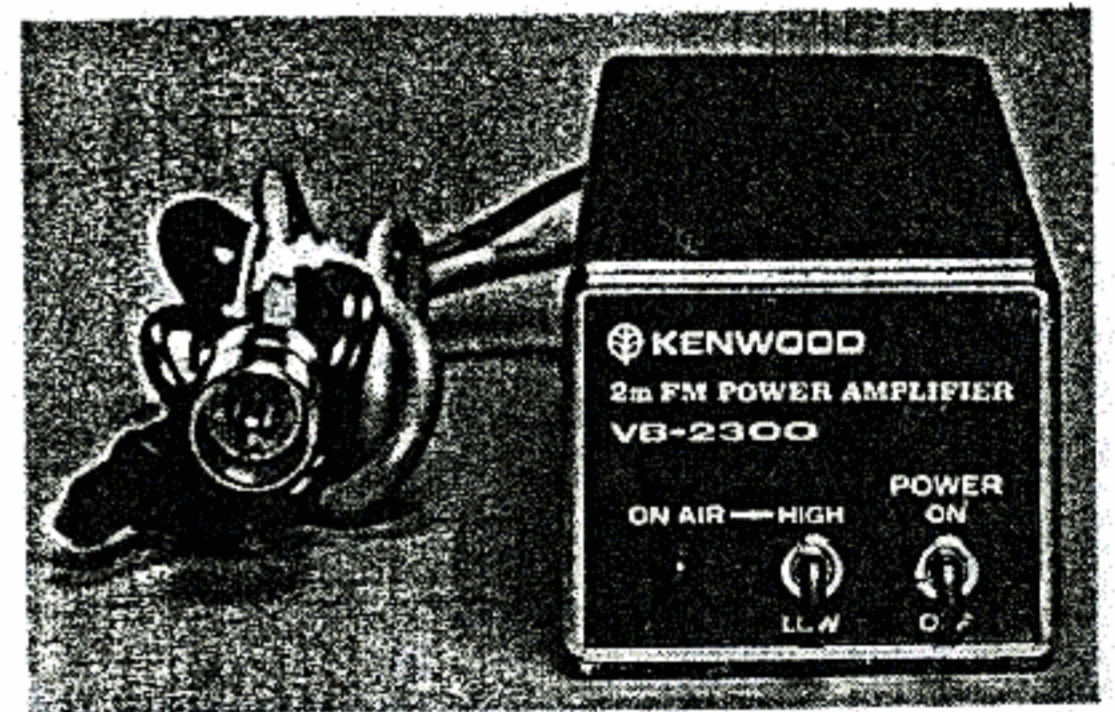