


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

GSD

1065-1

REVISIONS	
ISSUE	CHANGES
13	CN 33334 E REDRAWN WJM 08/26/91
14	CN 37544 C KH 02/20/98
15	CN 38562 E TML 05/28/02

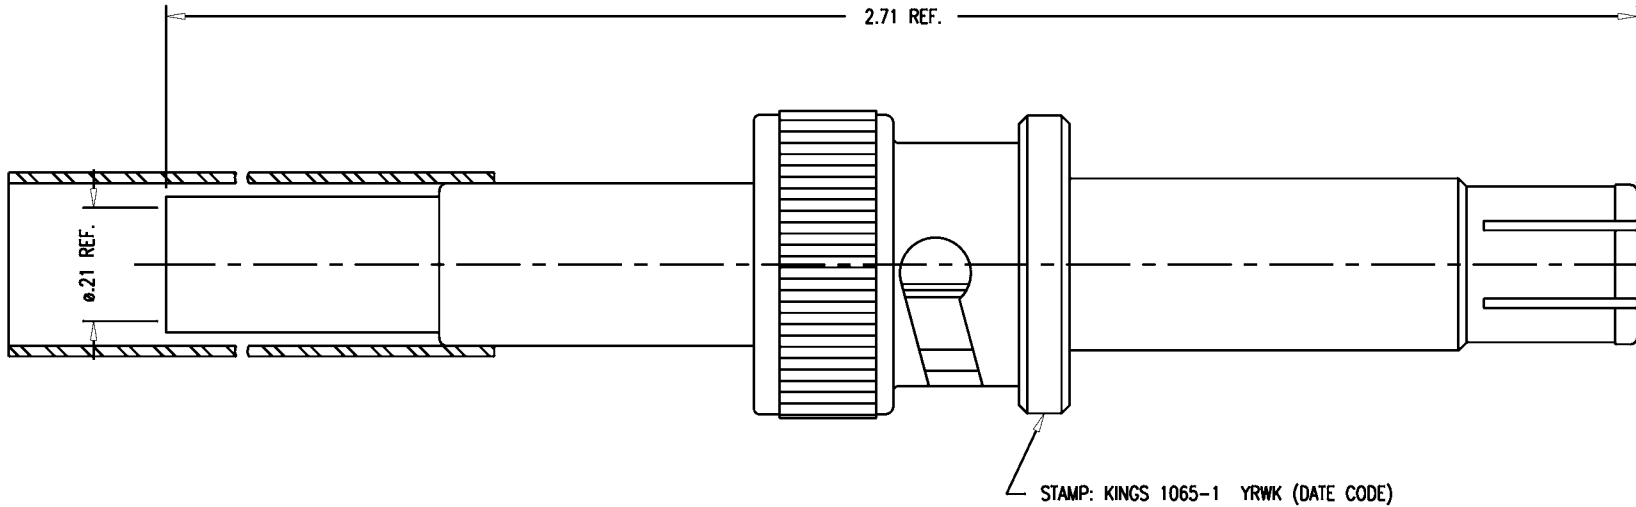

NOTES:

1. FOR USE WITH RG-58, 58A & 58C/U CABLE.
2. FOR CABLING INSTRUCTIONS SEE 3-7-1.
4. FOR CRIMPING USE DIE KTH-2001.
5. MATERIALS:
 INSULATOR: HIGH DENSITY POLYETHYLENE, MIL-P-22748
 GASKET: SILICONE RUBBER, ZZ-R-765
 HEAT SHRINK TUBING: POLYOLEFIN, PER MIL-I-23053/5 COLOR: RED
 K-GRIP SLEEVE: COM. BRONZE, ASTM-B-135
 K-GRIP BODY: BRASS, ASTM-B16
 WASHERS: BRASS, QQ-B-613
 ALL OTHER METAL PARTS: BER. COPPER, ASTM-B-196
6. FINISHES:
 CENTER CONTACT: HARD GOLD PLATE, PER MIL-G-45204
 SPRING WASHER: SILVER PLATE, PER QQ-S-365
 ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT NICKEL FINISH (TR-5)
7. ELECTRICAL CHARACTERISTICS:
 WORKING VOLTAGE: 10 KV DC

1065-1S

SCALE 4:1	
APPROX SURFACE AREA	
USED ON	
REF:	
PLUG, 10 KV	
DRAWN WJM	DATE 08/26/61
DESIGN MJB	DATE 09/04/61
APPR.	DATE

KINGS
 ELECTRONICS CO., INC.
 ROCK HILL, SOUTH CAROLINA 29730

GSD

1065-1