




Kodak Lithium Battery

K123LA

Effective : July 2003

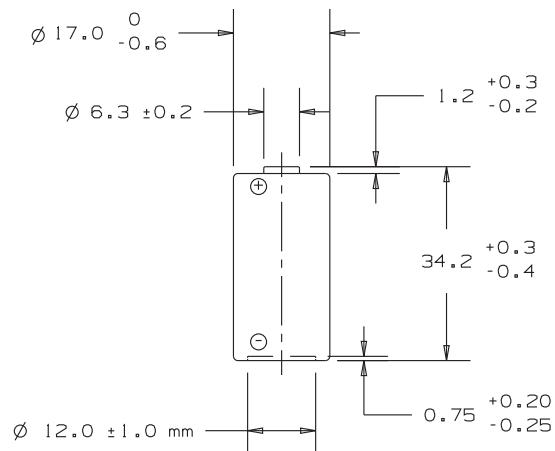


System:	Lithium/Manganese Dioxide, Li/MnO ₂
Designation:	ANSI 5018LC, IEC CR17345
Nominal Voltage:	3.0 Volts
Capacity:	1550 mAh at 2.5 mA to 1.8 volts
Maximum Discharge:	1,000 mA Continuous, 3,000 mA Pulse
Temperature Range:	-40°C to 65°C Operating -20°C to 45°C Storage
Average Weight:	16 grams
Volume:	7.8 cm ³
Terminals:	Flat Contacts, Negative Recessed
Jacket:	Foil Label
Lithium Content:	<0.5 grams/Battery

NOTE: 1) Recognized under the Component Program of Underwriters Laboratories Inc.
2) This battery complies with ANSI C18, IEC 60086, & EEC directive 91/157 standards.


Typical Pulse (Photoflash) Characteristics K123LA

ANSI PULSE TEST
900 mA CURRENT PULSE 3 SEC ON/27 SEC OFF CONTINUOUS

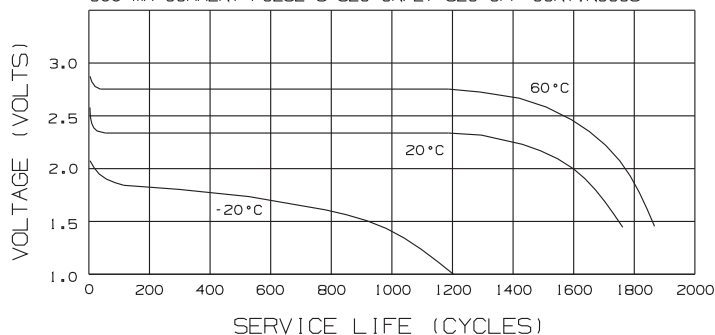


Typical Temperature Characteristics K123LA

60 OHMS CONTINUOUS DISCHARGE

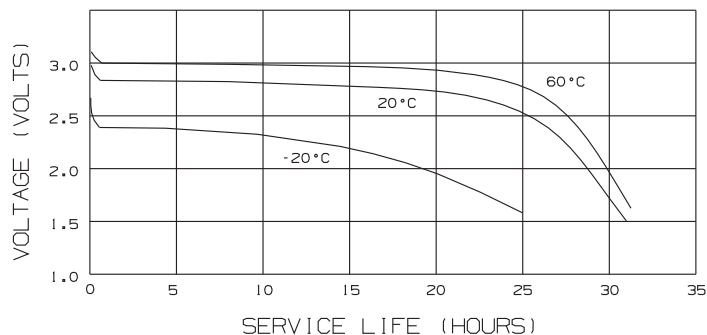


Typical Discharge Characteristics K123LA

CONTINUOUS DISCHARGE

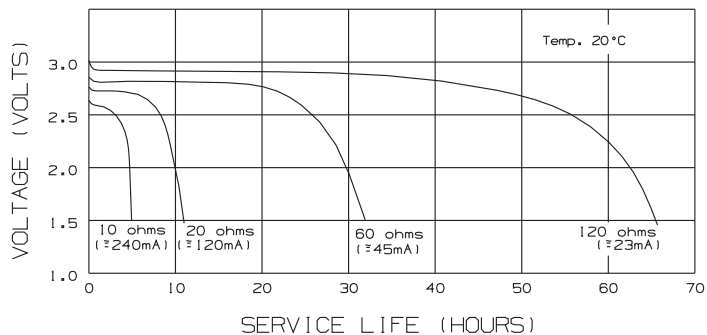

Typical Temperature Characteristics K123LA

1K OHM CONTINUOUS DISCHARGE

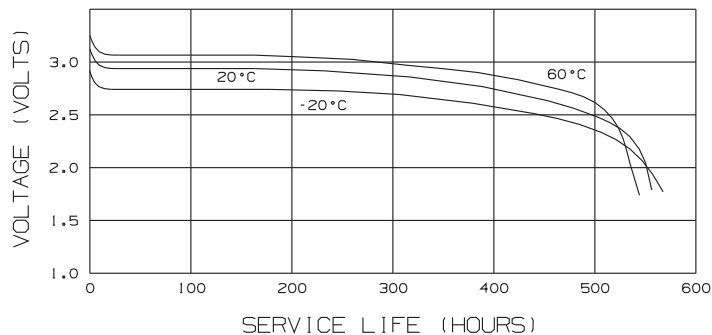

The curves and data in this publication represent product tested under the conditions specified. They do not represent standards or specifications which must be met by Eastman Kodak Company. The company reserves the right to change and improve product characteristics at any time.

For more information, contact
EASTMAN KODAK COMPANY
343 State street
Rochester, New York 14650-0811
1-800-242-2424
www.kodak.com/go/batteries