




Kodak Alkaline Battery

K23A


Effective : July 2003

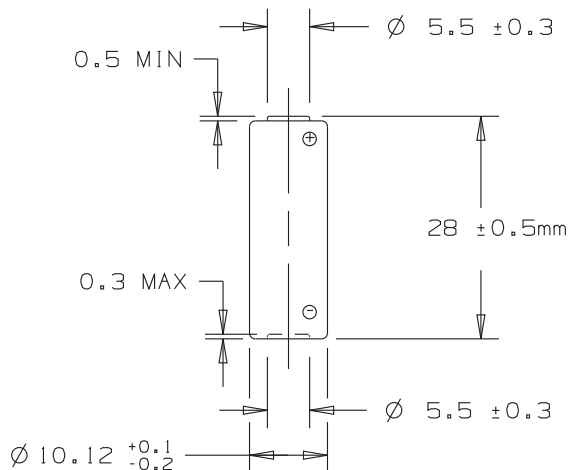

System:	Alkaline-Manganese Dioxide, Zn/MnO ₂
Designation:	ANSI 1811A, IEC -
Nominal Voltage:	12.0 Volts
Rated Capacity:	33 mAh to 6.0 Volts at 20K ohm load
Maximum Discharge:	0.5 mA Continuous, 5 mA Pulse
Temperature Range:	0°C to 54°C
Average Weight:	7.5 grams
Volume:	2.2 cm ³
Terminals:	Flat Contacts
Jacket:	Metal

NOTE: 1) This battery complies with: ANSI C18, IEC 60086, & EEC directive 91/157 standards.

Typical Discharge Characteristics K23A

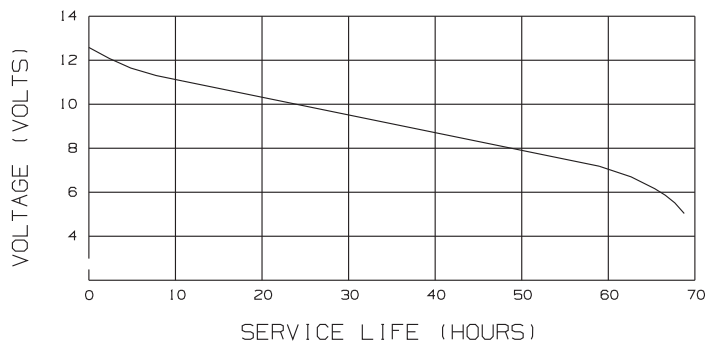

DISCHARGE RESISTANCE: 20K OHM
 DISCHARGE CONDITION: 24 HRS/DAY
 SERVICE LIFE: 66 HOURS
 CUT-OFF VOLTAGE: 6.0 VOLTS

The curves and data in this publication represent product tested under the conditions specified. They do not represent standards or specifications which must be met by Eastman Kodak Company. The company reserves the right to change and improve product characteristics at any time.

For more information, contact
 EASTMAN KODAK COMPANY
 343 State Street
 Rochester, New York 14650-0811
 1-800-242-2424
www.kodak.com/go/batteries