




# Kodak Alkaline Battery

## K28A

Effective : July 2003

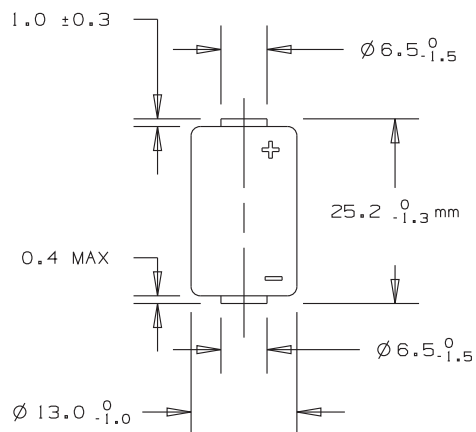


System:	Alkaline/Manganese Dioxide, Zn/MnO <sub>2</sub>
Designation:	ANSI 1414A, IEC 4LR44
Nominal Voltage:	6.0 Volts
Capacity:	100 mAh at 20 KOhms to 4.4 Volts
Maximum Discharge:	50 mA Continuous
Temperature Range:	-10°C to 54°C Operating -10°C to 14°C Storage
Average Weight:	10.4 grams
Volume:	3.30 cm <sup>3</sup>
Terminals:	Flat Contacts
Jacket:	Metal Litho

NOTE: 1) This battery complies with: ANSI C18, IEC 60086, & EEC directive 91/157 standards.


### Typical Discharge Characteristics K28A

TEMP: 20°C

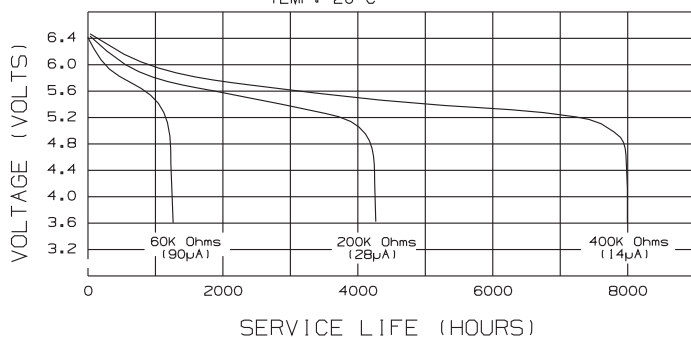


### Typical Temperature Characteristics K28A

LOAD: 60K Ohms (90µA)

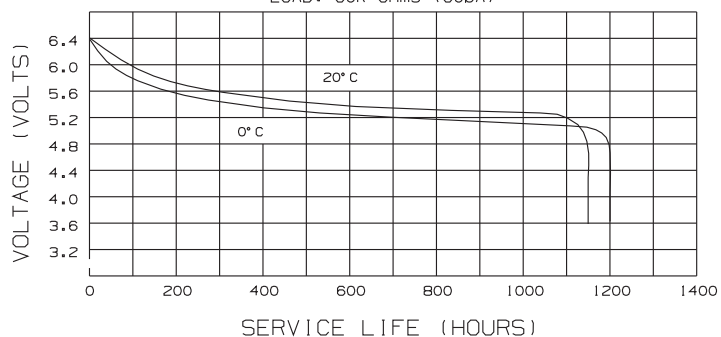


### Typical Shelf Life Characteristics K28A

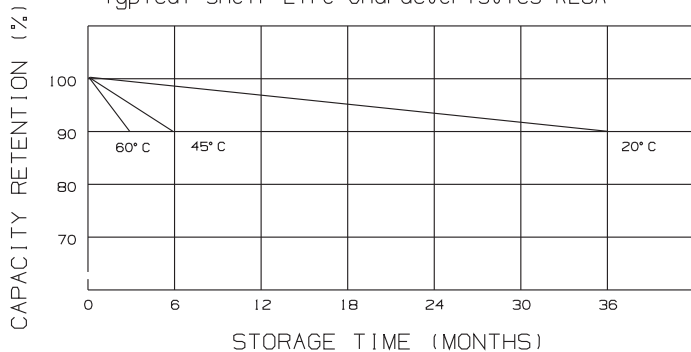

### Typical Temperature Characteristics K28A

LOAD: 2M Ohms (2.9µA)

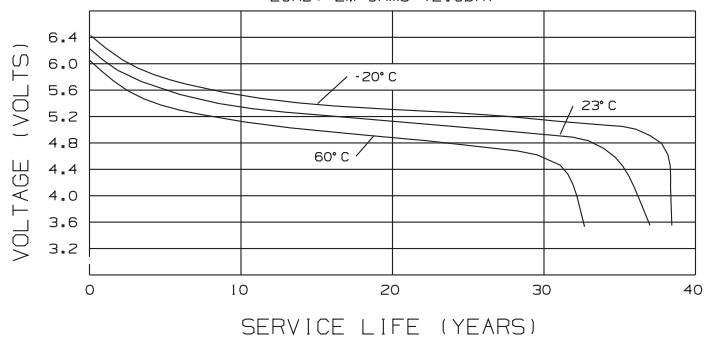

The curves and data in this publication represent product tested under the conditions specified. They do not represent standards or specifications which must be met by Eastman Kodak Company. The company reserves the right to change and improve product characteristics at any time.

For more information, contact  
EASTMAN KODAK COMPANY  
343 State Street  
Rochester, New York 14650-0811  
1-800-242-2424  
[www.kodak.com/go/batteries](http://www.kodak.com/go/batteries)