




Kodak Battery Charger

K600

Effective : March 2004

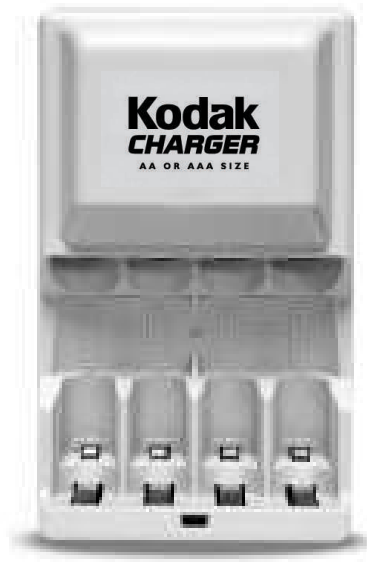

side "A" side "B"

Kodak K600 Ni-MH/Ni-Cd BATTERY CHARGER

INPUT: AC120V 50-60Hz 4.5W
 OUTPUT: DC2.4V 160mAx2 / 100mAx2

LISTED 9T27  US


ENTRADA: 120 V ca 50-60Hz 4.5W E153355 CLASS 2
 SALIDA: 2.4 V cc 160mAx2 / 100mAx2 BATTERY CHARGER

CAUTION: CHARGE ONLY NI-MH AND NI-Cd TYPE RECHARGEABLE BATTERIES. OTHER TYPES OF BATTERIES MAY BURST CAUSING INJURY TO PERSONS AND DAMAGE. RISK OF ELECTRIC SHOCK. DRY LOCATION USE ONLY.

ATTENTION: NE CHARGEZ QUE DES PILES RECHARGEABLES NI-MH ET NI-Cd. DES PILES D'UN AUTRE TYPE POURRAIENT EXPLOSER ET CAUSER DES BLESSURES ET DOMMAGES. RISQUE DE CHOC ELECTRIQUE POUR UTILISATION A L'INTERIEUR SEULEMENT.

Made in China for EASTMAN KODAK CO.
 Rochester, New York 14650 TM: Kodak

- 2 Charging circuits
- Insert 2 cells to side "A"
 - or-
 - 2 cells to side "B"
 - or-
 - 4 cells to side "A" & "B"



POWER PLUG STYLE

Designation:	Kodak Charger Model K600		
Dimensions:	L 113mm x W 66mm x H 37mm (excluding plug structure)		
Weight:	230 g (approx.)		
Battery Size Application:	AA or AAA size batteries		
Battery type:	Ni-MH or Ni-Cd		
Battery count:	2 or 4 of AA, or 2 or 4 of AAA size batteries		
Display Device:	LED on = Power on = Charging	LED off = Power off = Not Charging = Charger Finished	
Charge termination:	17 hrs (approx) By protection timer		
Input voltage:	120V AC, 50/60Hz, 5W	Powerplug style:	NEMA 1-15P
Output (charge current):	180-270mA DC for (2)AA size (2.4V DC) 100-180mA DC for (2)AAA size (2.4V DC)		
Charge time: (approx.)	Ni-MH AA (2300mAh)	14.5 hours	Ni-MH AA (2100mAh) 13 hours
	Ni-MH AA (1850mAh)	11.5 hours	Ni-MH AA (1700mAh) 10 hours
	Ni-MH AAA (800mAh)	8 hours	Ni-MH AAA (750mAh) 7.5 hours
Charge protection:	1)Timer 2)Over voltage detection 3)Mechanical reverse polarity protection (wrong insertion)		
Compliance:	1)Safety: Complies with UL 1310 & CSA C22.2 2)EMI: Complies with FCC part 15 class B		

The data in this publication represents product tested under the conditions specified. They do not represent standards or specifications which must be met by Eastman Kodak Company. The company reserves the right to change and improve product characteristics at any time.

For more information, contact
 EASTMAN KODAK COMPANY
 343 State Street
 Rochester, New York 14650-0811
 1-800-242-2424
www.kodak.com/go/batteries