


# Kodak Lithium Battery

KCR2


Effective : July 2003

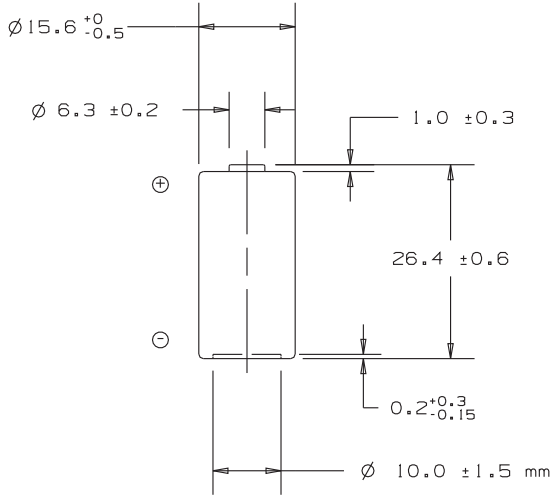


System:	Lithium/Manganese Dioxide, Li/MnO <sub>2</sub>
Designation:	ANSI 5046-LC, IEC CR2
Nominal Voltage:	3.0 Volts
Capacity:	850 mAh at 2.5 mA to 1.8 Volts
Maximum Discharge:	1000 mA Continuous, 2500 mA Pulse
Temperature Range:	-40°C to 65°C Operating -20°C to 45°C Storage
Average Weight:	12 grams
Volume:	5.16 cm <sup>3</sup>
Terminals:	Flat Contacts, Recessed Negative
Jacket:	Foil Label
Lithium Content:	<0.5 grams/Battery

NOTE: 1) Recognized under the Component Program of Underwriters Laboratories Inc.  
2) This battery complies with ANSI C18, IEC 60086, & EEC directive 91/157 standards.


Typical Pulse (Photoflash) Characteristics KCR2

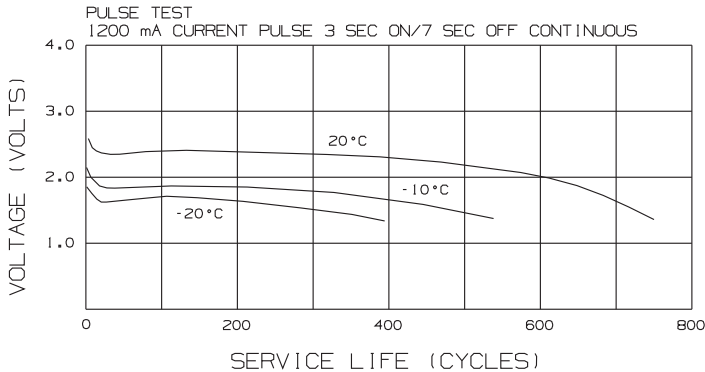


Typical Pulse (Photoflash) Characteristics KCR2

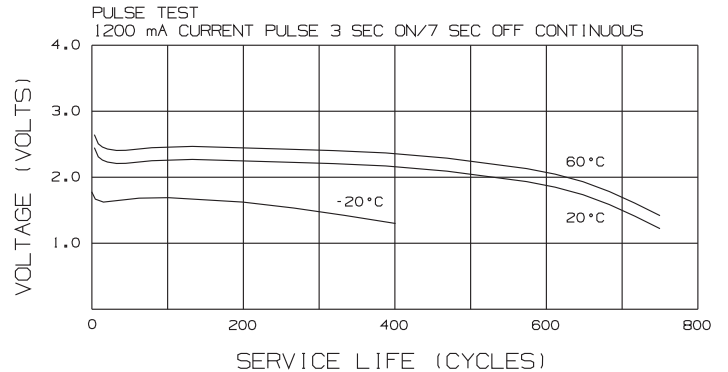

Typical Discharge Characteristics KCR2

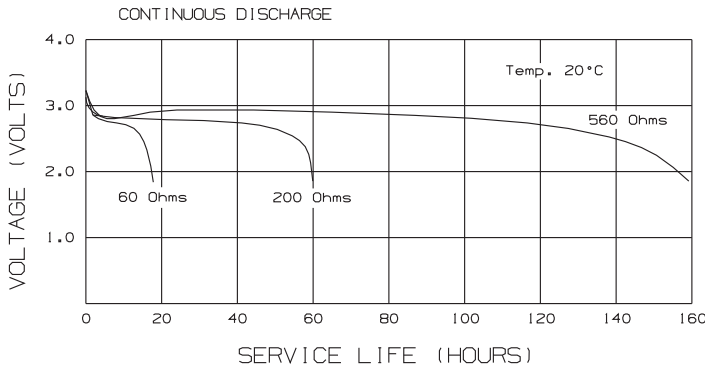

Typical Pulse (Photoflash) Characteristics KCR2

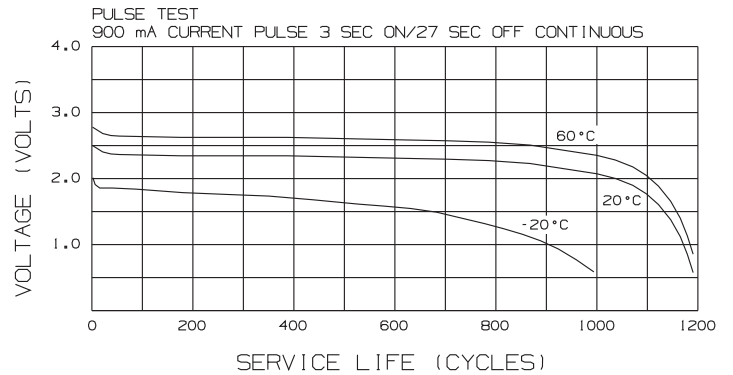

The curves and data in this publication represent product tested under the conditions specified. They do not represent standards or specifications which must be met by Eastman Kodak Company. The company reserves the right to change and improve product characteristics at any time.

For more information, contact  
EASTMAN KODAK COMPANY  
343 State Street  
Rochester, New York 14650-0811  
1-800-242-2424  
[www.kodak.com/go/batteries](http://www.kodak.com/go/batteries)