




Kodak Lithium Battery

KCR2016


Effective : July 2003

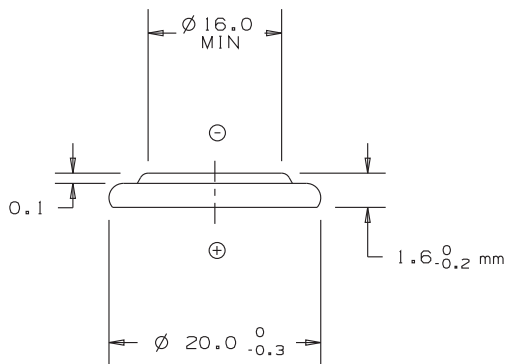


System:	Lithium/Manganese Dioxide, Li/MnO ₂
Designation:	ANSI 5000LC, IEC CR2016
Nominal Voltage:	3.0 Volts
Capacity:	90 mAh @ 15 KOhms to 2.0 Volts
Maximum Discharge:	0.10 mA Continuous, 10 mA Pulse
Temperature Range:	-20°C to 60°C Operating -20°C to 45°C Storage
Average Weight:	1.8 grams
Volume:	0.5 cm ³
Terminals:	Flat Contacts
Jacket:	None
Lithium Content:	<0.5 grams/Battery

NOTE: 1) This battery complies with ANSI C18, IEC 60086, & EEC directive 91/157 standards.


Typical Load Characteristics KCR2016

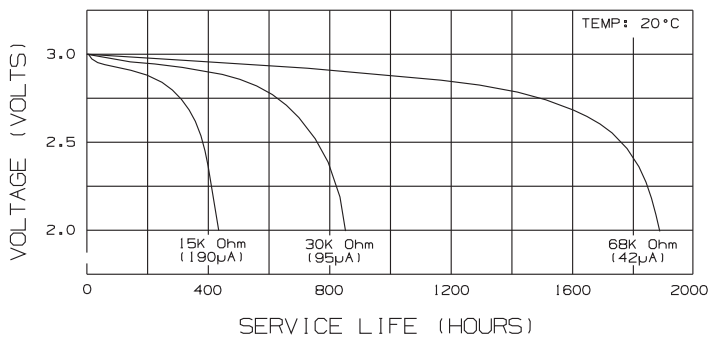


Typical Temperature Characteristics KCR2016

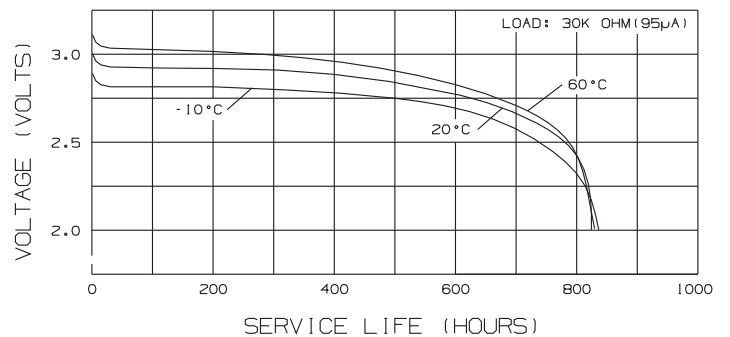

Operating Voltage v/s Load Resistance KCR2016

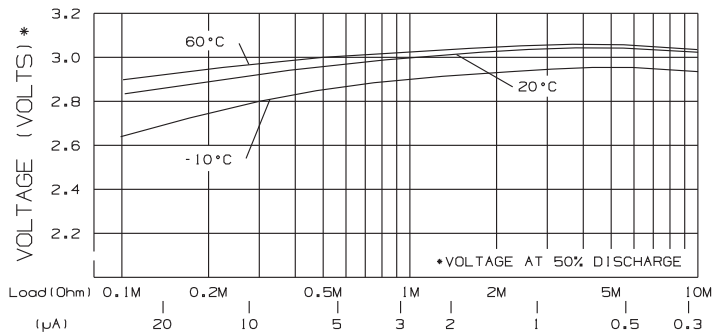

Capacity v/s Load Resistance KCR2016

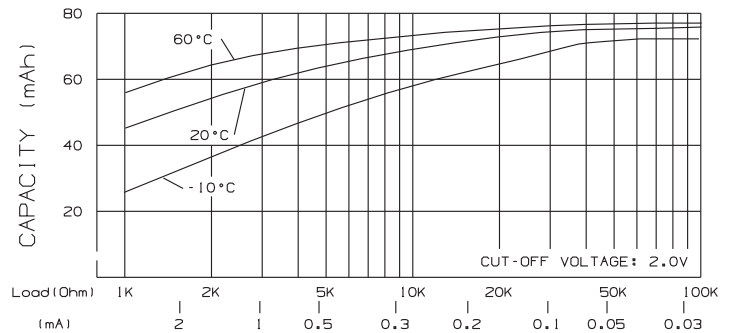

The curves and data in this publication represent product tested under the conditions specified. They do not represent standards or specifications which must be met by Eastman Kodak Company. The company reserves the right to change and improve product characteristics at any time.

For more information, contact EASTMAN KODAK COMPANY, 343 State Street, Rochester, New York 14650-0811, 1-800-242-2424, www.kodak.com/go/batteries