




Kodak Lithium Battery

KCRV3

Effective : July 2003

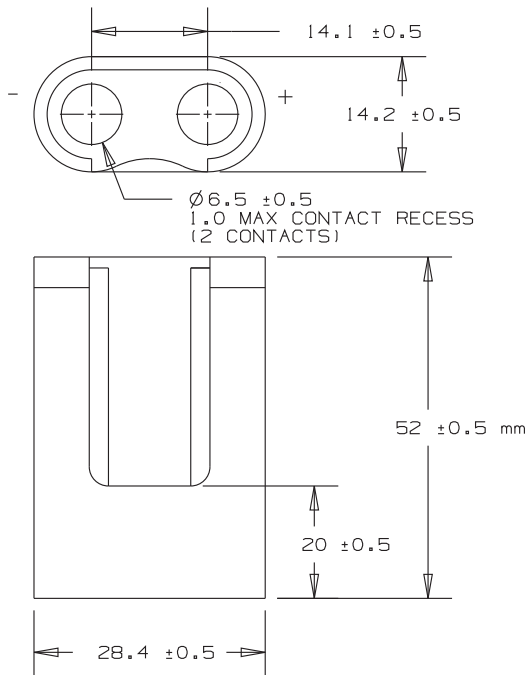


System:	Lithium/Manganese Dioxide, Li/MnO ₂	
Designation:	ANSI	IEC
Nominal Voltage:	3.0 Volts	
Capacity:	3200 mAh at 100 Ohms to 2.0 Volts	
Maximum Discharge:	1,500 mA Continuous, 3,500 mA Pulse	
Temperature Range:	-40°C to 65°C Operating -20°C to 45°C Storage	
Average Weight:	38 grams	
Volume:	21 cm ³	
Terminals:	Flat recessed contacts	
Jacket:	Plastic housing/film label	
Lithium Content:	<=.65 grams/cell <=.13 grams/battery	

NOTE: 1) Recognized under the Component Program of Underwriters Laboratories Inc.
 2) This battery complies with ANSI C18, IEC 60086, & EEC directive 91/157 standards.


Typical Pulse Characteristics KCRV3

ANSI PULSE TEST
 1.2 A PULSE 3 SEC ON/7 SEC OFF TO 1.30V

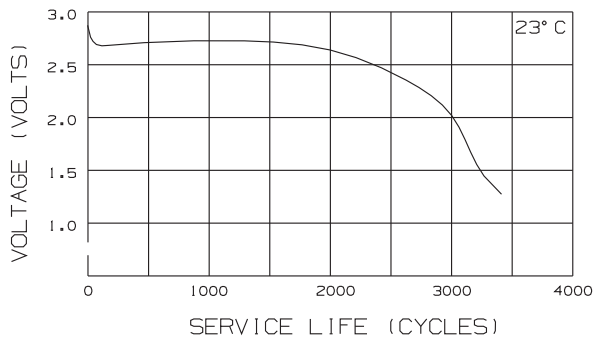


Typical Pulse Characteristics KCRV3

ANSI PULSE TEST
 0.9 A PULSE 3 SEC ON/27 SEC OFF TO 1.55V

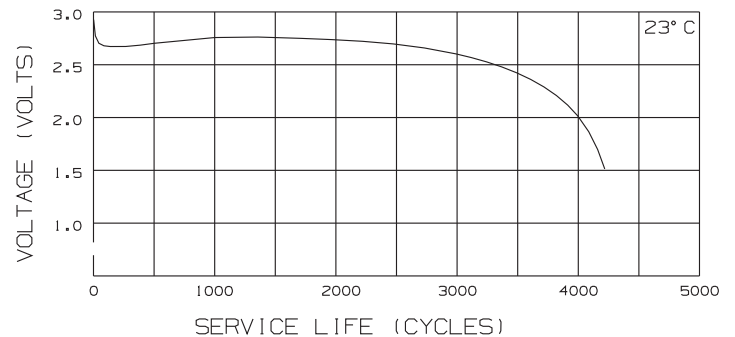


Typical Discharge Characteristics KCRV3

CONTINUOUS DISCHARGE (LOAD 100 Ohms) AT 23°C

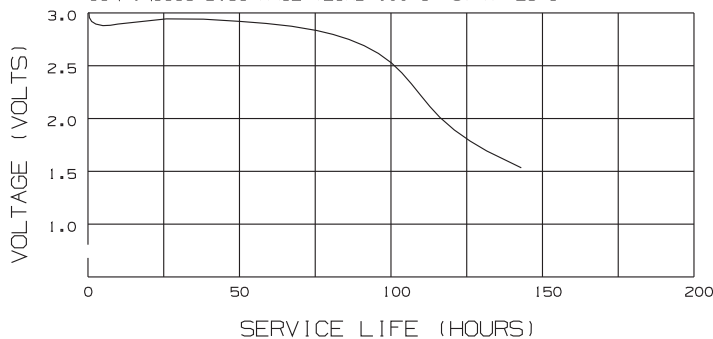

Typical Discharge Characteristics KCRV3

CONTINUOUS DISCHARGE (LOAD 1000mA) AT 23°C

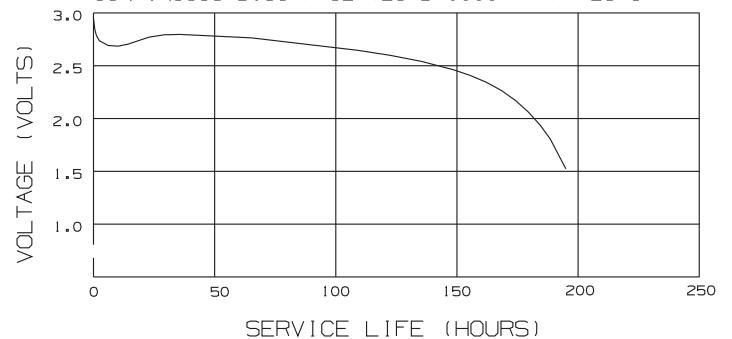

The curves and data in this publication represent product tested under the conditions specified. They do not represent standards or specifications which must be met by Eastman Kodak Company. The company reserves the right to change and improve product characteristics at any time.

For more information, contact
 EASTMAN KODAK COMPANY
 343 State Street
 Rochester, New York 14650-0811
 1-800-242-2424
www.kodak.com/go/batteries