

Kodak

i30 and i40 Scanners



You want **easy**.

You want **fast**.

You want **great images**.

Get everything you want from
a small desktop scanner – and more.

- Easy setup and integration
- Up to 25 pages – or 50 images – per minute
- Renowned image quality from Kodak
- Robust suite of bundled software
- USB 2.0 interface – Card and cable included
- Fits in any work space




KODAK Capture
Software Lite



FEATURES/BENEFITS

Perfect Page with iThresholding: Advanced image processing from Kodak that allows you to scan even poor-quality documents at full speed and get exceptional images. Boosts productivity by virtually eliminating the need to rescan or change settings.

Competitive scanner



Perfect Page Scanning with iThresholding, only from Kodak

Automatic image cropping and straightening for outstanding image accuracy at full scanning speed.

Fast scanning: Up to 25 pages or 50 images per minute.

Simultaneous output: Colour and bitonal and greyscale and bitonal.

Feature-rich bundled software makes it easy to maximize productivity right out of the box.

KODAK Capture Software, Lite, installs in minutes and offers a range of scanning features for practically any workgroup application. Easily upgradeable to the full version of Capture Software.

READIRIS Pro 8 Corporate Edition provides key functions for locating textual information fast, including multi-page optical character recognition (OCR) and direct scanning to searchable PDF files.

For integrators, bundled **ISIS** and **Kodak-developed TWAIN drivers** deliver speedy system integration. For end-users, the exclusive, **Kodak-developed TWAIN drivers** enable Kodak's advanced image processing at the scanner's full rated speed.

Brightness and contrast control: Customize colour output to fit your application.


VRS compatible for more imaging options.

Flexible Electronic Colour Dropout: Suppress red, green or blue background to improve forms processing.

Multi-feed detection to make sure every page gets scanned.

Quiet operation and small footprint: The i30 and i40 models fit easily on any desktop.

KODAK Service & Support: The Scanners come with a one year European warranty with advanced unit replacement and 5-day response time as standard. Customers have the option to upgrade to a 3-year warranty with next-business day response.

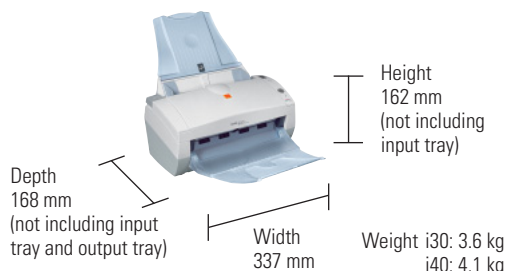

As an ENERGY STAR® Partner, Eastman Kodak Company has determined that these products meet ENERGY STAR® guidelines for energy efficiency.

specifications

Throughput Speeds: (at 200 dpi, portrait, letter-size)	Bitonal, Grayscale: Up to 25 ppm/50 ipm Color: Up to 25 ppm/40 ipm
Scanning Technology	Single CCD (i30); Dual CCD (i40) Greyscale output bit depth is 8 bits Colour capture bit depth is 48 bits (16 x 3) Colour output bit depth is 24 bits (8 x 3)
Recommended Daily Volume	Up to 1,000 pages per day
Optical Resolution	600 dpi
Illumination	Fluorescent (cold cathode)
Output Resolutions	75, 100, 150, 200, 240, 300, 400, and 600 dpi
Maximum Document Size	215 mm x 355.6 mm
Minimum Document Size	Single-sheet feeding: 50 mm x 87.5 mm Multiple-sheet feeding: 87.5 mm x 125 mm
Paper Thickness and Weight	52 - 105 g/m ² paper
Feeder	Up to 50 sheets of 75 g/m ² paper
Multi-Feed Detection	Length detection
Connectivity	USB 2.0 - Card and cable included
Interface Support	TWAIN and ISIS drivers included
Imaging Features (in the scanner)	Perfect Page Scanning with iThresholding, Adaptive Threshold Processing, deskew, autocrop, relative cropping, aggressive cropping, colour dropout, simultaneous output of bitonal and colour or bitonal and greyscale images, colour processing tables
On-board Compression	CCITT Group IV; JPEG or uncompressed output
File Format Outputs	BMP, TIFF and JPEG searchable PDF with bundled software
Electrical Requirements	100-240 V (International), 50/60 Hz
Power Consumption	i30 Standby: <12 Watts; i30 Running: <30 Watts i40 Standby: <12 Watts; i40 Running: <40 Watts
Environmental Factors	ENERGY STAR qualified scanners Operating temperature: 10°C to 35°C (50°F to 95°F) Operating humidity: 10% to 85%
Acoustical Noise	Standby: <46 dB Operating: <58 dB
PC Configuration	Minimum: PENTIUM III, 1 GHz processor, 128 MB RAM Recommended: PENTIUM IV, 2.5 GHz processor, 512 MB RAM, USB 2.0
Supported Operating Systems	WINDOWS XP (supports USB 2.0) WINDOWS 2000 Professional (supports USB 2.0) WINDOWS Me (USB 1.1 support only) WINDOWS 98 SE (USB 1.1 support only)
Bundled Software	KODAK Capture Software, Lite READIRIS Pro 8 Corporate Edition
Approvals and Product Certifications	AS/NZS 3548 Class B (C-Tick Mark), CAN/CSA-C22.2 No. 60950 (C-UL Mark), Canada ICES - 003 Issue 3 (Class B), GB4943, GB9254 (Class B), GB 17625.1 Harmonics, (CCC "S&E" Mark), EN 55022 ITE Emissions (Class B), EN 61000-3-2, Powerline Harmonics, EN 61000-3-3 Flicker, EN 55024 ITE Immunity, (CE Mark), EN 60950 (TUV GS Mark), IEC 60950, CISPR 22 Class B, VCCI (Class B), CNS 13438 (Class B), (BSMI Mark), UL 60950 (UL Mark), CFR 47 Part 15 Subpart B (FCC Class B)

Specifications subject to change without notice.

Printed on recycling paper

CONTACT INFORMATION

United Kingdom, Phone: +44 1 442 844791, Fax: +44 1 442 845856

Scandinavia, Phone: +44 1 442 845878, Fax: +44 1 442 845877

Germany, Austria and Switzerland, Phone: +49 711 406 3411, Fax: +49 711 406 3619

Eastern Europe, Middle East and Africa, Phone: +36 1 454 3031, Fax: +36 1 387 9113

France, Spain, Portugal, Phone: +33 1 4001 4082, fax +33 1 4001 3981

Italy, Phone: +39 0266028338, Fax: +39 0266028358

The Netherlands, Phone: +31 347 363 612, Fax: +31 347 363 606

Belgium and Luxembourg, Phone: +32 262 68506, Fax: +32 262 68502

www.kodak.com/go/docimaging

