



X-STREAM

WaveMaster 8620A 8600A 8500A 8300A Oscilloscopes

LEADING FEATURES

- 6, 5, or 3 GHz bandwidth
- 20 GS/s on all four channels (8620A only)
- 10 GS/s sample rate (20 Gs/s dual channel mode)
- All-SiGe front end (up to 75 ps rise time)
- 1 ps rms jitter noise floor
- 1 ppm internal sample clock
- X-Stream Technology data transfer is 10–100X faster than other DSOs
- Customizable – add your own measurements or functions (VBScript, MATLAB, Mathcad, or Excel) using the optional XMAP software package
- < 2.5 ps rms trigger jitter
- SiGe trigger circuit
- 10.4" TFT SVGA color display
- 100Base-T Ethernet
- Intuitive GUI
- Win2000 O/S



WaveMaster oscilloscopes include an all-SiGe front-end, X-Stream Technology and extensive customization features. The 8620A model, shown here, has a 20 GS/s per channel sampling rate.

Maximum Performance

The WaveMaster™ oscilloscope is designed to meet next-generation research and development needs. It is the only high bandwidth scope to include an all-SiGe front end for highest signal fidelity, to use unique X-Stream Technology, to provide fast display updates (up to 100X faster) of your analysis, and to provide the ability to customize the scope with your own measurements or functions. Imagine the power this provides to solve your unique problems and to speed product development. In addition, the WaveMaster DSO contains a SiGe trigger circuit for maximum trigger sensitivity at high bandwidths, and extremely low (< 2.5 ps) trigger jitter. A high stability (1 ppm) internal sample clock ensures the most precise timing measurements. Capture up to 2 Mpts with standard memory or upgrade to longer memory (up to 48 Mpts) to enable debug and design characterization of complex or rare occurrences in long-duration signals. The 8620A offers a real-time sampling rate of 20 GS/s per channel for unmatched DSO performance. LeCroy's extensive measurement and analysis tool sets, combined with innovative and intuitive displays, make complex WaveShape Analysis—simple.

Maximum Benefits

The high fidelity all-SiGe front end is ideal for use with the fastest, highest bandwidth requirements. Users making timing measurements will appreciate the low trigger jitter and superior timebase stability. The high resolution (800x600 pixel) display, and 20% larger viewing area allow for crisp, clear display of signals. Our unique "Histicons" (small images showing live statistical variations in measurements) enable you to find signal problems you weren't even aware of.

Probing Solutions

The WaveMaster line is fully compatible with LeCroy's wide assortment of passive and active, single-ended and differential probing solutions, including the new WaveLink family of probes. When used in conjunction with the 7.5 GHz D600 active differential probe, for instance, the 8620A offers 6 GHz system bandwidth at the probe tip. The WaveLink probes also provide the lowest circuit loading and smallest attenuation of any high bandwidth differential probe. Together, WaveMaster and WaveLink provide the highest performance scope/probe combination available.

LeCroy

WaveMaster 8620A/8600A/8500A/8300A Oscilloscopes

Unprecedented


The precision and fidelity of the WaveMaster front end is unprecedented in a real-time oscilloscope. LeCroy has delivered the first product to truly meet the needs of high-speed digital designers with a combination of exceptional front end, trigger, and timebase performance, together with long memory, X-Stream Technology, and the first true ability to customize your scope to your exact needs.

Measurement Accuracy – Stable and Precise

The WaveMaster oscilloscope delivers superior timebase performance and the lowest jitter noise floor of any DSO. The most advanced jitter characterization and analysis is possible with the WaveMaster scopes 1 ps rms jitter noise floor and exceptional timebase stability (+/-1 ppm clock accuracy) for short and long record lengths. In addition, very low trigger jitter (< 2.5 ps) contributes to the ease and accuracy of acquiring high-speed signals. A front end that supports a rise time as fast as 75 ps, enables measurement of the fastest signal edges, with high signal fidelity.

Exceptional Trigger Performance

The WaveMaster SiGe trigger circuit delivers the fastest trigger capability on the market, with a 5 GHz edge trigger bandwidth for capturing fast signals, and superior trigger sensitivity at high bandwidths. The versatile SMART Trigger® captures a variety of signals, including glitches and pulse widths down to 600 ps. The logic trigger makes it easy to trigger on a pattern of up to 5 inputs, or to qualify on 4 signal inputs and trigger on the 5th.

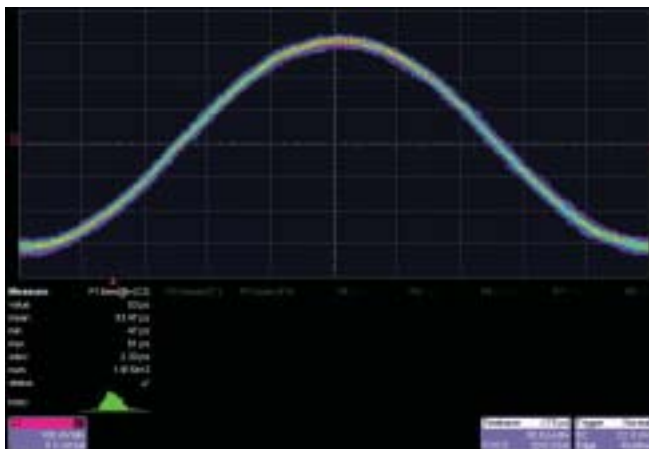

A 2 GHz sine wave input with persistence "on" demonstrates the exceptionally low trigger jitter on WaveMaster scopes.


X-Stream Technology

X-Stream should be a standard feature in every DSO, but it is only available in WaveMaster. X-Stream makes processing of waveform records up to 100X faster than other scopes. Imagine having the ability to see deep memory calculations updated quickly on the screen, and getting fast insight into the source of problems. Innovative views like "Histicons" help you identify signal problems without slowing down your display update. Why would you accept anything less? Leave outdated "viewing" technologies behind and upgrade to X-Stream.



True Customization

Only the WaveMaster DSO provides the ability to create your own parameter measurements or math functions in the scope's user interface. Unique or proprietary MATLAB, Mathcad, VBScript, or even Excel calculations can be simply selected like any other LeCroy-installed parameter or math function, and the results displayed on the scope screen. It's that easy! Since the resulting waveform is inserted back into the X-Stream processing flow, cursors, measurements, and math can be performed on it, giving much more power and flexibility than a simple export of data to a third party program. LeCroy's advanced features also provide the ability to program the scope using ActiveX Automation language, embedded scripts, and other open Windows features, to create a scope that meets your specific needs. Why accept only connectivity when you can have true customization?

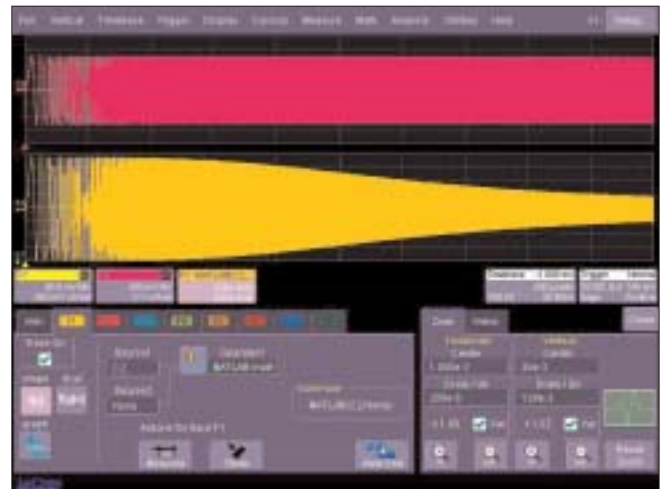

A user-created MATLAB low-pass filter is easily inserted as function F1 in the WaveMaster user interface.

Cursors

LeCroy has responded to demand from oscilloscope users for dedicated cursor knobs and a very flexible selection of cursors. Different cursor modes are easily recalled and set. You can access them from the front panel or the graphical user interface.

User Interface

The familiar scope controls on the front panel, coupled with a natural, context-sensitive graphical user interface, react quickly to your commands. Functionality is exactly where you expect it to be. If you have questions, the context-sensitive on-line help gives immediate assistance.



WaveMaster 8620A/8600A/8500A/8300A

Oscilloscopes Specifications

Vertical System	WaveMaster 8620A	WaveMaster 8600A	WaveMaster 8500A	WaveMaster 8300A
Analog Bandwidth @ 50 Ω (-3 dB)	6 GHz	6 GHz	5 GHz	3 GHz
Rise Time (Typical)	75 ps	75 ps	90 ps	150 ps
Input Channels	4			
Bandwidth Limiters	25 MHz; 250 MHz; 1 GHz 3 GHz; 4 GHz			25 MHz; 250 MHz; 1 GHz
Input Impedance	50 Ω \pm 2.0%			
Input Coupling	DC, GND			
Maximum Input Voltage	\pm 4 V _{peak}			
Channel-Channel Isolation	\geq 100:1 at 2 GHz; \geq 40:1 at 3 GHz; \geq 20:1 at 4 GHz;			
Vertical Resolution	8 bits; up to 11 bits with enhanced resolution (ERES)			
Sensitivity	2 mV – 1 V/div fully variable			
DC Gain Accuracy	\pm 1.5% of Full Scale			
Offset Range	2 mV – 194 mV/div; \pm 750 mV; 195 mV – 1 V/div; \pm 4 V			
Offset Accuracy	\pm (1.5% of full scale + 1.5% of offset value + 2 mV)			

Horizontal System

Timebases	Internal timebase common to 4 input channels; an external clock may be applied at the auxiliary input			
Time/Division Range	20 ps/div – 10 s/div			
Math & Zoom Traces	4 independent zoom and 4 math/zoom traces standard; 8 math/zoom traces available with XMAP (Master Analysis package) or XMATH (Advanced Math package)			
Clock Accuracy	\leq 1 ppm @ 0–40 degrees C			
Time Internal Accuracy	\leq 0.06 / SR + (1 ppm * Reading) (rms)			
Sample Rate & Delay Time Accuracy	\pm 1ppm \leq 10s interval			
Jitter Noise Floor	1 ps rms (Typical)			
Trigger & Interpolator Jitter	\leq 2.5 ps (Typical)			
Channel-Channel Deskew Range	\pm 4.5 ns			
External Timebase Reference	100 MHz; 50 Ω impedance; applied at the rear input			
External Clock	30 MHz – 2 GHz; 50 Ω impedance; applied at the auxiliary input			

Acquisition System

Single-Shot Sample Rate/Ch	20 GS/s	10 GS/s		
2 Channel Max	20 GS/s			
Random Interleaved Sampling (RIS)	200 GS/s for repetitive signals; 20 ps/div – 1 μ s/div			
Maximum Trigger Rate	150,000 waveforms/second (in Sequence Mode, up to 4 channels)			
Intersegment Time	\leq 6 μ s			
Maximum Acquisition Points/Ch	4 Ch	(2 Ch) / (4 Ch)	Duration @ 20 GS/s	Segments (Sequence Mode)
Standard	2M	2M / 1M	0.1 ms	500 Segments
M – Memory Option	8M	8M / 4M	0.4 ms	1,000 Segments
L – Memory Option	16M	16M / 8M	0.8 ms	5,000 Segments
VL – Memory Option	32M	32M / 16M	1.6 ms	10,000 Segments
XL – Memory Option	48M	48M / 24M	2.4 ms	20,000 Segments
XXL – Memory Option	N/A	100M / 50M	5.0 ms	25,000 Segments

Acquisition Processing

Averaging	Summed Averaging to 1 million sweeps; Continuous Averaging to 1 million sweeps
Enhanced Resolution (ERES)	From 8.5 to 11 bits vertical resolution
Envelope (Extrema)	Envelope, floor, roof for up to 1 million sweeps

Triggering System

Modes	Normal, Auto, Single, and Stop
Sources	Any input channel, External, Ext X10, Ext/10, or line; slope and level unique to each source (except line trigger)
Coupling Mode	DC
Pre-trigger Delay	0 – 100% of horizontal time scale
Post-trigger Delay	0 – 10,000 divisions
Hold-off by Time or Events	Up to 20 s or from 1 to 99 999 999 events
Internal Trigger Range	\pm 5 div from center
Max Trigger Frequency	5 GHz w/Edge Trigger; 750 MHz w/SMART Trigger (8300A = 3 GHz w/Edge Trigger, 750 MHz w/SMART Trigger)
External Trigger Input Range	Aux (\pm 0.4 V); Aux X10 (\pm 0.04 V); Aux / 10 (\pm 4 V)
Trigger Sensitivity (Edge)	3 Divisions @ 5 GHz, 2 Divisions @ 4 GHz, 1.2 Divisions @ 3 GHz (Typical)

WaveMaster 8620A/8600A/8500A/8300A

Oscilloscopes Specifications (continued)

Basic Triggers

Edge/Slope/Line Triggers when signal meets slope and level condition.

SMART Triggers

State or Edge Qualified Triggers on any input source only if a defined state or edge occurred on another input source. Delay between sources is selectable by time or events.

Dropout Triggers if signal drops out for longer than selected time between 2 ns and 20 s.

Pattern Logic combination (AND, NAND, OR, NOR) of 5 inputs (4 channels and external trigger input) Each source can be high, low, or don't care. The High and Low level can be selected independently. Triggers at start or end of the pattern.

SMART Triggers® with Exclusion Technology

Glitch Triggers on positive or negative glitches with widths selectable from 600 ps to 20 s or on intermittent faults.

Signal or Pattern Width Triggers on positive or negative pulse widths selectable from 600 ps to 20 s or on intermittent faults.

Signal or Pattern Interval Triggers on intervals selectable between 2 ns and 20 s.

Automatic Setup

Auto Setup Automatically sets timebase, trigger, and sensitivity to display a wide range of repetitive signals.

Vertical Find Scale Automatically sets the vertical sensitivity and offset for the selected channels to display a waveform with maximum dynamic range

Probes

Probes A variety of optional passive and active probes is available.

Probe System: ProLink with Probus Automatically detects and supports a variety of compatible probes; Supports ProLink-SMA and ProLink-BNC input adapters

Scale Factors Automatically or manually selected depending on probe used

Color Waveform Display

Type Color 10.4" flat-panel TFT-LCD with high resolution touch screen

Resolution SVGA; 800 x 600 pixels

Realtime Clock Dates, hours, minutes, seconds displayed with waveform. SNTP support to synchronize to precision internet clocks

Number of Traces Display a maximum of 8 traces. Simultaneously display channel, zoom, memory, and math traces.

Grid Styles Auto, Single, Dual, Quad, Octal, XY, Single + XY, Dual + XY

Waveform Styles Sample dots joined or dots only

Analog Persistence Display

Analog & Color-Graded Persistence Variable saturation levels; stores each trace's persistence data in memory

Persistence Selections Select analog, color, or three-dimensional.

Trace Selection Activate persistence on all or any combination of traces.

Persistence Aging Time Select from 500 ms to infinity.

Sweeps Displayed All accumulated, or all accumulated with last trace highlighted

Zoom Expansion Traces

Display up to 4 Zoom and 4 Math/Zoom traces; 8 Math/Zoom traces available with XMAP (Master Analysis package) or XMATH (Advanced Math package).

CPU

Processor Intel Pentium 4 @ 2.53 GHz or better with MS Windows 2000

Processing Memory Up to 2 GBytes

Internal Waveform Memory

M1, M2, M3, M4 Internal Waveform Memory (Store full-length waveforms with 16 bits/data point) Or store to any number of files limited only by data storage media.

Setup Storage

Front Panel and Instrument Status Store to the internal hard drive, floppy drive or to a USB-connected peripheral device.

Interface

Remote Control Via Windows Automation, or via LeCroy Remote Command Set.

GPIB Port (Optional) Supports IEEE – 488.2

Specifications are subject to change.

WaveMaster 8620A/8600A/8500A/8300A

Oscilloscopes Specifications (continued)

Interface

Remote Control	Via Windows Automation, or via LeCroy Remote Command Set.
GPIB Port (Optional)	Supports IEEE – 488.2
Ethernet Port	10/100Base-T Ethernet interface
Floppy Drive	Internal, DOS-format, 3.5" high-density
USB Ports	4 USB ports support Windows compatible devices
External Monitor Port Standard	15-pin D-Type SVGA-compatible
Parallel Port	1 standard

Auxiliary Output

Signal Types	Select from calibrator or control signals output on front panel.
Calibrator Signal	5 Hz – 5 MHz square wave or DC Level; 0.0 to 0.5 V into 50 Ω (0–1 V into 1 M Ω), or TTL Volts (Selectable)
Control Signals	Trigger enabled, trigger out, pass/fail status

Auxiliary Input

Signal Types	Select from External Trigger or External Clock input on front panel.
--------------	--

General

Auto Calibration	Ensures specified DC and timing accuracy is maintained for 1 year minimum.
Power Requirements	100–120 VAC at 50/60/400 Hz; 200–240 VAC at 50/60 Hz; Automatic AC Voltage selection. Power consumption: < 800 VA

Environmental

Temperature (Operating)	+5 °C to +40 °C including floppy disk and CD-ROM drives
Temperature (Non-Operating)	–20 °C to +60 °C
Humidity (Operating)	5% to 80% relative humidity (non-condensing) up to +30 °C. Upper limit derates to 25% relative humidity (non-condensing) at +40 °C.
Humidity (Non-Operating)	5% to 95% relative humidity (non-condensing) as tested per MIL-PRF-28800F.
Altitude (Operating)	up to 10,000 ft (3048 m) at or below +25 °C
Altitude (Non-Operating)	Up to 40,000 ft (12,192 m)
Random Vibration (Operating)	0.31 g _{rms} 5 Hz to 500 Hz, 15 minutes in each of three orthogonal axes
Random Vibration (Non-Operating)	2.4 g _{rms} 5 Hz to 500 Hz, 15 minutes in each of three orthogonal axes
Functional Shock	20 g peak, half sine, 11 ms pulse, 3 shocks (positive and negative) in each of three orthogonal axes, 18 shocks total

Physical Dimensions

Dimensions (HWD)	264 mm x 397 mm x 491 mm; 10.4" x 15.6" x 19.3" (height excludes feet)	
	8620A	8300A, 8500A, 8600A
Weight	23 Kg; 49 lbs.	18 kg; 39 lbs.
Shipping Weight	29 Kg; 63 lbs.	24 kg; 53 lbs.

Certifications

	CE Approved, UL and cUL listed;
	Conforms to EN 61326-1; EN 61010-1; UL 3111-1; and CSA C22.2 No. 1010.1

Warranty and Service

	3-year warranty; calibration recommended annually.
	Optional service programs include extended warranty, upgrades, and calibration services.

WaveMaster 8620A/8600A/8500A/8300A Oscilloscopes Specifications (continued)

Standard

Math Tools

Display up to four math function traces (F1 – F4). The easy to use graphical interface simplifies setup of up to two operations on each function trace, and function traces can be chained together to perform math-on-math.

absolute value	invert (negate)
average (summed)	log (base e)
average (continuous)	log (base 10)
derivative	product (x)
deskew (resample)	ratio (/)
difference (-)	reciprocal
enhanced resolution (to 11 bits vertical)	rescale (with units)
envelope	roof
exp (base e)	(sinx)/x
exp (base 10)	square
fft (power spectrum, magnitude, phase, up to 25 kpts)	square root
floor	sum (+)
histogram of 1000 events	trend (datalog) of 1000 events
integral	zoom (identity)

Pass/Fail Testing

Simultaneously test multiple parameters against selectable parameter limits or pre-defined masks. Pass or fail conditions can initiate actions including document to local or networked files, email the image of the failure, save waveforms, send a pulse out at the front panel auxiliary BNC output, or (with the GPIB option) send a GPIB SRQ.

Optional

Master Analysis Package (XMAP)

This package provides maximum capability and flexibility, and includes all the functionality present in XMATH, XDEV, and JTA2.

Advanced Math Package (XMATH)

This package provides a comprehensive set of signal WaveShape Analysis Tools providing insight into the waveshape of complex signals. Additional capability provided by XMATH includes:

- Intuitive, Graphical Math Setup (Processing Web) with unlimited chaining of functions
- 8 math traces total (4 additional)
- Parameter math – add, subtract, multiply, or divide two different parameters
- Histograms expanded with 19 histogram parameters and up to 2 billion events
- Trend (datalog) of up to 1 million events
- Track graphs of any measurement parameter
- FFT capability added to include: power averaging, power density, real and imaginary components, frequency domain parameters, and FFT on up to 25 Mpts.
- Narrow band power measurements
- Auto-correlation function
- Sparse function
- Cubic and Quadratic Interpolation function

Advanced Customization Package (XDEV)

This package provides a set of tools to modify the scope and customize it to meet your unique needs. Additional capability provided by XDEV includes

- Creation of your own measurement parameter or math function, using third party software packages, and display of the result in the scope. Supported third party software packages include:
 - VBScript
 - MATLAB
 - Excel
 - Mathcad
- CustomDSO – create your own user interface in a scope dialog box.
- Adding macro of keys to run VBScript files
- Support of plug-ins

Measure Tools

Displays any 8 parameters together with statistics, including their average, high, low, and standard deviations. Histograms provide a fast, dynamic view of parameters and wave shape characteristics.

amplitude	level @ x	rms
area	maximum	std. deviation
base	mean	top
cycles	median	width
delay	minimum	median
Δ delay	number of points	phase
duty cycle	+overshoot	time @ minimum (min.)
duration	-overshoot	time @ maximum (max.)
falltime (90–10%, 80–20%, @ level)	peak-to-peak	Δ time @ level
frequency	period	Δ time @ level from trigger
first	phase	x @ max
last	risetime (10–90%, 20–80%, @ level)	x @ min

Timing Tools

LeCroy M1 Timing Tools runs inside your WaveMaster oscilloscope, acquires data, and calculates, displays, and analyzes jitter in clock and serial data. A wide variety of measurement tools are available including differential crossing point measurements. Jitter viewing tools include line graph, histogram, jitter spectrum, text, and eye diagram. Available in an advanced or basic version.

LeCroy M1 Timing Tool (Advanced, 1 scope)	LeCROY M1 / ADV-1
LeCroy M1 Timing Tool (Advanced, 4 scopes)	LeCROY M1 / ADV-4
LeCroy M1 Timing Tool (Basic)	LeCROY M1 / BASIC

Jitter and Timing Analysis Package (JTA2)

This package provides jitter timing and analysis using time, frequency, and statistical views for common timing parameters, and also includes other useful tools. JTA2 includes:

- Jitter and timing parameters, with “Track” graphs of
 - Cycle-Cycle Jitter
 - N-Cycle
 - N-Cycle with start selection
 - Frequency
 - Period
 - Half Period
 - Width
 - Time Interval Error
 - Setup
 - Hold
 - Skew
 - Duty Cycle
 - Duty Cycle Error
- Edge@lv parameter (counts edges)
- Histograms expanded with 19 histogram parameters and up to 2 billion events
- Trend (datalog) of up to 1 million events
- Track graphs of all parameters
- Persistence histogram, persistence trace (mean, range, sigma)

Disk Drive Measurements Package (DDM2)

This package provides disk drive parameter measurements and related mathematical functions for performing disk drive WaveShape Analysis.

- Disk Drive Parameters are as follows:

amplitude asymmetry	local time trough-peak
local base	local time under threshold
local baseline separation	narrow band phase
local maximum	narrow band power
local minimum	overwrite
local number	pulse width 50
local peak-peak	pulse width 50–
local time between events	pulse width 50+
local time between peaks	resolution
local time between troughs	track average amplitude
local time at minimum	track average amplitude–
local time at maximum	track average amplitude+
local time peak-trough	auto-correlation s/n
local time over threshold	non-linear transition shift

- Correlation function
- Trend (datalog) of up to 1 million events
- Histograms expanded with 18 histogram parameters and up to 2 billion events

Ordering Information

WaveMaster 8620A Four Channel Digital Oscilloscope	Product Code
6 GHz, 20 GS/s 4 Ch, 2 Mpts/Ch Standard	WAVEMASTER 8620A
WaveMaster 8600A Four Channel Digital Oscilloscope	Product Code
6 GHz, 20 GS/s 2 Ch (10 GS/s, 4 ch), 2 Mpts/2Ch; 1 Mpt/Ch Standard	WAVEMASTER 8600A
WaveMaster 8500A Four Channel Digital Oscilloscope	Product Code
5 GHz, 20 GS/s 2 Ch (10 GS/s, 4 ch), 2 Mpts/2Ch; 1 Mpt/Ch Standard	WAVEMASTER 8500A
WaveMaster 8300A Four Channel Digital Oscilloscope	Product Code
3 GHz, 20 GS/s 2 Ch (10 GS/s, 4 ch), 2 Mpts/2Ch; 1 Mpt/Ch Standard	WAVEMASTER 8300A

Included with Standard 8600A and 8500A Configurations:

ProLink Adapter SMA; 4 each
ProLink Adapter BNC; 2 each
Operator's Manual; Quick Reference Guide; CD-ROM with OM/ RCM, Utility Software and Recovery Software
Remote Control Manual
Floppy Disk Drive
CD ROM Drive
Optical 3 button Wheel Mouse-USB
Standard Ports: 10/100Base-T Ethernet, Parallel, SVGA Video Output, USB
Protective Front Cover
Standard Commercial Calibration and Performance Certificate
3 Year Warranty

Included with Standard 8300A Configuration:

ProLink Adapter BNC; 5 each
Operator's Manual; Quick Reference Guide; CD-ROM with OM/ RCM, Utility Software and Recovery Software
Remote Control Manual
Floppy Disk Drive
CD ROM Drive
Optical 3 button Wheel Mouse-USB
Standard Ports: 10/100Base-T Ethernet, Parallel, SVGA Video Output, USB
Protective Front Cover
Standard Commercial Calibration and Performance Certificate
3 Year Warranty

Memory Options	8620A	8600A	8500A	8300A	
	8 Mpts/ch	8 Mpts/2 Ch, 4 Mpts/ch			M
	16 Mpts/ch	16 Mpts/2 Ch, 8 Mpts/ch			L
	32 Mpts/ch	32 Mpts/2 Ch, 16 Mpts/ch			VL
	48 Mpts/ch	48 Mpts/2 Ch, 24 Mpts/ch			XL

Long Memory Models

6 GHz, 20 GS/s, 2Ch (10 GS/s, 4 Ch), 100 Mpts/2ch; 50 MPT/ch	WaveMaster 8600A XXL
5 GHz, 20 GS/s, 2Ch (10 GS/s, 4 Ch), 100 Mpts/2ch; 50 MPT/ch	WaveMaster 8500A XXL
3 GHz, 20 GS/s, 2Ch (10 GS/s, 4 Ch), 100 Mpts/2ch; 50 MPT/ch	WaveMaster 8300A XXL

Software Options

Master Analysis Package	XMAP
Jitter and Timing Analysis	JTA2
Disk Drive Measurement Package	DDM2

Selected Accessories

ProLink Adapter BNC; 1 each	LPA-BNC
ProLink Adapter BNC kit of 4	LPA-BNC-Kit
Keyboard	KYBD-1
7.5 GHz Differential WaveLink Probe	D600
7.5 GHz Low Capacitance Passive Probe	PP066
3.5 GHz Active Voltage Probe	HFP3500
1.0 GHz Differential Probe	AP034
1 M Ω Adapter	AP-1M
Norton Anti-Virus	WM-AV
Oscilloscope Cart	OC1021
Oscilloscope Cart with additional shelf and drawer	OC1024
Rackmount Kit - 25" Slide	RMA-25
Rackmount Kit - 30" Slide	RMA-30
WaveMaster Soft Carrying Case	WMSCC
WaveMaster Hard Shell Transit Case	WMTC1

Warranty & Calibration

A variety of extended warranty, certification, and calibration services are available. Contact LeCroy Sales and Service for details

Sales and Service Throughout the World

Corporate Headquarters

700 Chestnut Ridge Road
Chestnut Ridge, NY 10977
USA
<http://www.lecroy.com>

LeCroy Sales Offices

Austria: Markersdorf
Phone (43) 2749 30050
Fax (43) 2749 30051

China: Beijing
Phone (86) 10 8526 1616
Fax (86) 10 8526 1619

Hong Kong
Phone (852) 2834 5630
Fax (852) 2834 9893

France: Les Ulis
Phone (33) 1 69 18 83 20
Fax (33) 1 69 07 40 42

Germany: Heidelberg
Phone (49) 6221 827 00
Fax (49) 6221 834 655

Italy: Venice
Phone (39) 041 456 97 00
Fax (39) 041 456 95 42

Japan: Osaka
Phone (81) 6 6396 0961
Fax (81) 6 6396 0962

Tokyo
Phone (81) 3 3376 9400
Fax (81) 3 3376 9587

Korea: Seoul
Phone (82) 2 3452 0400
Fax (82) 2 3452 0490

Singapore
Phone (65) 6442 4880
Fax (65) 6442 7811

Switzerland: Geneva
North Phone (41) 22 719 2228
South Phone (41) 22 719 2175
Fax (65) 6442 7811

U.K.: Abingdon
Phone (44) 1 235 536 973
Fax (44) 1 235 528 796

U.S.A.: Chestnut Ridge
Phone (1) 845 578 6020
Fax (1) 845 578 5985

