



■ Features :

- Universal AC input / Full range(up to 300VAC)
- Built in active PFC circuit compliance to EN61000-3-2 class C
- High efficiency up to 90%
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Cooling by free air convection
- U-bracket low profile:33mm
- ZVS technology to reduce power dissipation
- 3 years warranty(100% load 12hr/day≥5years)




SPECIFICATION

MODEL	ULP-150-12	ULP-150-15	ULP-150-24	ULP-150-30	ULP-150-36	ULP-150-48	ULP-150-56	
OUTPUT	DC VOLTAGE	12V	15V	24V	30V	36V	48V	56V
	RATED CURRENT	12.5A	10A	6.3A	5A	4.2A	3.2A	2.7A
	CURRENT RANGE (convection)	0 ~ 12.5A	0 ~ 10A	0 ~ 6.3A	0 ~ 5A	0 ~ 4.2A	0 ~ 3.2A	0 ~ 2.7A
	PEAK POWER (3sec) Note.6	200W	200W	200W	200W	200W	200W	200W
	RATED POWER (convection)	150W	150W	151.2W	150W	151.2W	153.6W	151.2W
	RIPPLE & NOISE (max.) Note.2	100mVp-p	100mVp-p	150mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p
	VOLTAGE ADJ. RANGE	10.8~13.2V	13.5~16.5V	21.6~26.4V	27~33V	32.4~39.6V	43.2~52.8V	50.4~61.6V
	VOLTAGE TOLERANCE Note.3	±2.0%	±2.0%	±2.0%	±2.0%	±2.0%	±2.0%	±2.0%
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
	LOAD REGULATION	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%
	SETUP, RISE TIME	2000ms, 100ms/230VAC 3000ms, 100ms/115VAC at full load						
HOLD UP TIME (Typ.)	16ms/230VAC 16ms/115VAC at full load							
INPUT	VOLTAGE RANGE Note.5	90 ~ 300VAC		127 ~ 424VDC				
	FREQUENCY RANGE	47 ~ 63Hz						
	POWER FACTOR (Typ.)	0.95/230VAC		0.98/115VAC at full load				
	EFFICIENCY (Typ.)	90%	90%	93%	93%	94%	94%	94%
	AC CURRENT (Typ.)	2A/115VAC		1A/230VAC				
	INRUSH CURRENT (Typ.)	Cold start 65A/230VAC						
	LEAKAGE CURRENT	<2mA / 240VAC						
PROTECTION	OVERLOAD	Normally works within 105~130% rated output power for 3sec and then shut down o/p voltage with auto-recovery 130~150% rated power or short circuit, constant current limiting within 3sec and shut down o/p voltage with auto-recovery						
	OVER VOLTAGE	13.5 ~ 16.3V	17 ~ 21V	26.7 ~ 32.4V	26.7 ~ 32.4V	41.4 ~ 48.6V	53 ~ 64.8V	53 ~ 64.8V
	OVER TEMPERATURE	95°C±5°C (TSW1) Protection type : Shut down o/p voltage,recovers automatically after fault condition is removed						
ENVIRONMENT	WORKING TEMP.	-40 ~ +70°C (Refer to output load derating curve)						
	WORKING HUMIDITY	20 ~ 90% RH non-condensing						
	STORAGE TEMP., HUMIDITY	-40 ~ +85°C, 10 ~ 95% RH						
	TEMP. COEFFICIENT	±0.03%/°C (0 ~ 60°C)						
	VIBRATION	10 ~ 500Hz, 5G 10min./1cycle, 60min. each along X, Y, Z axes						
SAFETY & EMC (Note 4)	SAFETY STANDARDS	EN61347-2-13, UI1012, UL60950-1,EN60950-1 approved						
	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC						
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms/500VDC/70%RH						
	EMI CONDUCTION & RADIATION	Compliance to EN55015,EN55022 (CISPR22) Class B,						
	HARMONIC CURRENT	Compliance to EN61000-3-2,CLASS C(≥60% load),EN61000-3-3						
OTHERS	EMS IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,8,11; ENV50204, EN61547, EN55024, heavy industry level (surge 4KV), criteria A						
	MTBF	K hrs min. MIL-HDBK-217F (25°C)						
	DIMENSION	200*68*33mm (L*W*H)						
NOTE	PACKING							
		<p>1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.</p> <p>2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.</p> <p>3. Tolerance : includes set up tolerance, line regulation and load regulation.</p> <p>4. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives.</p> <p>5. Derating may be needed under low input voltages. Please check the derating curve for more details.</p> <p>6. 3seconds or 20% duty cycle max. and the average output power should not exceed the rated power.</p>						

Case No. 988A-D Unit:mm

■ Mechanical Specification

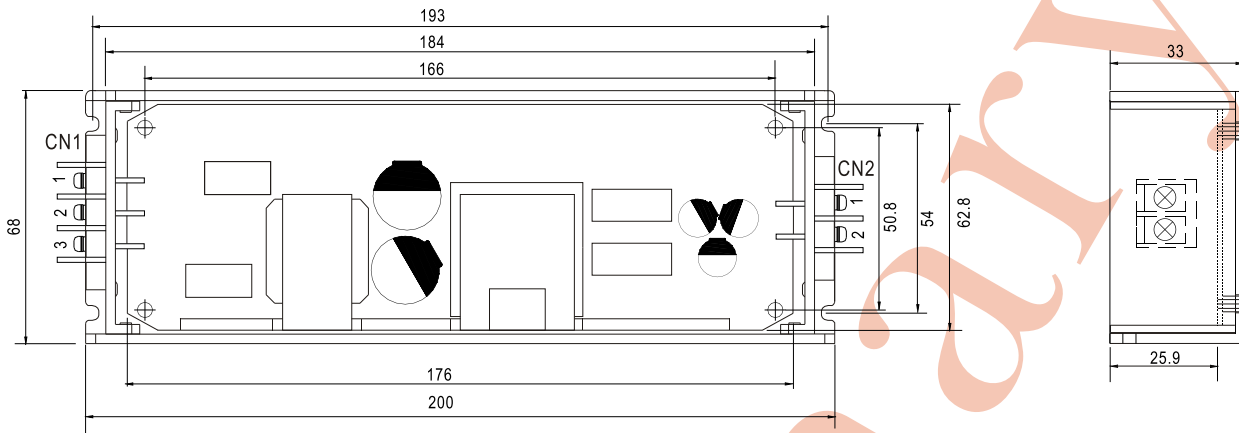


AC Terminal pin NO Assignment

Pin No.	Assignment
1	FG
2	AC/N
3	AC/L


DC Terminal pin NO Assignment

Pin No.	Assignment
1	V-
2	V+

■ Block Diagram

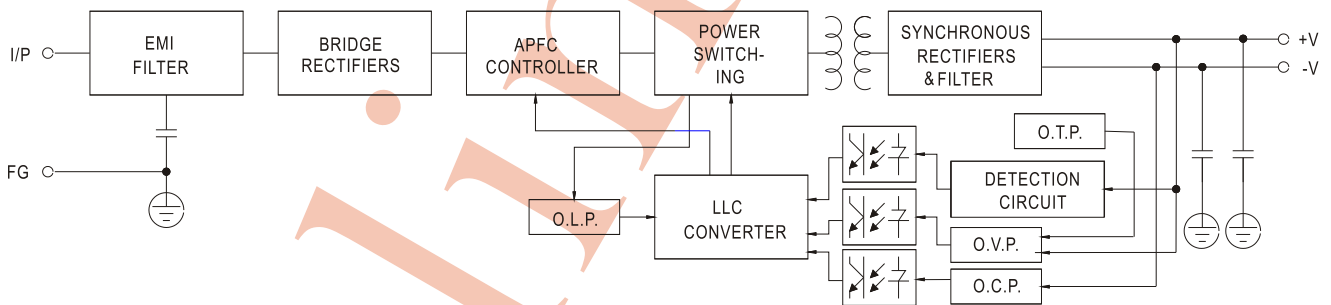

■ Derating Curve

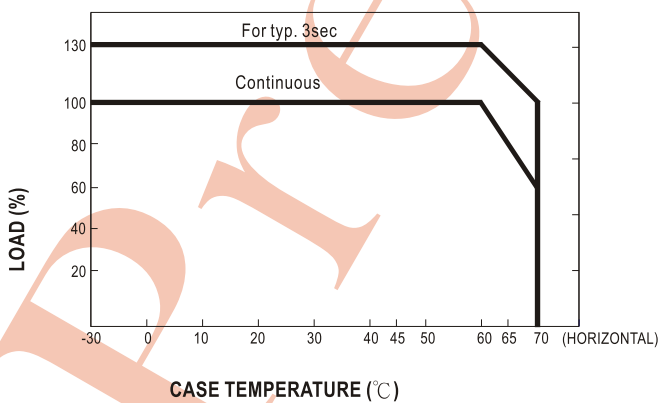

■ Static Characteristics

