


IKS-G6524 Series

24G-port full Gigabit managed Ethernet switches



- > 24 Gigabit Ethernet ports
- > Up to 24 optical fiber connections (SFP slots)
- > Fanless, -40 to 75°C operating temperature range (T models)
- > Turbo Ring and Turbo Chain (recovery time < 50 ms @ 250 switches), RSTP/STP, and MSTP* for network redundancy
- > Isolated redundant power inputs with universal 110/220 VAC power supply range

*Available in Q2, 2012



Introduction

Process automation and transportation automation applications combine data, voice, and video, and consequently require high performance and high reliability. The IKS-G6524 series full Gigabit backbone switches are equipped with 24 Gigabit Ethernet ports, making them ideal for large scale industrial networks. The IKS-G6524's full Gigabit capability increases bandwidth to provide high performance

and the ability to quickly transfer large amounts of video, voice, and data across a network. The switches support the Turbo Ring, Turbo Chain, and RSTP/STP redundancy protocols, and are fanless and come with an isolated redundant power supply to increase system reliability and the availability of your network backbone.

Features and Benefits

- Command line interface (CLI) for quickly configuring major managed functions*
- Supports advanced VLAN capability with Q-in-Q tagging*
- Software based IEEE 1588 PTP V2 (Precision Time Protocol) for precise time synchronization of networks*
- DHCP Option 82 for IP* address assignment with different policies
- Support EtherNet/IP and Modbus/TCP protocols for device management and monitoring
- Compatible with EtherNet/IP and PROFINET protocols for transparent data transmission
- Redundant Gigabit Turbo Ring and Turbo Chain (recovery time < 50 ms @ 250 switches), RSTP/STP, and MSTP* for network redundancy
- IGMP snooping and GMRP for filtering multicast traffic
- IEEE 802.1Q VLAN and GVRP protocol to ease network planning
- QoS (IEEE 802.1p/1Q and TOS/DiffServ) to increase determinism
- Port Trunking for optimum bandwidth utilization
- TACACS+*, SNMPv3, IEEE 802.1X, HTTPS, and SSH to enhance network security
- SNMPv1/v2c/v3 for different levels of network management
- RMON for efficient network monitoring and proactive capability
- Bandwidth management prevents unpredictable network status
- Lock port function for blocking unauthorized access based on MAC address
- Port mirroring for online debugging
- Automatic warning by exception through e-mail, relay output
- Digital inputs for integrating sensors and alarms with IP networks
- Redundant, dual AC power inputs

*Available in Q2, 2012

Specifications

Technology

Standards:

- IEEE 802.3 for 10BaseT
- IEEE 802.3u for 100BaseT(X) and 100BaseFX
- IEEE 802.3ab for 1000BaseT(X)
- IEEE 802.3z for 1000BaseSX/LX/LHX/ZX
- IEEE 802.3x for Flow Control
- IEEE 802.1D-2004 for Spanning Tree Protocol*
- IEEE 802.1w for Rapid Spanning Tree Protocol
- IEEE 802.1s for Multiple Spanning Tree Protocol*
- IEEE 802.1Q for VLAN Tagging

IEEE 802.1p for Class of Service

IEEE 802.1X for Authentication

IEEE 802.3ad for Port Trunk with LACP

Protocols: IGMPv1/v2, GMRP, GVRP, SNMPv1/v2c/v3, DHCP Server/Client, BootP, TFTP, SNMP, SMTP, RARP, RMON, HTTP, HTTPS, Telnet, Syslog, DHCP Option 66/67/82, SSH, LLDP, IEEE 1588 PTP V2*, EtherNet/IP*, Modbus/TCP, SNMP Inform, NTP Server/Client*

MIB: MIB-II, Ethernet-like MIB, P-BRIDGE MIB, Q-BRIDGE MIB, Bridge MIB, RSTP MIB, RMON MIB Groups 1, 2, 3, 9

Flow Control: IEEE 802.3x flow control, back pressure flow control

*Available in Q2, 2012

Switch Properties

- Priority Queues:** 8
- Max. Number of Available VLANs:** 256
- VLAN ID Range:** VID 1 to 4094
- IGMP Groups and Multicast Route:** 1000
- MAC Table Size:** 16 K
- Packet Buffer Size:** 12 Mbit
- DRAM Size:** 128 MB
- Flash Size:** 16 MB
- Jumbo Frame Size:** 9.6 KB
- Switching Fabric Capacity:** 48 Gbps
- Forwarding Rate:** 35.7 Mpps (packets per second)

Interface

- Gigabit Ethernet:** 10/100/1000BaseT(X) or 100/1000BaseSFP slot
- Console Port:** RS-232 (RJ45 connector)
- LED Indicators:** STAT, PWR1, PWR2, FAULT, MSTR/HEAD, CPLR/TAIL
- Alarm Contact:** 1 relay output with current carrying capacity of 2 A @ 30 VDC
- Digital Inputs:** 1 input with the same ground, but electrically isolated from the electronics.
 - +13 to +30V for state "1"
 - -30 to +3V for state "0"
 - Max. input current: 8 mA

Power Requirements

- Input Voltage:** 110/220 VAC (85 to 264 VAC)
- Input Current:** Max. 0.79/0.44 A @ 110/220 VAC
- Overload Current Protection:** Present
- Reverse Polarity Protection:** Present

Physical Characteristics

- Housing:** IP30 protection
- Dimensions:** 440 x 44 x 386.9 mm (17.32 x 1.73 x 15.23 in)
- Weight:** 5.1 kg
- Installation:** 19" rack mounting

Environmental Limits

- Operating Temperature:**
 - Standard Models: 0 to 60°C (32 to 140°F)
 - Wide Temp. Models: -40 to 75°C (-40 to 167°F)
- Storage Temperature:** -40 to 85°C (-40 to 185°F)
- Ambient Relative Humidity:** 5 to 95% (non-condensing)

Standards and Certifications

- Safety:** UL 60950-1, EN 60950-1
- EMI:** FCC Part 15 Subpart B Class A, EN 55022 Class A
- EMS:**
 - EN 61000-4-2 (ESD) Level 3, EN 61000-4-3 (RS) Level 3,
 - EN 61000-4-4 (EFT) Level 3, EN 61000-4-5 (Surge) Level 3,
 - EN 61000-4-6 (CS) Level 3, EN 61000-4-8, EN 61000-4-11
- Rail Traffic:** EN 50121-4
- Shock:** IEC 60068-2-27
- Freefall:** IEC 60068-2-32
- Vibration:** IEC 60068-2-6

Note: Please check Moxa's website for the most up-to-date certification status.

MTBF (mean time between failures)


- Time:**
 - IKS-G6524: 282,390 hrs
 - IKS-G6824: 280,035 hrs
- Database:** Telcordia (Bellcore), GB

Warranty

- Warranty Period:** 5 years
- Details:** See www.moxa.com/warranty

Dimensions

Unit: mm (inch)

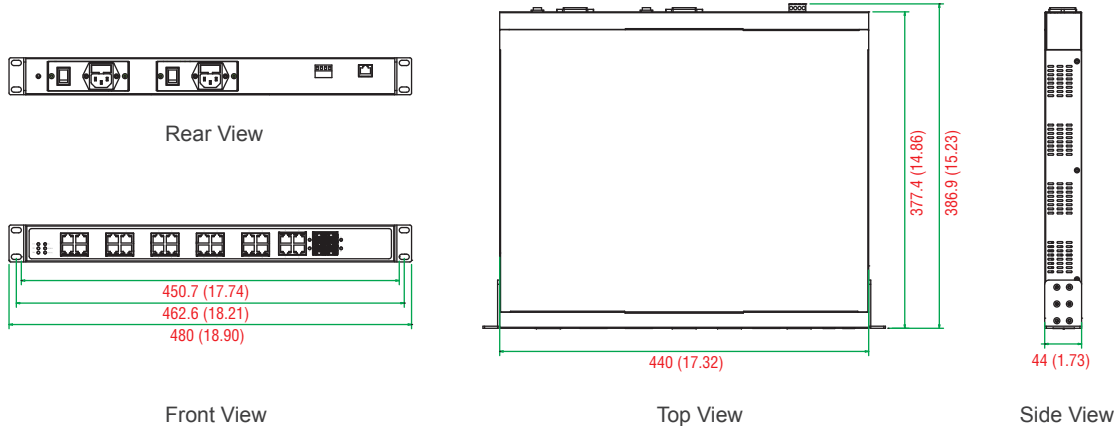

Ordering Information

Available Models		Port Interface			Power Supply	
Standard Temperature (0 to 60°C)	Wide Temperature (-40 to 75°C)	Gigabit Ethernet			Isolated Power Supply 1	Isolated Power Supply 2
		10/100/1000 BaseT(X)	100/1000 BaseSFP*	Combo Port, 10/100/1000 BaseT(X) or 100/1000 BaseSFP*	HV: 85 to 264 VAC	HV: 85 to 264 VAC
IKS-G6524-4GTXSFP-HV-HV	IKS-G6524-4GTXSFP-HV-HV-T	20	–	4	1	1
IKS-G6524-8GSFP-4GTXSFP-HV-HV	IKS-G6524-8GSFP-4GTXSFP-HV-HV-T	12	8	4	1	1
IKS-G6524-20GSFP-4GTXSFP-HV-HV	IKS-G6524-20GSFP-4GTXSFP-HV-HV-T	–	20	4	1	1

*The IKS-G6524 series supports 100/1000BaseSFP slots. See below for SFP-1G/1FE series SFP module product information.

Optional Accessories (can be purchased separately)

MXview: Moxa industrial network management software with 50, 100, 250, 500, or 1000 nodes

EDS-SNMP OPC Server Pro: OPC server software that works with all SNMP devices

ABC-01: Configuration backup and restoration tool for managed Ethernet switches, 0 to 60°C operating temperature

Power Cords: See website accessories pages for details

Package Checklist

- IKS-G6524 switch
- RJ45 to DB9 console port cable
- 2 power cords (EU and US)
- Protective caps for unused ports
- 2 rackmount ears
- Documentation and software CD
- Hardware installation guide (printed)
- Warranty card