

Terminations

MEDIUM AND HIGH POWER TERMINATIONS

- Complete Range from 5 W to 500 W CW
- Exceptionally Low VSWR
- Efficient Heat Dissipation
- Stable Load Impedance



SPECIFICATIONS

High Power Terminations with Type "N" Connectors*

FREQUENCY RANGE (MHz)	MODEL NO.	POWER INPUT		VSWR (Max)	WEIGHT	
		AVG. W (Max)	PEAK kW (Max)		lbs	Kg
700-18,000	369BN	175	10	0.7 - 1.0 GHz: 1.20 1.0 - 9.0 GHz: 1.10 9.0 - 18.0 GHz: 1.20	2.5	1.1
2000-18,000	368BN	500	5	2.0 - 3.0 GHz: 1.40 3.0 - 12.4 GHz: 1.30 12.4 - 18.0 GHz: 1.45	6.5	3





Medium Power Terminations with Type "N" Connectors*

FREQUENCY RANGE (MHz)	MODEL NO.	POWER INPUT		VSWR (Max)	WEIGHT	
		AVG. W (Max)	PEAK kW (Max)		Oz	Gr
DC-18,000	370BN	5	2	1.05 + .015f **	3	85

*Order Male or Female connectors as suffix letter, i.e., 369BNM Male Type "N"


**f denotes frequency in GHz

TYPICAL PERFORMANCE CURVES

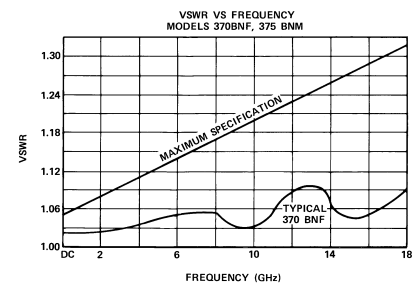


Terminations


OUTLINE DRAWINGS

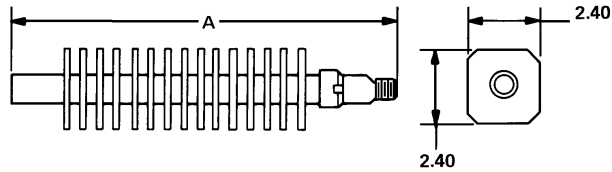

MODEL NO.	A
369BNF	12.88
369BNM	13.02

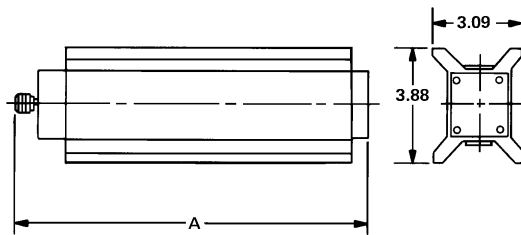

MODEL NO.	A
368BNF	11.78
368BNM	11.90



MODEL NO.	A	B
370BNF	1.58	.72
370BNM	1.67	.72