

Attenuators

DC-18 GHz

50 WCW TYPE N MEDIUM POWER ATTENUATORS

- Bidirectional - Full Power Input at Either Terminal Without Damage
- Excellent High Frequency VSWR




SPECIFICATIONS

FREQUENCY RANGE GHz	MODEL	ATTENUATION		POWER INPUT		DC-4	VSWR (Max)			WEIGHT (Max)	
		NOMINAL	DEVIATION	AVG* (W) Max	PEAK (W) Max		4-12.4	12.4-15	15-18	Oz	Gr
DC-18	776B	10 dB	±0.5	50w	1000	1.30	1.35	1.40	1.50	12	340
		20 dB	±0.75	50w	1000	1.30	1.35	1.40	1.50	12	340
		30 dB	±1.0	50w	1000	1.30	1.35	1.40	1.50	12	340


*Power ratings for horizontal operation at +25°C derate linearly to 5 watts at +125°C

ORDERING INFORMATION: Specify model number and add dash number suffix for attenuation in dB.
For example: 776B-10

OUTLINE DRAWINGS

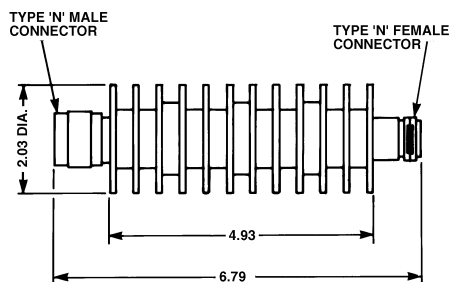

All dimensions are Max. unless otherwise specified.

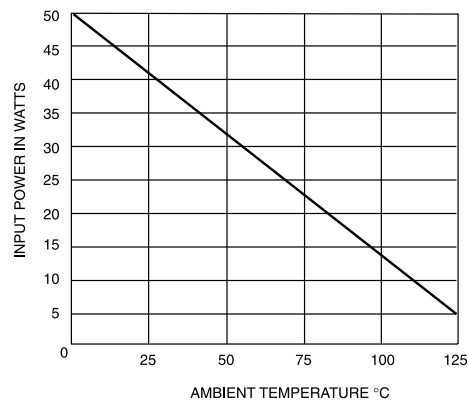

**Derating Curve, Horizontal Operation
Models 776B-10, 20, 30**